

EMC TEST REPORT

No. JSH007080380-001

Applicant : Pyramat LLC
16200-A Carmenita Rd., Cerritos, California,
90703, United States

Manufacturer : Xiamen Comfort Science and Technology Group
Co., Ltd.
No.18 Longshan South Road, Xiamen 361009,
China

Equipment : Sound Rocker Transmitter
Type/Model : 2.4GHz Transmitter

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2006): Radio Frequency Devices


ANSIC63.4 (2003): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

RSS-210 Issue 7 (June 2007): Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

RSS-Gen Issue 2 (June 2007): General Requirements and Information for the Certification of Radiocommunication Equipment

Date of issue: Sep 8, 2007

Tested by:



Wakeyou Wang (*Projector Engineer*)

Reviewed by:



Jonny Jing (*Reviewer*)

Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R.
China

FCC Registration Number: 236597
IC Assigned Code: 6201A

Name of contact: Steve Li
Tel: +86 21 64956565 ext. 214
Fax: +86 21 54262335 ext. 214

Content

SUMMARY.....	1
DESCRIPTION OF TEST FACILITY.....	2
1. GENERAL INFORMATION	5
1.1 Applicant Information.....	5
1.2 Identification of the EUT	5
1.3 Technical specification	5
1.4 Mode of operation during the test / Test peripherals used.....	6
2. TEST SPECIFICATION	7
2.1 Instrument list	7
2.2 Test Standard	7
3. MINIMUM 6dB BANDWIDTH	9
3.1 Limit.....	9
3.2 Test Configuration	9
3.3 Test Procedure and test setup.....	9
3.4 Test Protocol	10
3.5 Measurement uncertainty	10
4. MAXIMUM PEAK OUTPUT POWER	11
4.1 Test limit	11
4.2 Test Configuration	11
4.3 Test procedure and test setup.....	11
4.4 Test protocol	12
4.5 Measurement uncertainty	12
5. POWER SPECTRUM DENSITY	13
5.1 Test limit	13
5.2 Test Configuration	13
5.3 Test procedure and test setup.....	13
5.4 Test Protocol	14
5.5 Measurement uncertainty	14
6. SPURIOUS EMISSION	15
6.1 Test limit	15
6.2 Test Configuration	15
6.3 Test procedure and test setup.....	15
6.4 Test protocol	16
6.5 Measurement uncertainty	17
7. RESTRICT BAND RADIATED EMISSION	18
7.1 Test limit	18
7.2 Test Configuration	18
7.3 Test procedure and test setup.....	19
7.4 Test protocol	20
7.5 Measurement uncertainty	20
8. EMISSION OUTSIDE THE FREQUENCY BAND	21
8.1 Limit.....	21
8.2 Test Configuration	21
8.3 Test procedure and test setup.....	21
8.4 Test protocol	22
8.5 Measurement uncertainty	22

9. POWER LINE CONDUCTED EMISSION	23
9.1 Limit.....	23
9.2 Test configuration	23
9.3 Test procedure and test set up	24
9.4 Test protocol	25
9.5 Measurement Uncertainty	25
10. CHANNEL NUMBER OF HOPPING SYSTEM.....	26
10.1 Limit.....	26
10.2 Test Configuration	26
10.3 Test procedure and test setup	26
10.4 Test protocol	27
10.5 Measurement uncertainty	27
11. AVERAGE TIME OF OCCUPANCY IN ANY CHANNEL	28
11.1 Limit.....	28
11.2 Test Configuration	28
11.3 Test procedure and test setup	28
11.4 Test protocol	29
11.5 Measurement uncertainty	29
12. OCCUPIED BANDWIDTH	30
12.1 Test limit	30
12.2 Test Configuration	30
12.3 Test procedure and test setup	30
12.4 Test protocol	31
12.5 Measurement uncertainty	31

1. General Information

1.1 Applicant Information

Applicant: Pyramat LLC
16200-A Carmenita Rd., Cerritos, California,
90703, United States

Name of contact: Mr. Mike Hsia

Tel: 001-562-345-6058
Fax: 001-562-345-6082

Manufacturer: Xiamen Comfort Science and Technology Group
Co., Ltd.
No.18 Longshan South Road, Xiamen 361009,
China

Sample received date : Aug 27, 2007
Date of test : Aug 27, 2007~ Sep 8, 2007

1.2 Identification of the EUT

Equipment: Sound Rocker Transmitter

Type/model: 2.4GHz Transmitter

FCC ID: UJA0002B

1.3 Technical specification

Operation Frequency Band: 2.4GHz ~ 2.4835 GHz

Modulation: GFSK

Antenna Designation: Non-User Replaceable (Fixed)

Gain of Antenna: 2.5dBi max.

Rating: DC 6V, 200mA (Supplied by a AC/DC adaptor)

Description of EUT: The EUT is a transmitter to transmit audio signal to a sound rocker by wireless method. The audio signal generated by TV, DVD, VCR, satellite receiver and etc. is inputted into input terminal of EUT.

Channel Description:

There are 8 channels namely channel 1 to channel 8 which indicated by the LED light on the EUT. Here is the channel list:

Channel	Central frequency (MHz)
1	2404
2	2429
3	2454
4	2479
5	2409
6	2434
7	2459
8	2474

We can see that channel 1 with the lowest frequency, channel 3 with middle frequency and channel 4 with the highest frequency among the channels used. As a result, the three channels were chosen to perform test as representative.

1.4 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

A portable DVD which generating 1 kHz audio signal was used as a test peripheral.

2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESIB 26	R&S	EC 3045	2007-6-1	2008-5-31
Ultra-broadband antenna	HL 562	R&S	EC 3046-1	2007-6-1	2008-5-31
Horn antenna	HF 906	R&S	EC 3049	2007-6-1	2008-5-31
Signal generator	SMR 20	R&S	EC 3044-1	2007-8-22	2008-8-21
Power meter	PM2002	AR	EC3043-7	2007-1-23	2008-1-22
Power sensor	PH2000	AR	EC3043-8	2007-1-23	2008-1-22
Semi-anechoic chamber	-	Albatross project	EC 3048	2007-6-1	2008-5-31
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2007-6-1	2008-5-31
Pre-amplifier	Pre-amp 40	Beijing Radio 2	-	2007-3-4	2008-3-3
Horn antenna	K638A	Beijing Radio 2	-	2007-3-4	2008-3-3
A.M.N.	ESH2-Z5	R&S	EC 3119	2007-1-23	2008-1-22
Test Receiver	ESCS 30	R&S	EC 2107	2007-1-23	2008-1-22

2.2 Test Standard

47CFR Part 15 (2006)
 ANSI C63.4: 2003
 RSS-210 Issue 7 (June 2007)
 RSS-Gen Issue 2 (June 2007)

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-210 Issue 7 Annex 8	Pass
Maximum peak output power	15.247(b)(1)	RSS-210 Issue 7 Annex 8	Pass
Power spectrum density	15.247(e)	RSS-210 Issue 7 Annex 8	Pass
Spurious emission	15.209	RSS-210 Issue 7 Clause 2	Pass
Restrict band radiated emission	15.205	RSS-210 Issue 7 Clause 2	Pass
Emission outside the frequency band	15.247(d)	RSS-210 Issue 7 Annex 8	Pass
Power line conducted emission	15.207	RSS-Gen Issue 2 Clause 7.2.2	Pass
Channel number of hopping system	15.247(a)(1)(iii)	RSS-210 Issue 7 Annex 8	NA
Average time of occupancy in any channel	15.247(a)(1)(iii)	RSS-210 Issue 7 Annex 8	NA
Occupied bandwidth	-	RSS-Gen Issue 2 Clause 4.6.1	Tested


3. Minimum 6dB Bandwidth

Test result: PASS

3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Test Configuration

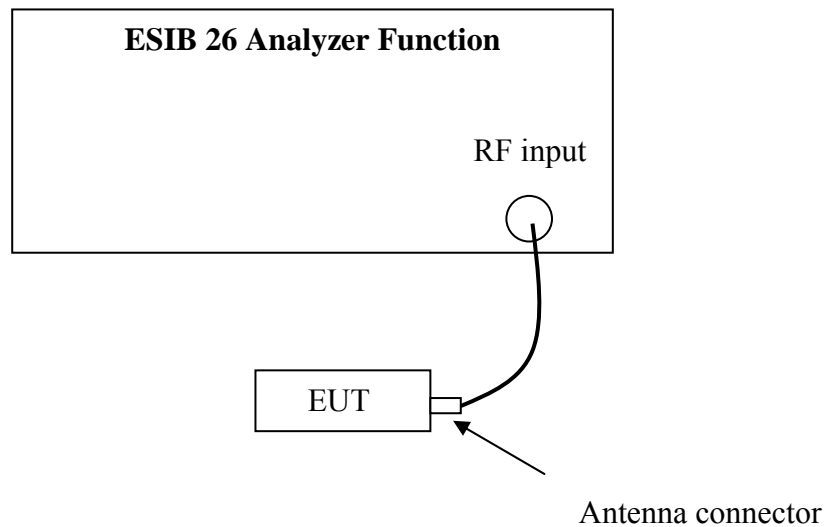

3.3 Test Procedure and test setup

The minimum 6dB bandwidth per FCC §15.247(a)(2) is measured using the ESIB 26 analyzer function with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel).

3.4 Test Protocol

Temperature : 22°C
Relative Humidity : 43%

Channel	Bandwidth (kHz)	Limit (kHz)	Margin(kHz)
1(lowest)	541	≥ 500	41
3(middle)	547	≥ 500	47
4(highest)	571	≥ 500	71

Remark: Margin = Bandwidth - Limit

3.5 Measurement uncertainty

The measurement uncertainty is $\pm 100\text{Hz}$.

4. Maximum peak output power


Test result: Pass

4.1 Test limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

4.2 Test Configuration

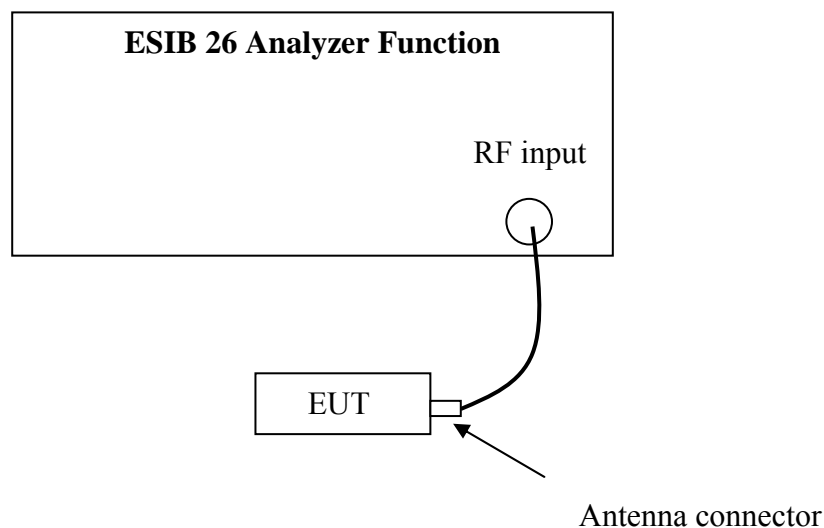

4.3 Test procedure and test setup

The power output per FCC § 15.247(b)(1) was measured using the ESIB 26 analyzer function with the resolutions bandwidth set at 1MHz, the video bandwidth set at 3MHz. The test was performed at 3 channels (lowest, middle and highest channel).

4.4 Test protocol

Temperature : 22 °C
Relative Humidity : 43 %

Channel	Reading of Receiver (dBm) R	Cable loss (dB) L	Corrected Reading (dBm) C	Limit (dBm)
1(lowest)	-2.81	2.50	-0.31	30
3(middle)	-5.25	2.50	-2.75	30
4(highest)	-5.52	2.50	-3.02	30

Remark: $C = R + L$

4.5 Measurement uncertainty

The measurement uncertainty is ± 1 dB.


5. Power spectrum density

Test result: Pass

5.1 Test limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Configuration

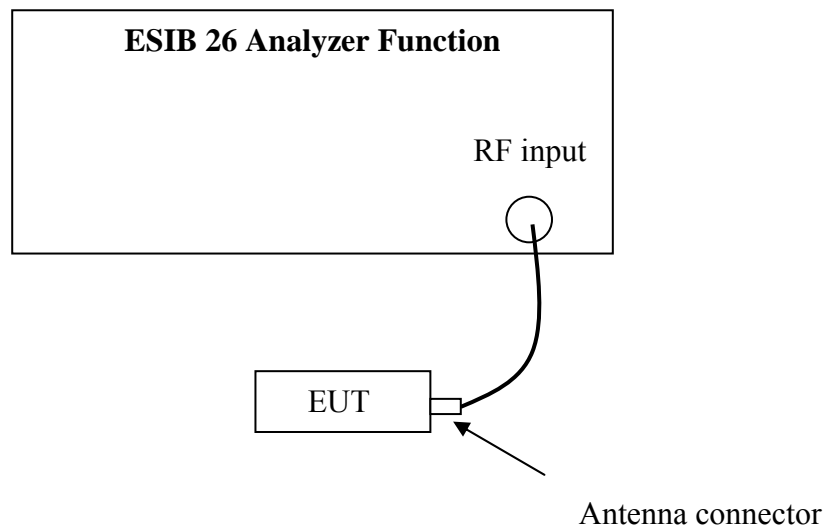

5.3 Test procedure and test setup

The power output per FCC §15.247(e) was measured using the ESIB 26 analyzer function with the resolutions bandwidth set at 3kHz, the video bandwidth set at 3kHz. The test was performed at 3 channels (lowest, middle and highest channel).

5.4 Test Protocol

Temperature : 22 °C
Relative Humidity : 43 %

Channel	Reading of Receiver (dBm) R	Cable loss (dB) L	Corrected Reading (dBm/3kHz) C	Limit (dBm/3kHz)
1(lowest)	-20.14	2.50	-17.64	≤ 8
3(middle)	-22.59	2.50	-20.09	≤ 8
4(highest)	-21.74	2.50	-19.24	≤ 8

Remark: **C** = **R**+ **L**

5.5 Measurement uncertainty

The measurement uncertainty is ± 1 dB/3kHz.

6. Spurious emission


Test result: PASS

6.1 Test limit

The spurious emission shall test through the 10th harmonic. It must comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration

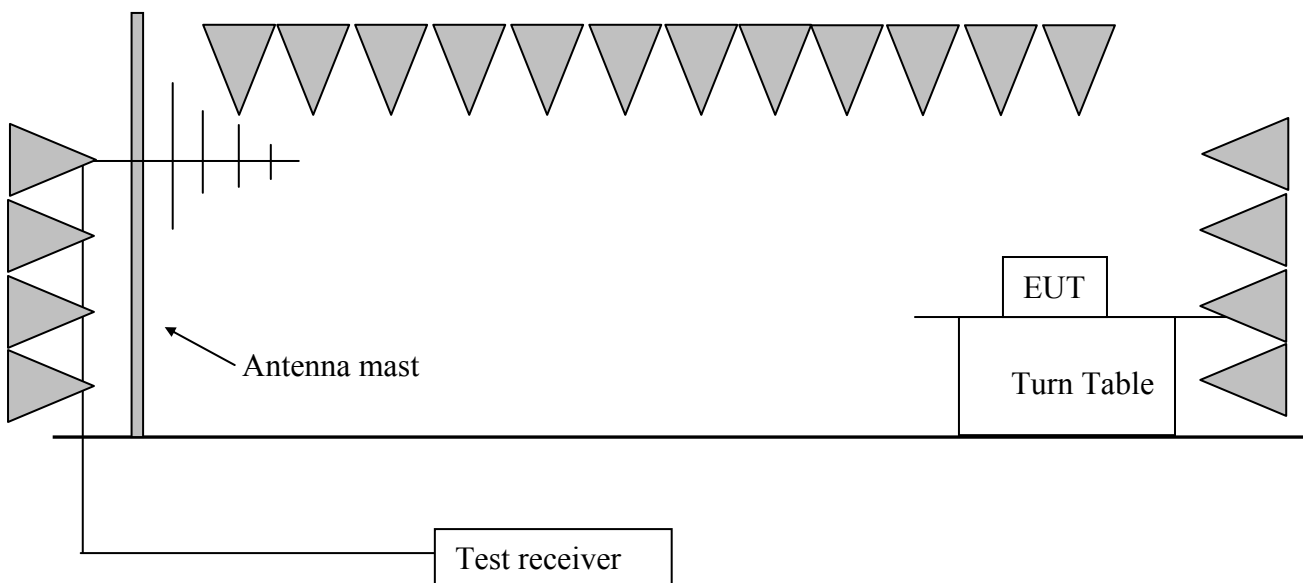

6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier is equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

6.4 Test protocol

Spurious emission for QP test below 1GHz, highest reading related to the limit

Channel	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	H	914.47	24.80	31.40	46.00	14.60
1	V	142.75	9.20	24.70	43.50	18.80
3	H	941.68	25.00	31.10	46.00	14.90
3	V	957.23	25.20	31.00	46.00	15.00
4	H	957.23	25.20	31.20	46.00	14.80
4	V	943.63	25.00	30.70	46.00	15.30

Remark: 1. Correct Factor = Antenna Factor + Cable Loss
2. Corrected Reading = Receiver Reading + Correct Factor
3. Margin = limit - Corrected Reading
4. For more details, please refer to the test data.

Spurious emission for PK test above 1GHz, highest reading related to the limit

Channel	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	H	4807.62	4.80	55.40	74.00	18.60
1	V	4807.62	4.80	57.20	74.00	16.80
3	H	4900.39	4.80	50.30	74.00	23.70
3	V	4900.96	4.80	52.00	74.00	22.00
4	H	4957.11	4.80	48.50	74.00	25.50
4	V	4958.32	4.80	51.03	74.00	22.97

Remark: 1. Correct Factor = Antenna Factor + Cable Loss - Gain of Preamplifier
2. Corrected Reading = Receiver Reading + Correct Factor
3. Margin = limit - Corrected Reading
5. For more details, please refer to the test data .

Duty cycle test (test set-up & procedure for this test is same as “maximum peak output power test” except that the central frequency is set to be a fundamental frequency and the span is set to be 0)

“On” period among one cycle (mS)	“Complete” period of one cycle (mS)	Duty cycle
0.37	0.63	59%

Remark: Duty cycle = “On” period / “Complete” cycle

Calculating the AV result by duty cycle

Chl	Ant	Frequency (MHz)	PK Result (dBuV/m)	Correct Factor (dB)	AV Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	H	4807.62	55.40	4.60	50.80	54.00	3.20
1	V	4807.62	57.20	4.60	52.60	54.00	1.40
3	H	4900.39	50.30	4.60	45.70	54.00	8.30
3	V	4900.96	52.00	4.60	47.40	54.00	6.60
4	H	4957.11	48.50	4.60	43.90	54.00	10.10
4	V	4958.32	51.03	4.60	46.43	54.00	7.57

Remark: 1. Correct Factor = $-20 * \log(\text{Duty cycle}) = -20 * \log(59\%)$

2. AV Result = PK Result - Correct Factor

3. Margin = limit - AV Result

6.5 Measurement uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of radiated emission is: $\pm 5.31\text{dB}$

The measurement uncertainty is given with a confidence of 95%, $k=2$.

The measurement uncertainty is traceable to internal procedure TI-036.

7. Restrict band radiated emission


Test result: PASS

7.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

7.2 Test Configuration

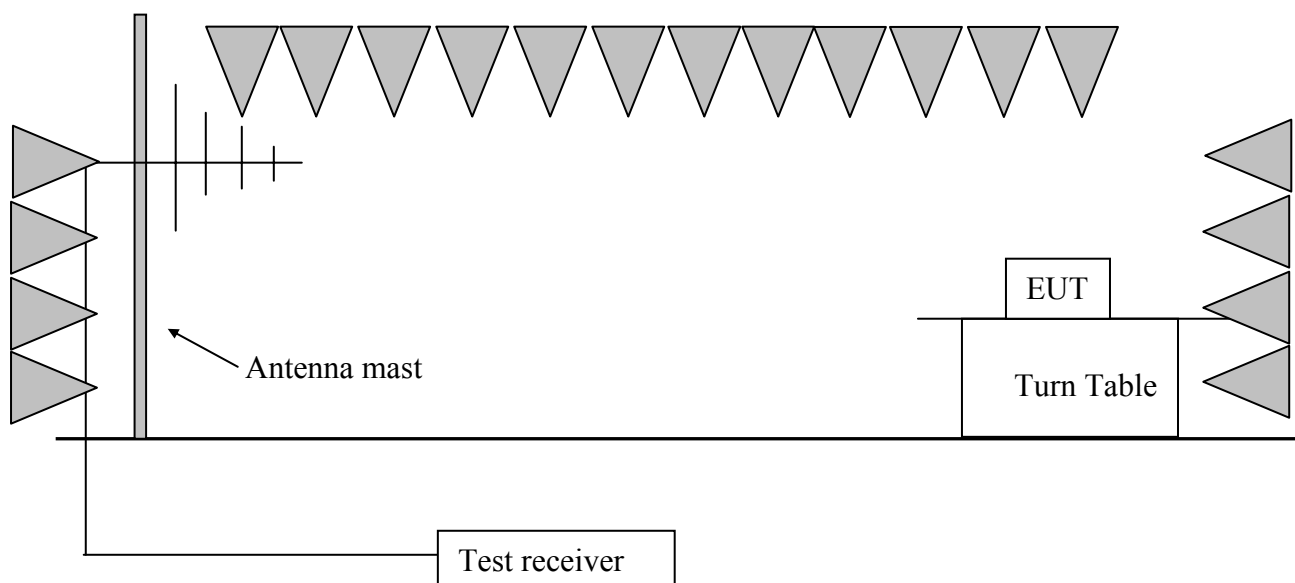

7.3 Test procedure and test setup

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge.
5. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above Spurious Radiated Emissions test procedure.

7.4 Test protocol

Highest reading on restrict band 2310MHz ~ 2390MHz, test on the lowest channel

Detector	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)
PK	2390.00	2.20	67.18	74
AV	2328.99	2.20	40.80	54

Highest reading on restrict band 2483.5MHz ~ 2500MHz, test on the highest channel

Detector	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)
PK	2483.50	2.20	71.54	74
AV	2495.01	2.20	34.99	54

7.5 Measurement uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of radiated emission is: $\pm 5.31\text{dB}$

The measurement uncertainty is given with a confidence of 95%, $k=2$.

The measurement uncertainty is traceable to internal procedure TI-036.


8. Emission outside the frequency Band

Test result: **PASS**

8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.2 Test Configuration

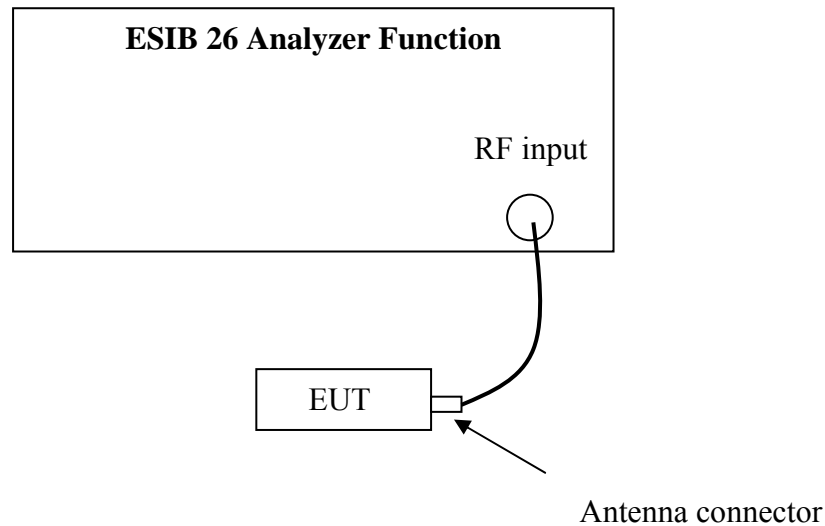

8.3 Test procedure and test setup

The Emission outside the frequency Band per FCC §15.247(d) is measured using the ESIB 26 analyzer function with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW.

8.4 Test protocol

Highest level outside the band edge (dBm)	Highest emission within the band edge (dBm)	Delta (dBm)	Limit
-50.54 (frequency lower than 2.4GHz)	-8.13	42.41	$\geq 20\text{dB}$
-53.20 (frequency higher than 2.4835GHz)	-11.58	41.62	$\geq 20\text{dB}$

8.5 Measurement uncertainty

The measurement uncertainty is $\pm 1\text{dB}$.


9. Power line conducted emission

Test result: Pass

9.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

9.2 Test configuration

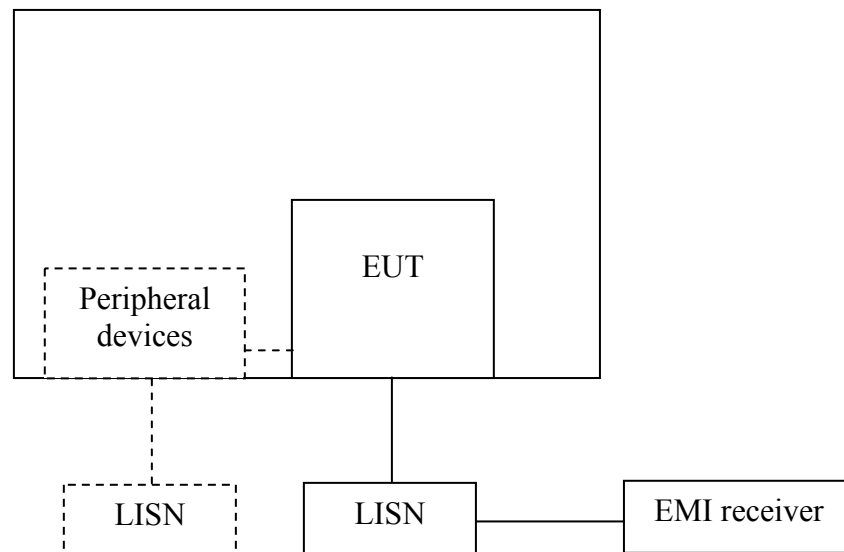

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.

9.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination. Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

The bandwidth of the test receiver is set at 9 kHz.

9.4 Test protocol

Power line: L

Freq	Correct Factor (dB)	Receiver Reading (dBuV)		Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV	QP	AV
0.15	3.00	*	*	*	*	*	*	*	*
0.20	3.00	*	*	*	*	*	*	*	*
1.00	3.00	*	*	*	*	*	*	*	*
2.00	3.00	*	*	*	*	*	*	*	*
5.00	3.00	*	*	*	*	*	*	*	*
30.00	3.00	*	*	*	*	*	*	*	*
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading. If margin>20dB, it would be marked as *.									

Power line: N

Freq	Correct Factor (dB)	Receiver Reading (dBuV)		Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV	QP	AV
0.15	3.00	*	*	*	*	*	*	*	*
0.20	3.00	*	*	*	*	*	*	*	*
1.00	3.00	*	*	*	*	*	*	*	*
2.00	3.00	*	*	*	*	*	*	*	*
5.00	3.00	*	*	*	*	*	*	*	*
30.00	3.00	*	*	*	*	*	*	*	*
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading. If margin>20dB, it would be marked as *.									

9.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty at mains terminal: $\pm 1.99\text{dB}$

The measurement uncertainty is given with a confidence of 95%, $k=2$.

The measurement uncertainty is traceable to internal procedure TI-036.


10. Channel Number of hopping system

Test result: NA

10.1 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

10.2 Test Configuration

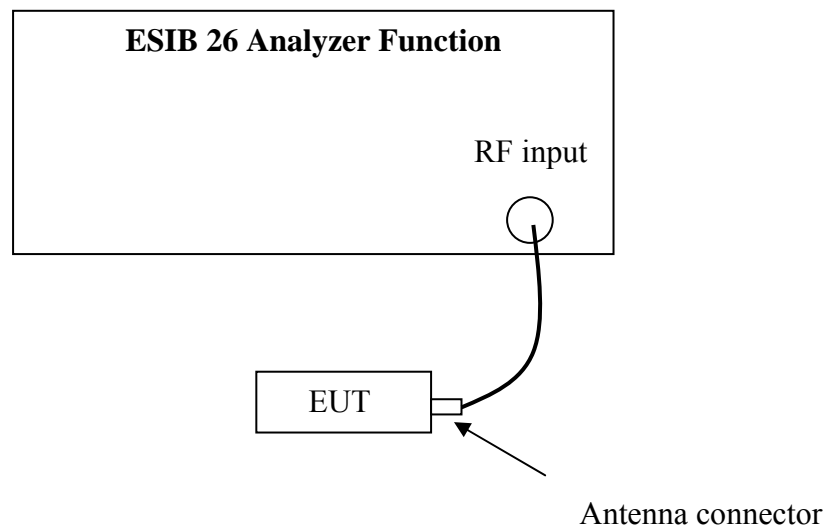

10.3 Test procedure and test setup

The channel number per FCC §15.247(a)(1)(iii) is measured using the ESIB 26 analyzer function with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW.

The RF passband of the EUT was divided into 3 appropriate bands to test.

10.4 Test protocol

Channel Number	Limit
-	≥ 15

10.5 Measurement uncertainty

The measurement uncertainty is ± 1 dB.


11. Average time of occupancy in any channel

Test result: NA

11.1 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Test Configuration

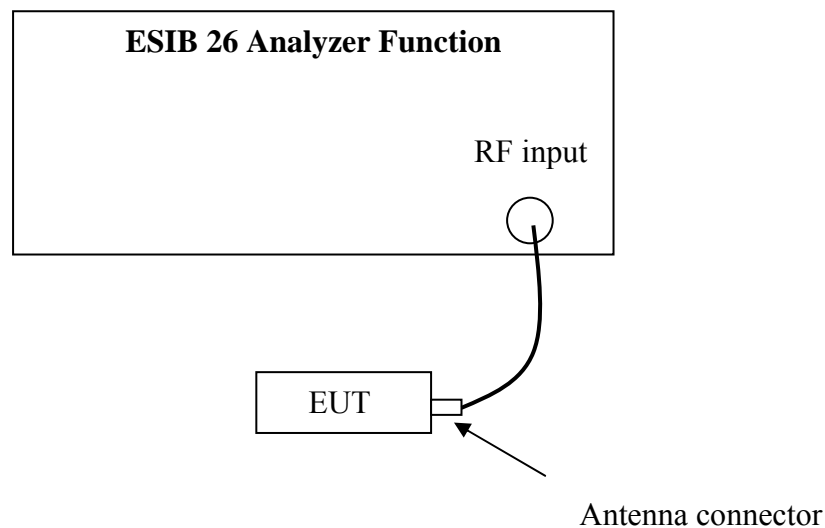

11.3 Test procedure and test setup

Average time of occupancy in any channel per FCC § 15.247(a)(1)(iii) is measured using the ESIB 26 analyzer function with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN set to be 0Hz to test in time domain. The test is performed at the middle channel.

11.4 Test protocol

Packet	Observed period (s) P	Time of occupancy for single hopping (ms) O	Hops among the interval of 3.6 s I	Average time of occupancy (s) T	Limit (s)
Packet Type 4	-	-	-	-	≤ 0.4
Packet Type 11	-	-	-	-	≤ 0.4
Packet Type 15	-	-	-	-	≤ 0.4

Remark: 1. There are 79 channels in all. So the observed period $P = 0.4 * 79 = 31.6$ s.
2. Average time of occupancy $T = O * I * P / 3.6$

11.5 Measurement uncertainty

The measurement uncertainty is $\pm 10\mu\text{s}$.


12. Occupied Bandwidth

Test Status: Tested

12.1 Test limit

None

12.2 Test Configuration

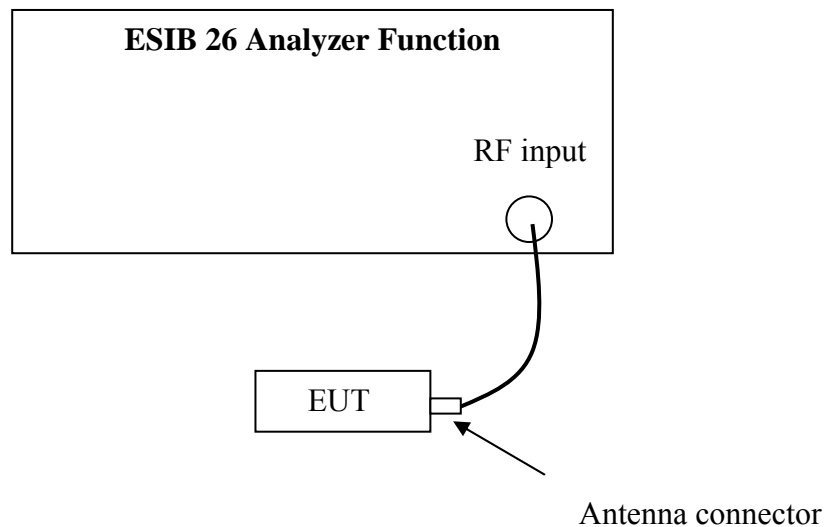

12.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 2 Clause 4.6.1 was measured using the ESIB 26 analyzer function with the resolutions bandwidth set at 1MHz, the video bandwidth set at 3MHz. The test was performed at 3 channels (lowest, middle and highest channel).

12.4 Test protocol

Temperature : 22 °C
Relative Humidity : 43 %

Channel	Occupied Bandwidth (MHz)	Max. Value (MHz)
1(lowest)	4.65	4.65
3(middle)	4.39	
4(highest)	4.49	

Remark: “Max. Value” is the maximum test result of the three measured occupied bandwidth and seen as the Occupied Bandwidth of this EUT.

12.5 Measurement uncertainty

The measurement uncertainty is ± 1 dB.