

Partial FCC Test Report

Report No.: RFBHAA-WTW-P21080670A R3

FCC ID: UJH-R1LOW

Test Model: R1LOW (refer to item 3.1 for more details)

Received Date: Aug. 15, 2022

Test Date: Aug. 15 ~ Aug. 16, 2022 (For Radiated Emission Test (Below 1GHz): low channel)

Jan. 12 ~ Jan. 18, 2023 (For Radiated Emission Test (Below 1GHz): middle & high channel and Radiated Emission Test (Above 1GHz))

Issued Date: Feb. 03, 2023

Applicant: Mitsubishi Electric Corporation Sanda Works

Address: 2-3-33 Miwa, Sanda-City, Hyogo 669-1513, Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

**FCC Registration /
Designation Number:** 281270 / TW0032



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
3 General Information	6
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Description of Support Units.....	11
3.3.1 Configuration of System under Test.....	11
3.4 General Description of Applied Standards and References.....	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Setup.....	15
4.1.6 EUT Operating Conditions.....	15
4.1.7 Test Results.....	16
5 Pictures of Test Arrangements	46
Annex A- Radiated out of Band Emission (OOBE) Measurement (For U-NII-3 band)	47
Annex B- Band Edge Measurement	48
Appendix – Information of the Testing Laboratories	51

Release Control Record

Issue No.	Description	Date Issued
RFBHAA-WTW-P21080670A	Original release	Sep. 29, 2022
RFBHAA-WTW-P21080670A R1	Remove some sample No.	Nov. 02, 2022
RFBHAA-WTW-P21080670A R2	Add Radiated Emission Test (Below 1GHz) test data of middle & high channel	Jan. 19, 2023
RFBHAA-WTW-P21080670A R3	Add Radiated Emission Test (Above 1GHz) test data	Feb. 03, 2023

1 Certificate of Conformity

Product: Display Audio

Brand: Mitsubishi Electric

Test Model: R1LOW (refer to item 3.1 for more details)

Sample Status: Mass production equivalent (#49, #51, #35)

Applicant: Mitsubishi Electric Corporation Sanda Works

Test Date: Aug. 15 ~ Aug. 16, 2022 (For Radiated Emission Test (Below 1GHz): low channel)
Jan. 12 ~ Jan. 18, 2023 (For Radiated Emission Test (Below 1GHz): middle & high channel and Radiated Emission Test (Above 1GHz))

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

This report is issued as a supplementary report of RFBHAA-WTW-P21080670 R1. This report shall be used combined together with its original report.

Prepared by : Pettie Chen , **Date:** Feb. 03, 2023
Pettie Chen / Senior Specialist

Approved by : Jeremy Lin , **Date:** Feb. 03, 2023
Jeremy Lin / Senior Engineer

Note: Radiated Emissions test is performed for the addendum. Refer to original report for the other test data.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b) (1/2/3/4(i/ii)/9)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0dB at 130.88MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 & ETSI TR 100 028:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Display Audio
Brand	Mitsubishi Electric
Test Model	R1LOW (refer to note for more details)
Sample Status	Mass production equivalent (#49, #51, #35)
Power Supply Rating	12.6Vdc
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
Operating Frequency	5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5720MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5260 ~ 5320MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5500 ~ 5720MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 12 802.11n (HT40), 802.11ac (VHT40): 6 802.11ac (VHT80): 3 5745 ~ 5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	5260 ~ 5320MHz: 2.923mW 5500 ~ 5720MHz: 0.894mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	2m non-shielded DC power cable without core
Cable Supplied	NA

Note:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report to the original BV CPS report no.: RFBHAA-WTW-P21080670 R1. The differences are adding 8.4" LCD Driver IC and adding series model (No. 49, No. 51). Only radiated emission test for new models were performed for this addendum.
2. The following models with different panel size are provided to this EUT. (New models are marked in boldface)

Brand	Model	Description	Main LCD Driver IC	2 nd LCD Driver IC
Mitsubishi Electric	R1LOW	No. 12 (7" ICS Panel), 16GB	✓	
		No. 45 (7"n-ICS Panel)	✓	
		No. 35 (8.4" AWS Panel and Sirius(GPS))	✓	✓
		No. 38 (8.4" AWS Panel and DAB/FM2)	✓	✓
		No. 13 (8.4" ICS Panel), 32GB	✓	✓
		No. 36 (8.4" AWS Panel): 2USB	✓	✓
		No. 14 (8.4" ICS Panel), 32GB	✓	✓
		No. 40 (8.4" ICS Panel), 16GB	✓	✓
		No. 42 (7" ICS w/Bezel Panel)	✓	
		No. 61 (7"n-ICS Panel), 16GB, digital camera	✓	
		No. 62 (8.4" ICS Panel), 32GB, digital camera	✓	✓
		No. 49 (8.4" ICS-B): SXM, 2USB	✓	✓
	No. 51 (8.4" ICS-B): 2USB	✓	✓	
R1LOW-CN1	No. 31 (8.4" AWS Panel)	✓	✓	

3. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11a	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX
802.11ac (VHT20)	2TX
802.11ac (VHT40)	2TX
802.11ac (VHT80)	2TX

* The modulation and bandwidth are similar for HT20/HT40 on 802.11n mode and VHT20/VHT40 on 802.11ac mode, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

4. There two modules are collocated in the EUT.

Module No.	Function
1	WLAN 2.4GHz, 5GHz, BT EDR, BT LE (1M)
2	BT LE (1M, 2M)

5. The EUT uses following antennas.

Type	Sheet metal antenna			
Connector	RF Receptacle Connector			
Model	2342059-1		2342059-2	
Frequency (MHz)	2400-2500	5150-5850	2400-2500	5150-5850
Gain (dBi)	3	2	1	4

6. The above Antenna information please refers to the manufacturer's antenna specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

For 5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210 MHz

For 5260 ~ 5320MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
58	5290 MHz

For 5500 ~ 5720MHz:

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	122	5610 MHz
138	5690 MHz		

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to		Description
	RE \geq 1G	RE<1G	
A	√	√	EUT: No. 49
B	√	√	EUT: No. 51
C	√	√	EUT: No. 35

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. For radiated emission (below 1GHz) test item, the worst maximum power was selected.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A, B, C	802.11a	5180-5240	36 to 48	40	OFDM	6.0
A, B, C	802.11a	5260-5320	52 to 64	52	OFDM	6.0
A, B, C	802.11a	5500-5720	100 to 144	100	OFDM	6.0
A, B, C	802.11a	5745-5825	149 to 165	149	OFDM	6.0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A, B, C	802.11a	5180-5240	36 to 48	40, 100, 149	OFDM	6.0
		5260-5320	52 to 64			
		5500-5720	100 to 144			
		5745-5825	149 to 165			

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE \geq 1G	25 deg. C, 71% RH	12.6Vdc	Noah Chang
RE<1G	25 deg. C, 71% RH	12.6Vdc	Randy Wu

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Battery	YUASA	75D23R-CMF II	NA	NA	-
B.	Fixture Board	NA	NA	NA	NA	Provided by client

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC power cable	1	2	N	0	Accessory
2.	USB cable	1	0.5	Y	0	Provided by client
3.	Harness cable	1	2	N	0	Provided by client

3.3.1 Configuration of System under Test



3.4 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart E (15.407)

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

KDB References Test Guidance:

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK: 74 (dBuV/m)	AV: 54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK: 105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK: 122.2 (dBuV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver Rohde & Schwarz	ESR3	102783	Dec. 21, 2021	Dec. 20, 2022
			Dec. 21, 2022	Dec. 20, 2023
Spectrum Analyzer KEYSIGHT	N9020B	MY60110513	Dec. 24, 2021	Dec. 23, 2022
			Dec. 26, 2022	Dec. 25, 2023
BILOG Antenna SCHWARZBECK	VULB9168	9168-1214	Oct. 27, 2021	Oct. 26, 2022
			Oct. 20, 2022	Oct. 19, 2023
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 14, 2021	Nov. 13, 2022
			Nov. 13, 2022	Nov. 12, 2023
HORN Antenna SCHWARZBECK	BBHA 9170	9170-995	Nov. 14, 2021	Nov. 13, 2022
			Nov. 13, 2022	Nov. 12, 2023
Preamplifier EMCI	EMC330N	980798	Jan. 17, 2022	Jan. 16, 2023
Preamplifier EMCI	EMC118A45SE	980808	Dec. 30, 2021	Dec. 29, 2022
			Dec. 29, 2022	Dec. 28, 2023
Preamplifier EMCI	EMC184045SE	980786	Jan. 17, 2022	Jan. 16, 2023
			Jan. 16, 2023	Jan. 15, 2024
RF signal cable EMCI	EMC104-SM-SM-(900 0+2000+1000)	201244+ 201232+ 210103	Jan. 17, 2022	Jan. 16, 2023
			Jan. 16, 2023	Jan. 15, 2024
RF signal cable EMCI	EMCCFD400-NM-NM- (9000+300+500)	201251+ 201249+ 201248	Jan. 17, 2022	Jan. 16, 2023
			Jan. 16, 2023	Jan. 15, 2024
RF signal cable EMCI	EMC101G-KM-KM-(5 000+3000+2000)	201261+201258+201 249	Jan. 17, 2022	Jan. 16, 2023
			Jan. 16, 2023	Jan. 15, 2024
Software BV ADT	ADT_Radiated_V7.6.1 5.9.5	NA	NA	NA
Antenna Tower Max-Full	MFA-515BSN	NA	NA	NA
Turn Table Max-Full	MFT-201SS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208676	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in WM Chamber 9.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard

No deviation.

4.1.5 Test Setup

For Radiated emission below 30MHz

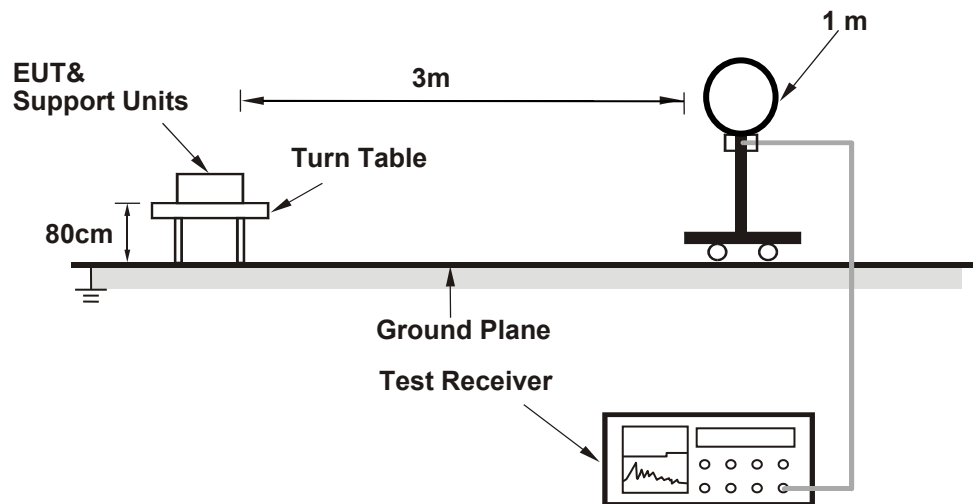

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	A		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	94.0 PK			1.03 H	6	52.9	41.1
2	*5200.00	87.0 AV			1.03 H	6	45.9	41.1
3	#10400.00	55.0 PK	68.2	-13.2	2.16 H	200	47.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	97.0 PK			1.03 V	188	55.9	41.1
2	*5200.00	90.5 AV			1.03 V	188	49.4	41.1
3	#10400.00	55.3 PK	68.2	-12.9	1.05 V	151	47.3	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	A		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	1.11 H	6	54.7	2.6
2	5150.00	47.7 AV	54.0	-6.3	1.11 H	6	45.1	2.6
3	*5260.00	91.2 PK			1.11 H	6	50.1	41.1
4	*5260.00	85.3 AV			1.11 H	6	44.2	41.1
5	#10520.00	55.0 PK	68.2	-13.2	1.11 H	200	46.6	8.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.13 V	184	54.6	2.6
2	5150.00	47.7 AV	54.0	-6.3	1.13 V	184	45.1	2.6
3	*5260.00	95.2 PK			1.13 V	184	54.1	41.1
4	*5260.00	89.4 AV			1.13 V	184	48.3	41.1
5	#10520.00	55.2 PK	68.2	-13.0	3.03 V	16	46.8	8.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	A		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.0 PK	74.0	-16.0	1.16 H	75	55.5	2.5
2	5460.00	47.2 AV	54.0	-6.8	1.16 H	75	44.7	2.5
3	#5470.00	58.4 PK	68.2	-9.8	1.16 H	75	55.8	2.6
4	*5500.00	92.7 PK			1.16 H	75	51.3	41.4
5	*5500.00	86.6 AV			1.16 H	75	45.2	41.4
6	11000.00	55.1 PK	74.0	-18.9	2.01 H	13	46.6	8.5
7	11000.00	43.3 AV	54.0	-10.7	2.01 H	13	34.8	8.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	1.13 V	184	55.7	2.5
2	5460.00	47.3 AV	54.0	-6.7	1.13 V	184	44.8	2.5
3	#5470.00	58.7 PK	68.2	-9.5	1.13 V	184	56.1	2.6
4	*5500.00	94.2 PK			1.13 V	184	52.8	41.4
5	*5500.00	87.0 AV			1.13 V	184	45.6	41.4
6	11000.00	54.5 PK	74.0	-19.5	2.15 V	216	46.0	8.5
7	11000.00	42.9 AV	54.0	-11.1	2.15 V	216	34.4	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	A		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.20	58.4 PK	68.2	-9.8	1.25 H	266	55.0	3.4
2	*5745.00	95.9 PK			1.25 H	266	53.2	42.7
3	*5745.00	90.9 AV			1.25 H	266	48.2	42.7
4	#5943.60	59.4 PK	68.2	-8.8	1.25 H	266	55.5	3.9
5	11490.00	54.7 PK	74.0	-19.3	3.33 H	306	45.5	9.2
6	11490.00	43.1 AV	54.0	-10.9	3.33 H	306	33.9	9.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.20	60.0 PK	68.2	-8.2	1.10 V	156	56.7	3.3
2	*5745.00	97.7 PK			1.10 V	156	55.0	42.7
3	*5745.00	92.5 AV			1.10 V	156	49.8	42.7
4	#5960.00	60.0 PK	68.2	-8.2	1.10 V	156	56.0	4.0
5	11490.00	55.0 PK	74.0	-19.0	1.33 V	105	45.8	9.2
6	11490.00	43.6 AV	54.0	-10.4	1.33 V	105	34.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	B		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	95.3 PK			1.28 H	72	54.2	41.1
2	*5200.00	88.8 AV			1.28 H	72	47.7	41.1
3	#10400.00	54.5 PK	68.2	-13.7	1.31 H	200	46.5	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	98.5 PK			1.09 V	185	57.4	41.1
2	*5200.00	92.4 AV			1.09 V	185	51.3	41.1
3	#10400.00	54.2 PK	68.2	-14.0	1.02 V	116	46.2	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	B		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.9 PK	74.0	-18.1	1.01 H	1	53.3	2.6
2	5150.00	46.4 AV	54.0	-7.6	1.01 H	1	43.8	2.6
3	*5260.00	93.3 PK			1.01 H	2	52.2	41.1
4	*5260.00	87.7 AV			1.01 H	2	46.6	41.1
5	#10520.00	55.5 PK	68.2	-12.7	2.11 H	209	47.1	8.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.5 PK	74.0	-17.5	1.00 V	185	53.9	2.6
2	5150.00	46.3 AV	54.0	-7.7	1.00 V	185	43.7	2.6
3	*5260.00	95.0 PK			1.00 V	185	53.9	41.1
4	*5260.00	88.8 AV			1.00 V	185	47.7	41.1
5	#10520.00	55.7 PK	68.2	-12.5	2.33 V	333	47.3	8.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	B		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.4 PK	74.0	-17.6	1.20 H	74	53.9	2.5
2	5460.00	46.5 AV	54.0	-7.5	1.20 H	74	44.0	2.5
3	#5470.00	57.0 PK	68.2	-11.2	1.20 H	74	54.4	2.6
4	*5500.00	91.9 PK			1.20 H	74	50.5	41.4
5	*5500.00	85.5 AV			1.20 H	74	44.1	41.4
6	11000.00	56.1 PK	74.0	-17.9	2.11 H	100	47.6	8.5
7	11000.00	42.9 AV	54.0	-11.1	2.11 H	100	34.4	8.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.5 PK	74.0	-17.5	1.32 V	199	54.0	2.5
2	5460.00	46.5 AV	54.0	-7.5	1.32 V	199	44.0	2.5
3	#5470.00	57.1 PK	68.2	-11.1	1.32 V	199	54.5	2.6
4	*5500.00	93.8 PK			1.32 V	199	52.4	41.4
5	*5500.00	86.8 AV			1.32 V	199	45.4	41.4
6	11000.00	55.0 PK	74.0	-19.0	2.33 V	303	46.5	8.5
7	11000.00	43.7 AV	54.0	-10.3	2.33 V	303	35.2	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	B		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.40	58.1 PK	68.2	-10.1	1.02 H	65	54.7	3.4
2	*5745.00	94.7 PK			1.02 H	65	52.0	42.7
3	*5745.00	88.8 AV			1.02 H	65	46.1	42.7
4	#5993.20	59.1 PK	68.2	-9.1	1.02 H	65	55.0	4.1
5	11490.00	56.5 PK	74.0	-17.5	2.15 H	222	47.3	9.2
6	11490.00	44.5 AV	54.0	-9.5	2.15 H	222	35.3	9.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5602.40	59.1 PK	68.2	-9.1	2.77 V	156	55.9	3.2
2	*5745.00	97.2 PK			2.77 V	156	54.5	42.7
3	*5745.00	90.7 AV			2.77 V	156	48.0	42.7
4	#5954.00	58.1 PK	68.2	-10.1	2.77 V	156	54.2	3.9
5	11490.00	55.7 PK	74.0	-18.3	2.11 V	159	46.5	9.2
6	11490.00	43.5 AV	54.0	-10.5	2.11 V	159	34.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	C		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	93.2 PK			1.25 H	15	52.1	41.1
2	*5200.00	86.6 AV			1.25 H	15	45.5	41.1
3	#10400.00	54.0 PK	68.2	-14.2	2.15 H	200	46.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	95.0 PK			1.18 V	176	53.9	41.1
2	*5200.00	88.9 AV			1.18 V	176	47.8	41.1
3	#10400.00	54.7 PK	68.2	-13.5	2.00 V	166	46.7	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	C		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.6 PK	74.0	-17.4	1.50 H	354	54.0	2.6
2	5150.00	47.3 AV	54.0	-6.7	1.50 H	354	44.7	2.6
3	*5260.00	91.1 PK			1.50 H	354	50.0	41.1
4	*5260.00	85.0 AV			1.50 H	354	43.9	41.1
5	#10520.00	54.7 PK	68.2	-13.5	2.15 H	200	46.3	8.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.19 V	185	54.9	2.6
2	5150.00	47.1 AV	54.0	-6.9	1.19 V	185	44.5	2.6
3	*5260.00	95.4 PK			1.19 V	185	54.3	41.1
4	*5260.00	89.1 AV			1.19 V	185	48.0	41.1
5	#10520.00	54.8 PK	68.2	-13.4	3.32 V	222	46.4	8.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	C		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.9 PK	74.0	-17.1	2.69 H	293	54.4	2.5
2	5460.00	47.4 AV	54.0	-6.6	2.69 H	293	44.9	2.5
3	#5470.00	57.8 PK	68.2	-10.4	2.69 H	293	55.2	2.6
4	*5500.00	91.8 PK			2.69 H	293	50.4	41.4
5	*5500.00	85.5 AV			2.69 H	293	44.1	41.4
6	11000.00	54.8 PK	74.0	-19.2	3.26 H	333	46.3	8.5
7	11000.00	45.1 AV	54.0	-8.9	3.26 H	333	36.6	8.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	1.00 V	69	54.7	2.5
2	5460.00	47.1 AV	54.0	-6.9	1.00 V	69	44.6	2.5
3	#5470.00	58.2 PK	68.2	-10.0	1.00 V	69	55.6	2.6
4	*5500.00	93.8 PK			1.00 V	69	52.4	41.4
5	*5500.00	87.6 AV			1.00 V	69	46.2	41.4
6	11000.00	55.3 PK	74.0	-18.7	2.13 V	299	46.8	8.5
7	11000.00	43.8 AV	54.0	-10.2	2.13 V	299	35.3	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	C		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.40	58.2 PK	68.2	-10.0	2.70 H	22	54.8	3.4
2	*5745.00	93.2 PK			2.70 H	22	50.5	42.7
3	*5745.00	86.8 AV			2.70 H	22	44.1	42.7
4	#5970.80	59.7 PK	68.2	-8.5	2.70 H	22	55.7	4.0
5	11490.00	56.3 PK	74.0	-17.7	4.00 H	222	47.1	9.2
6	11490.00	45.5 AV	54.0	-8.5	4.00 H	222	36.3	9.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5612.00	59.3 PK	68.2	-8.9	1.00 V	203	56.0	3.3
2	*5745.00	93.8 PK			1.00 V	203	51.1	42.7
3	*5745.00	87.0 AV			1.00 V	203	44.3	42.7
4	#5985.20	59.1 PK	68.2	-9.1	1.00 V	203	55.0	4.1
5	11490.00	55.8 PK	74.0	-18.2	3.23 V	333	46.6	9.2
6	11490.00	45.3 AV	54.0	-8.7	3.23 V	333	36.1	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.


Below 1GHz Worst-Case Data:

RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	118.27	37.6 QP	43.5	-5.9	1.99 H	261	53.0	-15.4
2	130.88	40.2 QP	43.5	-3.3	1.99 H	292	54.4	-14.2
3	215.27	29.6 QP	43.5	-13.9	1.49 H	273	45.9	-16.3
4	266.68	29.3 QP	46.0	-16.7	1.49 H	244	42.8	-13.5
5	400.54	40.6 QP	46.0	-5.4	1.00 H	180	50.6	-10.0
6	533.43	35.3 QP	46.0	-10.7	1.99 H	128	42.6	-7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

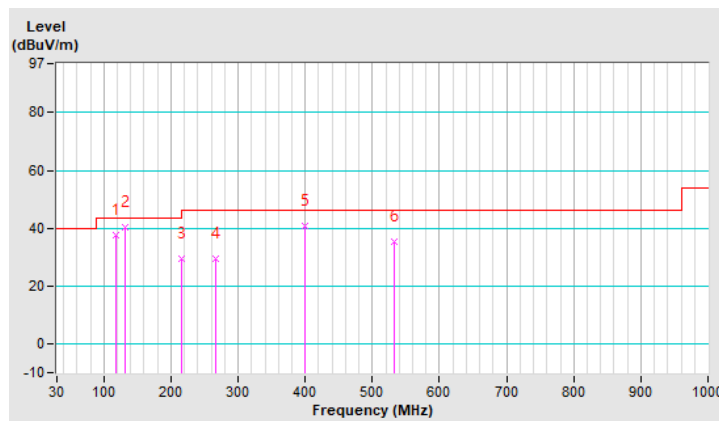


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	35.8 QP	40.0	-4.2	2.00 V	131	52.6	-16.8
2	130.88	42.5 QP	43.5	-1.0	1.01 V	115	56.7	-14.2
3	297.72	29.1 QP	46.0	-16.9	1.01 V	144	41.6	-12.5
4	400.54	41.3 QP	46.0	-4.7	1.01 V	335	51.3	-10.0
5	494.63	29.0 QP	46.0	-17.0	1.01 V	140	36.9	-7.9
6	533.43	30.5 QP	46.0	-15.5	1.51 V	179	37.8	-7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

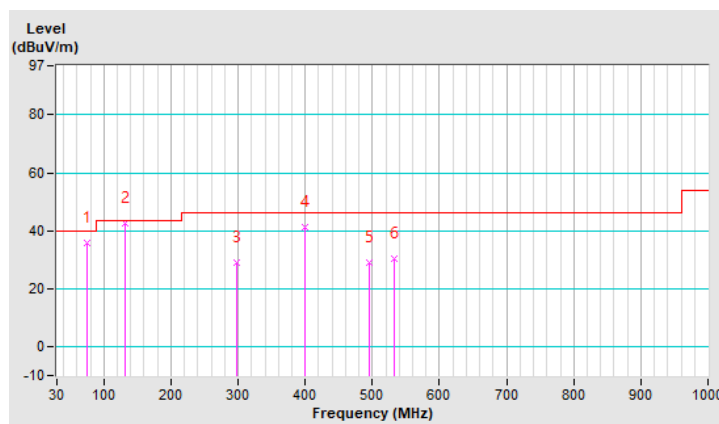


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	118.27	36.8 QP	43.5	-6.7	1.99 H	255	52.2	-15.4
2	130.88	40.1 QP	43.5	-3.4	1.99 H	253	54.4	-14.3
3	215.27	30.0 QP	43.5	-13.5	1.49 H	155	46.6	-16.6
4	400.54	40.3 QP	46.0	-5.7	1.00 H	200	50.4	-10.1
5	783.69	41.1 QP	46.0	-4.9	1.49 H	116	44.1	-3.0
6	933.07	39.2 QP	46.0	-6.8	1.00 H	147	40.0	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

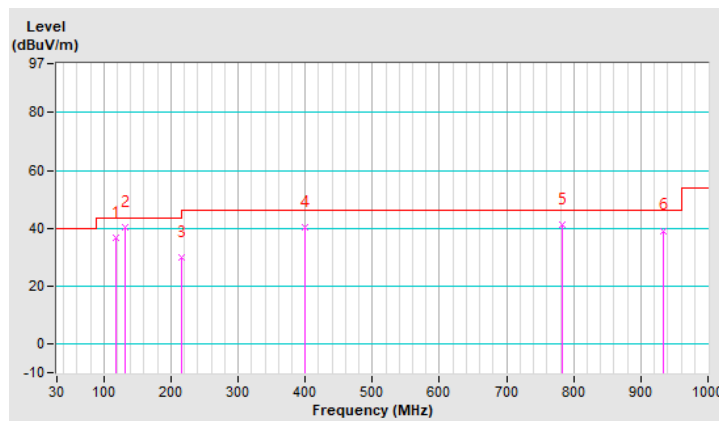


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	35.4 QP	40.0	-4.6	2.00 V	108	52.5	-17.1
2	130.88	41.1 QP	43.5	-2.4	1.01 V	100	55.4	-14.3
3	400.54	41.0 QP	46.0	-5.0	1.01 V	259	51.1	-10.1
4	694.45	36.3 QP	46.0	-9.7	1.01 V	237	40.4	-4.1
5	840.92	33.0 QP	46.0	-13.0	1.01 V	89	35.0	-2.0
6	939.86	37.9 QP	46.0	-8.1	1.01 V	111	38.7	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

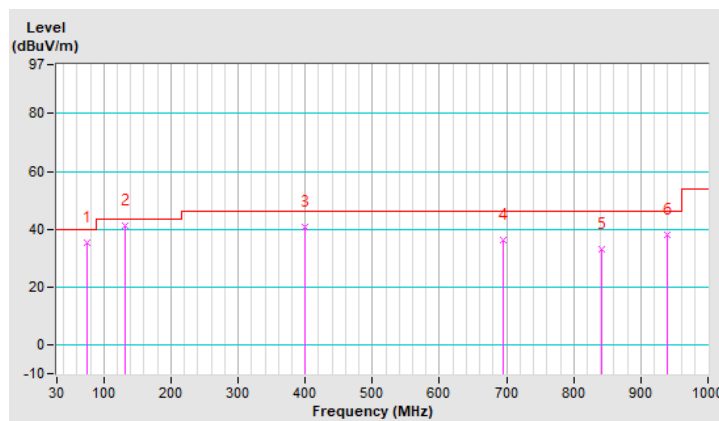


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	26.6 QP	40.0	-13.4	1.49 H	84	43.7	-17.1
2	130.88	40.1 QP	43.5	-3.4	1.99 H	253	54.4	-14.3
3	266.68	29.2 QP	46.0	-16.8	1.49 H	244	42.8	-13.6
4	400.54	40.0 QP	46.0	-6.0	1.00 H	200	50.1	-10.1
5	741.01	35.8 QP	46.0	-10.2	1.49 H	223	39.1	-3.3
6	762.35	38.2 QP	46.0	-7.8	1.49 H	114	41.2	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

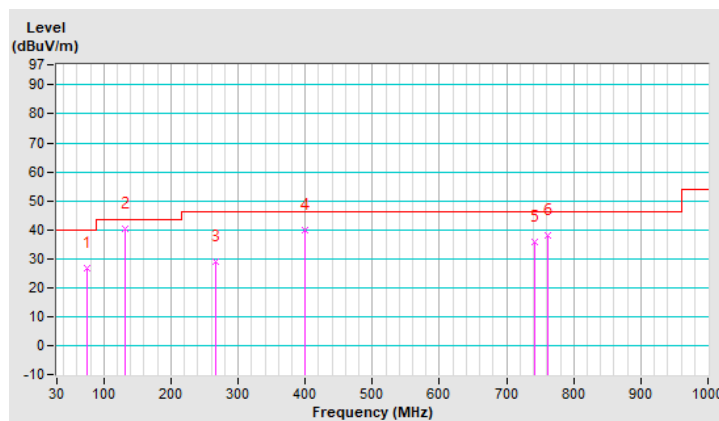


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	35.1 QP	40.0	-4.9	2.00 V	108	52.2	-17.1
2	130.88	40.5 QP	43.5	-3.0	1.01 V	200	54.8	-14.3
3	400.54	41.0 QP	46.0	-5.0	1.01 V	259	51.1	-10.1
4	593.57	34.3 QP	46.0	-11.7	1.01 V	160	39.9	-5.6
5	774.96	37.1 QP	46.0	-8.9	1.01 V	270	40.2	-3.1
6	889.42	29.8 QP	46.0	-16.2	2.00 V	169	31.5	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

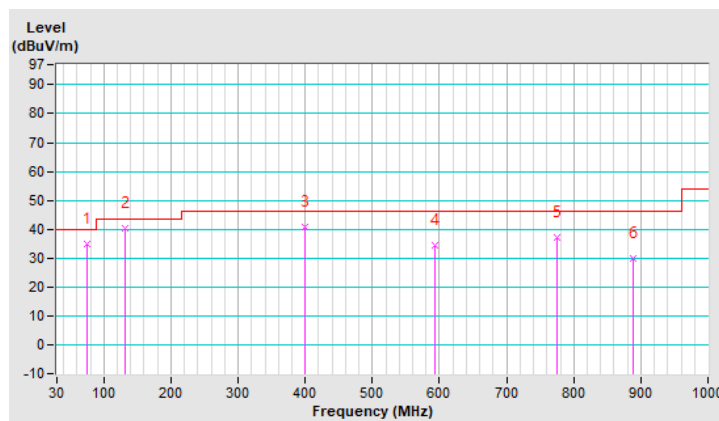


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	130.88	35.1 QP	43.5	-8.4	1.00 H	254	49.3	-14.2
2	197.81	26.9 QP	43.5	-16.6	1.00 H	266	43.3	-16.4
3	300.63	28.4 QP	46.0	-17.6	1.00 H	250	40.8	-12.4
4	400.54	40.0 QP	46.0	-6.0	1.00 H	238	50.0	-10.0
5	533.43	35.7 QP	46.0	-10.3	1.49 H	197	43.0	-7.3
6	666.32	38.6 QP	46.0	-7.4	1.00 H	161	43.1	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

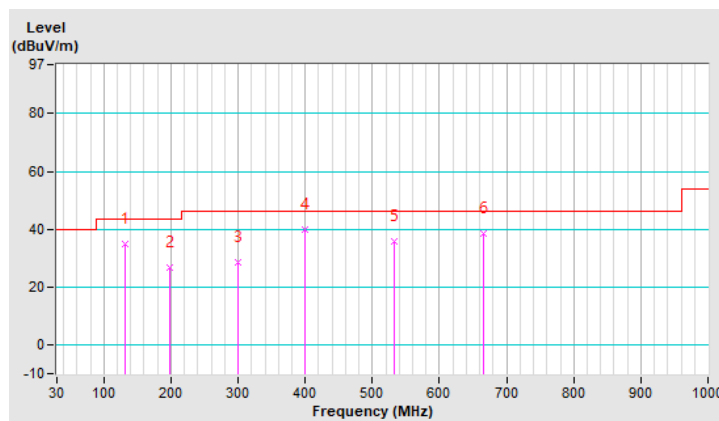


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	36.0 QP	40.0	-4.0	2.00 V	78	52.8	-16.8
2	142.52	38.1 QP	43.5	-5.4	1.01 V	47	51.4	-13.3
3	296.75	30.4 QP	46.0	-15.6	1.01 V	142	42.9	-12.5
4	400.54	43.2 QP	46.0	-2.8	1.01 V	326	53.2	-10.0
5	494.63	30.7 QP	46.0	-15.3	1.01 V	143	38.6	-7.9
6	593.57	33.7 QP	46.0	-12.3	1.01 V	155	39.2	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

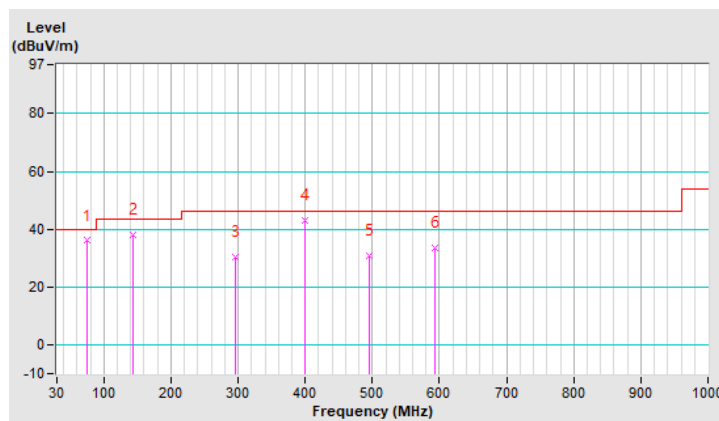


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	26.4 QP	40.0	-13.6	1.99 H	25	43.5	-17.1
2	130.88	34.6 QP	43.5	-8.9	1.00 H	245	48.9	-14.3
3	400.54	39.2 QP	46.0	-6.8	1.00 H	211	49.3	-10.1
4	794.36	41.1 QP	46.0	-4.9	1.99 H	351	44.1	-3.0
5	840.92	34.0 QP	46.0	-12.0	1.99 H	278	36.0	-2.0
6	933.07	39.6 QP	46.0	-6.4	1.99 H	100	40.4	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

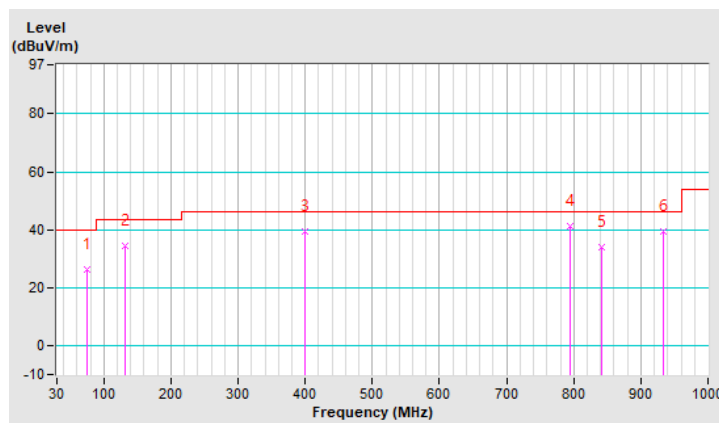


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	35.4 QP	40.0	-4.6	2.00 V	69	52.5	-17.1
2	142.52	37.7 QP	43.5	-5.8	1.01 V	40	51.0	-13.3
3	400.54	42.8 QP	46.0	-3.2	1.01 V	320	52.9	-10.1
4	666.32	37.3 QP	46.0	-8.7	1.01 V	245	41.8	-4.5
5	741.01	37.9 QP	46.0	-8.1	1.51 V	244	41.2	-3.3
6	939.86	38.6 QP	46.0	-7.4	1.01 V	102	39.4	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

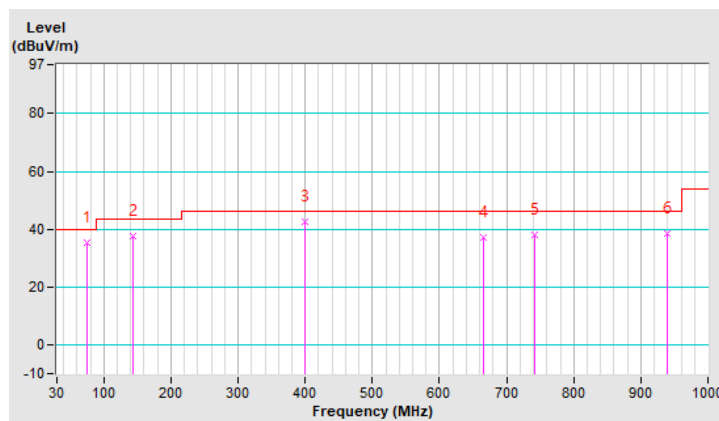


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	112.45	29.8 QP	43.5	-13.7	1.49 H	258	45.8	-16.0
2	149.31	29.2 QP	43.5	-14.3	1.00 H	289	42.2	-13.0
3	400.54	39.0 QP	46.0	-7.0	1.00 H	133	49.1	-10.1
4	600.36	30.9 QP	46.0	-15.1	1.49 H	149	36.5	-5.6
5	781.75	39.2 QP	46.0	-6.8	1.49 H	18	42.3	-3.1
6	974.78	30.3 QP	54.0	-23.7	1.49 H	32	30.7	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

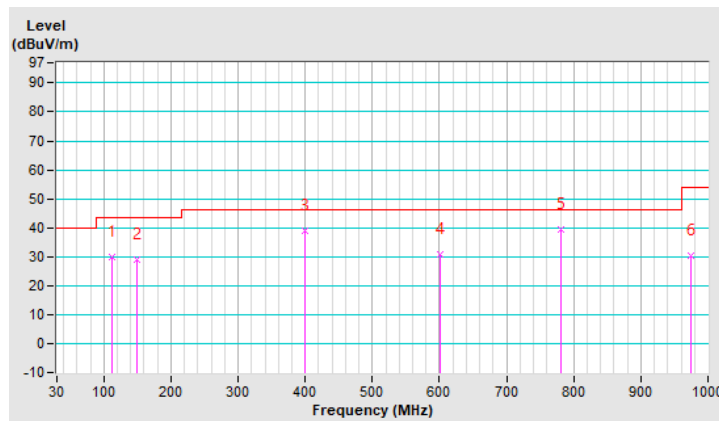


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	124.09	34.6 QP	43.5	-8.9	1.01 V	123	49.5	-14.9
2	202.66	33.3 QP	43.5	-10.2	1.01 V	246	50.0	-16.7
3	400.54	41.1 QP	46.0	-4.9	1.01 V	188	51.2	-10.1
4	758.47	33.3 QP	46.0	-12.7	1.01 V	188	36.3	-3.0
5	891.36	29.7 QP	46.0	-16.3	1.51 V	250	31.4	-1.7
6	985.45	31.2 QP	54.0	-22.8	1.01 V	138	31.6	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

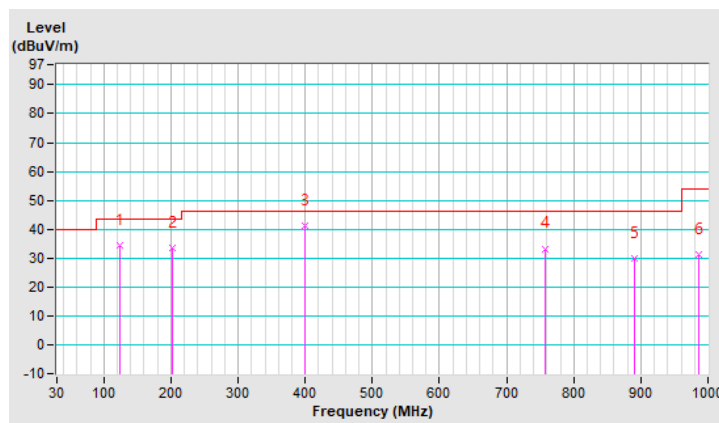


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	27.0 QP	40.0	-13.0	1.49 H	84	43.8	-16.8
2	137.67	34.4 QP	43.5	-9.1	1.49 H	229	48.0	-13.6
3	399.05	40.4 QP	46.0	-5.6	1.00 H	179	50.5	-10.1
4	666.32	37.4 QP	46.0	-8.6	1.49 H	140	41.9	-4.5
5	773.99	35.7 QP	46.0	-10.3	1.00 H	12	38.8	-3.1
6	939.86	37.7 QP	46.0	-8.3	1.00 H	224	38.3	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

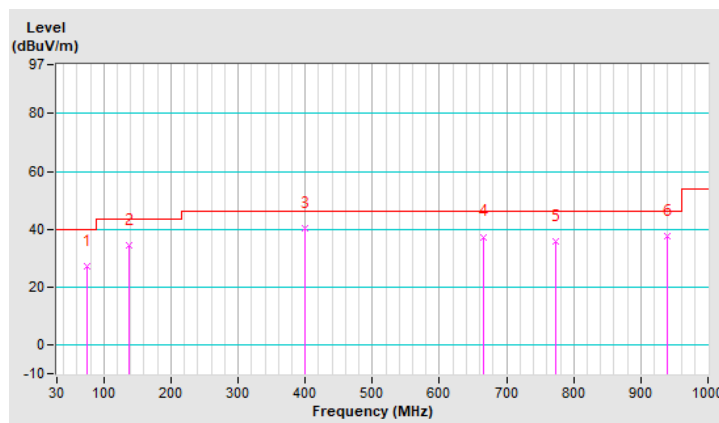


RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	32.6 QP	40.0	-7.4	1.01 V	303	46.8	-14.2
2	141.55	38.0 QP	43.5	-5.5	1.01 V	83	51.4	-13.4
3	399.15	41.0 QP	46.0	-5.0	1.01 V	333	51.1	-10.1
4	666.32	37.8 QP	46.0	-8.2	1.01 V	222	42.3	-4.5
5	802.12	35.0 QP	46.0	-11.0	1.01 V	169	37.7	-2.7
6	939.86	37.9 QP	46.0	-8.1	1.01 V	111	38.5	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

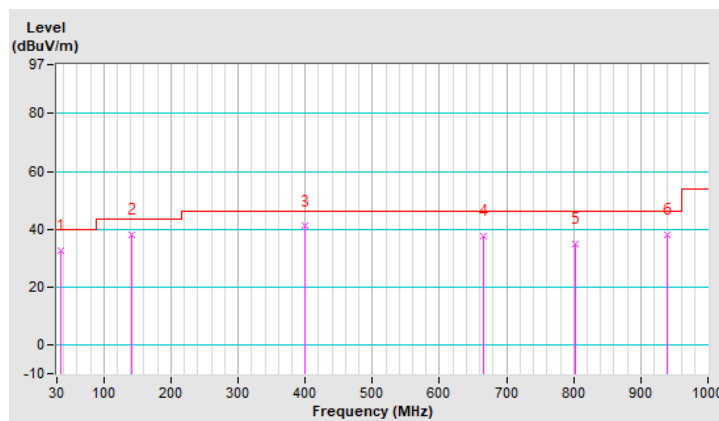


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	118.27	38.9 QP	43.5	-4.6	1.99 H	155	54.3	-15.4
2	130.88	38.5 QP	43.5	-5.0	1.99 H	223	52.8	-14.3
3	400.54	40.0 QP	46.0	-6.0	1.00 H	150	50.1	-10.1
4	666.32	36.6 QP	46.0	-9.4	1.00 H	125	41.1	-4.5
5	741.01	35.9 QP	46.0	-10.1	1.49 H	222	39.2	-3.3
6	933.07	40.1 QP	46.0	-5.9	1.49 H	134	40.9	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

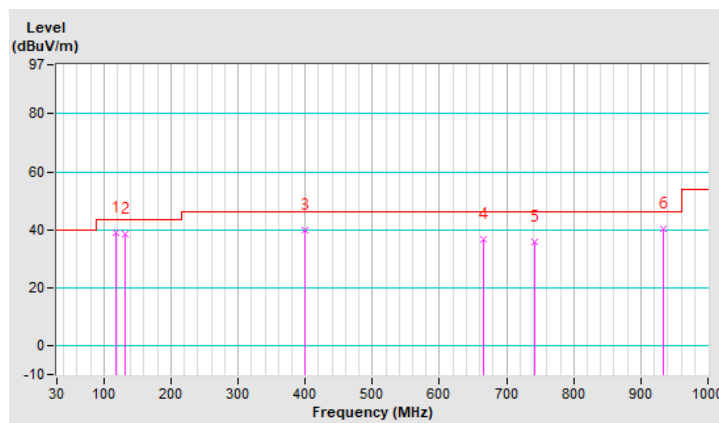


RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	130.88	40.0 QP	43.5	-3.5	1.51 V	146	54.3	-14.3
2	202.66	32.2 QP	43.5	-11.3	1.00 V	242	48.9	-16.7
3	400.54	41.4 QP	46.0	-4.6	1.00 V	259	51.5	-10.1
4	666.32	37.3 QP	46.0	-8.7	1.00 V	232	41.8	-4.5
5	741.01	37.4 QP	46.0	-8.6	1.00 V	81	40.7	-3.3
6	939.86	37.5 QP	46.0	-8.5	1.00 V	86	38.3	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

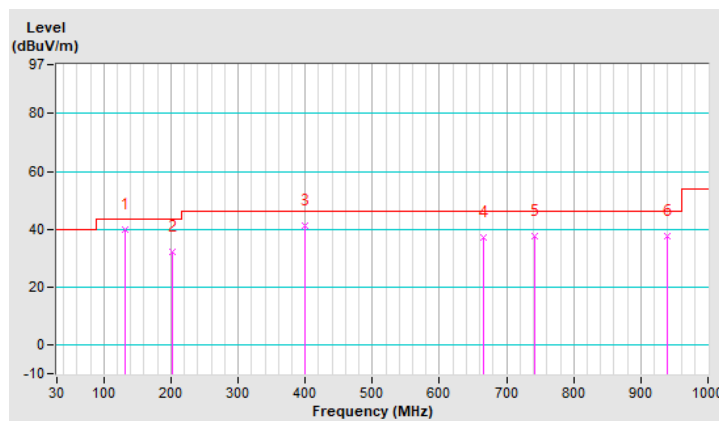


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	112.45	32.0 QP	43.5	-11.5	1.49 H	286	48.0	-16.0
2	197.81	29.3 QP	43.5	-14.2	1.99 H	251	45.9	-16.6
3	366.59	26.9 QP	46.0	-19.1	1.99 H	224	37.9	-11.0
4	400.54	40.3 QP	46.0	-5.7	1.00 H	177	50.4	-10.1
5	832.19	29.5 QP	46.0	-16.5	1.99 H	2	31.7	-2.2
6	952.47	32.7 QP	46.0	-13.3	1.49 H	18	33.3	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

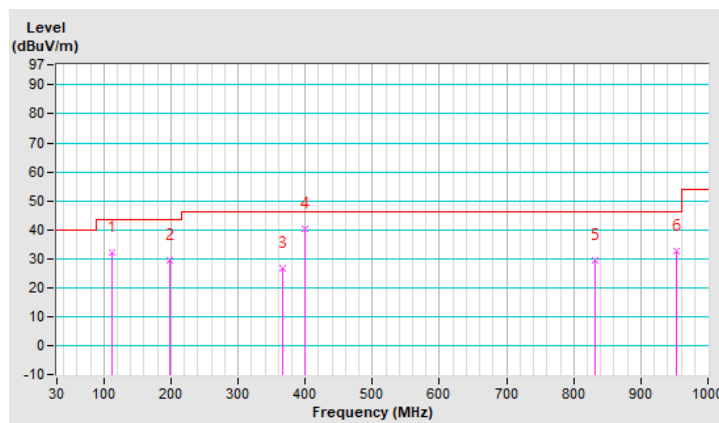


RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	32.4 QP	40.0	-7.6	1.00 V	7	46.5	-14.1
2	82.38	30.4 QP	40.0	-9.6	2.00 V	41	49.1	-18.7
3	171.62	28.3 QP	43.5	-15.2	1.00 V	120	41.8	-13.5
4	400.54	40.2 QP	46.0	-5.8	1.00 V	259	50.3	-10.1
5	626.55	26.5 QP	46.0	-19.5	1.51 V	92	31.7	-5.2
6	809.88	28.8 QP	46.0	-17.2	1.00 V	154	31.4	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

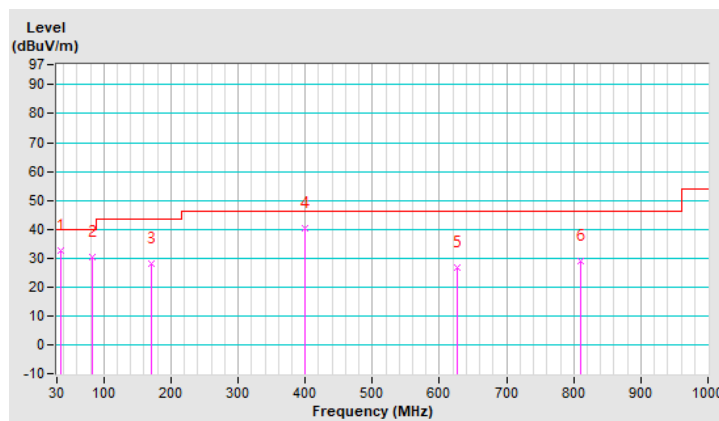


5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A- Radiated out of Band Emission (OOBE) Measurement (For U-NII-3 band)


Test Mode A

802.11a

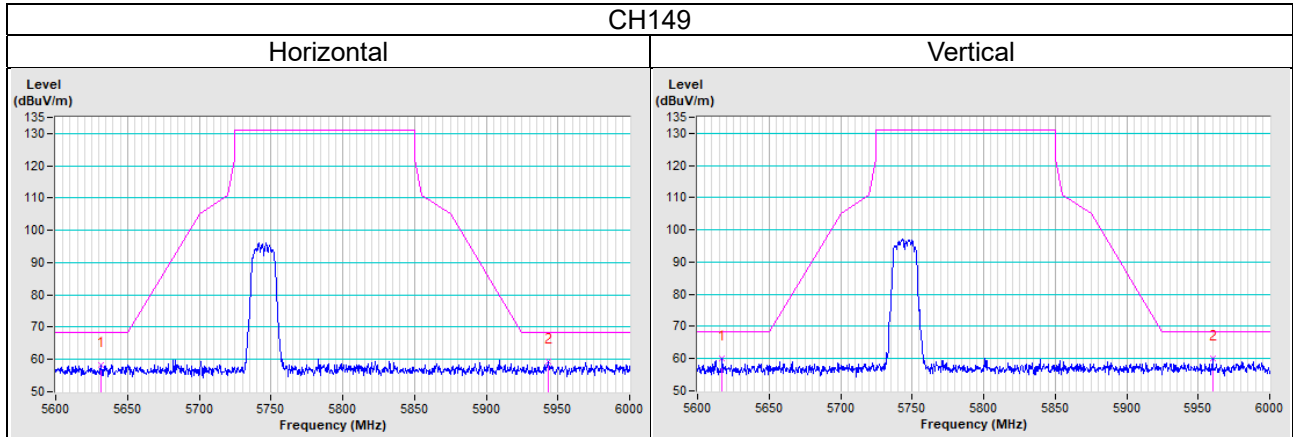


Test Mode B

802.11a

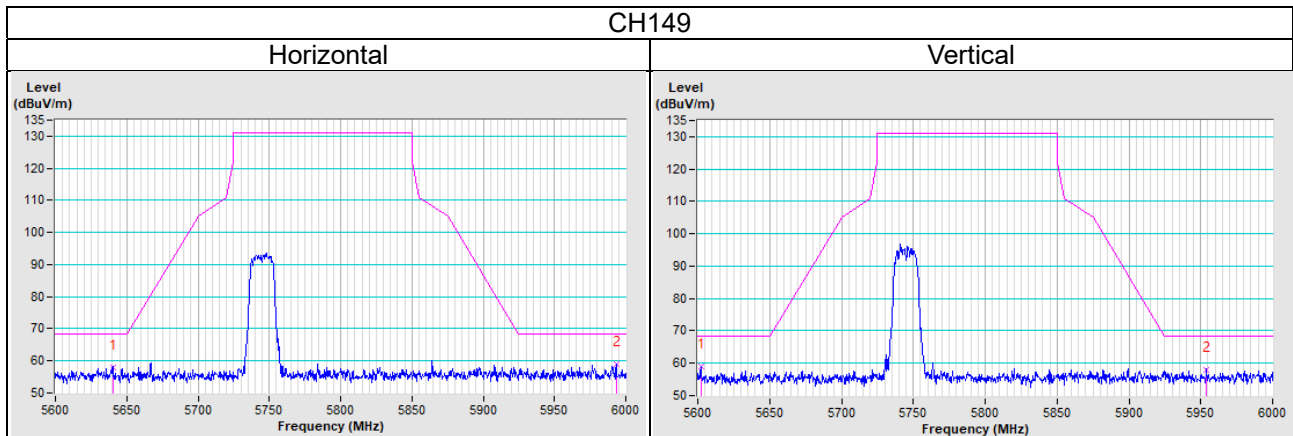


Test Mode C

802.11a

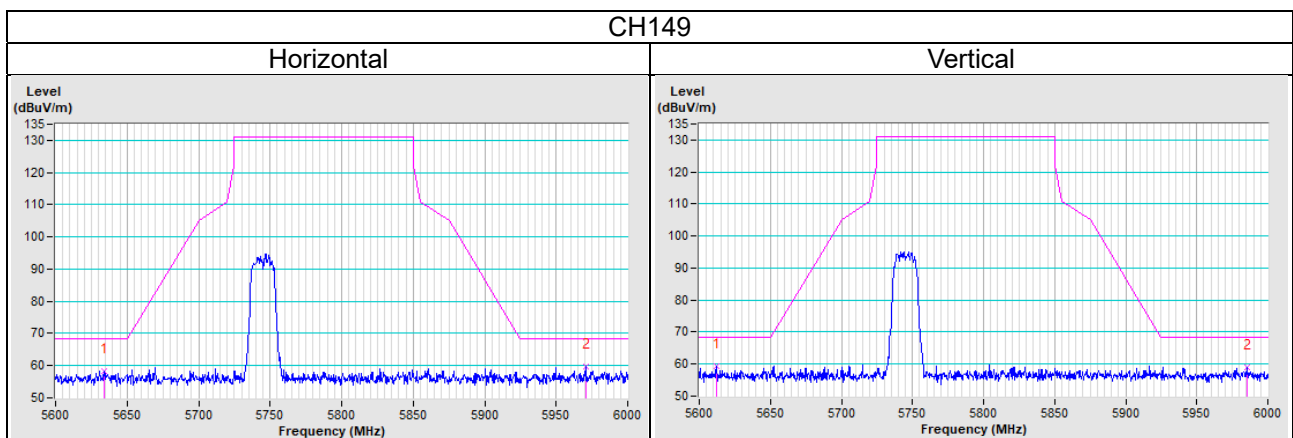


Annex B- Band Edge Measurement


Test Mode A

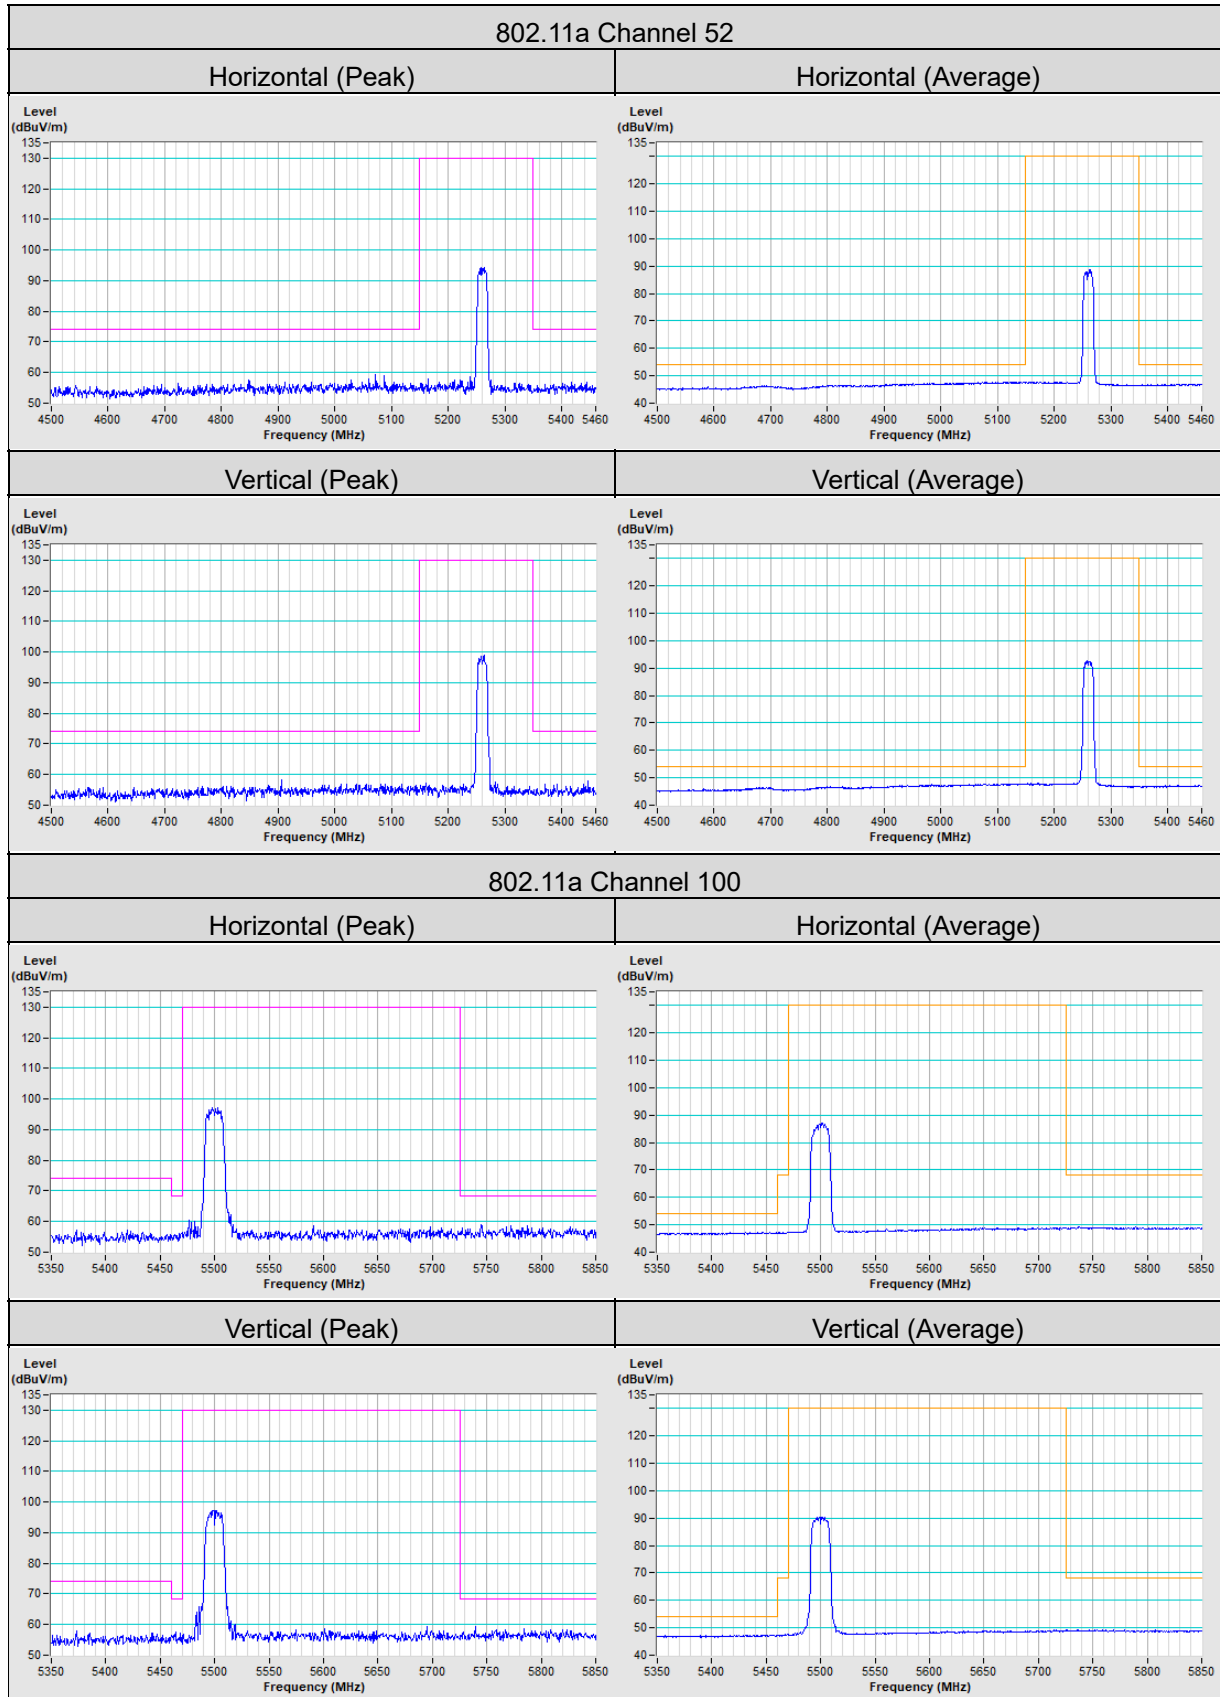

Test Mode B

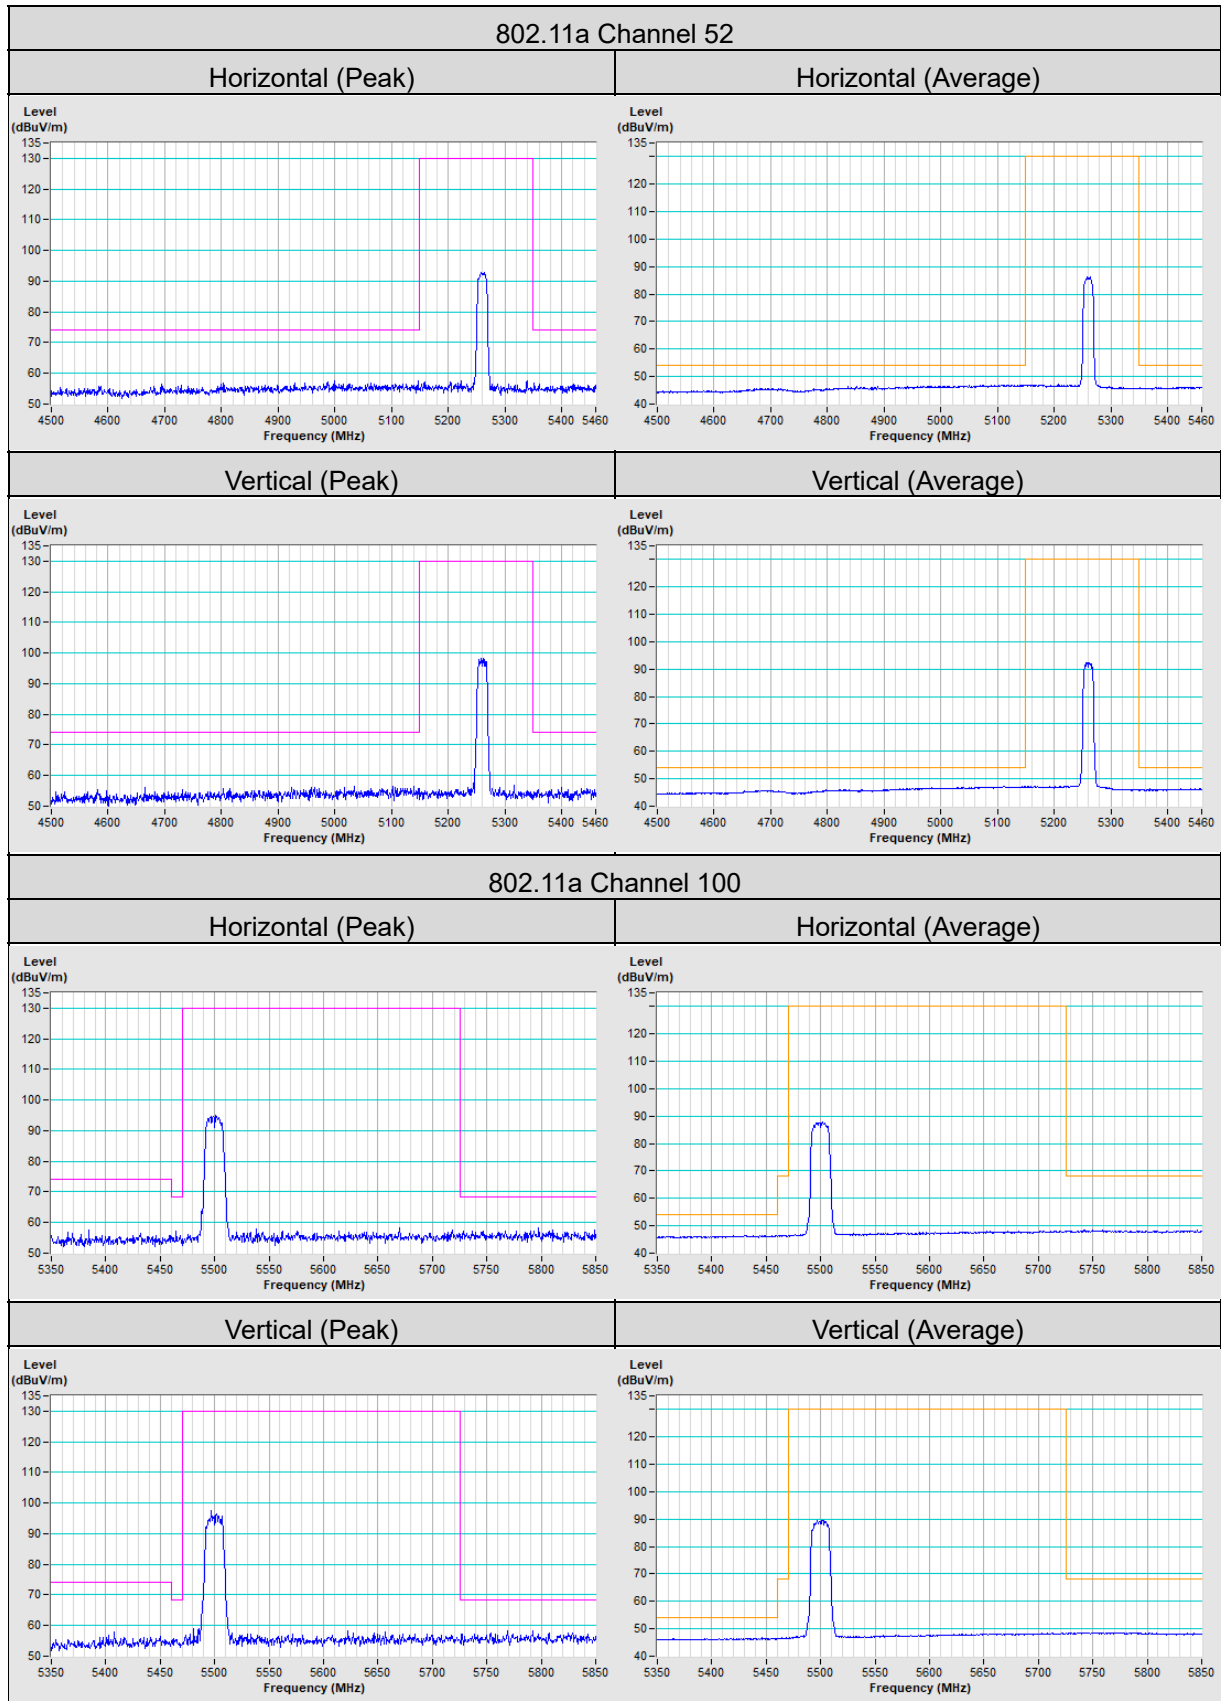

Test Mode C

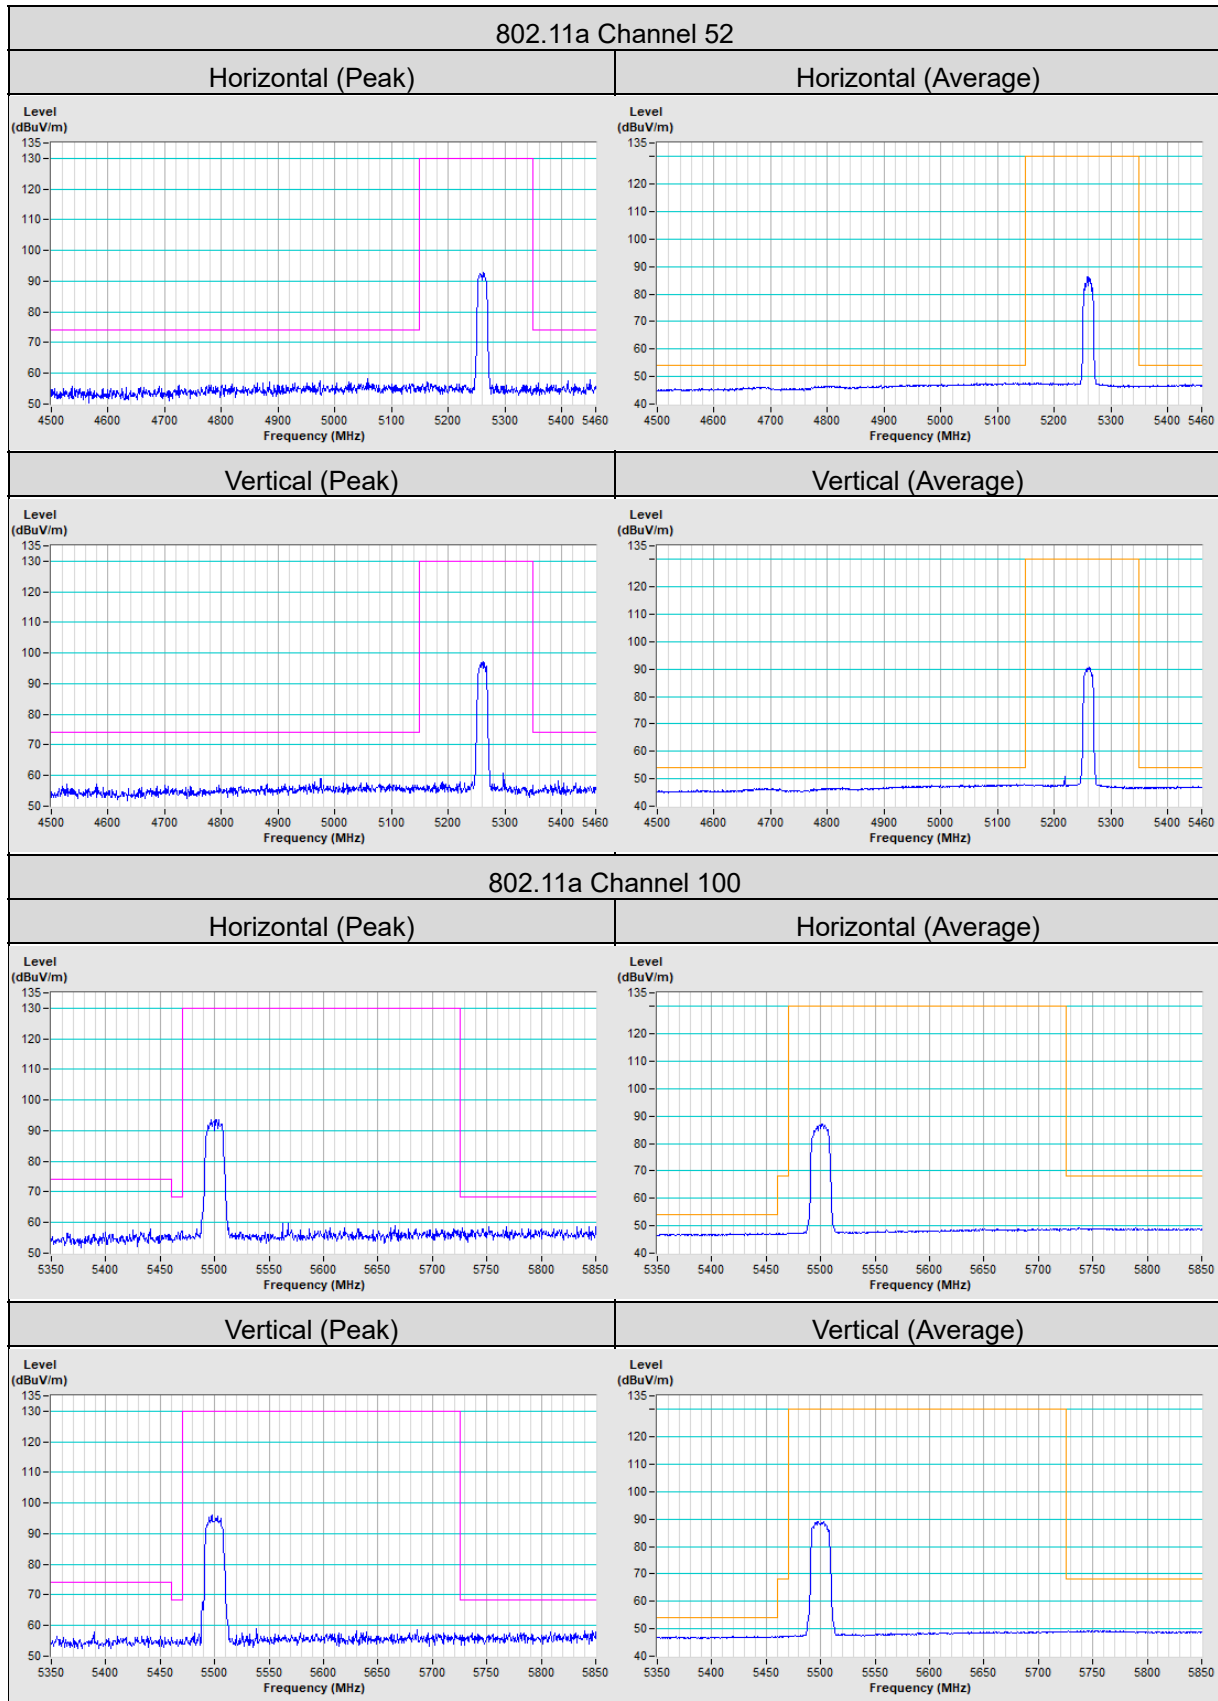

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---