





RADIO TEST REPORT

Test Report No. 14722523H-A-R1

Customer	Mitsubishi Electric Corporation Sanda Works
Description of EUT	Keyless System LFU
Model Number of EUT	SKE114-03
FCC ID	UJHSKE11403
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	August 25, 2023
Remarks	-

Representative test engineer	Approved by
	
Tetsuro Yoshida Engineer	Tsubasa Takayama Leader
 	
CERTIFICATE 5107.02	
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 22.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 14722523H-A

This report is a revised version of 14722523H-A. 14722523H-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14722523H-A	April 26, 2023	-
1	14722523H-A-R1	August 25, 2023	Correction of FCC ID in Cover page.

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT)	5
SECTION 3: Test specification, procedures & results	6
SECTION 4: Operation of EUT during testing	9
SECTION 5: Radiated emission (Fundamental and Spurious Emission)	11
SECTION 6: -20 dB Bandwidth	13
SECTION 7: 99 % emission bandwidth	13
APPENDIX 1: Test data	14
Radiated Emission (Fundamental and Spurious Emission)	14
-20 dB Bandwidth / 99 % emission bandwidth	22
APPENDIX 2: Test instruments	29
APPENDIX 3: Photographs of test setup	30
Radiated Emission	30
Worst Case Position	31

SECTION 1: Customer Information

Company Name	Mitsubishi Electric Corporation Sanda Works
Address	2-3-33, Miwa, Sanda-city, Hyogo 669-1513, Japan
Telephone Number	+81-79-298-8994
Contact Person	Masashi Nojima

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Keyless System LFU
Model Number	SKE114-03
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	March 31, 2023
Test Date	April 2 and 6, 2023

2.2 Product Description

General Specification

Rating	DC 12.0 V
--------	-----------

Radio Specification

Equipment Type	Transmitter
Frequency of Operation	125 kHz
Type of Modulation	ASK

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.209 Radiated emission limits; general requirements.

3.2 Procedures and results

Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
Conducted Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 8.8	<FCC> Section 15.207 <ISED> RSS-Gen 8.8	-	N/A	N/A	N/A *1)
Electric Field Strength of Fundamental Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 6.5, 6.12	<FCC> Section 15.209 <ISED> RSS-210 7.2 RSS-Gen 8.9	Radiated	N/A	3.9 dB 125 kHz, 0 deg. Peak with Duty factor (Mode 1 / Mode 3)	Complied
Electric Field Strength of Spurious Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 6.5, 6.6, 6.13	<FCC> Section 15.209 <ISED> RSS-210 7.3 RSS-Gen 8.9	Radiated	N/A	12.5 dB 58.624 MHz, Vertical QP (Mode 1)	Complied
-20 dB Bandwidth	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> -	<FCC> Reference data <ISED> -	Radiated	N/A	N/A	Complied

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.
*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

FCC Part 15.31 (e)

The battery voltage (DC 12 V) is provided to the EUT. Input voltage to RF part does not go through the regulator. So the test was performed with the supply voltage varied between 85 % and 115% of the nominal rated supply voltage (DC 12 V) and the variation of the input power does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the vehicle. Therefore, the equipment complies with the antenna requirement of Section 15.203

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
99 % emission bandwidth	RSS-Gen 6.7	-	Radiated	N/A	N/A	-

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Test Item	Frequency range		Uncertainty (+/-)	
Conducted emission AMN (LISN)	0.15 MHz to 30 MHz		3.3 dB	
Radiated emission	3 m	9 kHz to 30 MHz		
	10 m	3.0 dB		
	3 m	30 MHz to 200 MHz	Horizontal	4.8 dB
			Vertical	5.0 dB
		200 MHz to 1000 MHz	Horizontal	5.1 dB
			Vertical	6.2 dB
	10 m	30 MHz to 200 MHz	Horizontal	4.8 dB
			Vertical	4.8 dB
		200 MHz to 1000 MHz	Horizontal	5.0 dB
			Vertical	5.0 dB
	3 m	1 GHz to 6 GHz	4.9 dB	
		6 GHz to 18 GHz	5.2 dB	
	1 m	10 GHz to 26.5 GHz	5.4 dB	
26.5 GHz to 40 GHz		5.4 dB		
10 m	1 GHz to 18 GHz	5.4 dB		
-20 dB Bandwidth / 99 % emission bandwidth			0.96 %	

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan
Telephone: +81-596-24-8999

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.


SECTION 4: Operation of EUT during testing

4.1. Operating Mode(s)

Test mode	Remarks
1) Tx 125 kHz, Antenna - FL	-
2) Tx 125 kHz, Antenna - FR	-
3) Tx 125 kHz, Antenna - F	-
4) Tx 125 kHz, Antenna - R	-
5) Tx 125 kHz, Antenna - BP	-
6) Tx 125 kHz, Antenna - C	-
7) Tx 125 kHz, Antenna - Coil	-
*Power of the EUT was set by the software as follows; Software: DZ110799 (Date: 2023.03.16, Storage location: EUT memory) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product. Justification: The system was configured in typical fashion (as a user would normally use it) for testing.	

*This EUT has two modes which transponder key is attached or not. The worst case was confirmed with and without transponder key attached, as a result, the test without transponder key attached was the worst case. Therefore the test without transponder key attached was performed only.

4.2. Configuration and peripherals

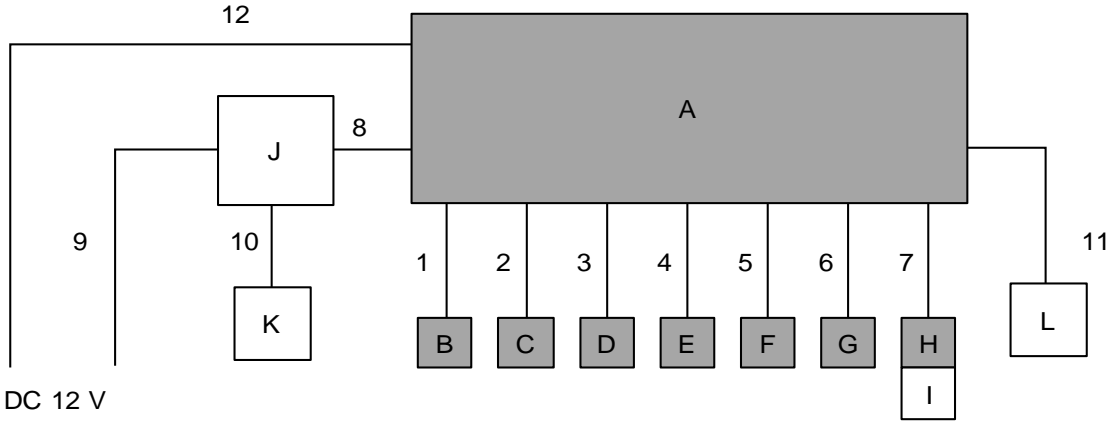

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.
 * The EUT does not transmit simultaneously from two antennas.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Keyless System LFU	SKE114-03	20230329-L1 (No.1) *1) 20230329-L2 (No.2) *2)	Mitsubishi Electric Corporation Sanda Works	EUT
B	LF Antenna (Door)	ANT-FL	D656-676N1-A (No.1)	Continental	EUT
C	LF Antenna (Door)	ANT-FR	D656-676N1-A (No.1)	Continental	EUT
D	LF Antenna (Room)	ANT-F	X001T60771 (No.1)	Mitsubishi Electric Corporation Sanda Works	EUT
E	LF Antenna (Room)	ANT-R	X001T60771 (No.1)	Mitsubishi Electric Corporation Sanda Works	EUT
F	LF Antenna (Room)	ANT-BP	X001T60771 (No.1)	Mitsubishi Electric Corporation Sanda Works	EUT
G	LF Antenna (Room)	ANT-C	X001T60771 (No.1)	Mitsubishi Electric Corporation Sanda Works	EUT
H	Antenna coil (Immobilizer)	-	N243-663S0 (No.1)	U-SHIN	EUT
I	Keyless System Hand Unit	SKE11D-01	20230329-T1 (No.1)	Mitsubishi Electric Corporation Sanda Works	-
J	Control JIG	-	X1L-782-01 (No.1)	Mitsubishi Electric Corporation Sanda Works	-
K	SW BOX	-	X1L-783-01 (No.1)	Mitsubishi Electric Corporation Sanda Works	-
L	Keyless System Receiver	SKE115-01	20230329-R1 (No.1)	Mitsubishi Electric Corporation Sanda Works	-

*1) Used for Mode 1 to Mode 7

*2) Used for confirmation with or without a transponder Key in Mode 7

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Antenna Cable	1.2	Unshielded	Unshielded	(No.1) *1)
2	Antenna Cable	1.2	Unshielded	Unshielded	(No.1) *1)
3	Antenna Cable	1.2	Unshielded	Unshielded	(No.1) *1)
4	Antenna Cable	1.2	Unshielded	Unshielded	(No.1) *1)
5	Antenna Cable	1.2	Unshielded	Unshielded	(No.1) *1)
6	Antenna Cable	1.2	Unshielded	Unshielded	(No.1) *1)
7	Antenna Cable	1.2	Unshielded	Unshielded	(No.1) *1)
8	Signal Cable	1.5	Unshielded	Unshielded	(No.1) *1)
9	DC Cable	3.5	Unshielded	Unshielded	-
10	Signal Cable	1.0	Unshielded	Unshielded	(No.1) *1)
11	Signal Cable	1.5	Unshielded	Unshielded	(No.1) *1)
12	DC Cable	3.5	Unshielded	Unshielded	-

*1) Customer's management number

SECTION 5: Radiated emission (Fundamental and Spurious Emission)

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.
The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[Limit conversion]

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

[Frequency: From 9 kHz to 30 MHz]

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., and 135 deg.) and horizontal polarization.

*Refer to Figure 2 about Direction of the Loop Antenna.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

These tests were performed in semi anechoic chamber. Therefore, the measured level of emissions may be higher than if measurements were made without a ground plane. However, test results were confirmed to pass against standard limit.

[Frequency: From 30 MHz to 1 GHz]

The measuring antenna height varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

[Test instruments and test settings]

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz
Antenna Type	Loop	Biconical	Logperiodic

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Frequency	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz
Instrument used	Test Receiver				
Detector	PK / AV	QP	PK / AV	QP	QP
IF Bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz
Test Distance	3 m *1)	3 m *1)	3 m *1)	3 m *2)	3 m


*1) Distance Factor: $40 \times \log(3 \text{ m} / 300 \text{ m}) = -80 \text{ dB}$

*2) Distance Factor: $40 \times \log(3 \text{ m} / 30 \text{ m}) = -40 \text{ dB}$

Figure 1: Test Setup

Below 1 GHz


Test Distance: 3 m

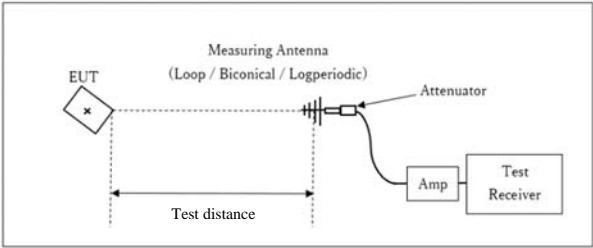


x : Center of turn table

Figure 2: Direction of the Loop Antenna

Side View (Vertical)

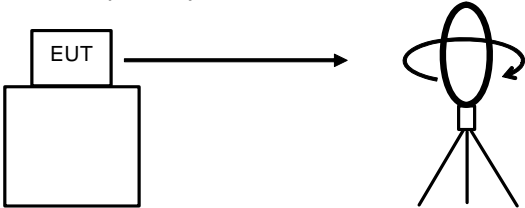


Top View (Horizontal)



Antenna was not rotated.

Top View (Vertical)

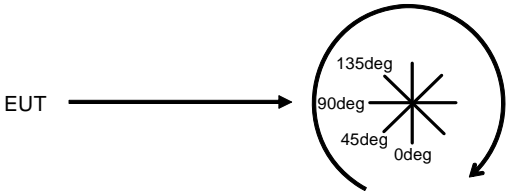

Front side: 0 deg.
 Forward direction: clockwise

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 9 kHz to 1 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: -20 dB Bandwidth

Test Procedure

The test was measured with a spectrum analyzer using a test fixture.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
-20 dB Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer

Test data : APPENDIX
Test result : Pass

SECTION 7: 99 % emission bandwidth

Test Procedure

The test was measured with a spectrum analyzer.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
99 % emission bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer

Peak hold was applied as Worst-case measurement.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	April 2, 2023	April 6, 2023
Temperature / Humidity	20 deg. C / 40 % RH	22 deg. C / 49 % RH
Engineer	Tetsuro Yoshida	Keiya Ido
Mode	Mode 1	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	-	21.7	45.6	23.9	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	-	21.7	45.6	23.9	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	-	21.7	45.6	23.9	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.9	19.1	-64.3	32.2	-	-28.5	39.6	68.1	
0deg	0.37500	PK	39.9	19.0	-64.3	32.2	-	-37.6	36.1	73.7	
0deg	0.50000	QP	31.2	19.0	-24.4	32.2	-	-6.4	33.6	40.0	
0deg	0.62500	QP	23.2	19.0	-24.3	32.2	-	-14.3	31.7	46.0	
0deg	0.75000	QP	24.5	19.1	-24.3	32.2	-	-12.9	30.1	43.0	
0deg	0.87500	QP	22.3	19.1	-24.3	32.2	-	-15.1	28.7	43.8	
0deg	1.00000	QP	23.3	19.0	-24.3	32.2	-	-14.2	27.6	41.8	
0deg	1.12500	QP	22.0	19.0	-24.3	32.2	-	-15.5	26.5	42.0	
0deg	1.25000	QP	22.4	19.1	-24.3	32.2	-	-15.0	25.6	40.6	
Hori.	52.564	QP	27.8	10.3	7.4	32.2	-	13.3	40.0	26.7	
Hori.	58.624	QP	39.7	8.3	7.5	32.2	-	23.3	40.0	16.7	
Hori.	135.366	QP	22.0	14.2	8.5	32.1	-	12.6	43.5	30.9	Floor Noise
Hori.	233.885	QP	30.5	11.9	9.4	32.0	-	19.8	46.0	26.2	
Hori.	332.767	QP	39.8	14.8	10.2	32.0	-	32.8	46.0	13.2	
Hori.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise
Vert.	52.564	QP	27.7	10.3	7.4	32.2	-	13.2	40.0	26.8	
Vert.	58.624	QP	43.9	8.3	7.5	32.2	-	27.5	40.0	12.5	
Vert.	135.366	QP	22.0	14.2	8.5	32.1	-	12.6	43.5	30.9	Floor Noise
Vert.	233.885	QP	38.8	11.9	9.4	32.0	-	28.1	46.0	17.9	
Vert.	332.767	QP	37.4	14.8	10.2	32.0	-	30.4	46.0	15.6	
Vert.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	0.0	21.7	25.6	3.9	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	0.0	21.7	25.6	3.9	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	0.0	21.7	25.6	3.9	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.9	19.1	-64.3	32.2	0.0	-28.5	19.6	48.1	
0deg	0.37500	PK	39.9	19.0	-64.3	32.2	0.0	-37.6	16.1	53.7	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.9	19.1	5.9	32.2	-	101.7	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

*It was confirmed that there were no differences in the spurious emission due to the input voltage.
If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power.
The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	April 2, 2023	April 6, 2023
Temperature / Humidity	20 deg. C / 40 % RH	22 deg. C / 49 % RH
Engineer	Tetsuro Yoshida	Keiya Ido
Mode	Mode 2	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.8	19.1	-64.3	32.2	-	-28.6	39.6	68.2	
0deg	0.37500	PK	39.8	19.0	-64.3	32.2	-	-37.7	36.1	73.8	
0deg	0.50000	QP	31.3	19.0	-24.4	32.2	-	-6.3	33.6	39.9	
0deg	0.62500	QP	23.2	19.0	-24.3	32.2	-	-14.3	31.7	46.0	
0deg	0.75000	QP	24.3	19.1	-24.3	32.2	-	-13.1	30.1	43.2	
0deg	0.87500	QP	22.1	19.1	-24.3	32.2	-	-15.3	28.7	44.0	
0deg	1.00000	QP	23.3	19.0	-24.3	32.2	-	-14.2	27.6	41.8	
0deg	1.12500	QP	22.1	19.0	-24.3	32.2	-	-15.4	26.5	41.9	
0deg	1.25000	QP	22.2	19.1	-24.3	32.2	-	-15.2	25.6	40.8	
Hori.	52.459	QP	33.1	10.3	7.4	32.2	-	18.6	40.0	21.4	
Hori.	63.171	QP	33.9	7.2	7.6	32.2	-	16.5	40.0	23.5	
Hori.	135.366	QP	22.0	14.2	8.5	32.1	-	12.6	43.5	30.9	Floor Noise
Hori.	233.885	QP	30.6	11.9	9.4	32.0	-	19.9	46.0	26.1	
Hori.	332.767	QP	39.8	14.8	10.2	32.0	-	32.8	46.0	13.2	
Hori.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise
Vert.	52.459	QP	34.4	10.3	7.4	32.2	-	19.9	40.0	20.1	
Vert.	63.171	QP	28.0	7.2	7.6	32.2	-	10.6	40.0	29.4	
Vert.	135.366	QP	22.0	14.2	8.5	32.1	-	12.6	43.5	30.9	Floor Noise
Vert.	233.885	QP	38.5	11.9	9.4	32.0	-	27.8	46.0	18.2	
Vert.	332.767	QP	37.4	14.8	10.2	32.0	-	30.4	46.0	15.6	
Vert.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.8	19.1	-64.3	32.2	0.0	-28.6	19.6	48.2	
0deg	0.37500	PK	39.8	19.0	-64.3	32.2	0.0	-37.7	16.1	53.8	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *
* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	5.9	32.2	-	101.6	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

*It was confirmed that there were no differences in the spurious emission due to the input voltage. If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated. Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	April 2, 2023	April 6, 2023
Temperature / Humidity	20 deg. C / 40 % RH	22 deg. C / 49 % RH
Engineer	Tetsuro Yoshida	Keiya Ido
Mode	Mode 3	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	-	21.7	45.6	23.9	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	-	21.7	45.6	23.9	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	-	21.7	45.6	23.9	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.8	19.1	-64.3	32.2	-	-29.6	39.6	69.2	
0deg	0.37500	PK	50.0	19.0	-64.3	32.2	-	-27.5	36.1	63.6	
0deg	0.50000	QP	40.6	19.0	-24.4	32.2	-	3.0	33.6	30.6	
0deg	0.62500	QP	36.3	19.0	-24.3	32.2	-	-1.2	31.7	32.9	
0deg	0.75000	QP	33.1	19.1	-24.3	32.2	-	-4.3	30.1	34.4	
0deg	0.87500	QP	24.5	19.1	-24.3	32.2	-	-12.9	28.7	41.6	
0deg	1.00000	QP	28.4	19.0	-24.3	32.2	-	-9.1	27.6	36.7	
0deg	1.12500	QP	24.8	19.0	-24.3	32.2	-	-12.7	26.5	39.2	
0deg	1.25000	QP	26.9	19.1	-24.3	32.2	-	-10.5	25.6	36.1	
Hori.	57.813	QP	38.1	8.5	7.5	32.2	-	21.9	40.0	18.1	
Hori.	64.215	QP	38.1	6.9	7.6	32.2	-	20.4	40.0	19.6	
Hori.	135.366	QP	22.0	14.2	8.5	32.1	-	12.6	43.5	30.9	Floor Noise
Hori.	233.885	QP	30.4	11.9	9.4	32.0	-	19.7	46.0	26.3	
Hori.	332.767	QP	39.1	14.8	10.2	32.0	-	32.1	46.0	13.9	
Hori.	494.402	QP	21.7	17.8	11.4	32.0	-	18.9	46.0	27.1	Floor Noise
Vert.	57.813	QP	41.7	8.5	7.5	32.2	-	25.5	40.0	14.5	
Vert.	64.215	QP	31.9	6.9	7.6	32.2	-	14.2	40.0	25.8	
Vert.	135.366	QP	22.0	14.2	8.5	32.1	-	12.6	43.5	30.9	Floor Noise
Vert.	233.885	QP	38.6	11.9	9.4	32.0	-	27.9	46.0	18.1	
Vert.	332.767	QP	37.1	14.8	10.2	32.0	-	30.1	46.0	15.9	
Vert.	494.402	QP	21.7	17.8	11.4	32.0	-	18.9	46.0	27.1	Floor Noise

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	0.0	21.7	25.6	3.9	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	0.0	21.7	25.6	3.9	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.9	19.1	-74.1	32.2	0.0	21.7	25.6	3.9	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.8	19.1	-64.3	32.2	0.0	-29.6	19.6	49.2	
0deg	0.37500	PK	50.0	19.0	-64.3	32.2	0.0	-27.5	16.1	43.6	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.9	19.1	5.9	32.2	-	101.7	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

*It was confirmed that there were no differences in the spurious emission due to the input voltage.
If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power.
The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	April 2, 2023	April 6, 2023
Temperature / Humidity	20 deg. C / 40 % RH	22 deg. C / 49 % RH
Engineer	Tetsuro Yoshida	Keiyo Ido
Mode	Mode 4	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.4	19.1	-64.3	32.2	-	-30.0	39.6	69.6	
0deg	0.37500	PK	49.6	19.0	-64.3	32.2	-	-27.9	36.1	64.0	
0deg	0.50000	QP	41.2	19.0	-24.4	32.2	-	3.6	33.6	30.0	
0deg	0.62500	QP	40.2	19.0	-24.3	32.2	-	2.7	31.7	29.0	
0deg	0.75000	QP	36.7	19.1	-24.3	32.2	-	-0.7	30.1	30.8	
0deg	0.87500	QP	26.0	19.1	-24.3	32.2	-	-11.4	28.7	40.1	
0deg	1.00000	QP	28.2	19.0	-24.3	32.2	-	-9.3	27.6	36.9	
0deg	1.12500	QP	24.1	19.0	-24.3	32.2	-	-13.4	26.5	39.9	
0deg	1.25000	QP	26.5	19.1	-24.3	32.2	-	-10.9	25.6	36.5	
Hori.	57.813	QP	38.1	8.5	7.5	32.2	-	21.9	40.0	18.1	
Hori.	64.215	QP	38.1	6.9	7.6	32.2	-	20.4	40.0	19.6	
Hori.	73.937	QP	38.8	6.4	7.8	32.1	-	20.9	40.0	19.1	
Hori.	233.885	QP	30.4	11.9	9.4	32.0	-	19.7	46.0	26.3	
Hori.	332.767	QP	39.0	14.8	10.2	32.0	-	32.0	46.0	14.0	
Hori.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise
Vert.	57.813	QP	41.6	8.5	7.5	32.2	-	25.4	40.0	14.6	
Vert.	64.215	QP	31.8	6.9	7.6	32.2	-	14.1	40.0	25.9	
Vert.	73.937	QP	29.6	6.4	7.8	32.1	-	11.7	40.0	28.3	
Vert.	233.885	QP	38.6	11.9	9.4	32.0	-	27.9	46.0	18.1	
Vert.	332.767	QP	37.4	14.8	10.2	32.0	-	30.4	46.0	15.6	
Vert.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.4	19.1	-64.3	32.2	0.0	-30.0	19.6	49.6	
0deg	0.37500	PK	49.6	19.0	-64.3	32.2	0.0	-27.9	16.1	44.0	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	5.9	32.2	-	101.6	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

*It was confirmed that there were no differences in the spurious emission due to the input voltage. If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated. Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	April 2, 2023	April 6, 2023
Temperature / Humidity	20 deg. C / 40 % RH	22 deg. C / 49 % RH
Engineer	Tetsuro Yoshida	Keiyo Ido
Mode	Mode 5	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.7	19.1	-74.1	32.2	-	21.5	45.6	24.1	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.7	19.1	-74.1	32.2	-	21.5	45.6	24.1	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.7	19.1	-74.1	32.2	-	21.5	45.6	24.1	Fundamental (DC 13.8 V)
0deg	0.25000	PK	55.2	19.1	-64.3	32.2	-	-22.2	39.6	61.8	
0deg	0.37500	PK	57.3	19.0	-64.3	32.2	-	-20.2	36.1	56.3	
0deg	0.50000	QP	31.8	19.0	-24.4	32.2	-	-5.8	33.6	39.4	
0deg	0.62500	QP	32.0	19.0	-24.3	32.2	-	-5.5	31.7	37.2	
0deg	0.75000	QP	34.7	19.1	-24.3	32.2	-	-2.7	30.1	32.8	
0deg	0.87500	QP	29.0	19.1	-24.3	32.2	-	-8.4	28.7	37.1	
0deg	1.00000	QP	29.0	19.0	-24.3	32.2	-	-8.5	27.6	36.1	
0deg	1.12500	QP	23.8	19.0	-24.3	32.2	-	-13.7	26.5	40.2	
0deg	1.25000	QP	25.7	19.1	-24.3	32.2	-	-11.7	25.6	37.3	
Hori.	57.813	QP	38.1	8.5	7.5	32.2	-	21.9	40.0	18.1	
Hori.	64.215	QP	38.2	6.9	7.6	32.2	-	20.5	40.0	19.5	
Hori.	135.366	QP	22.0	14.2	8.5	32.1	-	12.6	43.5	30.9	Floor Noise
Hori.	233.885	QP	30.5	11.9	9.4	32.0	-	19.8	46.0	26.2	
Hori.	332.767	QP	39.2	14.8	10.2	32.0	-	32.2	46.0	13.8	
Hori.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise
Vert.	57.813	QP	41.6	8.5	7.5	32.2	-	25.4	40.0	14.6	
Vert.	64.215	QP	32.0	6.9	7.6	32.2	-	14.3	40.0	25.7	
Vert.	135.366	QP	22.0	14.2	8.5	32.1	-	12.6	43.5	30.9	Floor Noise
Vert.	233.885	QP	38.7	11.9	9.4	32.0	-	28.0	46.0	18.0	
Vert.	332.767	QP	37.2	14.8	10.2	32.0	-	30.2	46.0	15.8	
Vert.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.7	19.1	-74.1	32.2	0.0	21.5	25.6	4.1	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.7	19.1	-74.1	32.2	0.0	21.5	25.6	4.1	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.7	19.1	-74.1	32.2	0.0	21.5	25.6	4.1	Fundamental (DC 13.8 V)
0deg	0.25000	PK	55.2	19.1	-64.3	32.2	0.0	-22.2	19.6	41.8	
0deg	0.37500	PK	57.3	19.0	-64.3	32.2	0.0	-20.2	16.1	36.3	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *
* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.7	19.1	5.9	32.2	-	101.5	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

*It was confirmed that there were no differences in the spurious emission due to the input voltage.
If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power.
The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	April 2, 2023	April 6, 2023
Temperature / Humidity	20 deg. C / 40 % RH	22 deg. C / 49 % RH
Engineer	Tetsuro Yoshida	Keiyo Ido
Mode	Mode 6	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	-	21.6	45.6	24.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	54.4	19.1	-64.3	32.2	-	-23.0	39.6	62.6	
0deg	0.37500	PK	57.8	19.0	-64.3	32.2	-	-19.7	36.1	55.8	
0deg	0.50000	QP	38.8	19.0	-24.4	32.2	-	1.2	33.6	32.4	
0deg	0.62500	QP	32.8	19.0	-24.3	32.2	-	-4.7	31.7	36.4	
0deg	0.75000	QP	34.6	19.1	-24.3	32.2	-	-2.8	30.1	32.9	
0deg	0.87500	QP	29.5	19.1	-24.3	32.2	-	-7.9	28.7	36.6	
0deg	1.00000	QP	28.4	19.0	-24.3	32.2	-	-9.1	27.6	36.7	
0deg	1.12500	QP	23.0	19.0	-24.3	32.2	-	-14.5	26.5	41.0	
0deg	1.25000	QP	25.7	19.1	-24.3	32.2	-	-11.7	25.6	37.3	
Hori.	57.813	QP	38.1	8.5	7.5	32.2	-	21.9	40.0	18.1	
Hori.	64.215	QP	38.2	6.9	7.6	32.2	-	20.5	40.0	19.5	
Hori.	73.937	QP	39.0	6.4	7.8	32.1	-	21.1	40.0	18.9	
Hori.	233.885	QP	30.4	11.9	9.4	32.0	-	19.7	46.0	26.3	
Hori.	332.767	QP	39.2	14.8	10.2	32.0	-	32.2	46.0	13.8	
Hori.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise
Vert.	57.813	QP	41.7	8.5	7.5	32.2	-	25.5	40.0	14.5	
Vert.	64.215	QP	31.7	6.9	7.6	32.2	-	14.0	40.0	26.0	
Vert.	73.937	QP	29.6	6.4	7.8	32.1	-	11.7	40.0	28.3	
Vert.	233.885	QP	38.8	11.9	9.4	32.0	-	28.1	46.0	17.9	
Vert.	332.767	QP	37.4	14.8	10.2	32.0	-	30.4	46.0	15.6	
Vert.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.8	19.1	-74.1	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	54.4	19.1	-64.3	32.2	0.0	-23.0	19.6	42.6	
0deg	0.37500	PK	57.8	19.0	-64.3	32.2	0.0	-19.7	16.1	35.8	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *
* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.8	19.1	5.9	32.2	-	101.6	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

*It was confirmed that there were no differences in the spurious emission due to the input voltage. If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated. Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	April 2, 2023	April 6, 2023
Temperature / Humidity	20 deg. C / 40 % RH	22 deg. C / 49 % RH
Engineer	Tetsuro Yoshida	Keiyo Ido
Mode	Mode 7	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	91.8	19.1	-74.1	32.2	-	4.6	45.6	41.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	91.8	19.1	-74.1	32.2	-	4.6	45.6	41.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	91.8	19.1	-74.1	32.2	-	4.6	45.6	41.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	34.2	19.1	-64.3	32.2	-	-43.2	39.6	82.8	
0deg	0.37500	PK	31.7	19.0	-64.3	32.2	-	-45.8	36.1	81.9	
0deg	0.50000	QP	23.8	19.0	-24.4	32.2	-	-13.8	33.6	47.4	
0deg	0.62500	QP	23.0	19.0	-24.3	32.2	-	-14.5	31.7	46.2	
0deg	0.75000	QP	22.7	19.1	-24.3	32.2	-	-14.7	30.1	44.8	
0deg	0.87500	QP	22.3	19.1	-24.3	32.2	-	-15.1	28.7	43.8	
0deg	1.00000	QP	22.1	19.0	-24.3	32.2	-	-15.4	27.6	43.0	
0deg	1.12500	QP	22.2	19.0	-24.3	32.2	-	-15.3	26.5	41.8	
0deg	1.25000	QP	22.0	19.1	-24.3	32.2	-	-15.4	25.6	41.0	
Hori.	57.813	QP	22.2	8.5	7.5	32.2	-	6.0	40.0	34.0	Floor Noise
Hori.	64.215	QP	22.7	6.9	7.6	32.2	-	5.0	40.0	35.0	Floor Noise
Hori.	73.937	QP	22.4	6.4	7.8	32.1	-	4.5	40.0	35.5	Floor Noise
Hori.	233.885	QP	21.9	11.9	9.4	32.0	-	11.2	46.0	34.8	Floor Noise
Hori.	332.767	QP	21.7	14.8	10.2	32.0	-	14.7	46.0	31.3	Floor Noise
Hori.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise
Vert.	57.813	QP	22.2	8.5	7.5	32.2	-	6.0	40.0	34.0	Floor Noise
Vert.	64.215	QP	22.7	6.9	7.6	32.2	-	5.0	40.0	35.0	Floor Noise
Vert.	73.937	QP	22.4	6.4	7.8	32.1	-	4.5	40.0	35.5	Floor Noise
Vert.	233.885	QP	21.9	11.9	9.4	32.0	-	11.2	46.0	34.8	Floor Noise
Vert.	332.767	QP	21.7	14.8	10.2	32.0	-	14.7	46.0	31.3	Floor Noise
Vert.	521.998	QP	21.5	17.7	11.5	32.0	-	18.7	46.0	27.3	Floor Noise

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	91.8	19.1	-74.1	32.2	0.0	4.6	25.6	21.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	91.8	19.1	-74.1	32.2	0.0	4.6	25.6	21.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	91.8	19.1	-74.1	32.2	0.0	4.6	25.6	21.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	34.2	19.1	-64.3	32.2	0.0	-43.2	19.6	62.8	
0deg	0.37500	PK	31.7	19.0	-64.3	32.2	0.0	-45.8	16.1	61.9	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor


Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	91.8	19.1	5.9	32.2	-	84.6	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

*It was confirmed that there were no differences in the spurious emission due to the input voltage. If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated. Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Spurious Emission
(Plot data, Worst case for Fundamental Emission)


Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	April 2, 2023	April 6, 2023
Temperature / Humidity	20 deg. C / 40 % RH	22 deg. C / 49 % RH
Engineer	Tetsuro Yoshida	Keiia Ido
Mode	Mode 1	

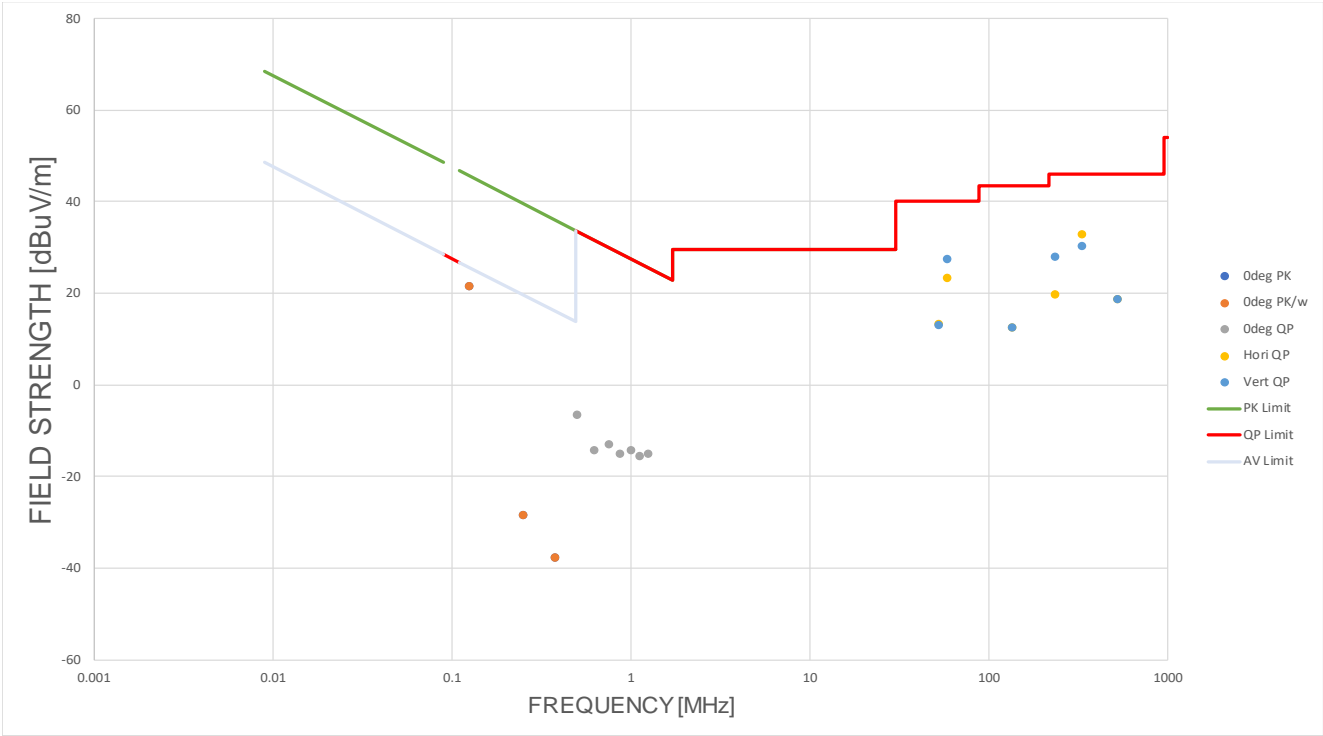

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	April 2, 2023
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 1

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
10.074	16.7304

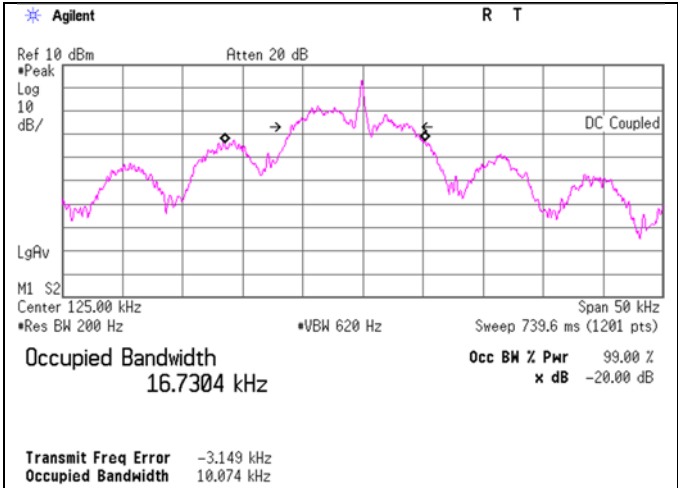


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	April 2, 2023
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 2

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.703	16.1692

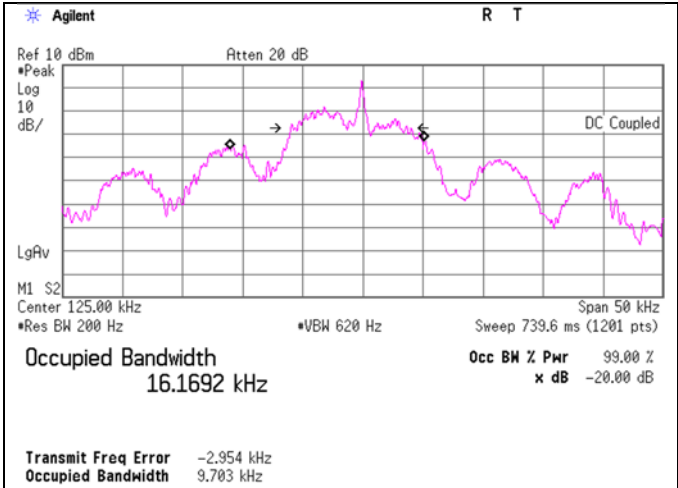


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	April 2, 2023
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 3

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.206	10.9176

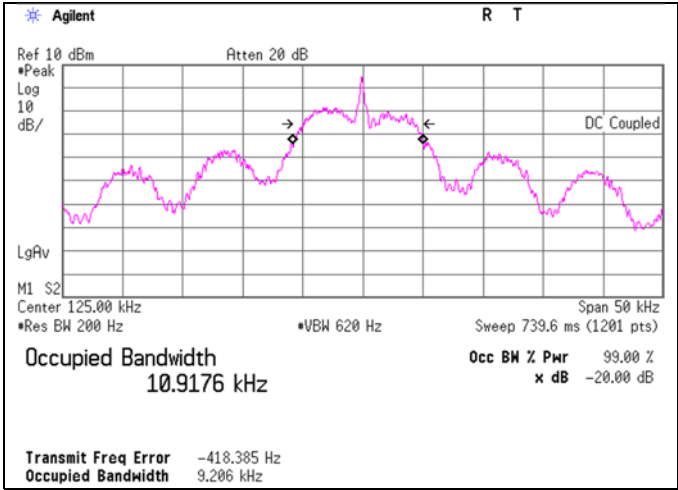


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	April 2, 2023
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 4

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.676	11.8655

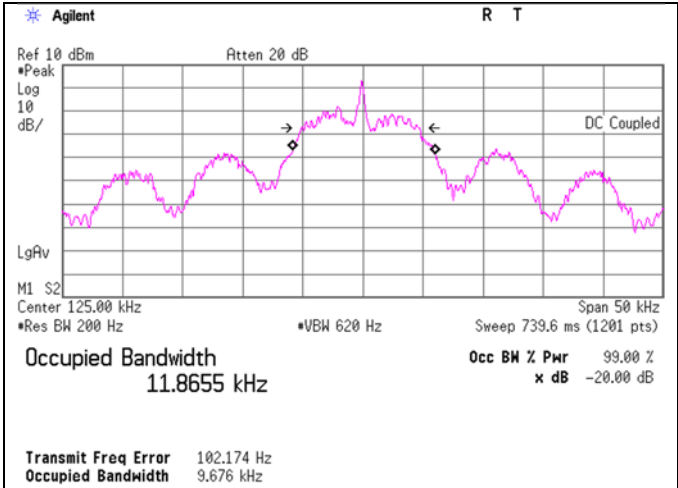


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	April 2, 2023
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 5

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.090	12.1677

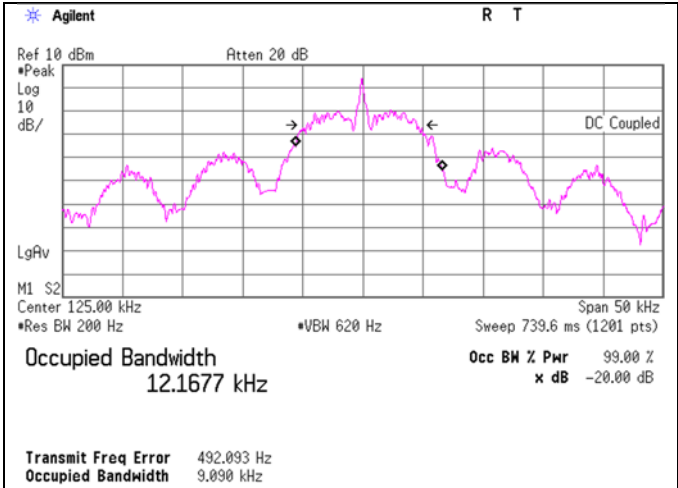


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	April 2, 2023
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 6

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
8.633	12.5789

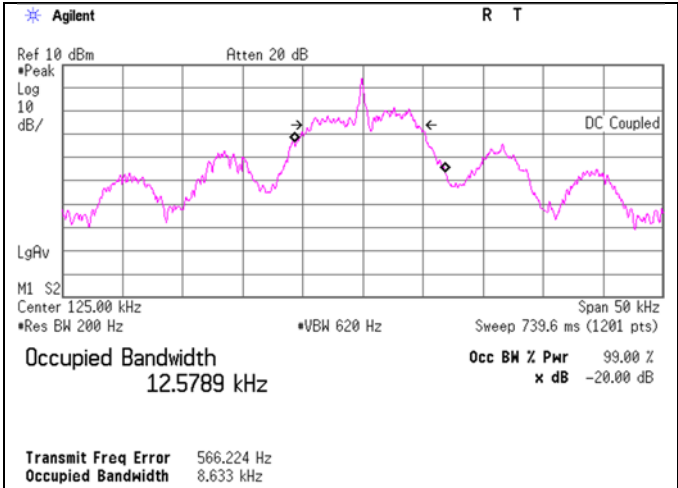


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	April 2, 2023
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 7

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
8.818	12.3589

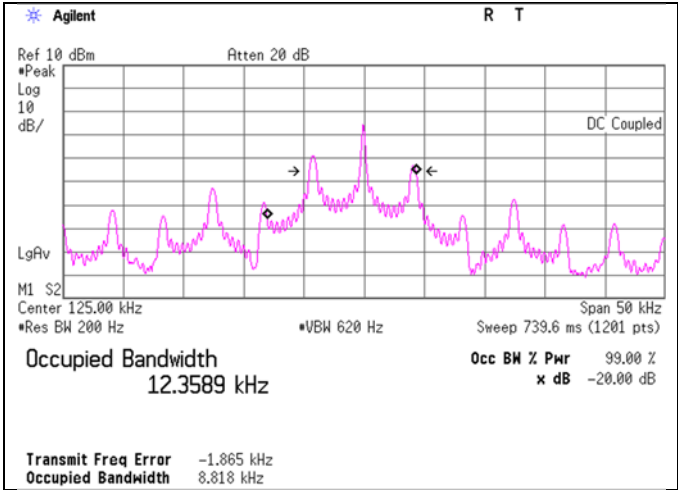

*It was confirmed that there were no differences in the bandwidth due to the input voltage and with or without transponder.

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/23/2022	24
RE	MAT-95	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/13/2022	12
RE	MBA-05	141425	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+ BBA9106	VHA 91031302	08/26/2022	12
RE	MCC-112	141216	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W/SFM14/sucoform141-PE/421-010/RFM-E321(SW)	-/00640	07/09/2022	12
RE	MCC-255	207745	Coaxial Cable	UL Japan	-	-	05/17/2022	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	09/27/2022	12
RE	MHF-24	141295	High Pass Filter 0.15-30MHz	Rohde & Schwarz	EZ-25/3	100041	02/01/2023	12
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	10/03/2022	12
RE	MLA-22	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/26/2022	12
RE	MLPA-01	141254	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100017	05/31/2022	12
RE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/17/2023	12
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/13/2023	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/07/2023	12
RE	MSA-16	141903	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186390	01/16/2023	12
RE	MTR-08	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	07/29/2022	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission