

FCC RF Test Report (BT-LE)

Report No.: FCC_RF_SL19081501-DGC-003_BLE

FCC ID: UJV-DIGBT5

Test Model: 410BT

Series Model: BOHE-BT, BOHE-BTI, 410BT-000, 410BT-MVA, 410BT-ASV, 410BT-000, 410BT-075, 410BT-075BSP, 410BT-100, 410BT-100BSP, 410BT-150, 410BT-150BSP, 410BT-200, 410BT-200BSP

Received Date: 08/15/2019

Test Date: 10/30/2019 – 11/6/2019

Issued Date: 11/07/2019

Applicant: DIG Corporation

Address: 1210 Activity Drive, Vista, CA 92081 USA

Manufacturer: DIG Corporation

Address: 1210 Activity Drive, Vista, CA 92081 USA

Issued By: Bureau Veritas Consumer Products Services, Inc.

Lab Address: 775 Montague Expressway, Milpitas, CA 95035

Test Location (1): 775 Montague Expressway, Milpitas, CA 95035

**FCC Registration /
Designation Number:** 540430



TESTING CERT # 2742-01

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	10
3.4 Description of Support Units	11
3.4.1 Configuration of System under Test	11
3.5 General Description of Applied Standards	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement	12
4.1.2 Test Instruments	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard	14
4.1.5 Test Setup.....	15
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results	17
4.2 Conducted Emission Measurement	23
4.2.1 Limits of Conducted Emission Measurement.....	23
4.2.2 Test Instruments	23
4.2.3 Test Procedures.....	24
4.2.4 Deviation from Test Standard	24
4.2.5 Test Setup.....	24
4.2.6 EUT Operating Conditions.....	24
4.2.7 Test Results	24
4.3 6dB Bandwidth Measurement	25
4.3.1 Limits of 6dB Bandwidth Measurement.....	25
4.3.2 Test Setup.....	25
4.3.3 Test Instruments	25
4.3.4 Test Procedure	25
4.3.5 Deviation from Test Standard	25
4.3.6 EUT Operating Conditions.....	25
4.3.7 Test Result	26
4.4 Conducted Output Power Measurement.....	28
4.4.1 Limits of Conducted Output Power Measurement	28
4.4.2 Test Setup.....	28
4.4.3 Test Instruments	28
4.4.4 Test Procedures.....	28
4.4.5 Deviation from Test Standard	28
4.4.6 EUT Operating Conditions.....	28
4.4.7 Test Results	29
4.5 Power Spectral Density Measurement.....	31
4.5.1 Limits of Power Spectral Density Measurement	31
4.5.2 Test Setup.....	31
4.5.3 Test Instruments	31
4.5.4 Test Procedure	31
4.5.5 Deviation from Test Standard	31
4.5.6 EUT Operating Condition	31

4.5.7 Test Results.....	32
4.6 Conducted Out of Band Emission Measurement.....	34
4.6.1 Limits of Conducted Out of Band Emission Measurement	34
4.6.2 Test Setup.....	34
4.6.3 Test Instruments	34
4.6.4 Test Procedure	34
4.6.5 Deviation from Test Standard	34
4.6.6 EUT Operating Condition	34
4.6.7 Test Results	35
5 Pictures of Test Arrangements.....	36
Appendix – Information on the Testing Laboratories	37

Release Control Record

Issue No.	Description	Date Issued
FCC_RF_SL19081501-DGC-003_BLE	Original Release	11/07/2019

1 Certificate of Conformity

Product: DIG Irrigation Timer w/ BT

Brand: DIG BT

Test Model: 410BT

Series Model: BOHE-BT, BOHE-BTI, 410BT-000, 410BT-MVA, 410BT-ASV, 410BT-000, 410BT-075, 410BT-075BSP, 410BT-100, 410BT-100BSP, 410BT-150, 410BT-150BSP, 410BT-200, 410BT-200BSP

Identification 3518, 4318

Number of EUT :

Sample Status: Engineering sample

Applicant: DIG CORPORATION

Test Date: 10/30/2019 – 11/6/2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services, Inc., Milpitas Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : 
_____, **Date:** 11/07/2019

Yao-Wei Lee / Test Engineer

Approved by : 
_____, **Date:** 11/12/2019

Ge Chen / Engineer Reviewer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	N/A	Not applicable because EUT is DC powered.
15.205 &15.209 & 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used. PCB antenna which is permanently attached.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.51dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.73dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.64dB
	6GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	4.91dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	DIG Irrigation Timer w/ BT
Brand	DIG BT
Test Model	410BT
Series Model	BOHE-BT, BOHE-BTI, 410BT-000, 410BT-MVA, 410BT-ASV, 410BT-000, 410BT-075, 410BT-075BSP, 410BT-100, 410BT-100BSP, 410BT-150, 410BT-150BSP, 410BT-200, 410BT-200BSP
Identification No. of EUT	4318, 3518
Status of EUT	Engineering sample
Power Supply Rating	3V, 1A
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	Up to 1Mbps
Operating Frequency	2.402 ~ 2.480GHz
Number of Channel	40
Output Power	1.795mW
Antenna Type	Integrated, 1.6dBi Gain
Antenna Connector	N/A

Note: All models have the same PCBA but are mounted on different valves. They are all electrically identical and share the same RF parameters.

3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Frequency (MHz)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	-	√	-

Where RE≥1G: Radiated Emission above 1GHz &
Bandedge Measurement

PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

NOTE: “-” means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0,19,39	GFSK	1

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 65%RH	3VDC	Yao Wei Lee
RE<1G	25deg. C, 65%RH	3VDC	Yao Wei Lee
APCM	25deg. C, 60%RH	3VDC	Yao Wei Lee

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is <98%, duty factor shall be considered.

Duty cycle = 2.122ms/2.492ms = 0.851, Duty factor = $10 * \log (1/0.851) = 0.700$




3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Dell	Latitude 3550	2MHWY32	N/A	Provided by Lab

Note: The core(s) is (are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

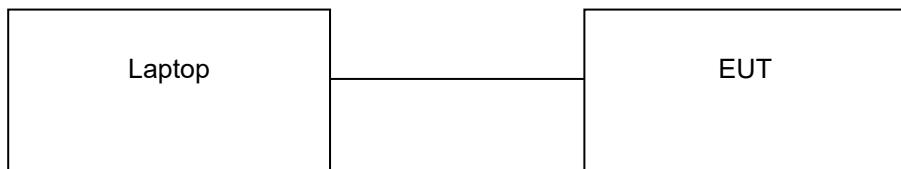

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
PXA Signal Analyzer KEYSIGHT	N9030B	MY57140584	03/05/2019	03/05/2020
Horn Antenna ETS-Lindgren	3117	218554	11/22/2017	11/22/2019
Biconilog Antenna Sunol	JB1	A030702	3/9/2018	3/9/2020
Preamplifier RF BAY INC	LPA-6-30	11170601	4/27/2019	4/27/2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

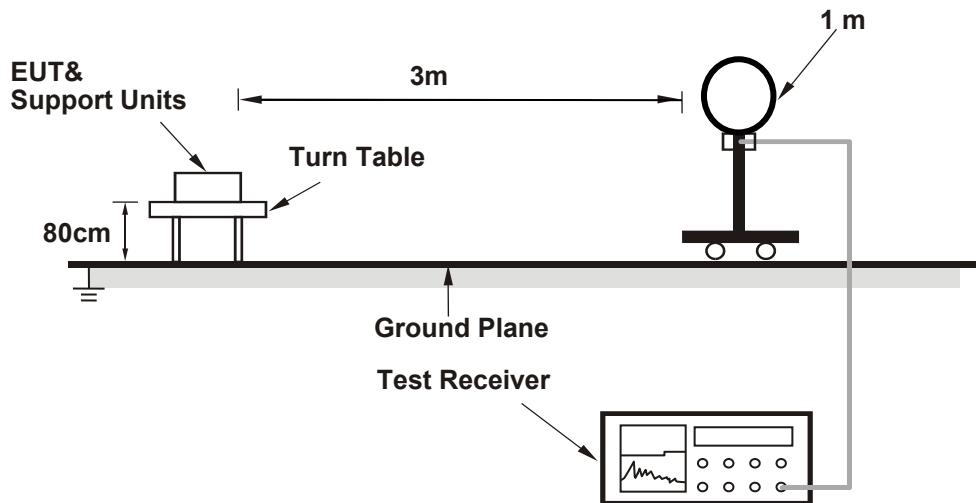

For Radiated emission 30MHz to 1GHz

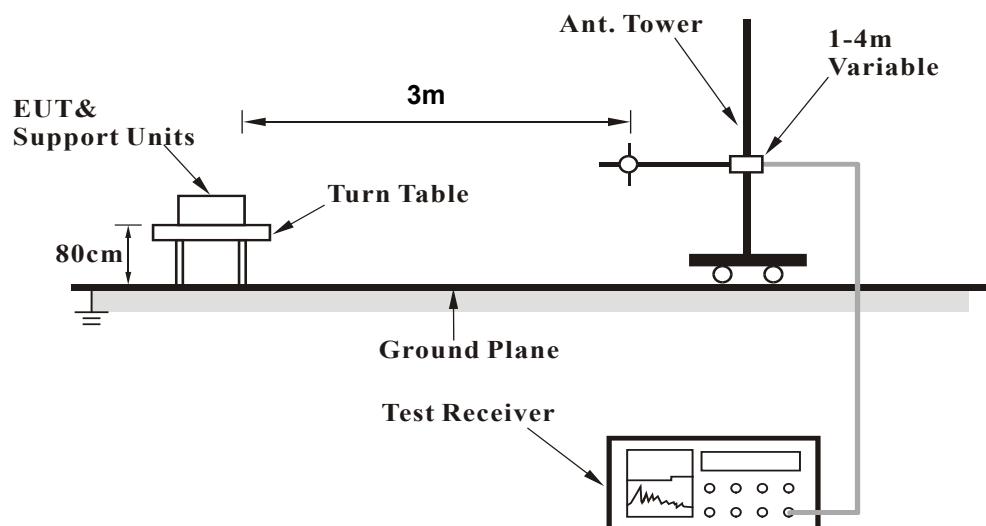

For Radiated emission above 1GHz

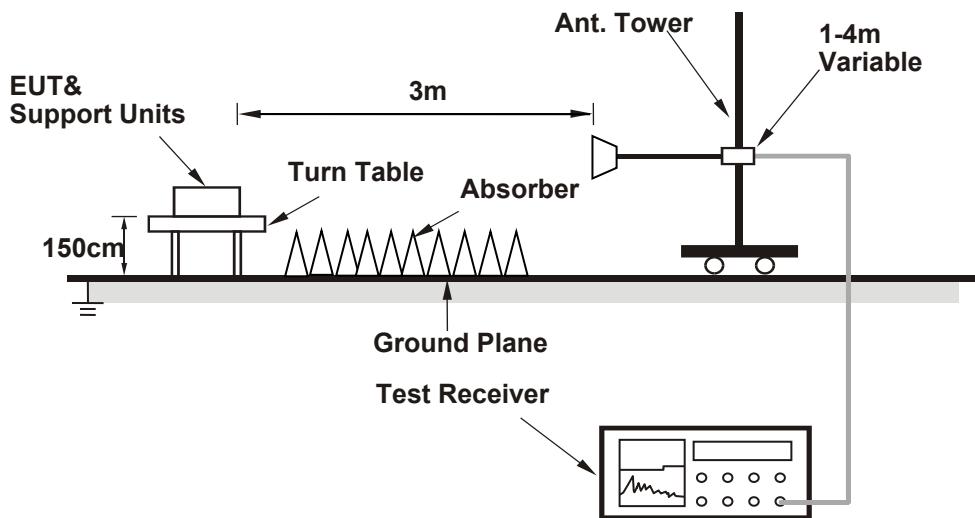

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Notebook Computer which is placed on remote site.
- Controlling software has been activated to set the EUT on specific status.

4.1.7 Test Results

BELOW 1GHz WORST-CASE DATA:

BT-LE (GFSK)


CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi Peak
FREQUENCY RANGE	30MHz – 1GHz		

ANTENNA POLARITY & Test Distance: Horizontal & Vertical at 3m

ANTENNA SECURITY & Test Distance: Horizontal & Vertical at 3m								
Frequency [MHz]	Pol	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
90	H	18	13.2	31.2	43.5	12.3	392.1	104.5
119.989	H	16.3	19.1	35.4	43.5	8.1	274.1	112.4
150.004	V	13.8	19.2	33	43.5	10.5	99.9	132.5
319.986	H	9.6	20.6	30.2	46	15.8	99.7	257.3
559.977	V	10.3	25.6	35.9	46	10.1	99.9	115.9
599.976	H	4.3	27.1	31.4	46	14.6	157.2	64.9

REMARKS:

1. Emission level (dBuV/m) = Reading QP (dBuV) + Factor (dB)
2. Factor (dB) = Antenna Factor (dB) – Cable Loss (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Limit Value – Emission level (dBuV/m)

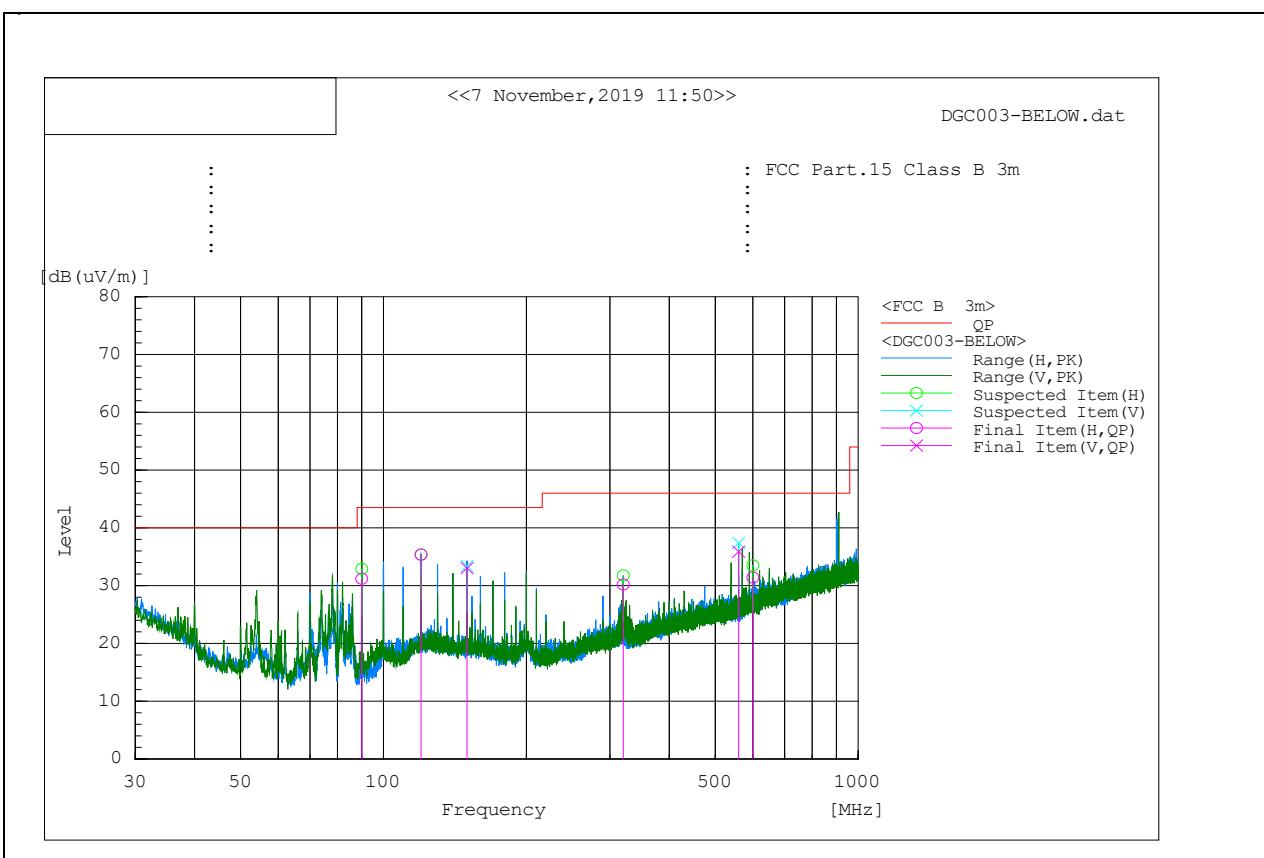

ABOVE 1GHz TEST DATA:
BT-LE (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak
FREQUENCY RANGE	1GHz ~ 25GHz		Average

ANTENNA POLARITY & test distance: HORIZONTAL & Vertical at 3 m									
Frequency [MHz]	Pol	Reading AV [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
3385.198	V	35.6	-6.3	Average	29.3	54	24.7	133.2	281.2
4803.995	V	47.8	-2.4	Average	45.4	54	8.6	201.4	276.3
6973.923	V	27.7	5.7	Average	33.4	54	20.6	208	106.8
3385.198	V	48.5	-6.3	Peak	42.2	74	31.8	133.2	281.2
4803.995	V	55.7	-2.4	Peak	53.3	74	20.7	201.4	276.3
6973.923	V	40.7	5.7	Peak	46.4	74	27.6	208	106.8

REMARKS:

1. Emission level (dBuV/m) = Reading QP (dBuV) + Factor (dB)
2. Factor (dB) = Antenna Factor (dB) – Cable Loss (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Limit Value – Emission level (dBuV/m)

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak
FREQUENCY RANGE	1GHz ~ 25GHz		Average

ANTENNA POLARITY & test distance: HORIZONTAL & Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level AV [dB(uV/m)]	Limit\AV [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
4879.9	V	46.6	-2.3	Average	44.3	54	9.7	133.2	281.2
5624.626	V	31.1	-0.8	Average	30.3	54	23.7	201.4	276.3
6948.656	H	28	5.6	Average	33.6	54	20.4	208	106.8
4879.9	V	54.1	-2.3	Peak	51.8	74	22.2	133.2	281.2
5624.626	V	44.3	-0.8	Peak	43.5	74	30.5	201.4	276.3
6948.656	H	41.3	5.6	Peak	46.9	74	27.1	208	106.8

REMARKS:

1. Emission level (dBuV/m) = Reading QP (dBuV) + Factor (dB)
2. Factor (dB) = Antenna Factor (dB) – Cable Loss (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Limit Value – Emission level (dBuV/m)


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak
FREQUENCY RANGE	1GHz ~ 25GHz		Average

ANTENNA POLARITY & test distance: HORIZONTAL & Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
4960.051	V	47.7	-2.2	Average	45.5	54	8.5	101.3	49.4
6840.565	V	27.8	5.4	Average	33.2	54	20.8	316.1	114.2
12414.358	H	21.9	13.3	Average	35.2	54	18.8	312.3	5.1
4960.051	V	55.5	-2.2	Peak	53.3	74	20.7	101.3	49.4
6840.565	V	41.7	5.4	Peak	47.1	74	26.9	316.1	114.2
12414.358	H	36.1	13.3	Peak	49.4	74	24.6	312.3	5.1


REMARKS:

1. Emission level (dBuV/m) = Reading QP (dBuV) + Factor (dB)
2. Factor (dB) = Antenna Factor (dB) – Cable Loss (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Limit Value – Emission level (dBuV/m)

RESTRICTED BAND (LOW CHANNEL)

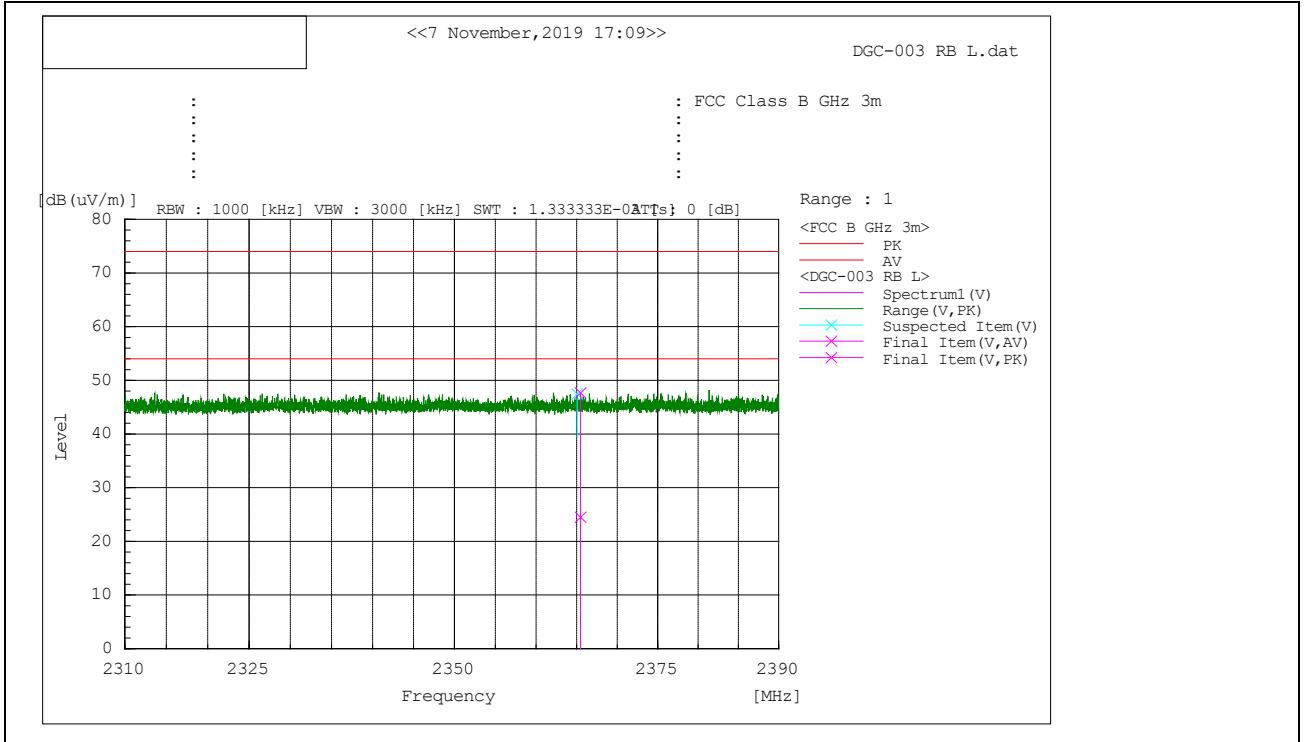

Frequency [MHz]	Pol	Reading [dB(uV)]	Measurement Type	Factor [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
2494.837	V	-9.1	Average	34.1	25	54	29	244.4	353.2
2494.837	V	14.6	Peak	34.1	48.7	74	25.3	244.4	353.2

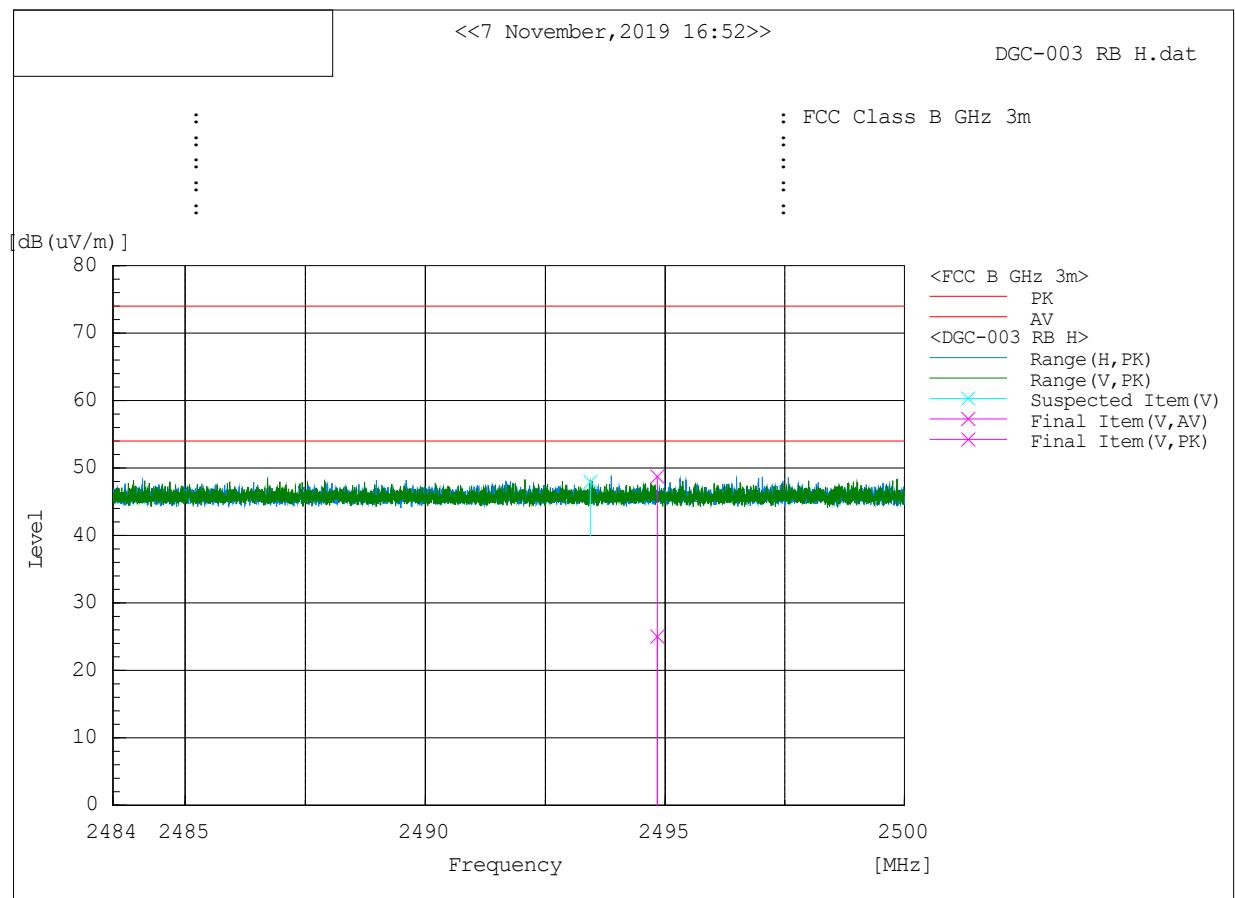RESTRICTED BAND (HIGH CHANNEL)


Frequency [MHz]	Pol	Reading [dB(uV)]	Measurement Type	Factor [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
2365.475	V	-9.2	Average	33.7	24.5	54	29.5	246.8	328.3
2365.475	V	14	Peak	33.7	47.7	74	26.3	246.8	328.3

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
EMI Test Receiver ROHDE & SCHWARZ	ESIB 40	100179	08/28/2018	11/28/2019
Transient Limiter ELECTRO-METRICS	EM-7600-5	106	12/31/2018	12/31/2019
LISN EMCO	3816/2NM	214372	01/10/2019	01/10/2020

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

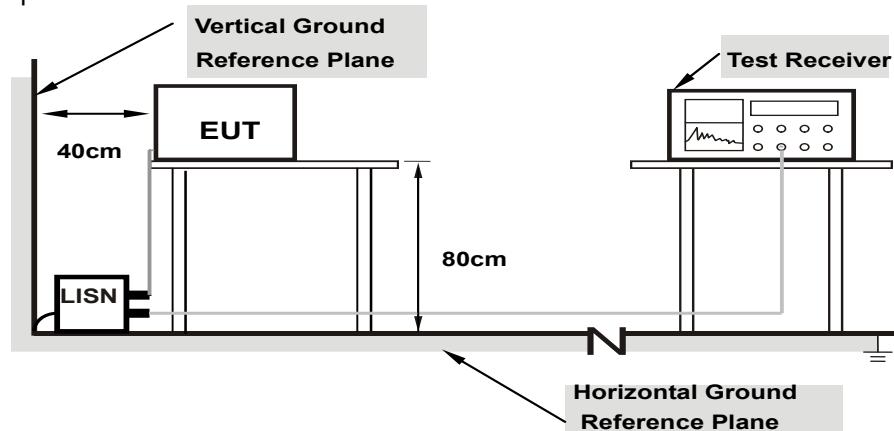

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Tests not applicable because EUT is powered by DC power supply

4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

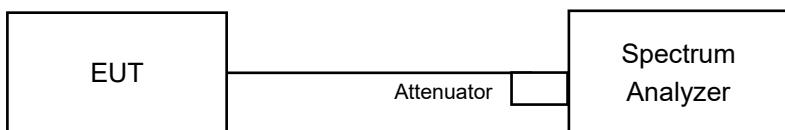

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.719	0.5	PASS
19	2440	0.794	0.5	PASS
39	2480	0.748	0.5	PASS

Test Plots:





4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- a. Set the RBW \geq DTS bandwidth.
- b. Set VBW $\geq 3 \times$ RBW.
- c. Set span $\geq 3 \times$ RBW
- d. Sweep time = auto couple.
- e. Detector = peak.
- f. Trace mode = max hold.
- g. Allow trace to fully stabilize.
- h. Use peak marker function to determine the peak amplitude level.

4.4.5 Deviation from Test Standard

No deviation.


4.4.6 EUT Operating Conditions


Same as Item 4.3.6.

4.4.7 Test Results

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	2.54	30	Pass
19	2440	2.25	30	Pass
39	2480	1.94	30	Pass

Test Plots:

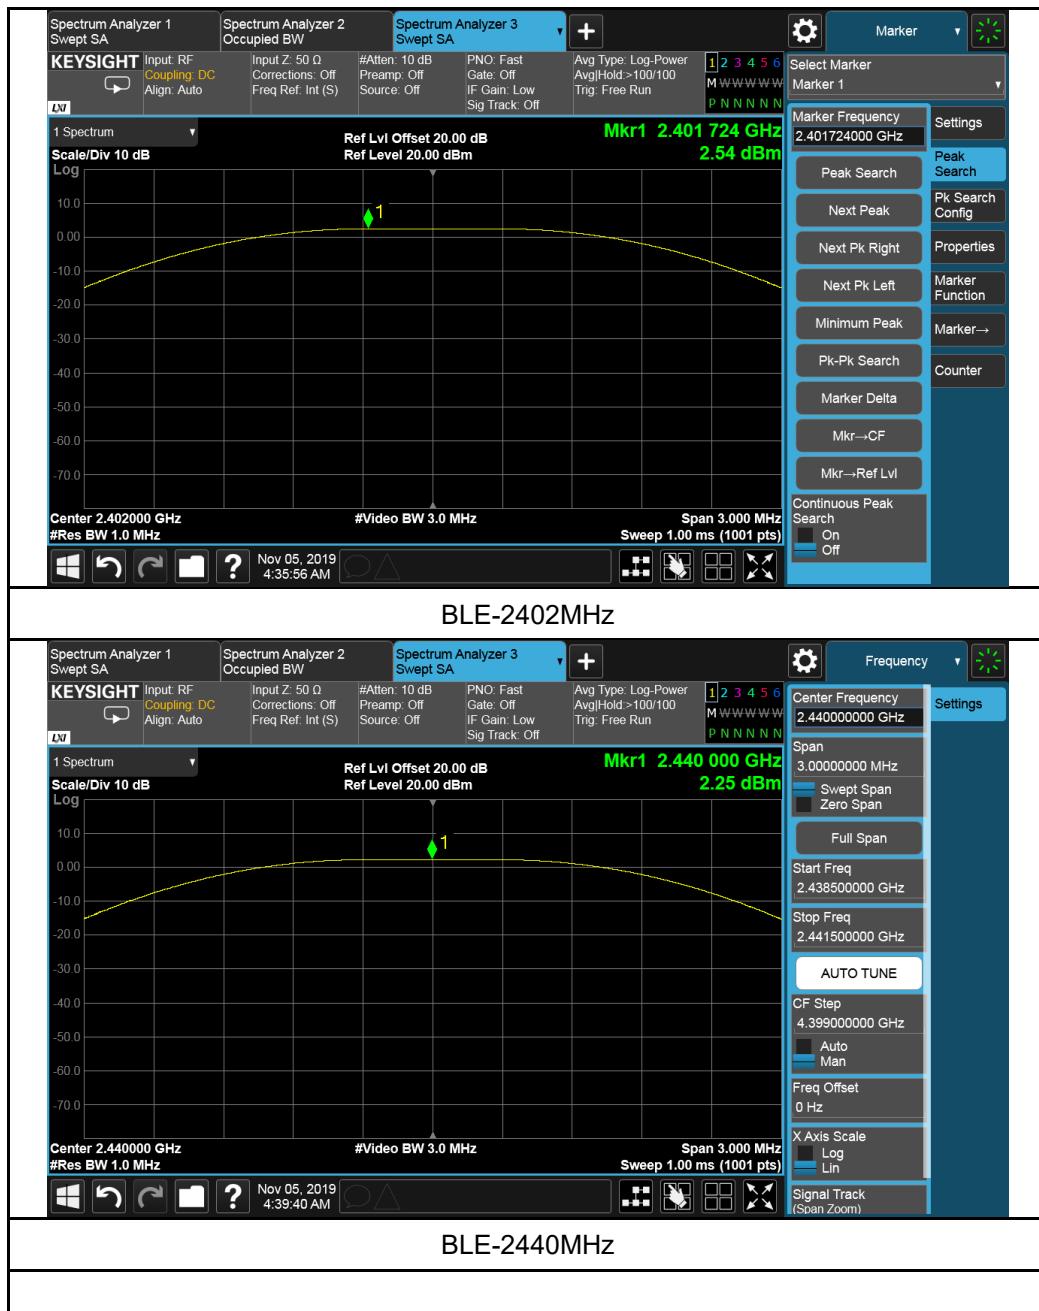

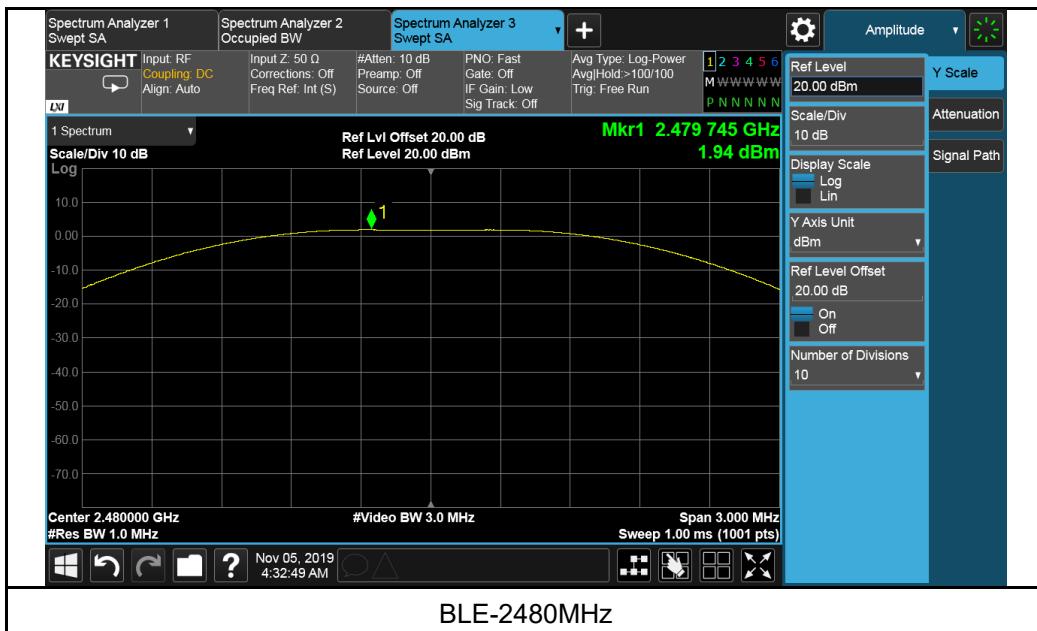

BLE-2480MHz

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.


4.5.6 EUT Operating Condition

Same as Item 4.3.6


4.5.7 Test Results

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
0	2402	-13.91	8	Pass
19	2440	-14.21	8	Pass
39	2480	-14.49	8	Pass


Test Plots:

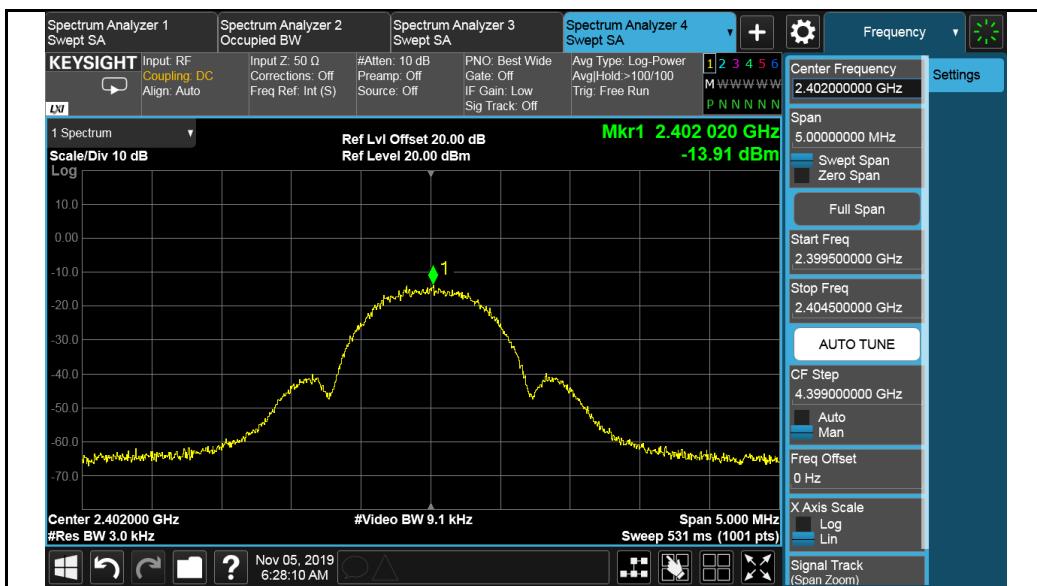

BLE-2402MHz

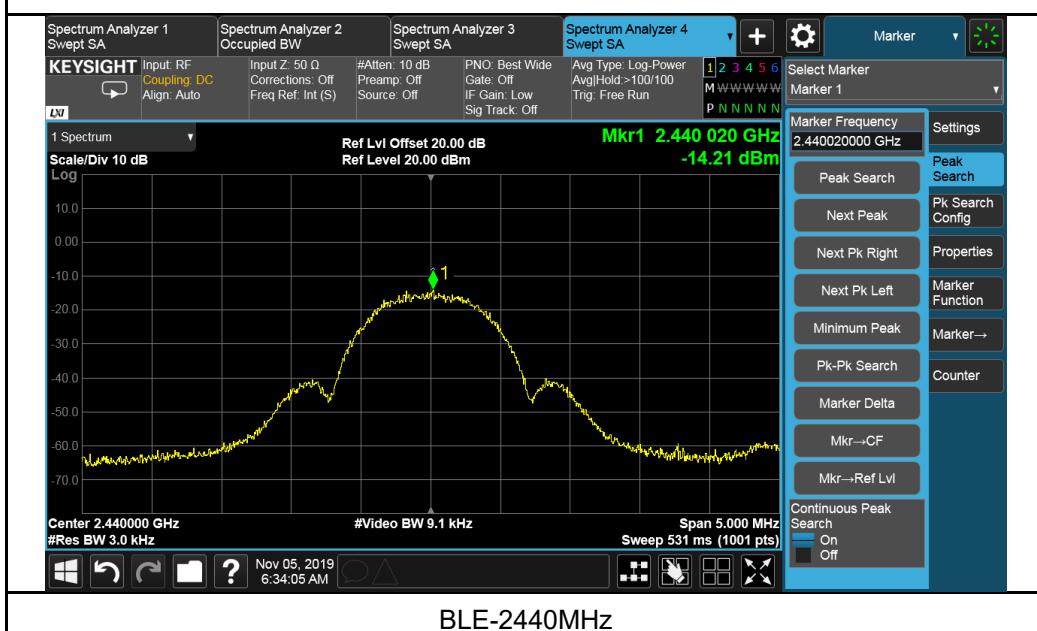

BLE-2440MHz

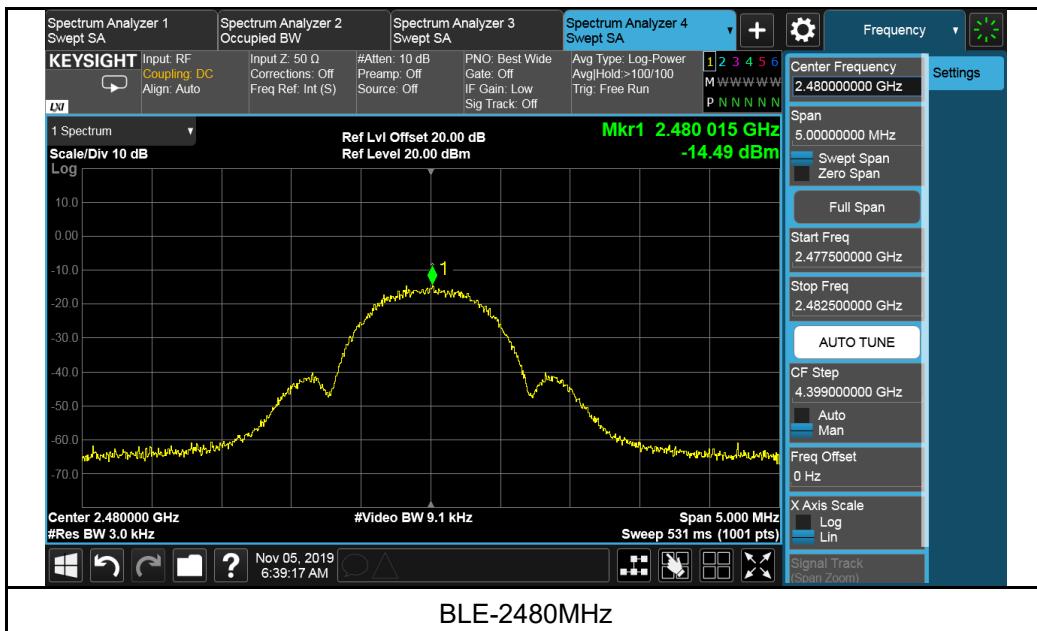


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

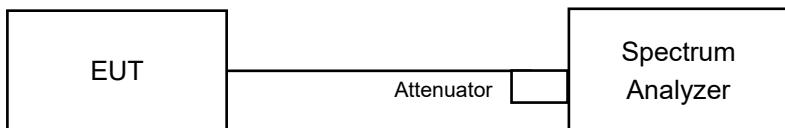

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

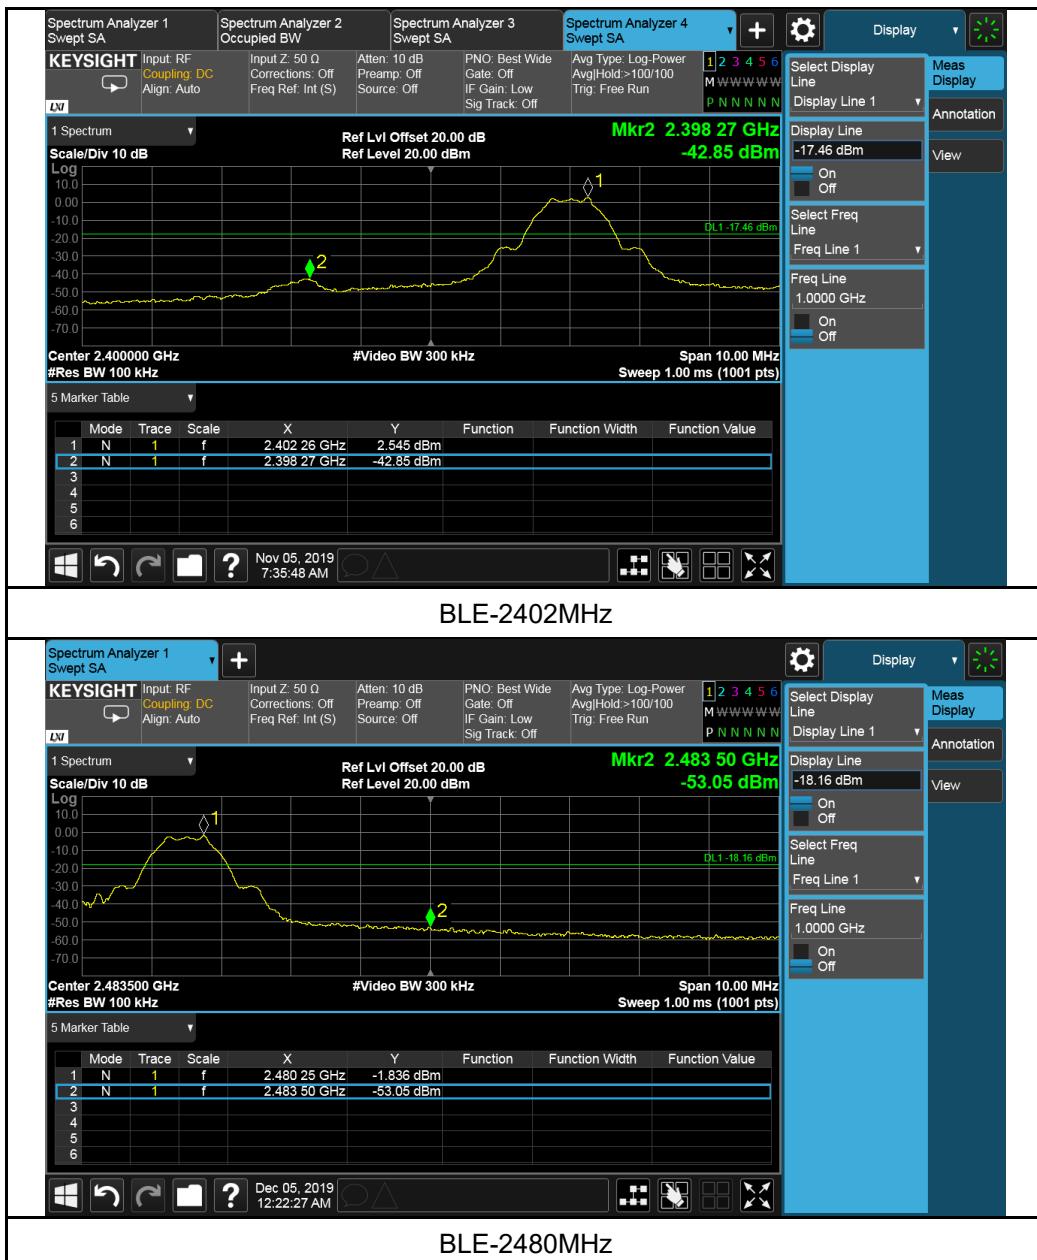

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

Bureau Veritas is a global leader in testing, inspection and certification (TIC) services. We help businesses improve safety, sustainability and productivity; and our clients include the majority of leading brands in retail, manufacturing and other industries. With a presence in every major country around the world, our quality assurance and compliance solutions are vital in helping our customers enhance product quality and concept-to-consumer journeys. We also assist with increasing speed to market, profitability and brand equity throughout the supply chain. Bureau Veritas is a leading wireless/IoT testing, inspection, audit and certification provider, with a global network of test laboratories to support the IoT industry in areas of connectivity, security, interoperability as well as quality, health & safety, and environmental/chemical requirements.

If you have any comments, please feel free to contact us at the following:

Milpitas EMC/RF/Safety/Telecom Lab
775 Montague Expressway, Milpitas, CA 95035
Tel: +1 408 526 1188

Sunnyvale OTA/Bluetooth Lab
1293 Anvilwood Avenue, Sunnyvale, CA 94089
Tel: +1 669 600 5293

Littleton EMC/RF/Safety/Environmental Lab
1 Distribution Center Cir #1, Littleton, MA 01460
Tel: +1 978 486 8880

Irvine OTA/PTCRB/Bluetooth/V2X Lab
15 Musick, Irvine, CA 92618
Tel: +1 949 716 6512

Email: sales.eaw@us.bureauveritas.com
Web Site: www.cpsusa-bureauveritas.com

The address and road map of all our labs can be found in our web site also.

--- END ---