



Nemko

Nemko USA, Inc.
11696 Sorrento Valley Rd., Suite F
San Diego, CA 92121-1024
Phone (858) 755-5525 Fax (858) 452-1810

Test Report: 2006 090699 HANDSET EMC

Project number: 26-699-DIG R2

Applicant: DIG Corp
1210 Activity Dr.
Vista, CA 92081


Equipment Under Test (EUT): Handset

Model: LEIT RC2

FCC ID: UJV-LEIT02

In Accordance With: FCC Part 15 Subpart C, 15.249
CANADA, IC RSS-Gen, IC RSS 210

Tested By: Nemko USA Inc.
11696 Sorrento Valley Road, Suite F
San Diego, CA 92121

Authorized By: 
Michael T. Krumweide, EMC Supervisor

Date: October 27, 2006

Total Number of Pages: 28

Section 1. Summary of Test Results

General

All measurements are traceable to national standards

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15; Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

This Radio Standards Specification (RSS) sets out the requirements for license exempt low-power intentional radiators. The applicable standard for low-power intentional radiators in Canada, corresponding to FCC Part 15 Subpart C, is RSS-210. The two are very closely harmonized in terms of permitted frequencies, types of operation, and other technical requirements. The test results reported in this report are deemed satisfactory evidence of compliance with Industry Canada Standard RSS-210.

The assessment summary is as follows:

Apparatus Assessed: LEIT 2 Handset

Specification: FCC Part 15 Subpart C, 15.249
IC RSS-Gen, IC RSS 210

Compliance Status: Complies

Exclusions: None

Non-compliances: None

Report Release History:

| REVISION | DATE | COMMENTS | |
|----------|------------|------------------|-----------------------|
| - | 10-27-2006 | Prepared By: | Ferdinand S. Custodio |
| - | 10-27-2006 | Initial Release: | Mike T. Krumweide |

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TESTED BY:


Ferdinand S. Custodio, EMC Test Engineer

Date: October 27, 2006

TABLE OF CONTENTS

| | |
|---|-----------|
| Section 1. Summary of Test Results..... | 2 |
| Section 2: Equipment Under Test..... | 5 |
| 2.1 Product Identification | 5 |
| 2.2 Samples Submitted for Assessment..... | 5 |
| 2.3 Theory of Operation..... | 6 |
| 2.4 Technical Specifications of the EUT..... | 6 |
| Section 3: Test Conditions | 7 |
| 3.1 Specifications | 7 |
| 3.2 Deviations From Laboratory Test Procedures..... | 7 |
| 3.3 Test Environment..... | 7 |
| 3.4 Test Equipment..... | 8 |
| Section 4: Observations | 9 |
| 4.1 Modifications Performed During Assessment..... | 9 |
| 4.2 Record Of Technical Judgements | 9 |
| 4.3 EUT Parameters Affecting Compliance..... | 9 |
| 4.4 Test Deleted | 9 |
| 4.5 Additional Observations..... | 9 |
| Section 5: Results Summary..... | 10 |
| 5.1 FCC Part 15 Subpart C and IC RSS-210 Equivalent: Test Results | 10 |
| Appendix A: Test Results..... | 11 |
| Clause 15.209(a) Radiated Emissions within Restricted Bands | 11 |
| IC RS-210 2.2/2.7 Radiated Emissions within Restricted Bands..... | 13 |
| Clause 15.215(c) Occupied Bandwidth..... | 14 |
| Clause 15.249(a) Radiated Emissions not in Restricted Bands | 15 |
| Clause 15.249(d) Spurious Emissions (except Harmonics) | 17 |
| IC RSS-Gen 7.2.2 Transmitter and Receiver AC Power Lines Conducted Emissions Limits | 20 |
| Clause 2.1055(a) Frequency Stability | 22 |
| Appendix B: Setup Photographs | 24 |
| Appendix C: Block Diagram of Test Setups | 28 |

Section 2: Equipment Under Test

2.1 Product Identification

The Equipment Under Test was identified as follows:

LEIT 2 Handset

Engineering sample, serial number not available during assessment



2.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

| Sample No. | Description | Serial No. |
|-------------------------|-----------------------------|------------|
| 26-699-DIGR1 Handset US | LEIT 2 Handset (US version) | NA |

2.3 Theory of Operation

The LEIT 2 Handset is a handheld device used to control the LEIT 2 Controller (FCC Report # 2006 090699 Controller FCC 15,249). It is a two-way communication device powered by a rechargeable battery. The EUT can program data at the same time request data. Examples of features are: set an irrigation watering schedule, manual open/close valves, retrieve run time history for this/last month, view the power status and more. The LEIT 2 Controller is a solar power, radio controller irrigation controller. Its function is to actuate a solenoid to turn on/off irrigation valves.

2.4 Technical Specifications of the EUT

| | |
|-----------------------------|----------------------------------|
| Manufacturer: | DIG Corporation |
| Operating Frequency: | 920MHz Only |
| Emission Designator | 80K0F1D |
| Rated Power: | 0.6mW |
| Modulation: | FSK |
| Type of Receiver: | Low IF Receiver |
| Antenna Data: | Integral |
| Power Source: | 3.6VDC NiMH Rechargeable Battery |

Section 3: Test Conditions

3.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
5725-5850 MHz and 24.0-24.25 GHz bands.

RSS-Gen General Requirements and Information for the Certification of
Radiocommunication Equipment

RSS-210 Low-power License-exempt Radiocommunication Devices (All
Frequency Bands): Category I Equipment

3.2 Deviations From Laboratory Test Procedures

No deviations from Laboratory Test Procedure

3.3 Test Environment

All tests were performed under the following environmental conditions:

| | | |
|--------------------|---|--|
| Temperature range | : | 15 – 30 °C |
| Humidity range | : | 20 - 75 % |
| Pressure range | : | 86 - 106 kPa |
| Power supply range | : | +/- 5% of rated voltages |
| Temperature | : | -20 to +55 °C (General) |
| Voltage | : | NiMH battery: 3.6VDC (Handset) Super Capacitor: 4.2V to 7.5VDC (Controller) |

3.4 Test Equipment

| Nemko ID | Device | Manufacturer | Model | Serial Number | Cal Date | Cal Due Date |
|----------|---------------------------|---------------------|------------------|---------------|------------|--------------|
| 877 | Antenna, DRG Horn | AH Systems | 2882 | 688 | 6/20/06 | 6/20/07 |
| 110 | Antenna, LPA | Electrometrics | LPA-25 | 1217 | 11/29/05 | 11/29/06 |
| 835 | Spectrum Analyzer | Rohde & Schwarz | RHDFSEK | 829058/005 | 1/18/06 | 01/18/07 |
| 911 | Spectrum Analyzer | Agilent | E4440A | US41421266 | 6/7/06 | 6/7/07 |
| N149 | Environmental Chamber | Cincinnati Sub-Zero | ZPHS-32-2-2-H/AC | ZP0552665 | 5/11/06 | 5/11/07 |
| 842 | Preamp | Nemko | Nemko | NA | 9/12/06 | Verified |
| 114 | Antenna, Bicon | EMCO | 3104 | 2997 | 12/7/2005 | 12/07/06 |
| 827 | Preamplifier | Com-Power | PA-103 | 161032 | 1/11/2006 | 01/11/07 |
| 422 | Spectrum Analyzer Display | HP | 85662A | 2403A07080 | 4/12/2006 | 04/12/07 |
| 533 | Quasi-Peak Adapter | HP | 85650A | 2043A00211 | 4/12/2006 | 04/12/07 |
| 535 | Spectrum Analyzer | HP | 85680A | 2517A01757 | 4/12/2006 | 04/12/07 |
| 681 | Transient Limiter | HP | 11947A | 3107A02634 | 8/9/2006 | 08/09/07 |
| 805 | LISN | Solar | 9348-50-R-24-BNC | 992823 | 11/16/2005 | 11/16/06 |
| 559 | High Pass Filter | Solar | 8310-1.0 | 844823 | 03/101/06 | 03/01/07 |
| 901 | pre amp | Sonoma | 310 N | 130607 | 12/19/05 | 12/19/06 |
| 128 | Antenna, Bicon | EMCO | 3104 | 2882 | 10/6/05 | 10/6/06 |

Section 4: Observations

4.1 Modifications Performed During Assessment

No modifications were performed during assessment.

4.2 Record Of Technical Judgements

No technical judgements were made during the assessment.

4.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

4.4 Test Deleted

No Tests were deleted from this assessment.

4.5 Additional Observations

Model Number used in this report will be LEIT RC2.

Section 5: Results Summary

This section contains the following:

FCC Part 15 Subpart C: Test Results and corresponding IC RSS-210 equivalent.

The column headed "Required" indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No: not applicable / not relevant

Y Yes: Mandatory i.e. the apparatus shall conform to these test.

N/T Not Tested, mandatory but not assessed. (See section 4.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

5.1 FCC Part 15 Subpart C and IC RSS-210 Equivalent: Test Results

| Part 15 | Test Description | Required | Result |
|---|--|----------|--------|
| 15.207 (a) | Powerline Conducted Emissions | N | |
| 15.209 (a) <i>IC RS-210 2.2/2.7</i> | Radiated Emissions within Restricted Bands | Y | Pass |
| 15.215 (c) <i>IC RS-Gen 4.4.1</i> | Occupied Bandwidth | Y | Pass |
| 15.249 (a) <i>IC RS-210 A2.9</i> | Radiated Emissions not in Restricted Bands | Y | Pass |
| 15.249 (b) | Fixed Point-to-Point operation in the 24.0-24.25 GHZ Band | N | |
| 15.249 (d) <i>IC RS-210 2.6</i> | Spurious Emissions (except Harmonics) | Y | Pass |
| 2.1055 (a) <i>IC RS-210 2.1, IC RS-Gen 4.5</i> | Frequency Stability | Y | Pass |
| <i>IC RS-Gen 7.2.2</i> | Transmitter and Receiver AC Power Lines Conducted Emission Limit | Y | Pass |

Notes:

Spurious Emissions was measured when the unit is in "Stand By" mode to show compliance with IC RSS General Receiver requirements, however no emissions were detected and with the same results as Part 12.249 (d) measurements.

Appendix A: Test Results

Clause 15.209(a) Radiated Emissions within Restricted Bands

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (uV/meter) | Measurement Distance (meter) |
|-----------------|---------------------------|------------------------------|
| 0.009-0.490 | 2400/F (kHz) | 300 |
| 0.490-1.705 | 24000/F (kHz) | 30 |
| 1.705-30.0 | 30 | 3 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Test Conditions:

| | | | |
|---------------------|-------------------|--------------|--------------------|
| Sample Number: | Controller US | Temperature: | 25 |
| Date: | 9/12/2006 | Humidity: | 58 |
| Modification State: | Loop transmission | Tester: | Ferdinand Custodio |
| | | Laboratory: | OATS |

Test Results:

See Attached Plots.

Additional Observations:

The Spectrum was searched from 30MHz to the 10th Harmonic.

These results apply to emissions found in the restricted bands defined in FCC Part 15 Subpart C, 15.205.

The EUT was measured on three orthogonal axes. The EUT was tested with freshly charged batteries.

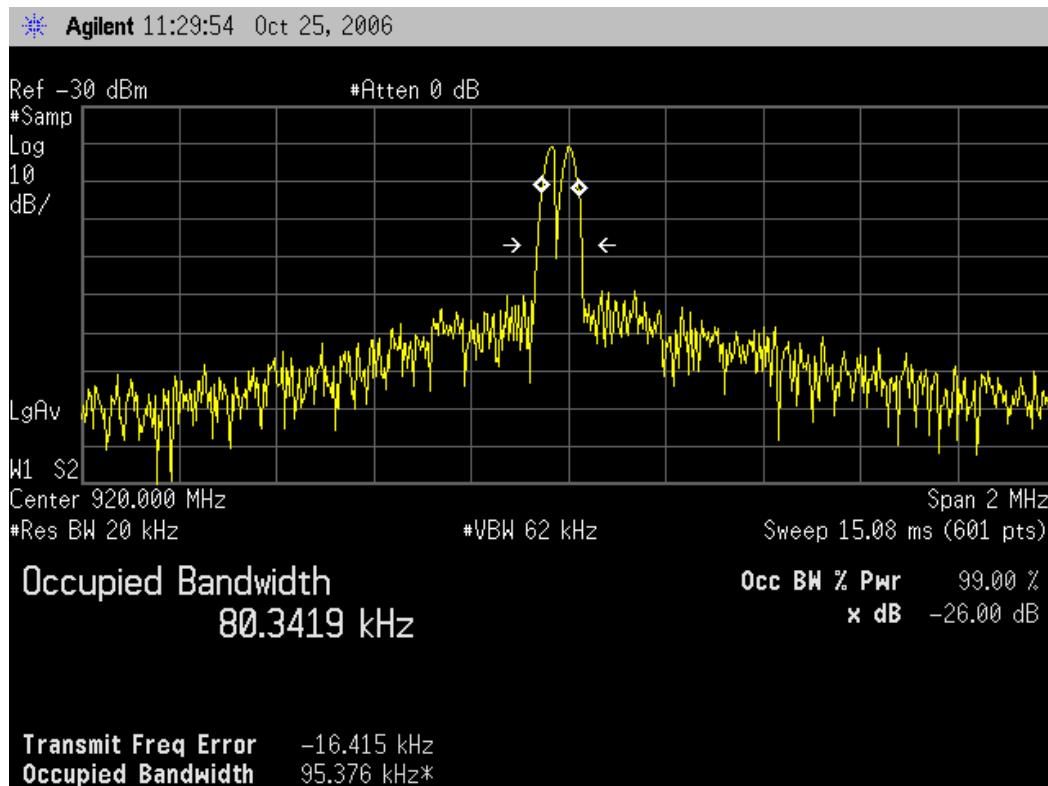
All Measurements (including above 1GHz) were performed at 3m with a Peak detector of 1MHz RBW/VBW.

Clause 15.215(c) Occupied Bandwidth

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in Sec. Sec. 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Conditions:

| | | | |
|----------------------------|-------------------|---------------------|--------------------|
| Sample Number: | Handset US | Temperature: | 22 |
| Date: | 10/27/2006 | Humidity: | 44 |
| Modification State: | Loop transmission | Tester: | Ferdinand Custodio |

Test Results:**Notes:**

Clause 15.249(a) Radiated Emissions not in Restricted Bands

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency (MHz) | Field strength of fundamental (mV/meter) | Field strength of harmonics (uV/meter) |
|-----------------------------|--|--|
| 902-928 | 50 | 500 |
| 2400-2483.5 | 50 | 500 |
| 5725-5875 | 50 | 500 |
| 24000-24250 | 250 | 2500 |

Test Conditions:

| | | | |
|----------------------------|-------------------|---------------------|--------------------|
| Sample Number: | Handset US | Temperature: | 25 |
| Date: | 9/12/2006 | Humidity: | 58 |
| Modification State: | Loop transmission | Tester: | Ferdinand Custodio |
| | | Laboratory: | OATS |

Test Results:

See Attached Plots.

Additional Observations:

The Spectrum was searched from 30MHz to the 10th Harmonic.

The EUT was measured on three orthogonal axes. The EUT was tested with freshly charged batteries.

All Measurements (including above 1GHz) were performed at 3m with a Peak detector of 1MHz RBW/VBW.



NEMKO USA, Inc.

Nemko**San Diego Headquarters:**

11696 Sorrento Valley Rd.

San Diego, CA 92121

Tel: (858) 755-5525

Fax: (858) 452-1810

Radiated Emissions Data

Complete X Job #: 26-699-DIG Test #:
 Preliminary Page of

Client Name : DIG Corp.
 EUT Name : LEIT II
 EUT Model # : Handset 920MHz
 EUT Part # :
 EUT Serial # :
 EUT Config. : Running loop transmission routine

Specification : FCC Part 15.249 (a) Not in Restricted Bands Reference :
 Rod. Ant. #: NA Temp. (deg. C) : 25 Date : 9/12/2006
 Bicon Ant.#: Humidity (%) : 58 Time :
 Log Ant.#: 110 EUT Voltage : Staff : FSCustodio
 DRG Ant. # 877 EUT Frequency :
 Dipole Ant.#: NA Phase:
 Cable#: 40FT Location: SOATS
 Preamp#: 842 Distance: 3 meters
Quasi-Peak RBW: 120 kHz
Video Bandwidth 120 kHz
Average RBW: 1 MHz
Video Bandwidth 10 Hz
Peak RBW: 1 MHz
Video Bandwidth 1 MHz

PreSelect#: NA Measurements below 1 GHz are Quasi-Peak values, unless otherwise stated.
 Measurements above 1 GHz are Average values, unless otherwise stated.

| Meas. Freq. (MHz) | Ant. Pol. (H/V) | Antenna used | Meter Reading (dBuV) | Antenna Factor (dB) | Path Loss (dB) | RF Gain (dB) | Corrected Reading (dBuV/m) | Spec. limit (dBuV/m) | CR/SL Diff. (dB) | Pass Fail Unc. | Comment |
|-------------------------|-----------------------|-----------------|----------------------------|---------------------------|----------------------|--------------------|----------------------------------|----------------------------|------------------------|----------------------|-------------|
| 920 | V | 110 | 53.09 | 22.7 | 5.6 | 0.0 | 81.4 | 94.0 | -12.6 | Pass | |
| 920 | H | 110 | 64.79 | 22.7 | 5.6 | 0.0 | 93.1 | 94.0 | -0.9 | Pass | |
| 1840.00 | V | 877 | 45.24 | 24.8 | 2.0 | 48.4 | 23.6 | 54.0 | -30.4 | Pass | |
| 1840.00 | H | 877 | 43.46 | 24.8 | 2.0 | 48.4 | 21.8 | 54.0 | -32.2 | Pass | |
| 5520.00 | V | 877 | 50.44 | 35 | 7.4 | 43.3 | 49.6 | 54.0 | -4.4 | Pass | |
| 5520.00 | H | 877 | 49.32 | 35 | 7.4 | 43.3 | 48.4 | 54.0 | -5.6 | Pass | |
| 6440.00 | V | 877 | | 35.7 | 8.2 | 42.7 | 1.2 | 54.0 | -52.8 | Pass | Noise floor |
| 6440.00 | H | 877 | | 35.7 | 8.2 | 42.7 | 1.2 | 54.0 | -52.8 | Pass | Noise floor |
| 10120.00 | V | 877 | | 38.6 | 11.2 | 35.9 | 13.9 | 54.0 | -40.1 | Pass | Noise floor |
| 10120.00 | H | 877 | | 38.6 | 11.2 | 35.9 | 13.9 | 54.0 | -40.1 | Pass | Noise floor |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

Clause 15.249(d) Spurious Emissions (except Harmonics)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Sec. 15.209, whichever is the lesser attenuation.

Test Conditions:

| | | | |
|----------------------------|----------------------------|---------------------|--------------------|
| Sample Number: | Handset US | Temperature: | 22 |
| Date: | 9/14/2006 and 10/27/2006 | Humidity: | 55 |
| Modification State: | Loop transmission/Charging | Tester: | Ferdinand Custodio |

Test Results:

See Attached Plots.

Additional Observations:

The Spectrum was searched from 30MHz to the 10th Harmonic.

The EUT was measured on three orthogonal axes. The EUT was tested with freshly charged batteries.

The EUT was also measured using the supplied AC Adapter/Charger while charging.

All Measurements were performed at 3m with a Quasi-Peak detector below 1GHz and a Peak detector of 1MHz RBW/VBW above 1GHz.



NEMKO USA, Inc.

Nemko**San Diego Headquarters:**

11696 Sorrento Valley Rd.

San Diego, CA 92121

Tel: (858) 755-5525

Fax: (858) 452-1810

Radiated Emissions DataComplete X
Preliminary _____Job # : 26-699-DIG Test # : _____
Page _____ of _____

Client Name : DIG Corp.
 EUT Name : LEIT II
 EUT Model # : Handset 920MHz
 EUT Part # :
 EUT Serial # :
 EUT Config. : Charging

Specification : CFR47 Part 15, Subpart B, Class B
 Rod. Ant. #: NA Temp. (deg. C) : 21
 Bicon Ant. #: 114 Humidity (%) : 13
 Log Ant. #: 110 EUT Voltage : 120
 DRG Ant. # NA EUT Frequency : 60
 Dipole Ant. #: NA Phase: 1
 Cable#: SOATS Location: SOATS
 Preamp#: 827 Distance: 3 meters
 Spec An. #: 911
 QP #: 911
 PreSelect#: NA

Reference :
 Date : Oct.27, 2006
 Time : 8:30AM
 Staff : FSCustodio

| | |
|------------------------|---------------------|
| <u>Quasi-Peak</u> | <u>RBW: 120 kHz</u> |
| <u>Video Bandwidth</u> | <u>120 kHz</u> |
| <u>Average</u> | <u>RBW: 1 MHz</u> |
| <u>Video Bandwidth</u> | <u>10 Hz</u> |
| <u>Peak</u> | <u>RBW: 1 MHz</u> |
| <u>Video Bandwidth</u> | <u>1 MHz</u> |

Measurements below 1 GHz are Quasi-Peak values, unless otherwise stated.
 Measurements above 1 GHz are Average values, unless otherwise stated.

| Meas. Freq. (MHz) | Ant. Pol. (H/V) | Atten. (dB) | Meter Reading (dBuV) | Antenna Factor (dB) | Path Loss (dB) | RF Gain (dB) | Corrected Reading (dBuV/m) | Spec. limit (dBuV/m) | CR/SL Diff. (dB) | Pass Fail Unc. | Comment |
|-------------------|-----------------|-------------|----------------------|---------------------|----------------|--------------|----------------------------|----------------------|------------------|----------------|---------|
| 38.738 | V | | 46.79 | 11.6 | 1.1 | 32.6 | 26.9 | 40.0 | -13.1 | Pass | |
| 39.673 | V | | 48.59 | 11.6 | 1.1 | 32.6 | 28.7 | 40.0 | -11.3 | Pass | |
| 42.03 | V | | 52.59 | 11.1 | 1.1 | 32.6 | 32.2 | 40.0 | -7.8 | Pass | |
| 44.144 | V | | 51.09 | 11.1 | 1.1 | 32.6 | 30.7 | 40.0 | -9.3 | Pass | |
| 49.074 | V | | 50.09 | 11.3 | 1.2 | 32.6 | 30.0 | 40.0 | -10.1 | Pass | |
| 50.952 | V | | 52.99 | 11.8 | 1.2 | 32.5 | 33.5 | 40.0 | -6.6 | Pass | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

IC RSS-Gen 7.2.2 Transmitter and Receiver AC Power Lines Conducted Emissions Limits

The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

The conducted emissions shall be measured with a 50 ohm/50 microhenry line impedance stabilization network. A description of the method of measurement that is acceptable to Industry Canada is found in RSS-212.

AC Power Lines Conducted Emissions Limits

| Frequency range (MHz) | Conducted limit (dB μ V) | |
|--------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

*Decreases with the logarithm of the frequency

Test Conditions:

| | | | |
|----------------------------|------------|---------------------|--------------------|
| Sample Number: | Handset US | Temperature: | 22 |
| Date: | 10/27/2006 | Humidity: | 44 |
| Modification State: | Charging | Tester: | Ferdinand Custodio |
| | | Laboratory: | Shield Room #1 |

Test Results:

See Attached Plots.

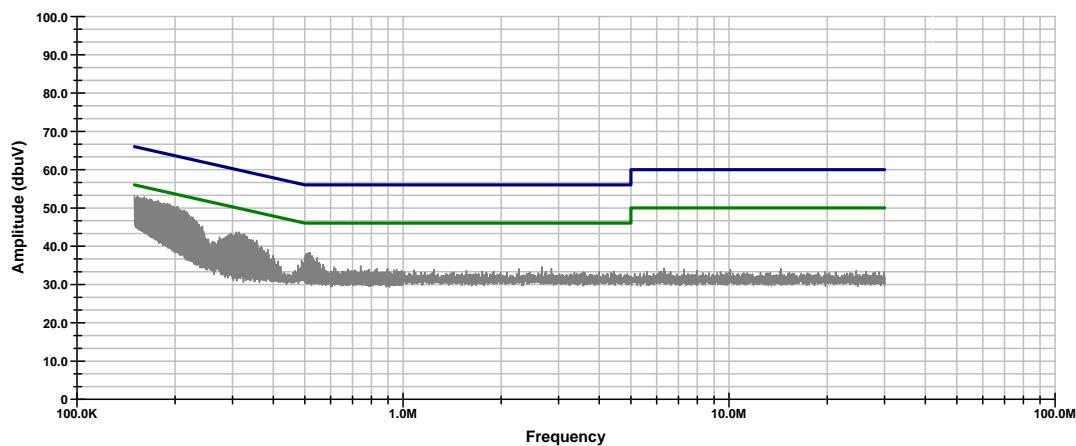
Notes:

Test was done using the supplied AC Adapter/Charger (CUI Inc. Model# 35-12-150, DC 12V 150mA)

Nemko USA, Inc.

FCC Class B Conducted Emissions

120VAC @ 60Hz, L1 PK, QP = 0, AV = X

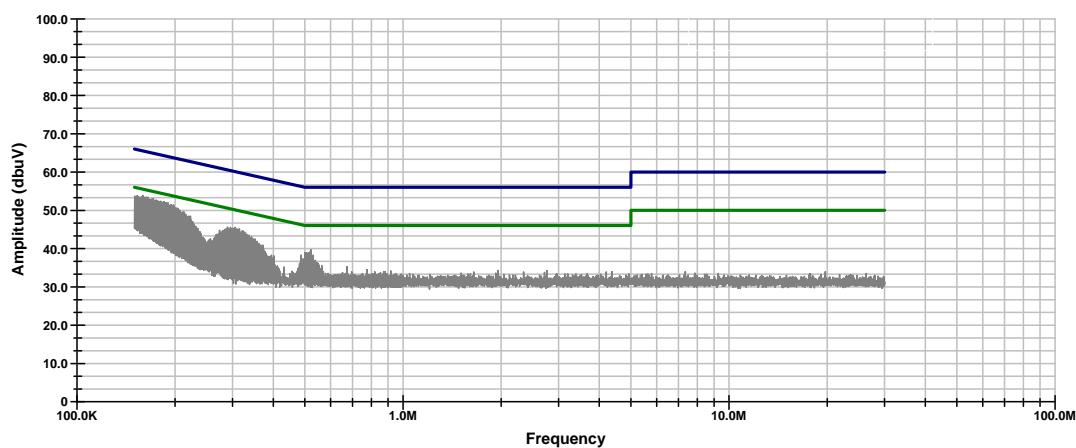
DIG Corp
LEIT II Handset (920MHz)
26-699-DIG

08:31:03 AM, Friday, October 27, 2006

Line 1**Nemko USA, Inc.**

FCC Class B Conducted Emissions

120VAC @ 60Hz, L2 PK, QP = 0, AV = X

DIG Corp
LEIT II Handset (920MHz)
26-699-DIG

08:34:14 AM, Friday, October 27, 2006

Line 2

Clause 2.1055(a) Frequency Stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:
(1) From -30[deg] to +50[deg] centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

Test Conditions:

| | | | |
|----------------------------|-------------------|---------------------|--------------------|
| Sample Number: | Handset US | Temperature: | 25 |
| Date: | 9/13/2006 | Humidity: | 56 |
| Modification State: | Loop transmission | Tester: | Ferdinand Custodio |

Test Results:

10900 Hz difference, which corresponds to 11.848 ppm
Limit = 100 ppm

See Attached Plots.

| Part 2.1055 (-30°C to +50°C) | | | |
|---|---------|-------------------|-----------------------|
| Spectrum Analyzer @ 100KHz RBW, 1MHz RBW, 1MHz Span | | LEIT II Handset | |
| Worst case variation: | | Set Frequency: | 919.9673 MHz @ 20°C |
| Temp.Set Point | Time | 85% of Vnom | Vnom=Internal Battery |
| Temp.Actual | | Frequency Δ (MHz) | Frequency Δ (MHz) |
| | | Difference (MHz) | Difference (MHz) |
| -30 | 8:30AM | | 919.978 |
| -29.8 | | | 0.010700000 |
| -20 | 9:30AM | | 919.978 |
| -19.9 | | | 0.010700000 |
| -10 | 10:30AM | | 919.9782 |
| -10 | | | 0.010900000 |
| 0 | 11:30AM | | 919.9782 |
| 0 | | | 0.010900000 |
| 10 | 12:30PM | | 919.9774 |
| 10.1 | | | 0.010100000 |
| 20 | 1:30PM | | 919.9698 |
| 20.2 | | | 0.002500000 |
| 30 | 2:30PM | | 919.9698 |
| 29.9 | | | 0.002500000 |
| 40 | 3:30PM | | 919.9673 |
| 40 | | | 0.000000000 |
| 50 | 4:30PM | | 919.9597 |
| 50 | | | 0.007600000 |

Appendix B: Setup Photographs

Radiated Emissions Setup:





Spurious Emissions Setup:



Conducted Emissions Setup:



Appendix C: Block Diagram of Test Setups

Test Site For Radiated Emissions

