



W66 N220 Commerce Court • Cedarburg, WI 53012 • USA  
Phone: 262.375.4400 • Fax: 262.375.4248  
[www.lsr.com](http://www.lsr.com)

**TEST REPORT #: 311048**  
**LSR Job #: C-1146**

Compliance Testing of:

Meta Watch

Test Date(s):

June 2<sup>nd</sup> – July 20<sup>th</sup>, 2011

Prepared For:

Fossil  
Attn: Dave Rosales  
2280 N. Greenville Ave.  
Richardson, TX 75082

**In accordance with:**  
**Federal Communications Commission (FCC) Part 15, Subpart C, Section 15.247**  
**Industry Canada (IC) RSS 210 Annex 8**  
**Frequency Hopping Spread Spectrum (FHSS)**

This Test Report is issued under the Authority of:

Signature: 


Date: 7/29/11

Test Report Reviewed by:  
Peter Feilen, EMC Engineer

Tested by:  
Shane Rismeyer, EMC Engineer

Signature: Date: 7/26/11

Signature: Date: 7/25/11





This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

# TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION .....	3
1.1 - Scope.....	4
1.2 – Normative References .....	4
1.3 - LS Research, LLC in Review .....	5
EXHIBIT 2. PERFORMANCE ASSESSMENT .....	6
2.1 - Client Information.....	6
2.2 - Equipment Under Test (EUT) Information .....	6
2.3 - Associated Antenna Description .....	6
2.4 - EUT’S Technical Specifications .....	7
2.5 - Product Description.....	8
EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS .....	9
3.1 - Climate Test Conditions.....	9
3.2 - Applicability & Summary Of EMC Emission Test Results .....	9
3.3 - Modifications Incorporated in the EUT for Compliance Purposes .....	9
3.4 - Deviations & Exclusions from Test Specifications .....	9
EXHIBIT 4. DECLARATION OF CONFORMITY .....	10
EXHIBIT 5. RADIATED EMISSIONS TEST.....	11
5.1 - Test Setup.....	11
5.2 - Test Procedure .....	11
5.3 - Test Equipment Utilized .....	11
5.4 - Test Results .....	11
5.5 - Calculation of Radiated Emissions Limits .....	12
5.6 - Radiated Emissions Test Data Chart.....	13
5.7 - Screen Captures - Radiated Emissions Test.....	15
5.8 - Receive Mode Testing .....	19
5.9 - Screen Captures - Radiated Emissions Testing – Receive Mode .....	20
EXHIBIT 7. OCCUPIED BANDWIDTH .....	24
7.1 - Limits.....	24
7.2 - Method of Measurements .....	24
7.3 - Test Data .....	24
7.4 - Screen Captures - Occupied Bandwidth.....	25
EXHIBIT 8. BAND EDGE MEASUREMENTS .....	27

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>

8.1 - Method of Measurements .....	27
EXHIBIT 9. POWER OUTPUT (CONDUCTED) .....	29
9.1 - Method of Measurements .....	29
9.2 - Test Data .....	29
9.3 - Screen Captures – Power Output (Conducted) .....	30
EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS: 15.247(d) .....	32
10.1 - Limits.....	32
10.2 - Conducted Harmonic And Spurious RF Measurements .....	32
10.3- Screen Captures – Spurious Radiated Emissions .....	33
EXHIBIT 11. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS.....	36
EXHIBIT 12. CHANNEL PLAN AND SEPARATION.....	37
12.1 - Screen Captures – Channel Separation .....	38
EXHIBIT 13. CHANNEL OCCUPANCY .....	42
EXHIBIT 14. EQUAL CHANNEL USAGE AND PSEUDORANDOM HOPPING SEQUENCE.....	43
EXHIBIT 15. RECEIVER SYNCHRONIZATION AND RECEIVER INPUT BANDWIDTH. ....	44
APPENDIX A - Test Equipment List.....	45
APPENDIX B - Test Standards: Current Publication Dates Radio.....	47
APPENDIX C - Uncertainty Statement.....	48
APPENDIX D - Antenna Specification(s) .....	49

## EXHIBIT 1. INTRODUCTION

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>

## **1.1 - Scope**

References:	FCC Part 15, Subpart C, Section 15.247 and 15.209 FCC Part 2, Section 2.1043 paragraph (b)1. RSS GEN and RSS 210 Annex 8
Title:	FCC : Telecommunication – Code of Federal Regulations, CFR 47, Part 15. IC : Low-power License-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment
Purpose of Test:	To gain FCC and IC Certification Authorization for Low- Power License-Exempt Transmitters.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	Commercial, Industrial or Business Residential

## **1.2 – Normative References**

<b>Publication</b>	<b>Title</b>
47 CFR, Parts 0-15 (FCC)	Code of Federal Regulations - Telecommunications
RSS 210 Annex 8	Low-power License-exempt Radio- communication Devices (All Frequency Bands): Category I Equipment
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
CISPR 16-1-1	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus.
CISPR 16-2-1	Specification for radio disturbance and immunity measuring apparatus and methods. Part 201: Conducted disturbance measurement.
FCC Public Notice DA 00-705	Frequency Hopping Spread Spectrum Transmitters

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>

### **1.3 - LS Research, LLC in Review**

As an EMC Testing Laboratory, our Accreditation and Assessments are recognized through the following:

---



TESTING CERT #1255.01

A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025: 2005 with Electrical (EMC) Scope of Accreditation  
A2LA Certificate Number: 1255.01

---



Federal Communications Commission (FCC) – USA

Listing of 3 Meter Semi-Anechoic Chamber based on Title 47 CFR – Part 2.948  
FCC Registration Number: 90756

---



**Canada**

Industry Canada

On file, 3 Meter Semi-Anechoic Chamber based on RSS-212 – Issue 1  
File Number: IC 3088-A  
On file, 3 and 10 Meter OATS based on RSS-212 – Issue 1  
File Number: IC 3088

---



U. S. Conformity Assessment Body (CAB) Validation

Validated by the European Commission as a U. S. Competent Body operating under the U. S./EU, Mutual Recognition Agreement (MRA) operating under the European Union Electromagnetic Compatibility – Council Directive 2004/108/EC (formerly 89/336/EEC, Article 10.2).

Date of Validation: January 16, 2001

Validated by the European Commission as a U.S. Notified Body operating under the U.S. /EU, Mutual Recognition Agreement (MRA) operating under the European Union Telecommunication Equipment – Council Directive 99/5/EC, Annex V.

Date of Validation: November 20, 2002

Notified Body Identification Number: 1243

---

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1 - Client Information

Manufacturer Name:	Fossil
Address:	2280 N. Greenville Ave.
Contact Name:	Dave Rosales

### 2.2 - Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	Meta Watch
Model Number:	WDS111
Serial Number:	N/A

### 2.3 - Associated Antenna Description

Johanson 2.4 GHz Chip antenna. See Appendix D for datasheet

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## 2.4 - EUT'S Technical Specifications

EUT Frequency Range (in MHz)	2402-2479
Occupied Bandwidth (99% BW)	1.032 kHz
Type of Modulation	GFSK
Emission Designator	1K03G1D
EIRP (in mW) Max	0.813
EIRP (in mW) Min	0.638
Transmitter Spurious (worst case) at 1 meter	63.3 dBuV/m
Receiver Spurious (worst case) at 3 meters	37.78 dBuV/m
Receiver Bandwidth	1 MHz
Receiver Sensitivity	-91 dBm
Stepped (Y/N)	No
Step Value:	N/A
Frequency Tolerance %, Hz, ppm	Better than 100ppm
Microprocessor Model # (if applicable)	MSP430F5438A
Antenna Information	
Detachable/non-detachable	Non-detachable
Type	Chip
Gain (in dBi)	0.5 Peak
EUT will be operated under FCC Rule Part(s)	15.247
EUT will be operated under RSS Rule Part(s)	210
Modular Filing	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Portable or Mobile?	Portable

RF Technical Information:

Type of Evaluation (check one)		SAR Evaluation: Device Used in the Vicinity of the Human Head
	X	SAR Evaluation: Body-worn Device
		RF Evaluation

Procedure for Portable RF Exposure from KDB 447498:

$$\text{Output Power} \leq \frac{60}{f \text{ (GHz)}} \text{ (mW)}$$

$$0.813 \text{ mW} \leq 24.59 \text{ mW}$$

Note: Since the peak output power of 0.813 mW is below the low threshold of 24.59mW this device does not need SAR evaluation

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## **2.5 - Product Description**

Meta Watch™ is a wearable development system that enables rapid development of ‘connected-watch’ applications. The Meta Watch platforms utilize embedded *Bluetooth*® technology to connect to smartphones, tablets and other electronics devices. Optimized for low-power operation, watch platforms are based on the MSP430™ ultra-low-power microcontroller and CC2560 *Bluetooth* host controller interface solution from Texas Instruments Incorporated (TI).

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>



# EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

## 3.1 - Climate Test Conditions

Temperature:	68 °F
Humidity:	38%
Pressure:	755 mmHg

## 3.2 - Applicability & Summary Of EMC Emission Test Results

FCC and IC Paragraph	Test Requirements	Compliance (Yes/No)
FCC : 15.207 IC : RSS GEN sect. 7.2.2	Power Line Conducted Emissions Measurements	N/A
FCC : 15.247 (a)(1)(i) IC : RSS 210 A8.1 (a)	20 dB Bandwidth	Yes
FCC : 15.247(b) & 1.1310 IC : RSS 210 A8.4	Maximum Output Power	Yes
FCC : 15.247(i), 1.1307, 1.1310, 2.1091 & 2.1093 IC : RSS 102	RF Exposure Limit	Yes
FCC :15.247(c) IC : RSS 210 A8.5	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
FCC:15.247 (a)(1)(i) IC: RSS 210 (b)	Carrier Frequency Separation	Yes
FCC:15.247 (a)(1)(i),(ii),(iii) IC: RSS 210 (c),(d),(e)	Number of Hopping Channels	Yes
FCC:15.247 (a)(1)(i),(ii),(iii) IC: RSS 210 (c),(d),(e)	Time of Occupancy (Dwell Time)	Yes
FCC : 15.247(c), 15.209 & 15.205 IC : RSS 210 A8.2(b), section 2.2, 2.6 and 2.7	Transmitter Radiated Emissions	Yes

## 3.3 - Modifications Incorporated in the EUT for Compliance Purposes

None  Yes (explain below)

In order for the EUT to pass Radiated Spurious Emissions the power level for all channels was set to 13.

## 3.4 - Deviations & Exclusions from Test Specifications

None  Yes (explain below)

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 4. DECLARATION OF CONFORMITY

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.247, and Industry Canada RSS-210 for a Frequency Hopping Spread Spectrum (FHSS) Transmitter.

*Note: If some emissions are seen to be within 3 dB of their respective limits; as these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.*

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>

## EXHIBIT 5. RADIATED EMISSIONS TEST

### **5.1 - Test Setup**

The test setup was assembled in accordance with Title 47, CFR FCC Part 15, RSS GEN and ANSI C63.4. The EUT was placed on an 80cm high non-conductive pedestal, centered on a flush mounted 2-meter diameter turntable inside a 3 meter Semi-Anechoic, FCC listed Chamber. The EUT was operated in a continuously modulated transmit mode for testing using power as provided by a bench DC supply.

The applicable limits apply at a 3 meter distance. Measurements above 4 GHz were performed at a 1.0 meter separation distance. The calculations to determine these limits are detailed in the following pages. Please refer to Appendix A for a complete list of test equipment. The test sample was operated on one of three (3) standard channels: low (Channel 00, 2402 MHz.), middle (Channel 38, 2462 MHz) and high (Channel 78, 2479 MHz) to comply with FCC Part 15.31(m).

### **5.2 - Test Procedure**

Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 30 MHz to 25000 MHz was scanned and investigated. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. A Bi-conical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz to 1000 MHz. A Double-Ridged Waveguide Horn Antenna was used from 1 GHz to 18 GHz and a Standard Gain Horn Antenna was used from 18 GHz to 25 GHz at a separation distance of 1m. The maximum radiated RF emissions were found by raising and lowering the antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities. The EUT was rotated along three orthogonal axes during the investigations to find the highest emission levels.

### **5.3 - Test Equipment Utilized**

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at an IEC/ISO 17025 accredited calibration laboratory, traceable to the SI standard. In addition, the Connecting Cables were measured for losses using a calibrated Signal Generator and an EMI Receiver. The resulting correction factors and the cable loss factors from these calibrations were entered into the EMI Receiver database. As a result, the data taken from the EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The EMI Receiver was operated with resolution bandwidths as prescribed in ANSI C63.4.

### **5.4 - Test Results**

The EUT was found to **MEET** the Radiated Emissions requirements of Title 47 CFR, FCC Part 15.247 and Canada RSS-210 for a FHSS transmitter.

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>

## 5.5 - Calculation of Radiated Emissions Limits

The maximum peak output power of an intentional radiator in the 2400-2483.5 MHz band, as specified in Title 47 CFR 15.247 and RSS 210 is 1 Watt. The harmonic and spurious RF emissions, as measured in any 100 kHz bandwidth, as specified in 15.247 (d) and RSS 210 A8.5, shall be at least 20 dB below the measured power of the desired signal, and must also meet the requirements described in 15.205(c) for FCC and section 2.2, 2.6 and 2.7 of RSS 210 for IC.

The following table depicts the general radiated emission limits above 30 MHz. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements. These limits were applied to any signals found in the 15.205 restricted bands. The mentioned limits correspond to those limits listed in RSS 210 section 2.7.

Frequency (MHz)	3 m Limit $\mu\text{V/m}$	3 m Limit (dB $\mu\text{V/m}$ )	1 m Limit (dB $\mu\text{V/m}$ )
30-88	100	40.0	-
88-216	150	43.5	-
216-960	200	46.0	-
960-24,000	500	54.0	63.5

Sample conversion of field strength ( $\mu\text{V/m}$  to dB $\mu\text{V/m}$ ):

$$\text{dB}\mu\text{V/m} = 20 \log_{10} (100) = 40 \text{ dB}\mu\text{V/m} \text{ (from 30-88 MHz)}$$

For measurements made at 1.0 meter, a 9.5 dB correction has been invoked.

960 MHz to 10,000 MHz

500 $\mu\text{V/m}$  or 54.0 dB/ $\mu\text{V/m}$  at 3 meters

$$54.0 + 9.5 = 63.5 \text{ dB}/\mu\text{V/m} \text{ at 1 meter}$$

Reported data is the raw data corrected for all applicable factors such as antenna factors, cable loss, etc.

Sample reported data:

Raw Data + Antenna Factor + Cable Factor = Reported Data

$$58.85 \text{ dB}\mu\text{V/m} + 28.52 \text{ dB} + 4.93 \text{ dB} = 92.3 \text{ dB}\mu\text{V/m}$$

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## 5.6 - Radiated Emissions Test Data Chart

Frequency Range Inspected: 30 MHz to 25000 MHz

<b>Manufacturer:</b>	Fossil					
<b>Date(s) of Test:</b>	6/2/11-6/8/11					
<b>Test Engineer(s):</b>	Shane Rismeyer					
<b>Voltage:</b>	5VDC					
<b>Operation Mode:</b>	Continuous transmit, modulated mode					
<b>Environmental Conditions in the Lab:</b>	Temperature: 71° F Relative Humidity: 42 %					
<b>EUT Power:</b>		Single Phase	VAC		3 Phase	VAC
		Battery		X	Other: Bench DC Supply (5VDC)	
<b>EUT Placement:</b>	X	80cm non-conductive table			10cm Spacers	
<b>EUT Test Location:</b>	X	3 Meter Semi-Anechoic FCC Listed Chamber			3/10m OATS	
<b>Measurements:</b>		Pre-Compliance			Preliminary	X Final
<b>Detectors Used:</b>	X	Peak		X	Quasi-Peak	X Average

The following table depicts the level of significant spurious radiated RF emissions found (other than the fundamentals and its harmonics):

Frequency (MHz)	Ant./EUT Polarity	Height (meters)	Azimuth (degrees)	Measured EFI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
986.5	V/V	1.00	0	27.8	54.0	26.2
297.3	H/V	1.00	0	25.6	46.0	20.4

The following table depicts the level of radiated Fundamental emissions seen:

Frequency (MHz)	Ant./EUT Polarity	Height (meters)	Azimuth (degrees)	Measured EFI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2402	H/S	1.01	0	88.4	125.2	36.8
2462	V/V	1.07	0	83.8	125.2	41.4
2479	H/S	1.00	0	83.3	125.2	41.9

<b>Prepared For:</b> Fossil	<b>Model Number:</b> WDS111	<b>Report #:</b> 311048
<b>EUT:</b> Meta Watch	<b>Serial Number:</b> N/A	<b>LSR Job #:</b> C-1146

*RADIATED EMISSIONS DATA CHART (continued)*

The following table depicts the level of significant radiated harmonic emissions seen on Channel 00 (2402 MHz):

Ant/EUT Polarity	Frequency (MHz)	Peak (dBµV/m)	Average EFI (dBµV/m)	Height (cm)	Azimuth (degrees)	Limit (dBµV/m)	Margin (dBµV/m)
V/Vertical	4803.9	61.13	59.47	104	0	63.5	4.0

The following table depicts the level of significant radiated harmonic emissions seen on Channel 30 (2462 MHz):

Ant/EUT Polarity	Frequency (MHz)	Peak (dBµV/m)	Average EFI (dBµV/m)	Height (cm)	Azimuth (degrees)	Limit (dBµV/m)	Margin (dBµV/m)
H/Vertical	4924	63.91	63.1	101.4	54.2	63.5	0.4
V/Vertical	7385.9	63.80	62.9	112.6	53.4	63.5	0.6

The following table depicts the level of significant radiated harmonic emissions seen on Channel 78 (2479 MHz):

Ant/EUT Polarity	Frequency (MHz)	Peak (dBµV/m)	Average EFI (dBµV/m)	Height (cm)	Azimuth (degrees)	Limit (dBµV/m)	Margin (dBµV/m)
V/Side	4958	63.98	63.3	105.3	297.1	63.5	0.2
H/Vertical	7437	63.29	62.1	110.1	46.6	63.5	1.4

*Notes:*


1. A Quasi-Peak Detector was used in measurements below 1 GHz. To ensure the peak emissions did not exceed 20 dB above the limits a peak detector was used. A peak detector with video averaging was used for measurements above 1 GHz.
2. Measurements above 4 GHz were made at 1 m of separation from the EUT. Limits have been corrected to reflect the change in measurement distance.

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146


## 5.7 - Screen Captures - Radiated Emissions Test

Note: These screen captures represent Peak Emissions. For measurements, a Quasi-Peak detector function is utilized when measuring frequencies below 1 GHz, and a video averaged Peak detector function is utilized when measuring frequencies above 1 GHz.

*Channel 2462 MHz, Antenna Vertically Polarized, 30-300 MHz, at 3m*

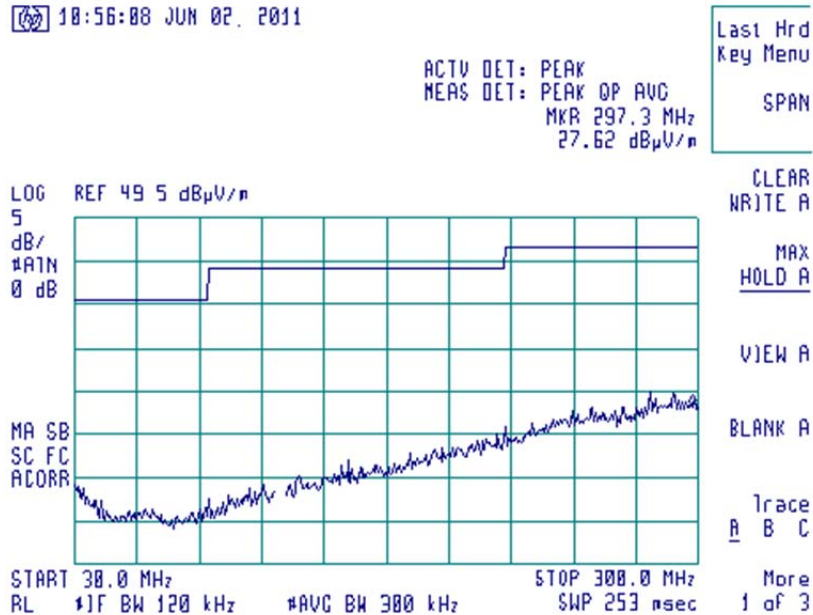


*Channel 2462 MHz, Antenna Vertically Polarized, 300-1000 MHz, at 3m*

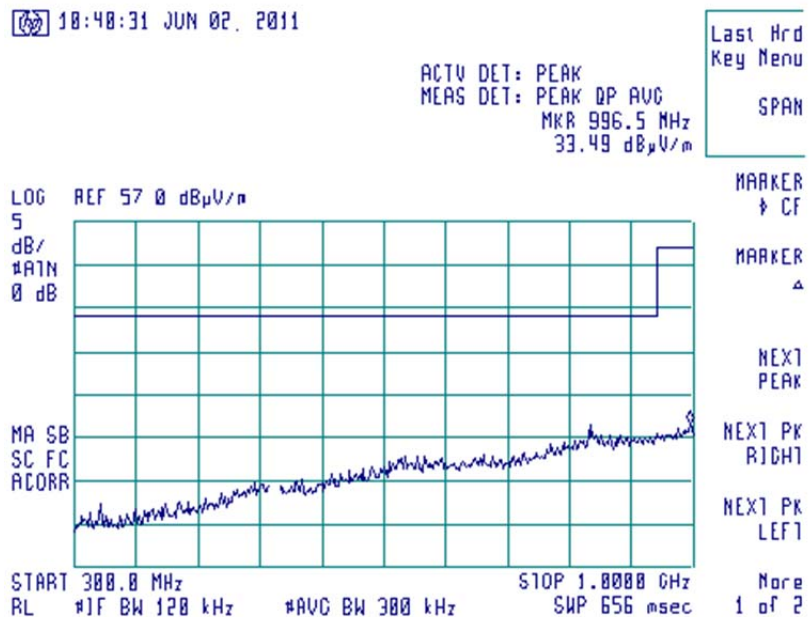


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

Screen Captures - Radiated Emissions Testing (continued)

Channel 2462 MHz, Antenna Vertically Polarized, 1000-2300 MHz, at 3m

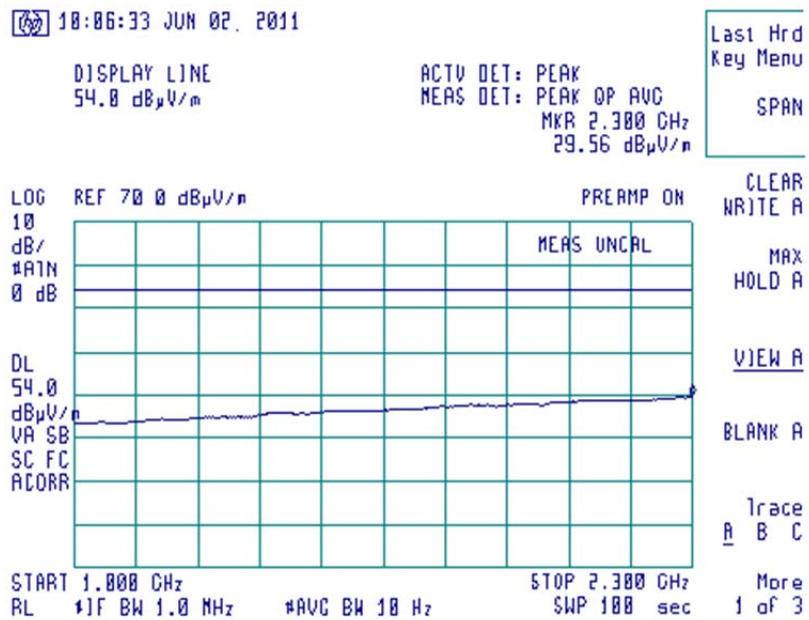

Channel 2402 MHz, Antenna Vertically Polarized, 2300-2400 MHz, at 3m

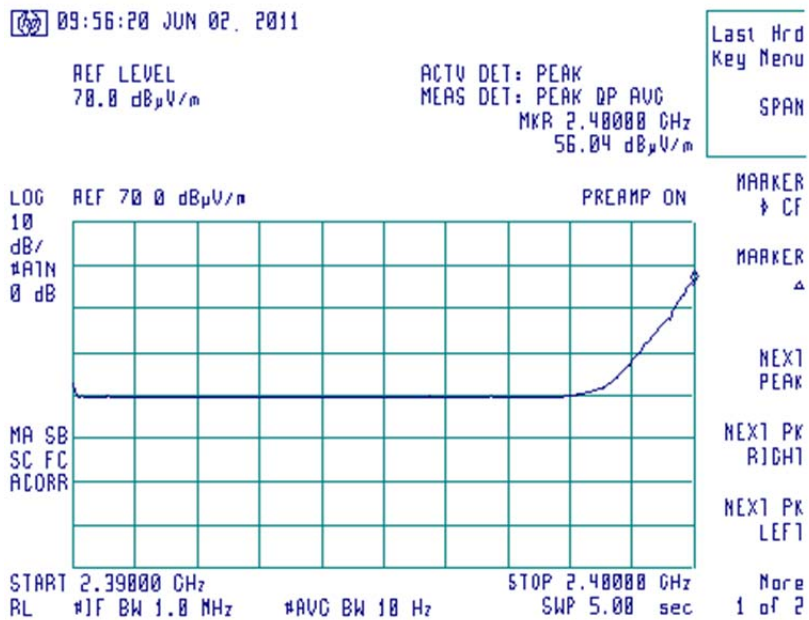


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146




Screen Captures - Radiated Emissions Testing (continued)

Channel 2479 MHz, Antenna Vertically Polarized, 2483.5-2500 MHz (UBE), at 3m

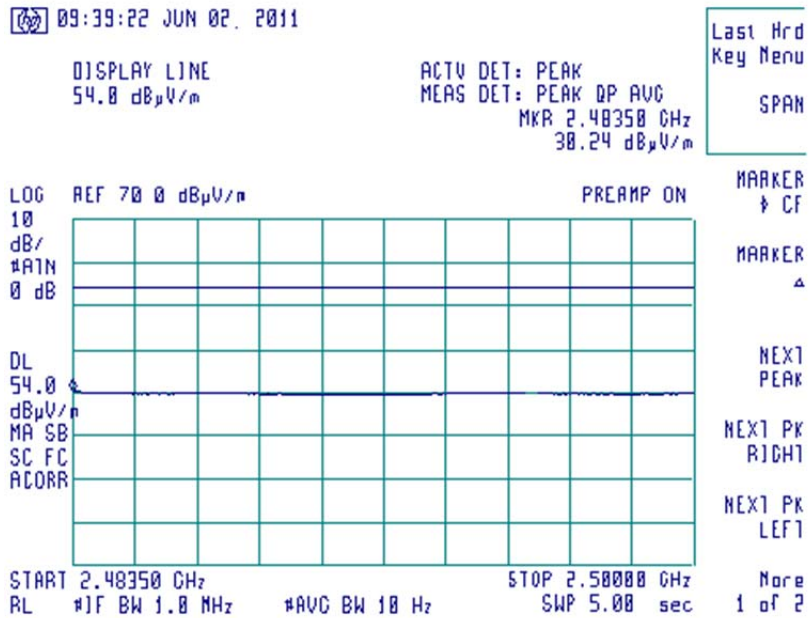


Channel 2462 MHz, Antenna Vertically Polarized, 2500-4000 MHz, at 3m

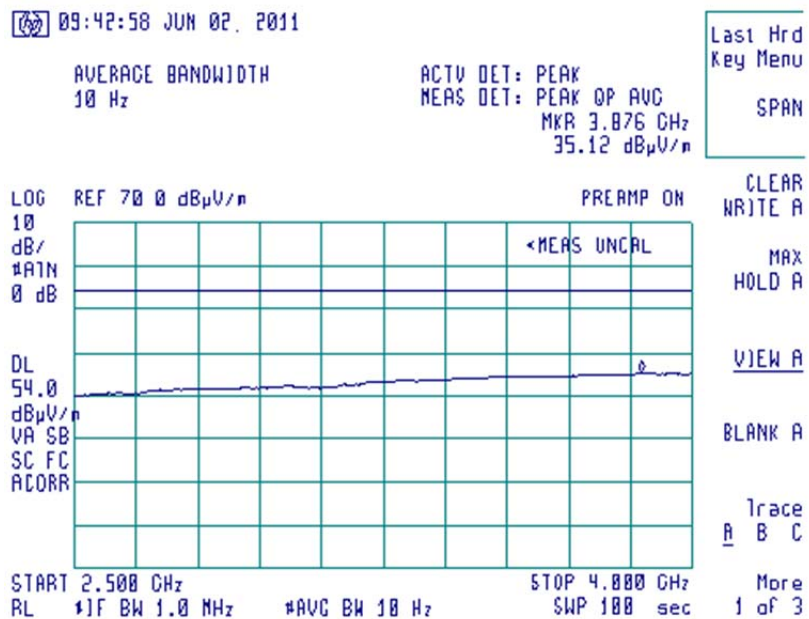


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

Screen Captures - Radiated Emissions Testing (continued)

Channel 2462 MHz, Antenna Vertically Polarized, 4000-18000 MHz, at 1m

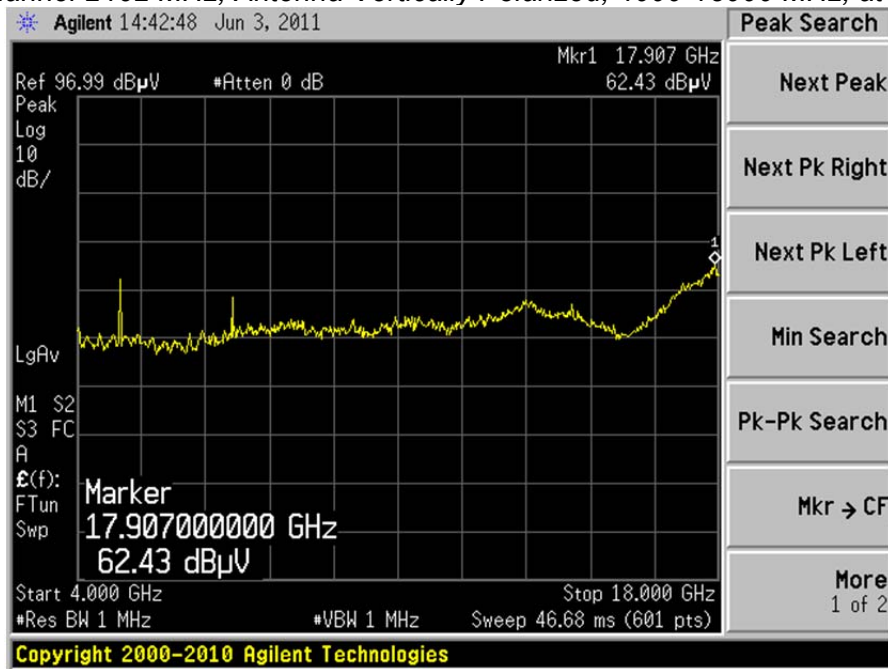

Channel 2462 MHz, Antenna Vertically Polarized, 18000-25000 MHz, at 1m

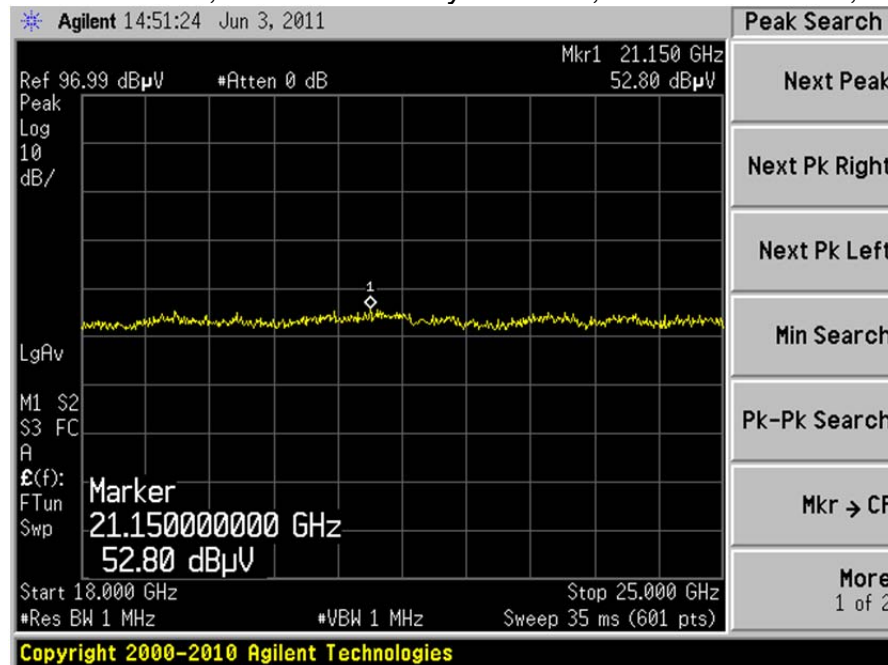

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## 5.8 - Receive Mode Testing

Per the requirements of RSS-210 and CFR 47 part 15, the EUT was placed in continuous receive mode and the radiated spurious emissions were measured and compared to the limits stated in RSS-Gen Section 4.10 and CFR 47 15.109.

The test setup, procedure, and equipment utilized were identical to that described in sections 5.1, 5.2, and 5.3 of this document.

Measurement data and screen captures from the receive tests are presented below:

Frequency (MHz)	Ant./EUT Polarity	Height (m)	Azimuth (degrees)	Measured EMI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
289.2	V/Vertical	1.00	0	25.41	46.0	20.59
996.5	V/Vertical	1.00	0	30.49	54.0	23.51
2467.3	V/Vertical	1.00	0	37.78	54.0	16.22

Notes:


1. A Quasi-Peak Detector was used in measurements below 1 GHz. To ensure the peak emissions did not exceed 20 dB above the limits a peak detector was used above 1 GHz. A peak detector with video averaging was used for measurements above 1 GHz.
2. Measurements above 4 GHz were made at 1 meters of separation from the EUT.
3. H: Horizontal, V: Vertical,

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146


## 5.9 - Screen Captures - Radiated Emissions Testing - Receive Mode

Note: These screen captures represent Peak Emissions. For measurements, a Quasi-Peak detector function is utilized when measuring frequencies below 1 GHz, and a video averaged Peak detector function is utilized when measuring frequencies above 1 GHz.

### Antenna Vertically Polarized, 30 MHz to 300 MHz

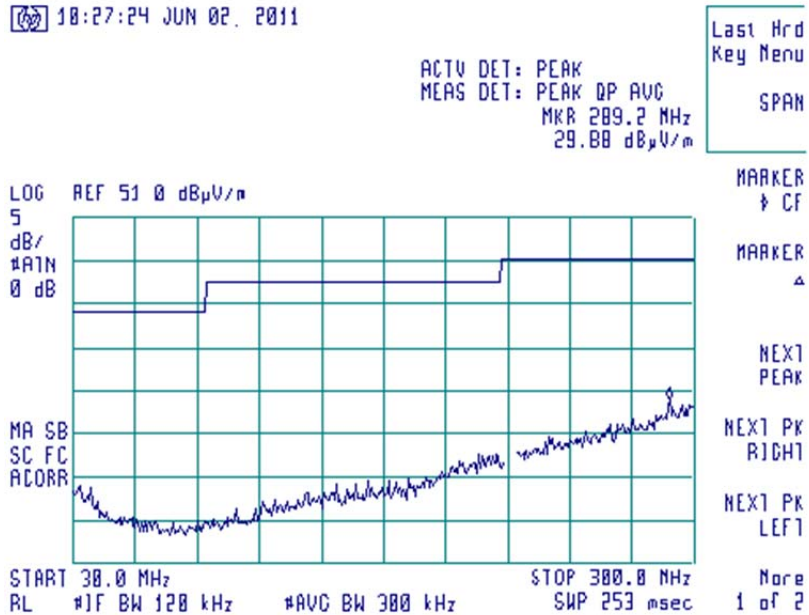


### Antenna Vertically Polarized, 300 MHz to 1000 MHz

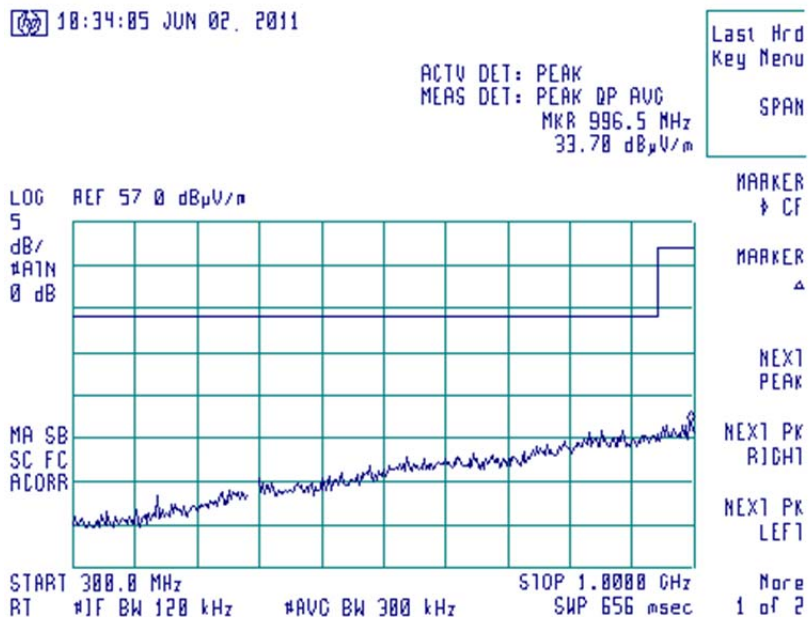


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

Screen Captures - Radiated Emissions Testing – Receive Mode (continued)

Antenna Vertically Polarized, 1000 MHz to 2400 MHz

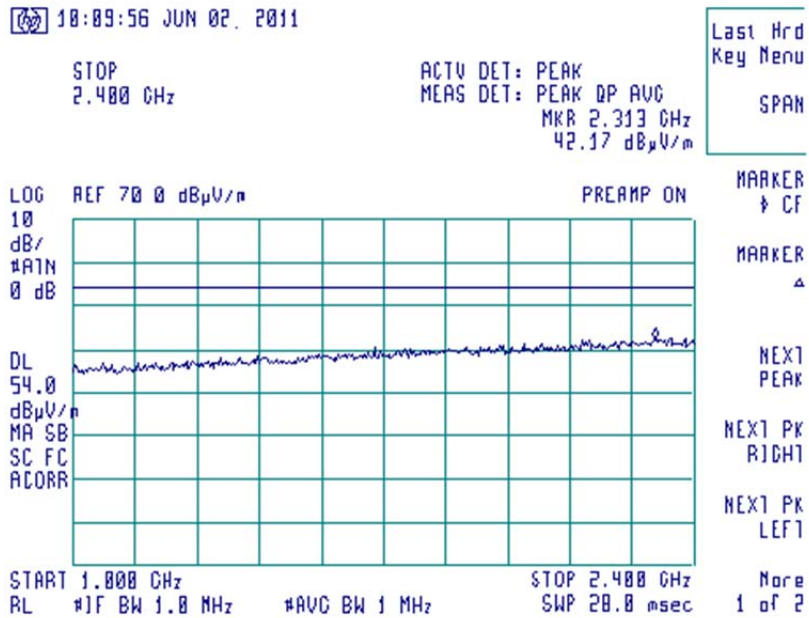


Antenna Vertically Polarized, 2400 MHz to 2500MHz

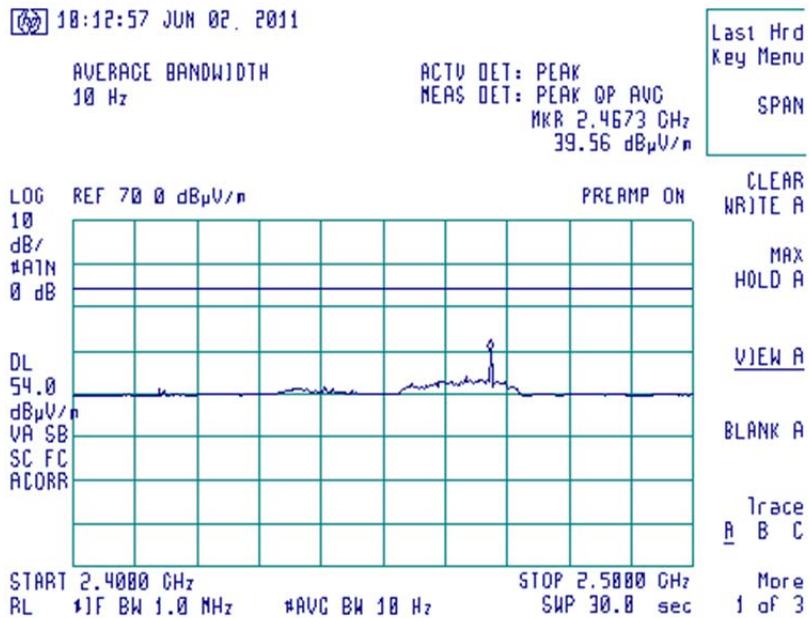


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

Screen Captures - Radiated Emissions Testing – Receive Mode (continued)

Antenna Vertically Polarized, 2500 MHz to 4000MHz

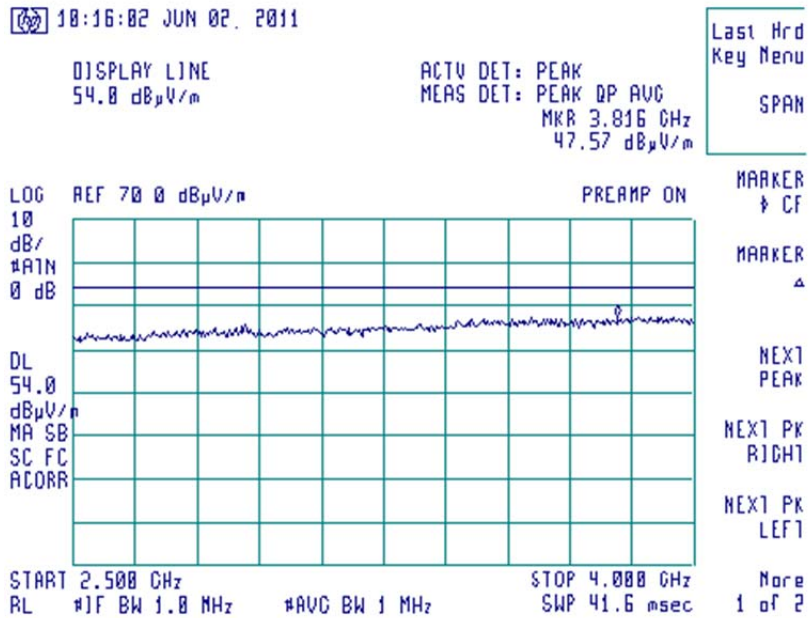


Antenna Vertically Polarized, 4000 MHz to 18000MHz

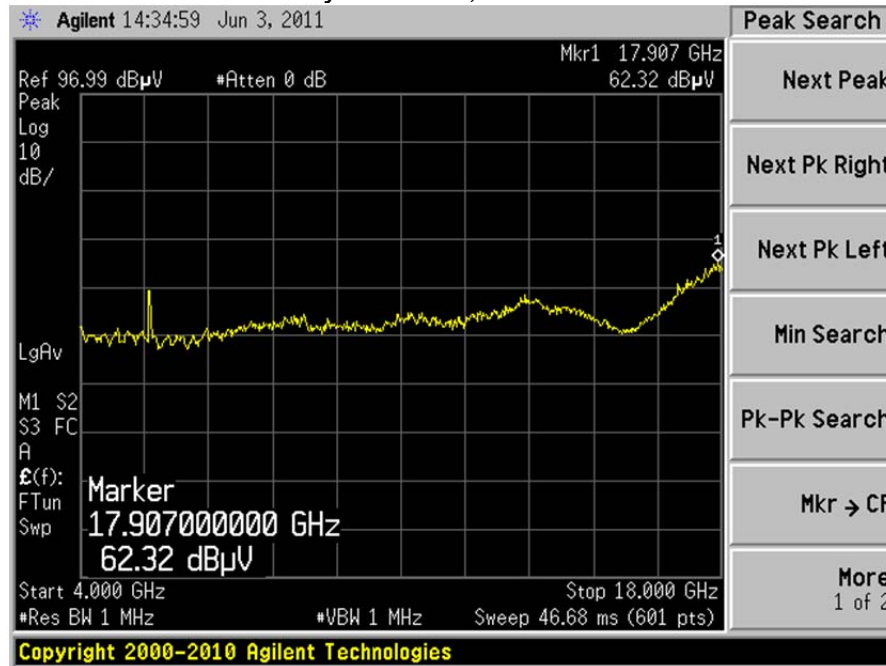

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

Screen Captures - Radiated Emissions Testing – Receive Mode (continued)

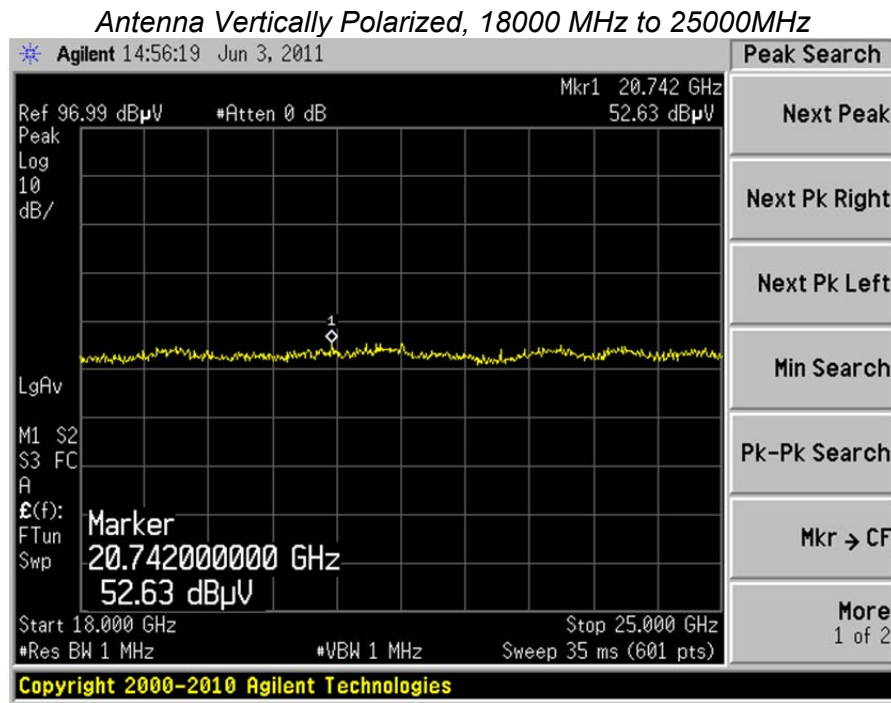

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 7. OCCUPIED BANDWIDTH

### 7.1 - Limits

For a frequency Hopping system in the 2400 to 2500 MHz band, the 20 dB bandwidth shall not exceed 500 kHz for FCC CFR 47 15.247 (a)(1)(i) and IC RSS 210 A8.1. (c).

### 7.2 - Method of Measurements

The transmitter output was connected to the Spectrum Analyzer. The bandwidth of the fundamental frequency was measured with the Spectrum Analyzer using 470 Hz RBW and VBW=4.7 kHz.

For this portion of the tests, a direct measurement of the transmitted signal was performed at the antenna port of the EUT, via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, allowing direct measurements, without the need for any further corrections. A spectrum analyzer was used with the resolution bandwidth set to 470 Hz for this portion of the tests. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used in peak-hold mode while measurements were made, as presented in the chart below.

From this data, the closest measurement (20 dB bandwidth) when compared to the specified limit, is 1.213 kHz, which is below the maximum of 500 kHz.



### 7.3 - Test Data

Channel	Center Frequency (MHz)	Measured -20 dBc Occ. BW (kHz)	Maximum -20 dBc Limit (kHz)	Margin (kHz)
00	2402	1.03	500	498.97
30	2462	1.04	500	498.96
78	2479	1.03	500	498.97

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146




## 7.4 - Screen Captures - Occupied Bandwidth

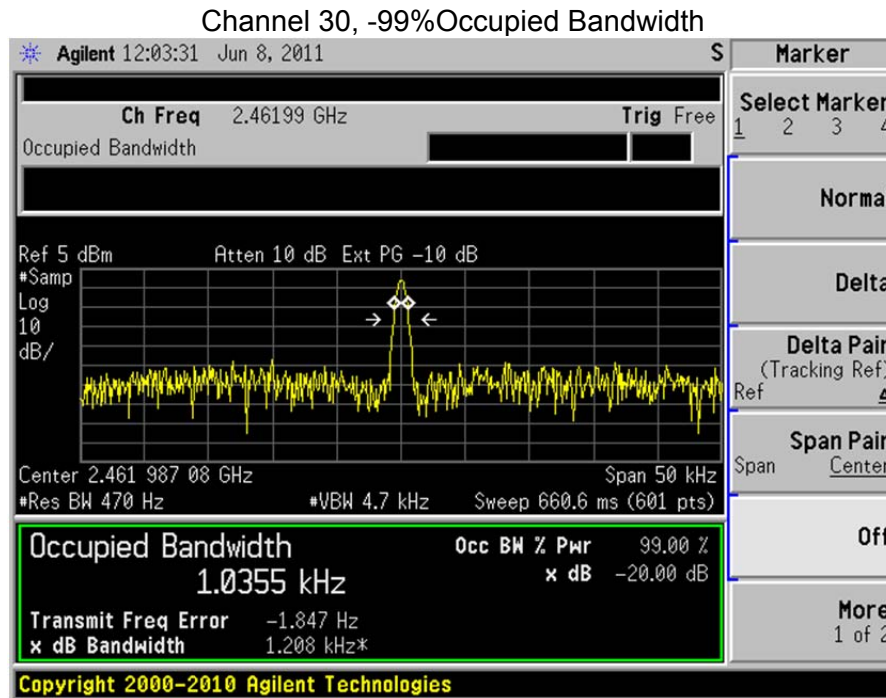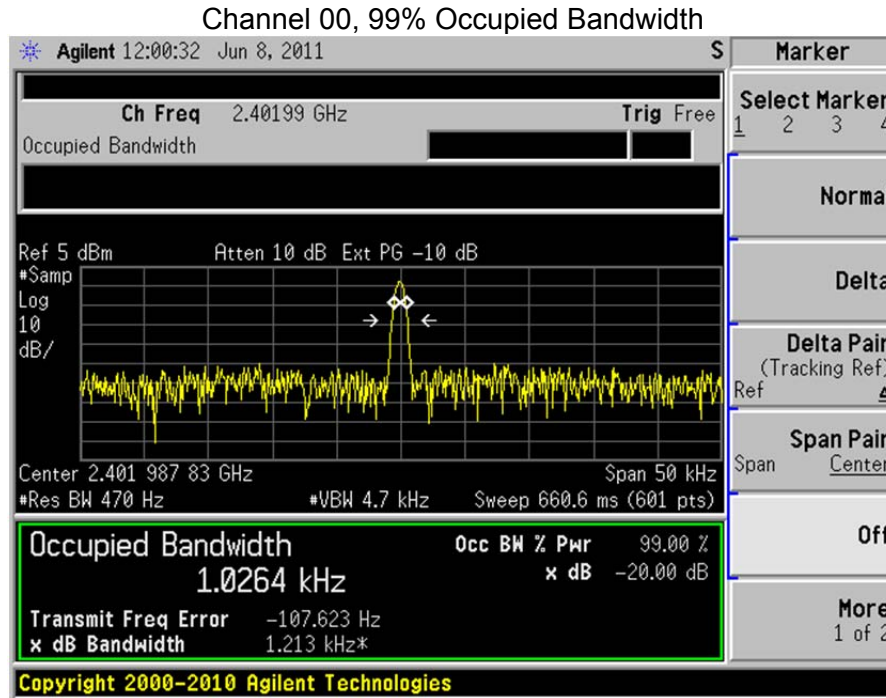

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

### Channel 78, 99% Occupied Bandwidth

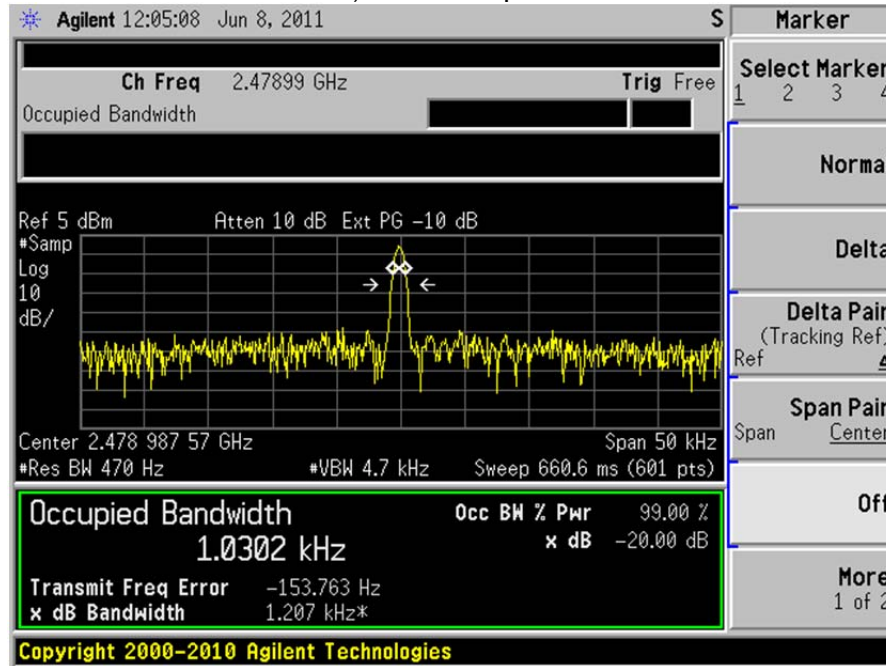

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146


# EXHIBIT 8. BAND EDGE MEASUREMENTS

## 8.1 - Method of Measurements

FCC 15.209(b) and 15.247(d) require a measurement of spurious emission levels to be at least 20 dB lower than the fundamental emission level, in particular at the Band-Edges where the intentional radiator operates. Also, RSS 210 Section 2.2 requires that unwanted emissions meet limits listed in tables 2 and 3 of the same standard and also to the limits in the applicable annex. The following screen captures demonstrate compliance of the intentional radiator at the 2400-2483.5 MHz Band-Edges. The EUT was operated in continuous transmit mode with continuous modulation, with internally generated data as the modulating source. The EUT was operated at the lowest channel for the investigation of the lower Band-Edge, and at the highest channel for the investigation of the higher Band-Edge.

Screen Capture Demonstrating Compliance at the Lower Band-Edge


The Lower Band-Edge limit, in this case, would be 68.4 dBuV/m at 3m.

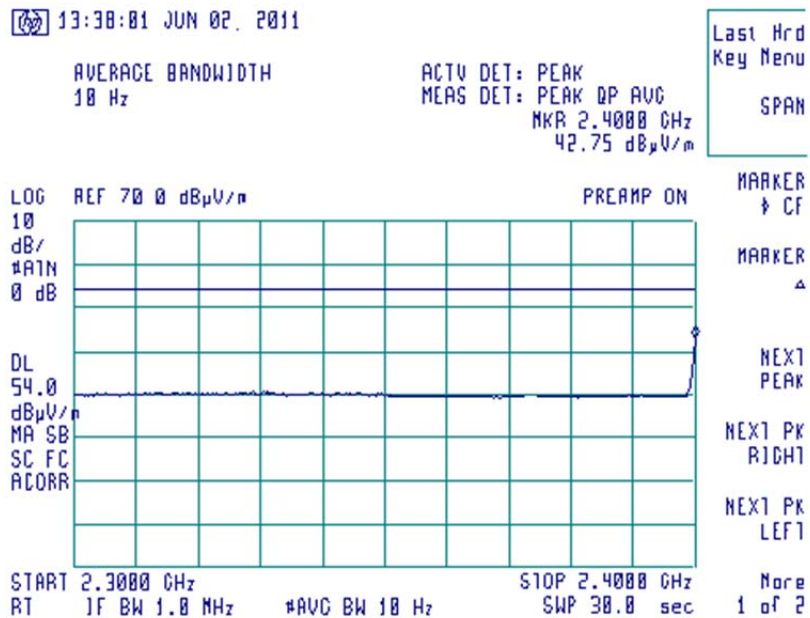

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

# Screen Capture Demonstrating Compliance at the Higher Band-Edge

The Upper Band-Edge limit, would be 54 dBuV/m at 3m.

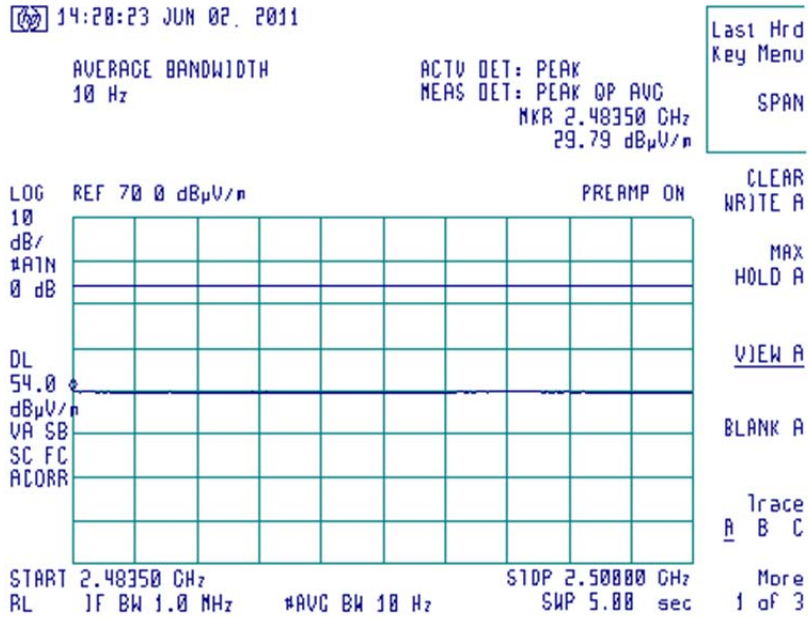

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 9. POWER OUTPUT (CONDUCTED)

### 9.1 - Method of Measurements



The conducted RF output power of the EUT was measured at the antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, allowing direct measurements without the need for any further corrections. The unit was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with resolution bandwidths set to 1 MHz and a span of 5 MHz, Bluetooth, and 3 MHz and a span of 10 MHz, wireless, with measurements from a peak detector presented in the chart below.

### 9.2 - Test Data

Channel	Center Frequency (MHz)	Limit (dBm)	Measured Power (dBm)	Margin (dB)
Low	2402	30.0	-2.45	32.45
Middle	2462	30.0	-1.74	31.74
High	2479	30.0	-1.40	31.40


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

### 9.3 - Screen Captures - Power Output (Conducted)

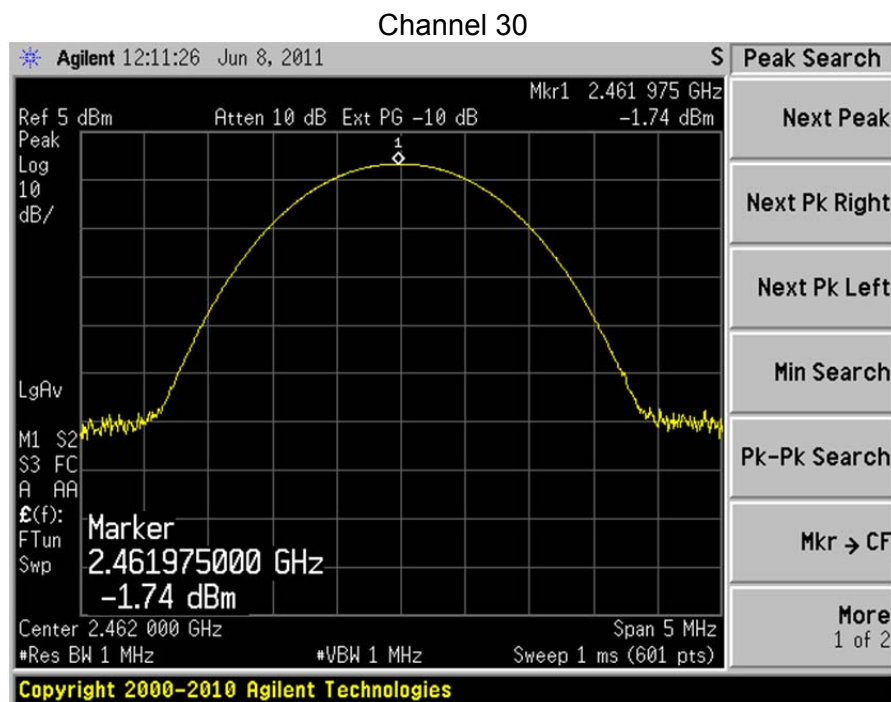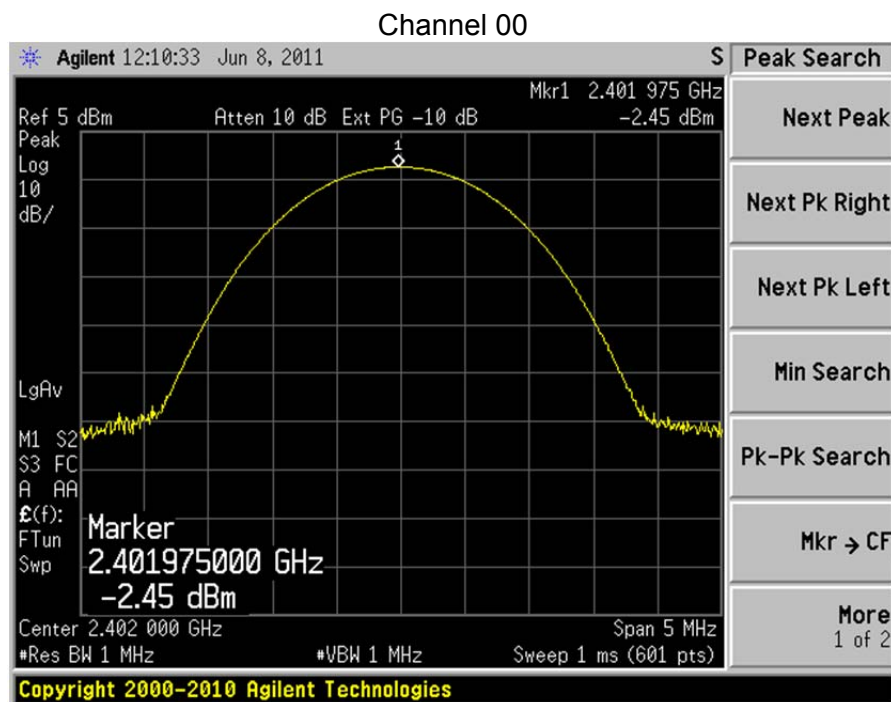

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

### Channel 78

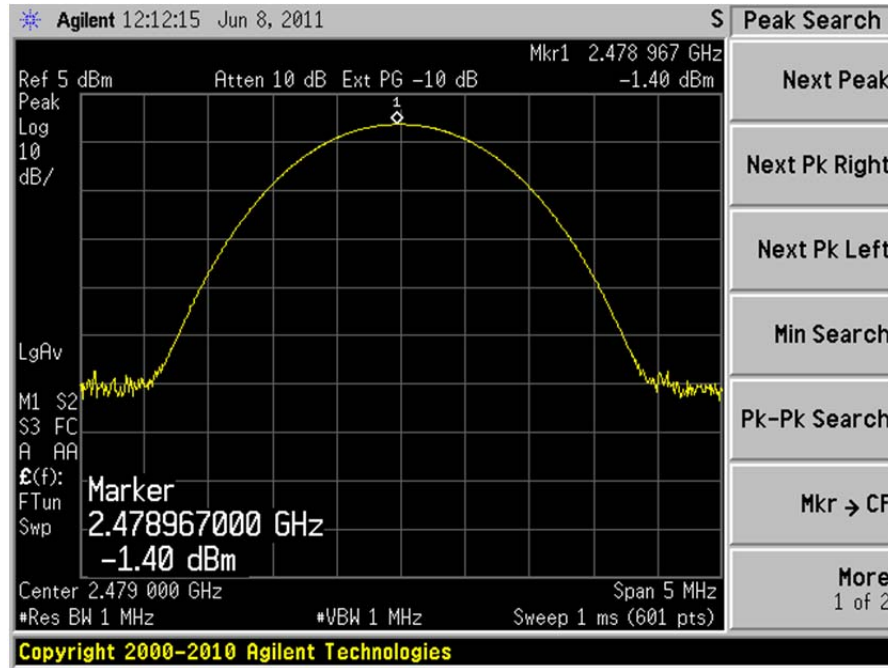

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

# EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS: 15.247(d)

## **10.1 - Limits**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 db below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

## **10.2 - Conducted Harmonic And Spurious RF Measurements**

FCC Part 15.247(d) and IC RSS 210 A8.5 both require a measurement of conducted harmonic and spurious RF emission levels, as reference to the carrier level when measured in a 100 kHz bandwidth. For this test, the spurious and harmonic RF emissions from the EUT were measured at the EUT antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, thereby allowing direct readings of the measurements made without the need for any further corrections. A spectrum analyzer was used with the resolution bandwidth set to 100 kHz for this portion of the tests. The unit was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with measurements from a peak detector presented in the chart below. Screen captures were acquired and any noticeable spurious and harmonic signals were identified and measured.



### Transmitter Harmonic Emissions

Frequency	Channel 00	Channel 39	Channel 78
Fundamental	-2.82	-2.05	-1.86
2 <sup>nd</sup> Harmonic	-43.19	-42.57	-42.21
3 <sup>rd</sup> Harmonic	-54.87	-56.34	-57.32
4 <sup>th</sup> Harmonic	-62.78	-63.97	-63.78
5 <sup>th</sup> Harmonic	-61.31	-63.47	-63.43
6 <sup>th</sup> Harmonic	-53.17	-48.28	-46.51
7 <sup>th</sup> Harmonic	-47.54	-48.71	-50.88
8 <sup>th</sup> Harmonic	-70.82	-67.62	-67.81
9 <sup>th</sup> Harmonic	-62.75	-65.19	-66.82
10 <sup>th</sup> Harmonic	-71.75	-69.33	-69.35

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146




### 10.3- Screen Captures – Spurious Radiated Emissions

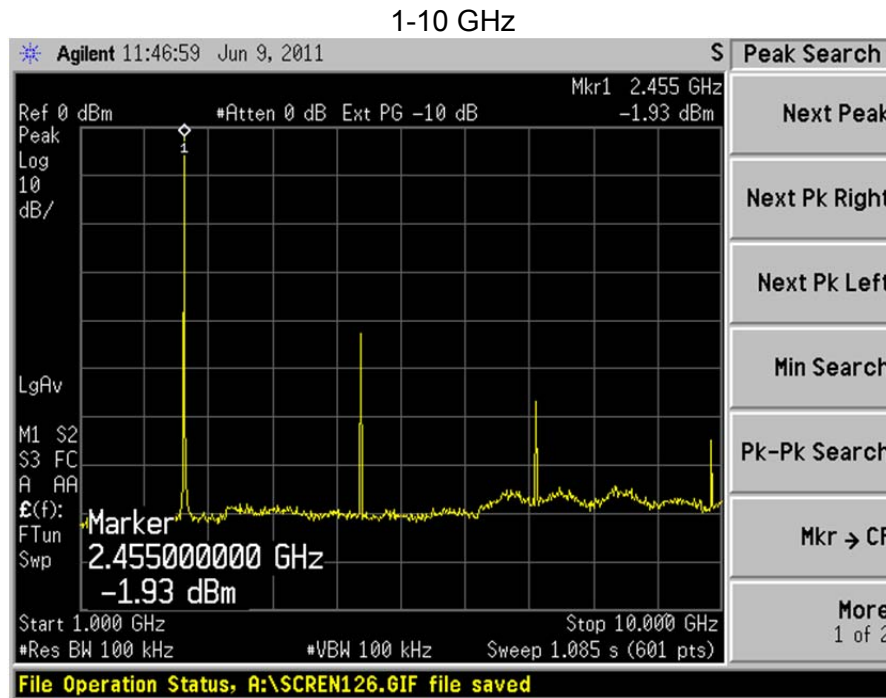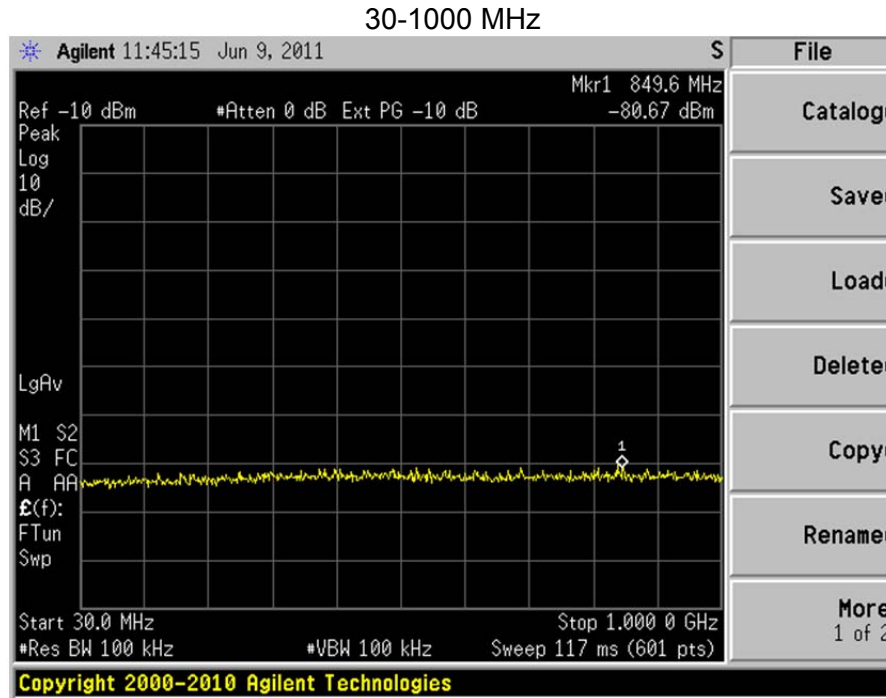


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

### 10-25 GHz

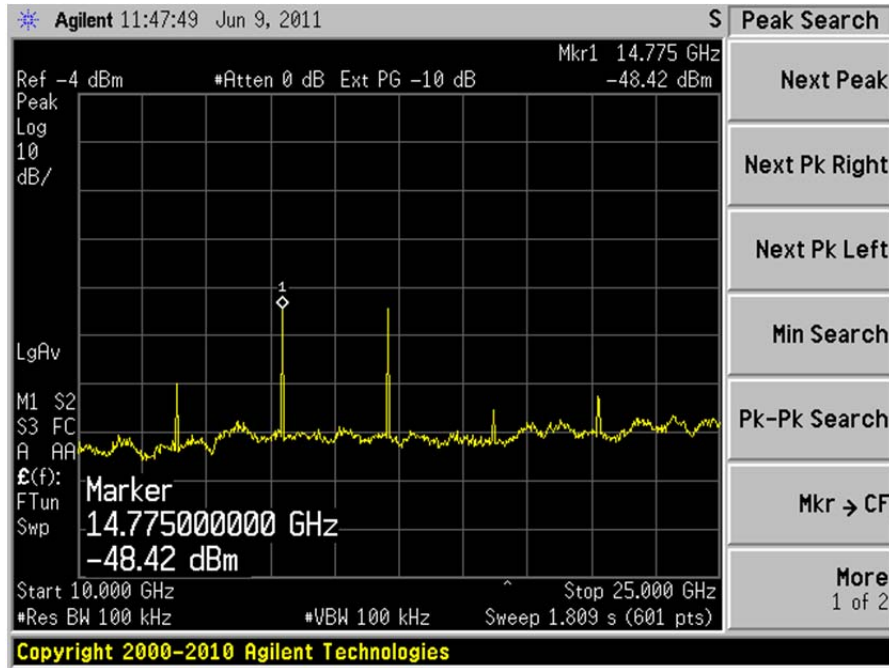


### Receive Mode 30-1000 MHz

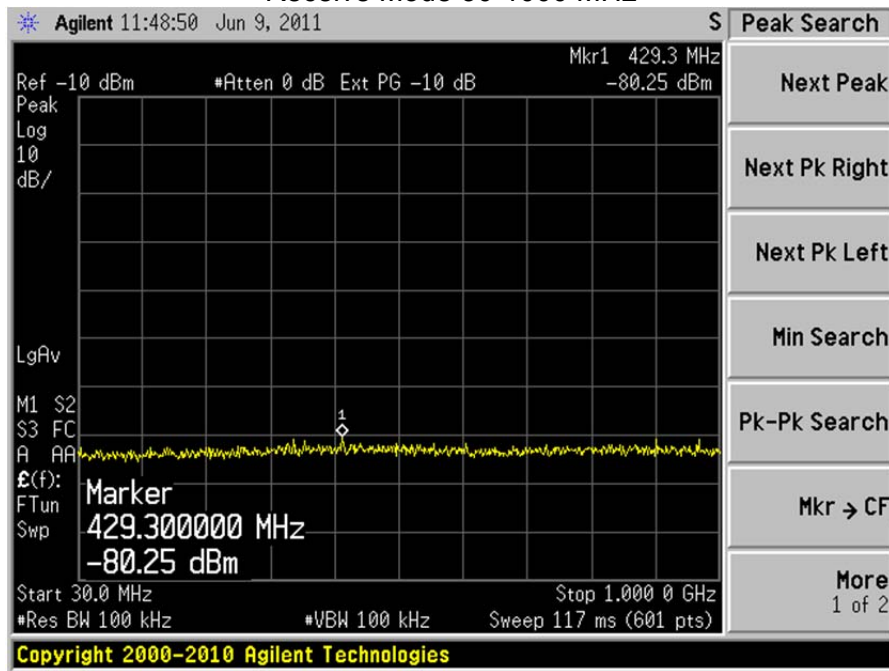


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

### Receive Mode 1-10 GHz

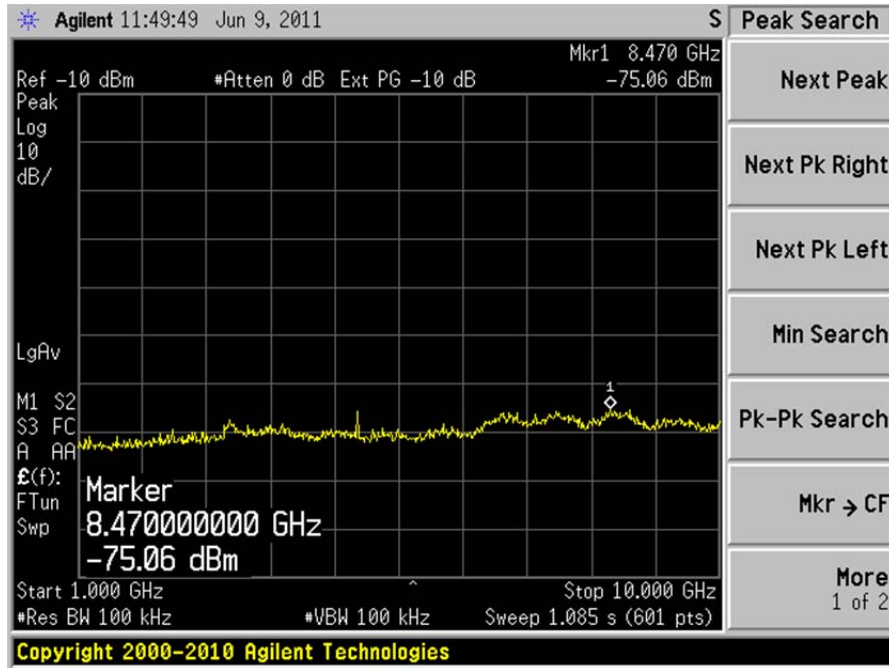

### Receive Mode 10-25 GHz

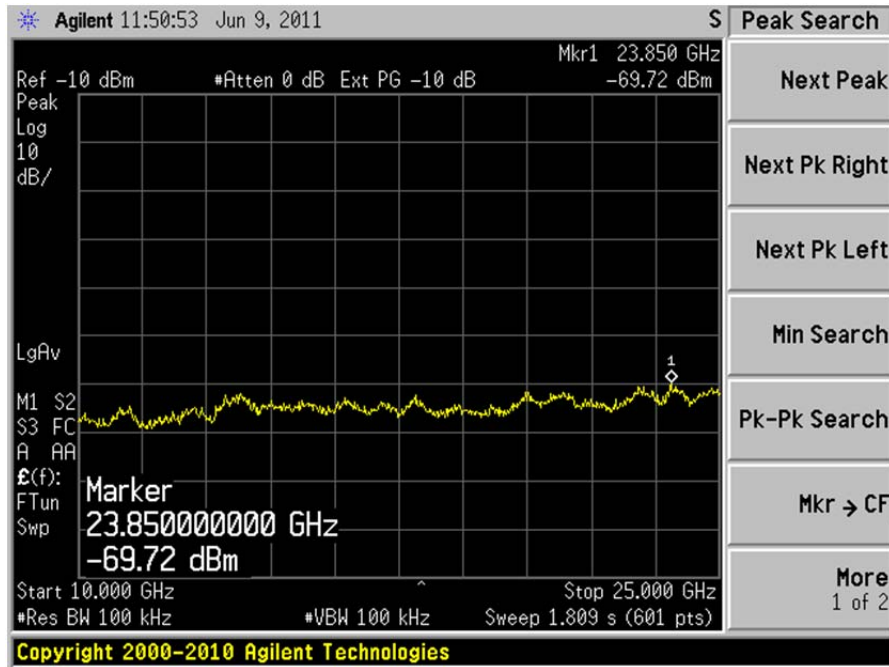

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 11. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS

For measurements of the frequency and power stability, the transmitter was powered by an external bench-type variable power supply. A Spectrum Analyzer was used to measure the frequency at the appropriate frequency markers and also the output power at the antenna port.

4.25 VDC		5 VDC		Channel
Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)	
-2.30	2401988139	-2.3	2401988123	Low
-1.99	2461987637	-2.04	2461987720	Mid
-1.73	2478987670	-1.75	2478987704	High

### Frequency Drift

Channel	Maximum (Hz)	Minimum (Hz)	Difference (Hz)
Low	2401988139	2401988123	16
Mid	2461987720	2461987637	83
High	2478987704	2478987670	34

The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characterizes were well behaved, and the system returned to the same state of operation as before the power cycle.

The maximum shift in frequency is 83 Hz which is better than 100 ppm in the 2400 MHz to 2483.5 MHz band.

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 12. CHANNEL PLAN AND SEPARATION

A spectrum analyzer was used with a resolution bandwidth of 30 kHz to measure the channel separation of the EUT.

The minimum and maximum channel-separations measured for this device are 1013 Hz and 1033 Hz respectively.

The minimum channel separation limit as stated in FCC CFR 47 15.247 and IC RSS210 is 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

The minimum number of channels limit as stated in FCC CFR 47 15.247 and IC RSS210 is 50 channels for channel bandwidth less than 250 kHz and 25 channels for channel bandwidth greater than 250 kHz.



The following plots describe this spacing, and also establish the channel separation and plan.

Range (MHz)	Number of Channels Per Capture	Max separation (Hz)
2400 - 2410.5	9.0	1015
2410.5 - 2420	9.5	1013
2420 - 2430	10.0	1033
2430 - 2440	10.0	1017
2440-2450	10.0	1017
2450-2460	10.0	1033
2460-2470	10.0	1017
2470-2483.5	10.5	1012.5

<b>Total Channels</b>	79
<b>Largest Max separation</b>	1033
<b>Smallest Max Separation</b>	1013

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>


## 12.1 - Screen Captures - Channel Separation

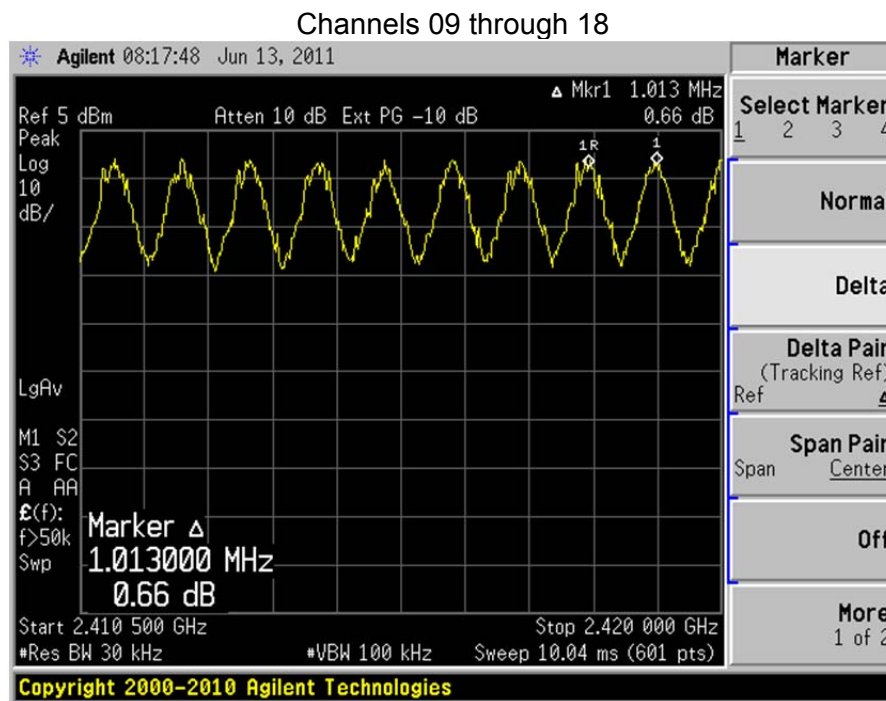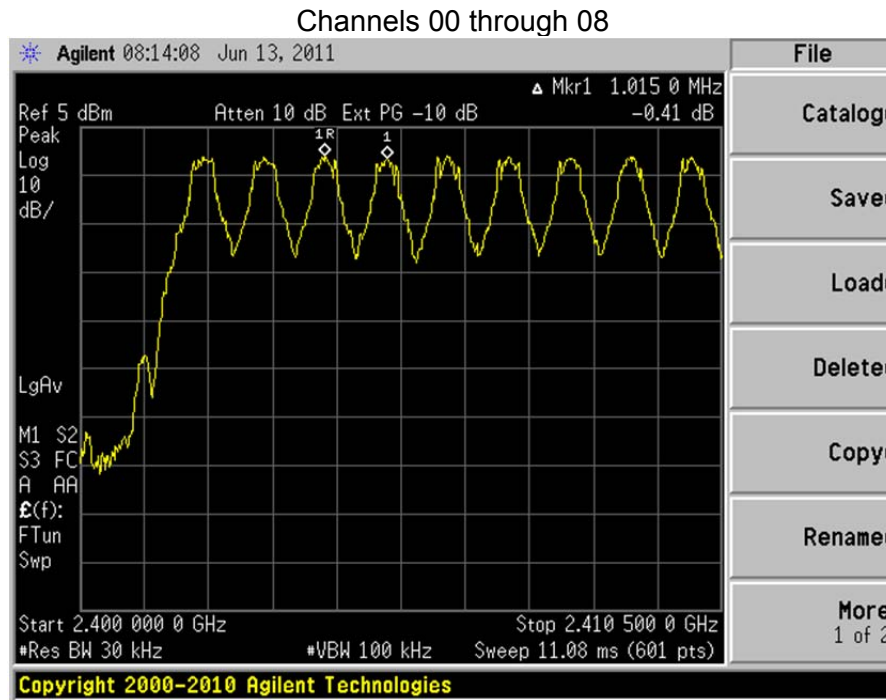


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

Screen Captures – Channel Separation (*continued*)

Channels 18 through 28

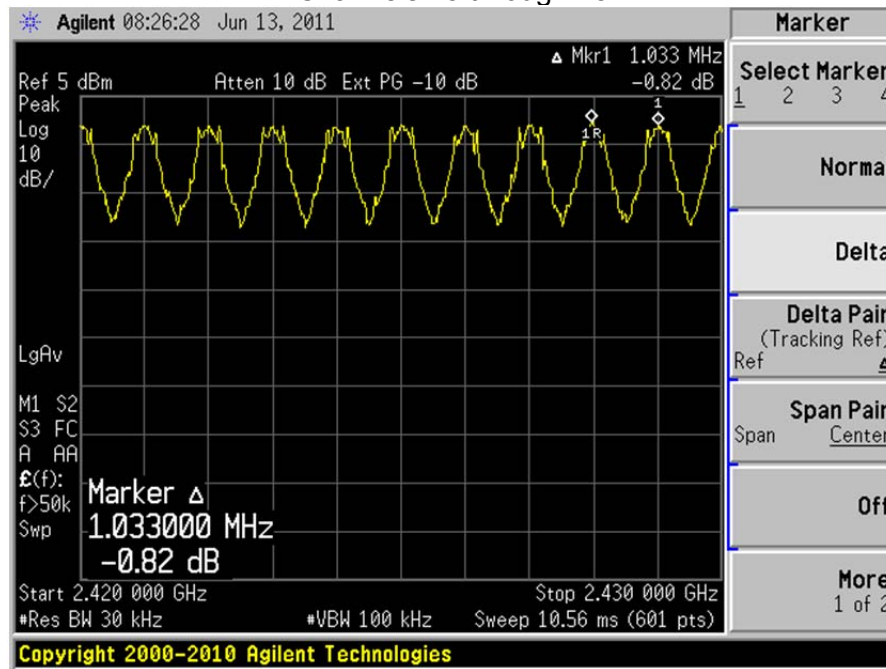


Channels 28 through 38

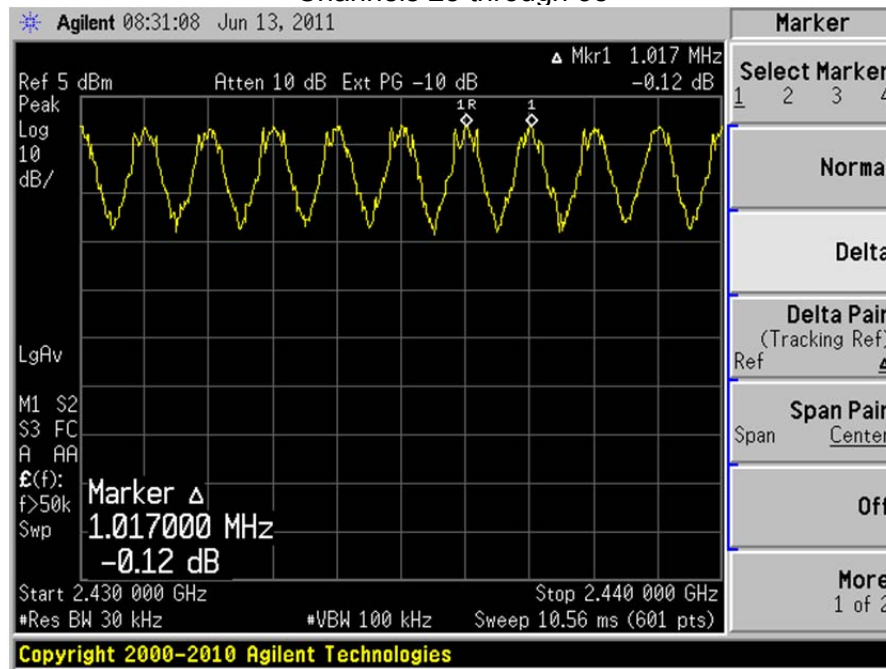


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

Screen Captures – Channel Separation (*continued*)

Channels 38 through 48

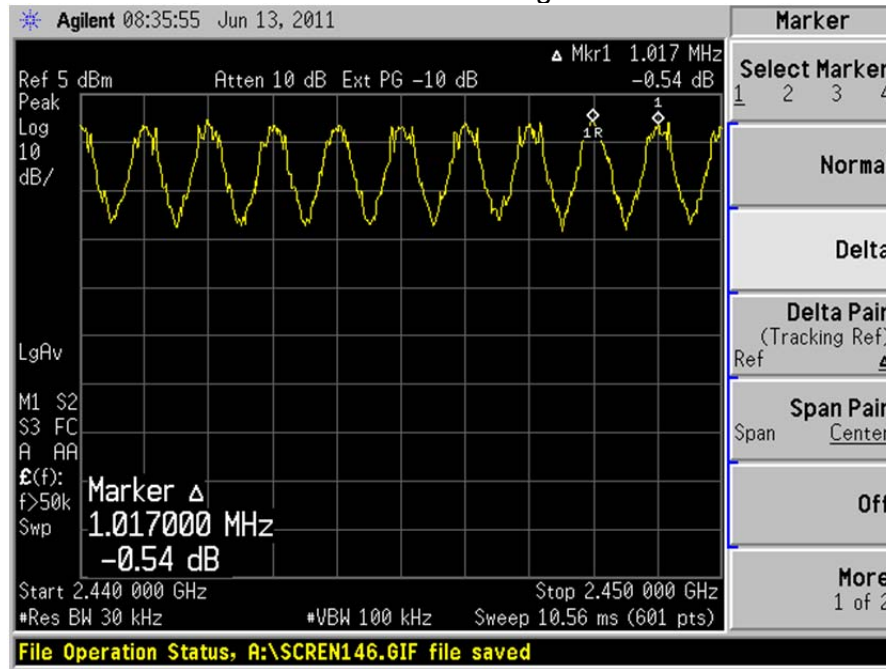

Channels 48 through 58

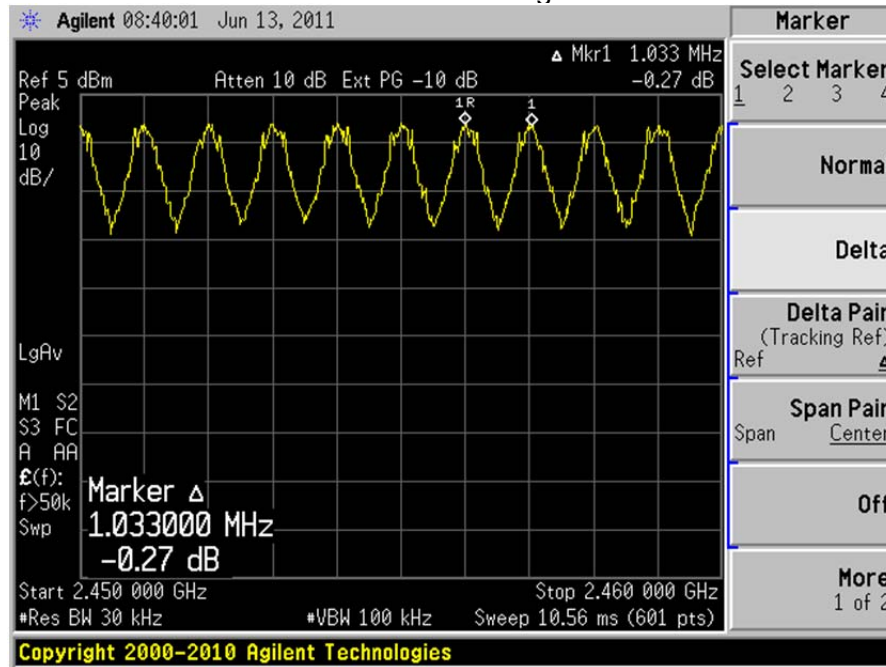


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146




Screen Captures – Channel Separation (*continued*)

Channels 58 through 68

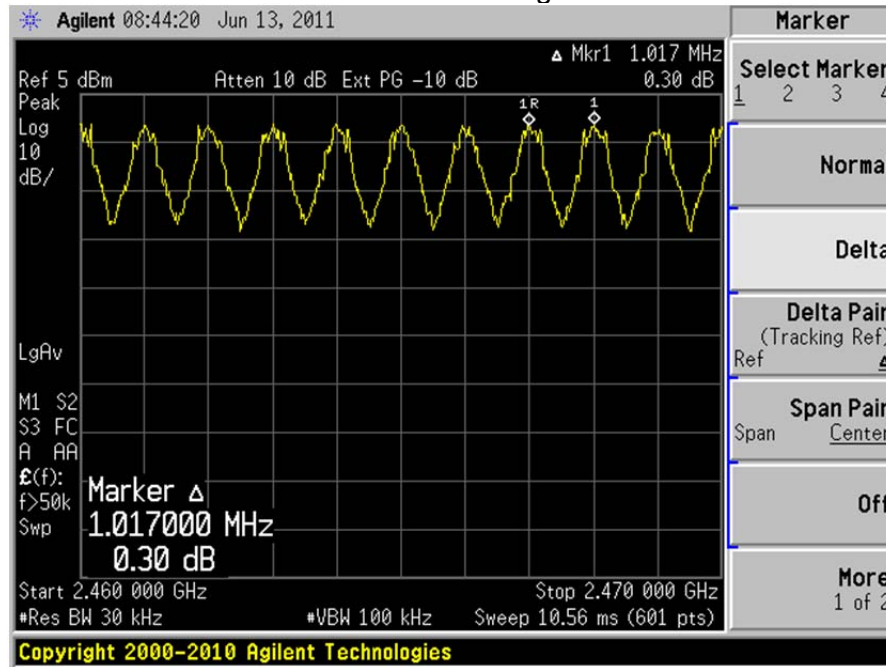

Channels 68 through 78

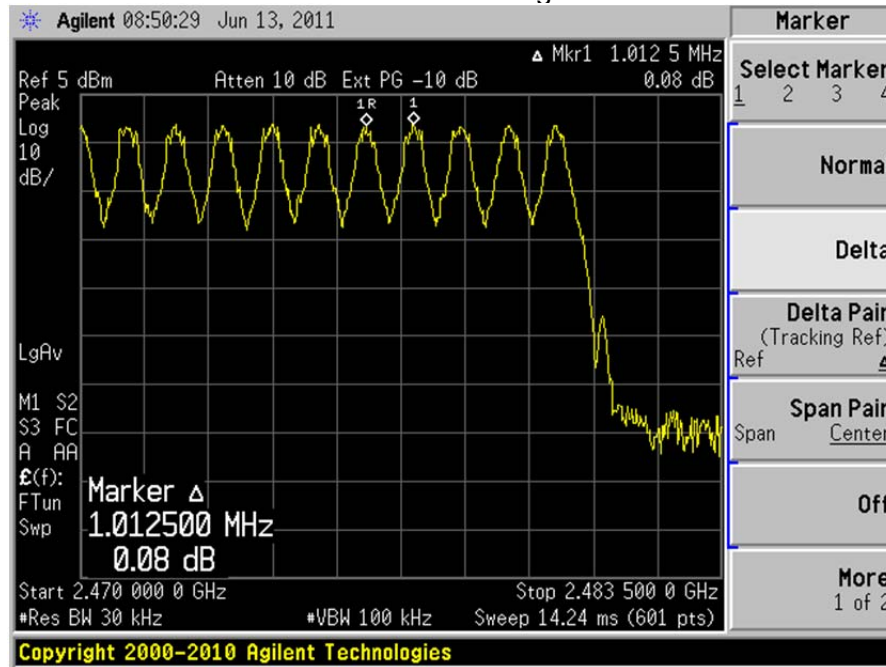


Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 13. CHANNEL OCCUPANCY

Part 15.247(a)(1) requires a channel occupancy, for this device, of no more than 400 milliseconds in a 31.6 second window (given 79 EUT has 79 channels). The channel occupancy for this EUT was measured using a spectrum analyzer, set to zero-span at the frequency of interest. With the analyzer in peak-hold mode, the transmission lengths can be measured by adjusting the sweep rate of the analyzer.

The longest time any transmission will occur on a single channel is 156.67 microseconds. In a 30ms window, each channel has 1 transmission cycle. The maximum occupancy in a 31.6 second window is calculated by dividing 1 transmission cycle in a 30ms window. Then, multiplying by the 313.33 microsecond transmission duration per cycle, to arrive at 330.0 milliseconds total occupancy.

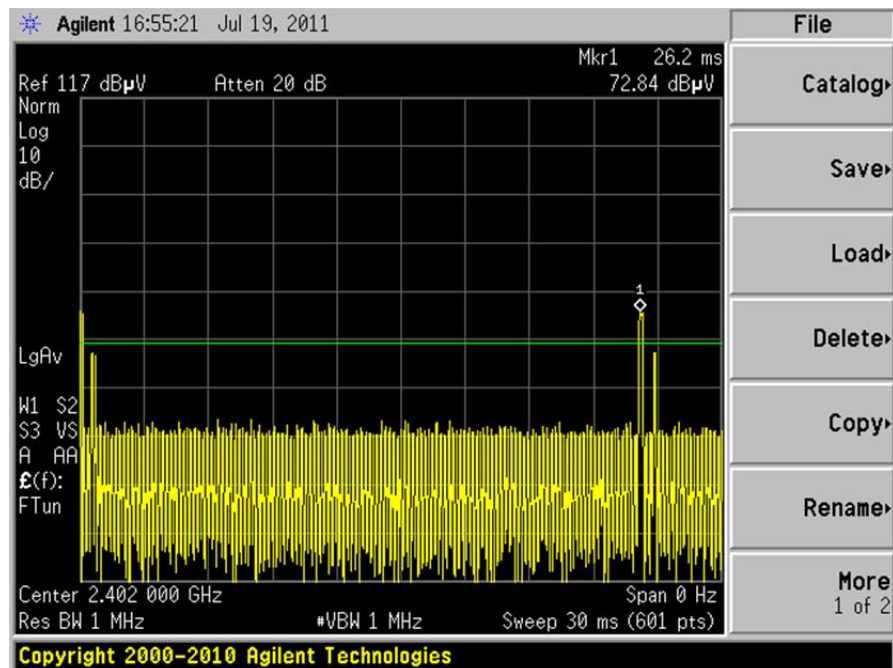


Capture showing 1 transmission cycle of 30ms with two packets of 156.667  $\mu$ s duration each.

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 14. EQUAL CHANNEL USAGE AND PSEUDORANDOM HOPPING SEQUENCE.

In total, six types of hopping sequence are defined – five for the basic hop system and one for an adapted set of hop locations used by adaptive frequency hopping (AFH). These sequences are:

- A page hopping sequence with 32 wake-up frequencies distributed equally over the 79 MHz, with a period length of 32;
- A page response hopping sequence covering 32 response frequencies that are in a one-to-one correspondence to the current page hopping sequence. The master and slave use different rules to obtain the same sequence;
- An inquiry hopping sequence with 32 wake-up frequencies distributed equally over the 79 MHz, with a period length of 32;
- An inquiry response hopping sequence covering 32 response frequencies that are in a one-to-one correspondence to the current inquiry hopping sequence.
- A basic channel hopping sequence which has a very long period length, which does not show repetitive patterns over a short time interval, and which distributes the hop frequencies equally over the 79 MHz during a short time interval.
- An adapted channel hopping sequence derived from the basic channel hopping sequence which uses the same channel mechanism and may use fewer than 79 frequencies. The adapted channel hopping sequence is only used in place of the basic channel hopping sequence. All other hopping sequences are not affected by hop sequence adaptation.

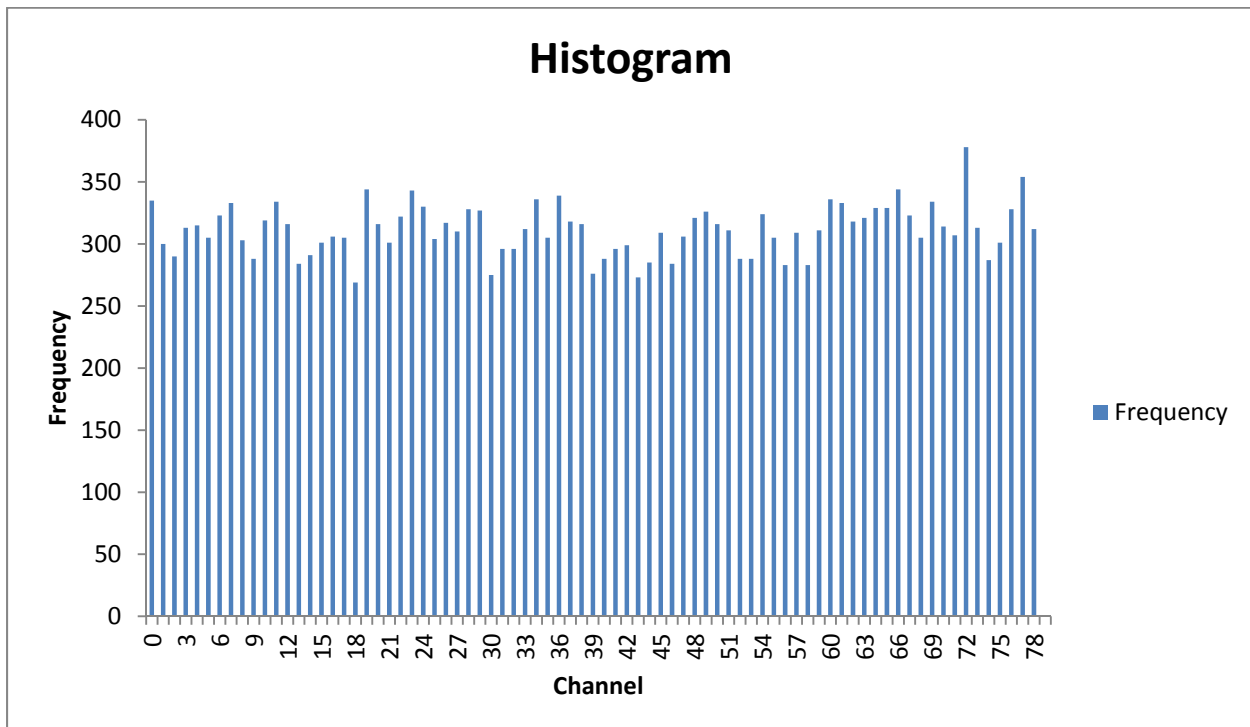

Note: The information in this section is provided by= the manufacturer.

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146

## EXHIBIT 15. RECEIVER SYNCHRONIZATION AND RECEIVER INPUT BANDWIDTH.

The hop table is determined by the master's Bluetooth address and the master's Bluetooth clock. The hop sequence generation is described in the Bluetooth Baseband Specification section 2.6. The slave creates an offset from its own clock to create a clock synchronized to the master. The clock is a 28 bit counter with a period of 312.5 us (one half of a time slot). Using the master's Bluetooth address and its synchronized version of the master clock the slave generates the hop sequence of the piconet.

Master transmissions start on even number slots and slave transmissions start in odd slots. Each packet starts with an access code which provides synchronization information and packet information. During an active conversation the slave is constantly synchronizing its clock with the master clock. When the slave goes into sniff mode (low power mode) it must listen for packets to obtain synchronization information before transmitting. Before a connection is made the slave connects to the master using a special hop sequence in a mode called Paging. This is described in section 2.4.3 of the Bluetooth Baseband Specification.

The receiver input bandwidth is 1 MHz.

Note: The information in this section is provided by the manufacturer.

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>

## APPENDIX A - Test Equipment List



Date: 6-Apr-2011 Type Test: Channel Occupancy Job #: C-1146

Prepared By: Shane Rismeyer Customer: Fossil Quote #: 311048

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EKD0ID01048.0	5546519	9/22/2011	9/22/2012	Active Calibration
2	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: *Shane Rismeyer*

Quality Assurance: *Peter Fein*



Date: 6-Apr-2011 Type Test: Channel Plan & Separation Job #: C-1146

Prepared By: Shane Rismeyer Customer: Fossil Quote #: 311048

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EKD0ID01048.0	5546519	9/22/2011	9/22/2012	Active Calibration
2	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: *Shane Rismeyer*

Quality Assurance: *Peter Fein*



Date: 6-Apr-2011 Type Test: Spurious Emissions Job #: C-1146

Prepared By: Shane Rismeyer Customer: Fossil Quote #: 311048

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EKD0ID01048.0	5546519	9/22/2011	9/22/2012	Active Calibration
2	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: *Shane Rismeyer*

Quality Assurance: *Peter Fein*



Date: 6-Apr-2011 Type Test: Conducted Power Output Job #: C-1146

Prepared By: Shane Rismeyer Customer: Fossil Quote #: 311048

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EKD0ID01048.0	5546519	9/22/2011	9/22/2012	Active Calibration
2	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: *Shane Rismeyer*

Quality Assurance: *Peter Fein*

Prepared For: <b>Fossil</b>	Model Number: <b>WDS111</b>	Report #: <b>311048</b>
EUT: <b>Meta Watch</b>	Serial Number: <b>N/A</b>	LSR Job #: <b>C-1146</b>



Date: 6-Apr-2011 Type Test: Occupied Bandwidth (20dB) Job #: C-1146

Prepared By: Shane Rismeyer Customer: Fossil Quote #: 311048

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EKD0101048.0	5546519	9/22/2011	9/22/2012	Active Calibration
2	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: *Shane Rismeyer* Quality Assurance: *Peter Fein*



Date: 6-Apr-2011 Type Test: Radiated Emissions Job #: C-1146

Prepared By: Shane Rismeyer Customer: Fossil Quote #: 311048

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960013	EMI Receiver	HP	8546A System	3617A00320;3448A	10/29/2010	10/29/2011	Active Calibration
2	EE 960014	EMI Receiver-filter section	HP	85460A	3448A00296	10/29/2010	10/29/2011	Active Calibration
3	AA 960078	Log Periodic Antenna	EMCO	93146	9701-4855	10/19/2010	10/19/2011	Active Calibration
4	AA 960150	Bicon Antenna	ETS	3110B	0003-3346	10/19/2010	10/19/2011	Active Calibration
5	AA 960007	Double Ridge Horn Antenna	EMCO	3115	9311-4138	4/27/2011	4/27/2012	Active Calibration
6	EE 960147	Pre-Amp	Adv. Micro	VLA612	123101	1/4/2011	1/4/2012	Active Calibration
7	EE 960146	Std. Gain Horn Ant. w/preamp	Adv. Micro	VLA622-4	123001	10/13/2010	10/13/2011	Active Calibration

Project Engineer: *Shane Rismeyer* Quality Assurance: *Peter Fein*

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146



## APPENDIX C - Uncertainty Statement

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

<b>Measurement Type</b>	<b>Particular Configuration</b>	<b>Uncertainty Values</b>
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.24 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.8 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.18 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.92 dB
Conducted Emissions	Shielded Room/EMCO LISN	1.60 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	1.128 Volts/Meter
Conducted Immunity	3 Volts level	1.0 V

<b>Prepared For: Fossil</b>	<b>Model Number: WDS111</b>	<b>Report #: 311048</b>
<b>EUT: Meta Watch</b>	<b>Serial Number: N/A</b>	<b>LSR Job #: C-1146</b>



## APPENDIX D - Antenna Specification(s)

### 2450 MHz Antenna

P/N 2450AT18B100

Detail Specification: 08/10/09

Page 1 of 3

#### General Specifications

Part Number	2450AT18B100
Frequency Range	2400 - 2500 Mhz
Peak Gain	0.5 dBi typ. (XZ-V)
Average Gain	-0.5 dBi typ. (XZ-V)
Return Loss	9.5 dB min.

Input Power	3W max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quantity	3,000

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2450AT18B100S
		T & R	Suffix = E	Eg. 2450AT18B100E
Termination Style		100% Tin	Suffix = None	Eg. 2450AT18B100(E or S)
		Tin / Lead	Please consult Factory	

#### Terminal Configuration

No.	Function
1	Feeding Point
2	NC




#### Mechanical Dimensions

	In	mm
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 ± 0.008	1.60 ± 0.20
T	0.051 +.004/-.008	1.30 +0.1/-0.2
a	0.020 ± 0.012	0.50 ± 0.30

#### Mounting Considerations


Mount these devices with brown mark facing up. Units: mm  
Line width should be designed to provide 50 Ω impedance matching characteristics.

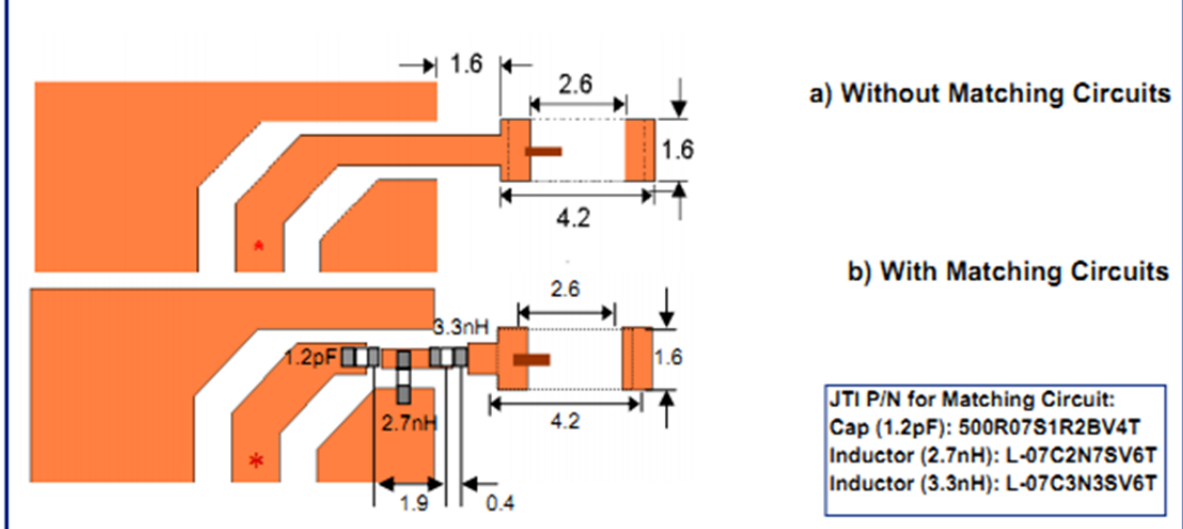

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146


Typical Electrical Characteristics (T=25°C)

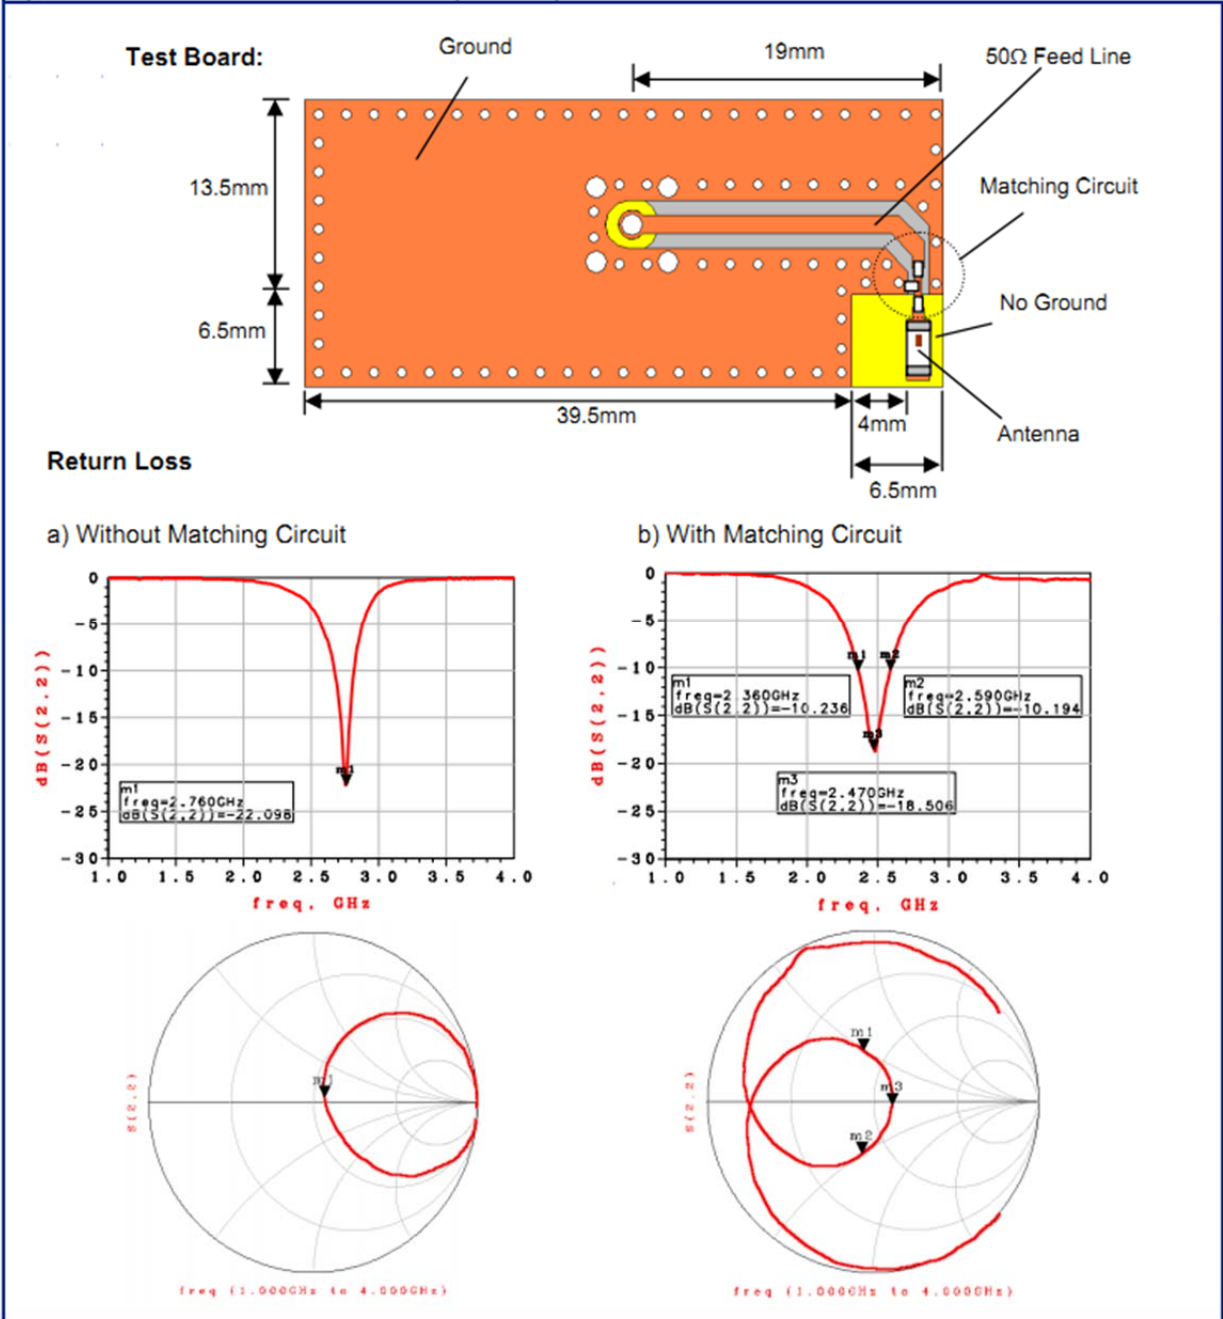



Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146



Typical Radiation Patterns

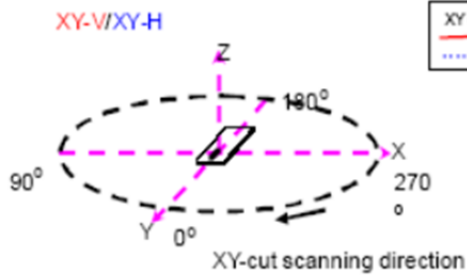


XY cut @2.45GHz  
 — Vertical  
 ..... Horizontal

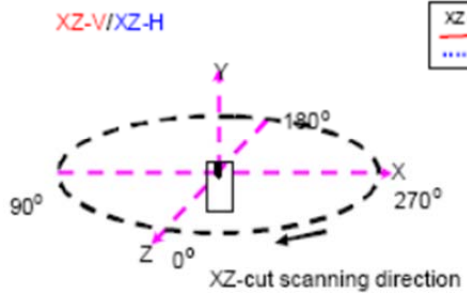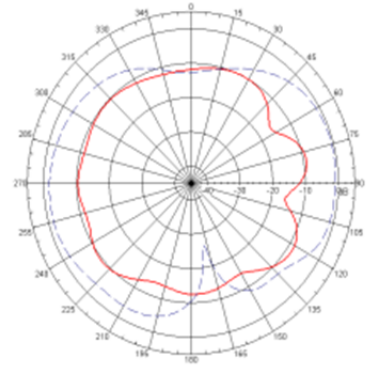

XZ cut @2.45GHz  
 — Vertical  
 ..... Horizontal

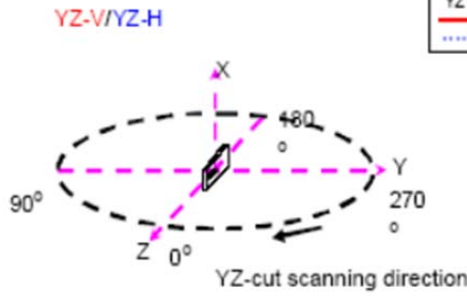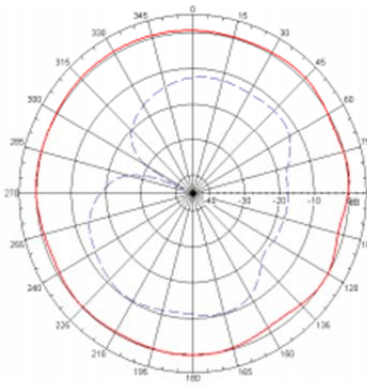

YZ cut @2.45GHz  
 — Vertical  
 ..... Horizontal

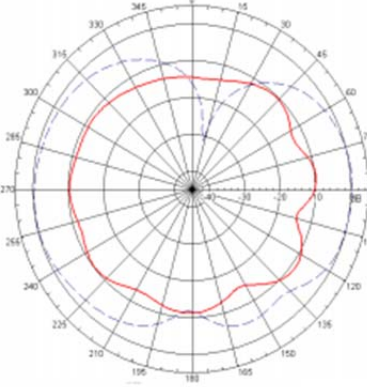

Johanson Technology, Inc. reserves the right to make design changes without notice.  
 All sales are subject to Johanson Technology, Inc. terms and conditions.

Prepared For: Fossil	Model Number: WDS111	Report #: 311048
EUT: Meta Watch	Serial Number: N/A	LSR Job #: C-1146