

Test report No:  
NIE: 73220REM.002

## Test report

### FCC Rules and Regulations CFR 47, Part 15, Subpart B and C (10-1-21 Edition) & ICES-003 Issue 7 (October 2020)

(*) Identification of item tested	SALTO KS IQ 2.0
(*) Trademark	SALTO
(*) Model and /or type reference	IQ223 (Type reference: IQ2.0)
Other identification of the product	Contains FCC ID: QOQ-BGM220S2 Contains IC: 5123A-BGM220S2
(*) Features	Features: Ethernet, ZigBee, Bluetooth LE and cellular technology HW version: 2.0 SW version: CCCPROD (Control FW), 0091 (RF2 Module FW)
Manufacturer	SALTO SYSTEMS, S.L. Arkotz 9, Polígono Lanbarren 20180, Oiartzun, Gipuzkoa, SPAIN
Test method requested, standard	FCC Rules and Regulations CFR 47, Part 15, Subpart B and C (10-1-21 Edition) & ICES-003 Issue 7 (October 2020)
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager
Date of issue	2023-01-12
Report template No	FDT08_24 (*) "Data provided by the client"

## Index

ACRONYMS .....	3
COMPETENCES AND GUARANTEES .....	3
GENERAL CONDITIONS .....	3
UNCERTAINTY .....	3
DATA PROVIDED BY THE CLIENT .....	4
USAGE OF SAMPLES .....	4
TEST SAMPLE DESCRIPTION .....	5
IDENTIFICATION OF THE CLIENT .....	6
TESTING PERIOD AND PLACE .....	6
DOCUMENT HISTORY .....	6
ENVIRONMENTAL CONDITIONS .....	7
REMARKS AND COMMENTS .....	8
TESTING VERDICTS .....	8
LIST OF EQUIPMENT USED DURING THE TEST .....	8
SUMMARY .....	9
APPENDIX A: TEST RESULTS .....	10

## Acronyms

Acronym ID	Acronym Description
Code	EMC Test Code
Freq Rng	Frequency Range
MP	Measurement Point
OM	Operation Mode
S/	Sample
V	Verdict
RE	Radiated Emission
LR	Low Range
HR	High Range

## Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 30 MHz to 1000 MHz is  $I = \pm 4,9$  dB for quasi-peak measurements,  $I = \pm 4,6$  dB for peak measurements ( $k= 2$ ).

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 1000 MHz to 12.75 GHz is  $I = \pm 2,6$  dB for peaks and average measurements ( $k = 2$ ).

## Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a SALTO KS IQ2.0 communication hub with Ethernet/PoE and cellular technology to connect the wireless locks to the SALTO KS cloud and IEEE 802.15.4 and Bluetooth LE technology to communicate with the access points.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	73220C_10.1	SALTO KS IQ 2.0	IQ223	--	2022-08-17	Element Under Test
S/01	54625D_11.1	POE injector	--	--	2017-10-17	Auxiliary Element
S/01	54625D_13.1	Power cable	--	--	2017-10-17	Auxiliary Element
S/01	54625D_38.1	Ethernet cable	--	--	2017-12-20	Auxiliary Element

Notes referenced to samples during the project:

None.

## Test sample description

Ports..... :	Port name and description		Cable			
			Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>
	Ethernet	100 m	[ ]	[ ]	[ ]	
		.....	[ ]	[ ]	[ ]	
Supplementary information to the ports..... :	.....					
Rated power supply .....	Voltage and Frequency		Reference poles			
			L1	L2	L3	N
	[ ]	AC:	[ ]	[ ]	[ ]	[ ]
	[X]	DC: PoE: IEEE 802.3af (802.3at Type 1)				
Rated Power .....	9.6 W (power supply) and 15.4 W (max. PoE)					
Clock frequencies..... :	32.768 KHz, 12 MHz, 25 MHz and 32 MHz					
Other parameters .....	--					
Software version .....	CCCPROD (Control FW) + 0091 (RF2 Module FW)					
Hardware version .....	2.0					
Dimensions in cm (W x H x D) .....	14.6 x 14.6 x 3 cm					
Mounting position .....	[ ]	Table top equipment				
	[X]	Wall/Ceiling mounted equipment				
	[ ]	Floor standing equipment				
	[ ]	Hand-held equipment				
	[ ]	Other: .....				
Modules/parts..... :	Module/parts of test item		Type		Manufacturer	
	Bluetooth LE certified module		BLE		Silicon Labs	
	IEEE 802.15.4		IEEE 802.15.4		Texas Instruments	
	.....		.....		.....	
Accessories (not part of the test item) .....	Description		Type		Manufacturer	
	.....		.....		.....	
	.....		.....		.....	
Documents as provided by the applicant .....	Description		File name		Issue date	
	Firmware explanation document		.....		.....	
	User manual		.....		.....	
	.....		.....		.....	

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

---

SALTO SYSTEMS, S.L.  
Arkotz 9, Polígono Lanbarren  
20180 Oiartzun, Gipuzkoa, SPAIN

## Testing period and place

---

<b>Test Location</b>	DEKRA Testing and Certification S.A.U.
<b>Date (start)</b>	2022-08-22
<b>Date (finish)</b>	2022-12-03

## Document history

---

Report number	Date	Description
73220REM.002	2023-01-12	First release

## Environmental conditions

---

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860mbar Max. = 1060mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860mbar Max. = 1060mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 60 %
<b>Air pressure</b>	Min. = 860mbar Max. = 1060mbar

## Remarks and comments

The tests have been performed by the technical personnel: Salvador Cuellar and Carlos Haro.

## Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P
Partial Passed	P*

## List of equipment used during the test

Control No.	Equipment	Model	Manufacturer	Next Calibration
6064	SEMIANECHOIC ABSORBER LINED CHAMBER	SAC-3	FRANKONIA	N/A
6329	SHIELDED ROOM	---	FRANKONIA	N/A
6132	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2023-04-05
6126	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2023-04-05
8866	EMI TEST RECEIVER 2Hz-44GHz	ESW44	ROHDE AND SCHWARZ	2023-09-21
5641	HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	EST LINDGREN	2024-09-15
4612	HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	2024-07-13
9360	PRE-AMPLIFIER G>40dB 1-18 GHz	BLMA 0118-1M	BONN ELEKTRONIK	2023-05-11
4848	MEASUREMENT SOFTWARE EMC/RF	EMC32	ROHDE AND SCHWARZ	N/A
6129	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	--	--	2023-04-28
4679	THREE-PHASE ARTIFICIAL NETWORK 32A	--	--	2023-01-11



Control No.	Equipment	Model	Manufacturer	Next Calibration
5152	TRANSIENT LIMITER 10DB N CONNECTOR	VTSD 9561-F	SCHWARZBECK	2023-11-09
4523	EMI TEST RECEIVER 20Hz-26.5GHz	ESU26	ROHDE AND SCHWARZ	2023-11-05

## Summary

Test Specification.	Requirement – Test case	Verdict	Remark
FCC CFR 47, Part 15, Subpart B (10-1-21 Edition) & ICES-003 Issue 7 (October 2020)	RE Radiated emission. Electromagnetic field measure	Pass	---
FCC CFR 47, Part 15, Subpart B and Subpart C (10-1-21 Edition) & ICES-003 Issue 7 (October 2020)	CE Continuous conducted emission	Pass	---
<u>Supplementary information and remarks:</u> None			

## Appendix A: Test results

## Appendix A content

DESCRIPTION OF THE OPERATION MODES .....	12
TEST STANDARDS VERSION APPLIED .....	13
TEST CASES DETAILS .....	14
<i>RE Radiated emission. Electromagnetic field measure</i> .....	14
<i>CE Continuous conducted emission</i> .....	18

## Description of the operation modes

---

The operation modes described in this paragraph constitute a functionality of the sample under test for itself.

The operation modes used by the samples to which the present report refers, are shown in the following table:

Id	Description
OM/01	EUT ON. Bluetooth LE and ZigBee (IEEE 802.15.4) in IDLE state. Ethernet communication established. Power supply: 48Vdc (through PoE port, IEEE 802.3af (802.3at Type 1))
OM/02	EUT ON. Bluetooth LE, ZigBee (IEEE 802.15.4) and Ethernet communication established. Power supply: 48Vdc (through PoE port, IEEE 802.3af (802.3at Type 1))

## Test standards version applied

---

The product standards and test standards applied for each test cases are shown in the following table:

Product Test Standard	Test standard	Requirement – Test case
FCC CFR 47, Part 15, Subpart B (10-1-21 Edition) & ICES-003 Issue 7 (October 2020)	ANSI C63.4 (2014)	RE Radiated emission.
FCC CFR 47, Part 15, Subpart B and C (10-1-21 Edition) & ICES-003 Issue 7 (October 2020)	ANSI C63.4 (2014)	CE Continuous conducted emission

## Test Cases Details

### RE Radiated emission. Electromagnetic field measure


#### Limits of interference Class B

The applied limit for radiated emissions, 3 m distance, according to the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B (10-1-21 Edition), Secs. 15.109 & ICES-003 Issue 7 (October 2020)


Frequency range (MHz)	FCC Part 15B		ICES-003 Issue 7		FCC Part 15B & ICES-003 Issue 7	
	QP Limit for 3 m		QP Limit for 3 m		PK Limit for 3 m	AVG Limit for 3 m
	( $\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )	( $\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )
30 to 88	100	40	100	40	---	---
88 to 216	150	43.5	150	43.5	---	---
216 to 230	200	46	200	46	---	---
230 to 960	200	46	224	47		
960 to 1000	500	54	500	54	---	---
Above 1000	---	---	---	---	74	54

Limits according to FCC Part 15B, are equal or more stringent than those of ICES-003 Issue 7.

#### Setup for measurements

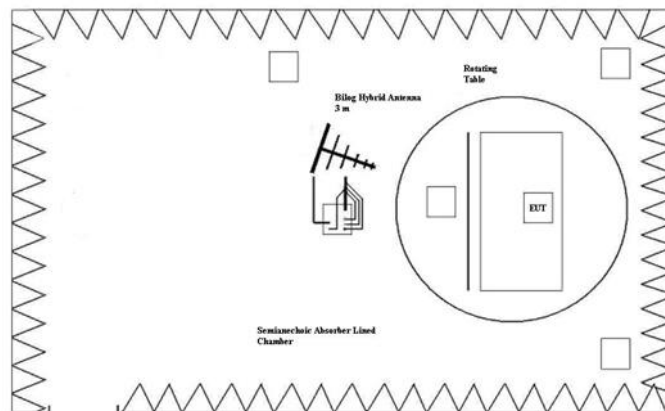

Setup for measurements < 1GHz.

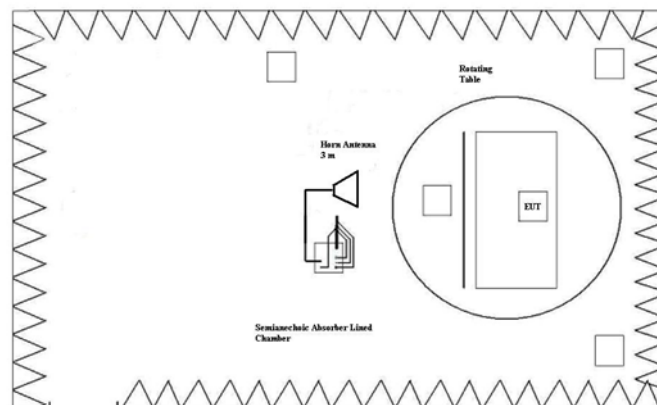

Setup for measurements > 1GHz.

## **Results**

<b>S/</b>	<b>OM</b>	<b>Code</b>	<b>Freq Rng (MHz)</b>	<b>V</b>
01	OM/01	RE0101LR	[30, 1000]	P
01	OM/01	RE0101HR1	[1000, 12750]	P

Note: Range:  $f > 12.75$  GHz. Test required only to the 5th harmonics of the maximum internal work frequency in the EUT.

## **Verdict**

Pass


**Attachments**

**EMC Test Code = RE0101LR, Frequency Range MHz = [30, 1000]**

Sample ID: S/01

Operation Mode: OM/01. EUT ON. Bluetooth LE and ZigBee (IEEE 802.15.4) in IDLE state. Ethernet communication established. Power supply: 48Vdc (through PoE port, IEEE 802.3af (802.3at Type 1))

Full Spectrum

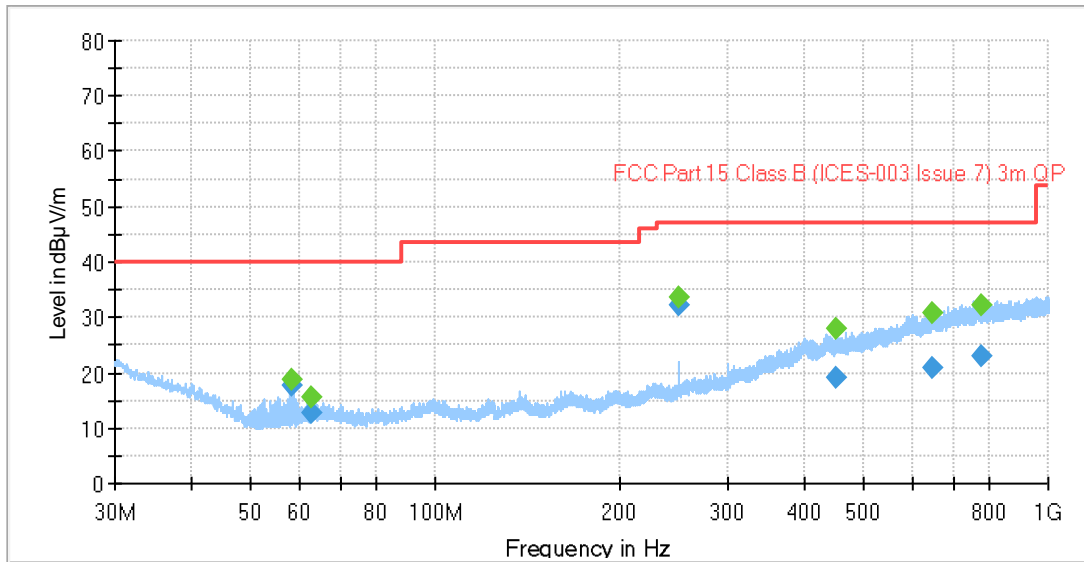

◆ Preview Result 1-PK+ Final\_Result QPK
 ◆ FCC Part 15 Class B (ICES-003 Issue 7) 3m QF Final\_Result PK+

**Tables:**

Frequency(MHz)	MaxPeak(dBµV/m)	Average(dBµV/m)	Limit(dBµV/m)	Margin(dB)	Height (cm)	Pol	Azimuth (deg)
58.333000	17.53	---	40.00	22.47	241.0	V	105.0
58.333000	---	18.89	---	---	241.0	V	105.0
62.727000	12.76	---	40.00	27.24	209.0	V	-170.0
62.727000	---	15.66	---	---	209.0	V	-170.0
250.014000	---	33.73	---	---	153.0	V	74.0
250.014000	32.11	---	47.00	14.89	153.0	V	74.0
452.029000	---	27.86	---	---	155.0	V	-164.0
452.029000	18.99	---	47.00	28.01	155.0	V	-164.0
645.192000	---	30.90	---	---	232.0	H	55.0
645.192000	20.78	---	47.00	26.22	232.0	H	55.0
776.314000	---	32.11	---	---	212.0	H	106.0
776.314000	22.90	---	47.00	24.10	212.0	H	106.0




**EMC Test Code = RE0101HR1, Frequency Range MHz = [1000, 12750]**

Sample ID: S/01

Operation Mode: OM/01. EUT ON. Bluetooth LE and ZigBee (IEEE 802.15.4) in IDLE state. Ethernet communication established. Power supply: 48Vdc (through PoE port, IEEE 802.3af (802.3at Type 1))

**Images:**

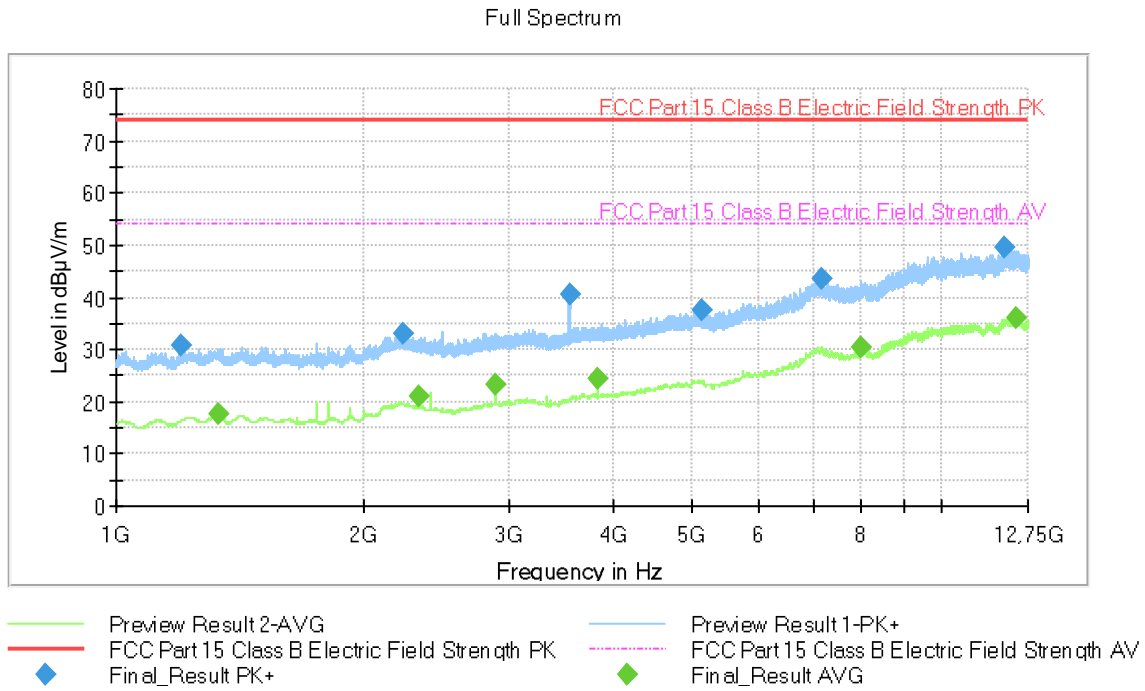

**Tables:**

Frequency(MHz)	MaxPeak(dBµV/m)	Average(dBµV/m)	Limit(dBµV/m)	Margin(dB)
1197.750000	30.62	---	73.97	43.35
1328.000000	---	17.77	53.97	36.20
2231.500000	32.87	---	73.97	41.10
2324.000000	---	20.87	53.97	33.10
2880.000000	---	23.35	53.97	30.62
3544.000000	40.54	---	73.97	33.43
3840.000000	---	24.30	53.97	29.67
5132.500000	37.66	---	73.97	36.31
7182.750000	43.46	---	73.97	30.51
8010.500000	---	30.43	53.97	23.54
11938.500000	49.51	---	73.97	24.46
12318.250000	---	35.91	53.97	18.06

## CE Continuous conducted emission

### Limits of interference Class B

The applied limit for continuous conducted emissions in power leads, according with the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B and C (10-1-21 Edition), Secs. 15.107 and 15.207 & ICES-003 Issue 7 (October 2020), in the frequency range 0,15 to 30 MHz, for Class B equipment was:

Frequency range (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0,15 to 0,5	66 – 56*	56 – 46*
0,5 to 5	56	46
5 to 30	60	50

\*Decreases with the logarithm of the frequency.

### Results

S/	OM	Code	Freq Rng (MHz)	Line	V
01	OM/01	CE0101N	[0.15, 30]	N	P
01	OM/01	CE0101L1	[0.15, 30]	L1	P
01	OM/02	CE0102N	[0.15, 30]	N	P
01	OM/02	CE0102L1	[0.15, 30]	L1	P

### Verdict

Pass


**Attachments**

**EMC Test Code = CE0101N, Frequency Range MHz = [0.15, 30], Conducted Emissions - Tested Line = N**

Sample ID: S/01

Operation Mode: OM/01. EUT ON. Bluetooth LE and ZigBee (IEEE 802.15.4) in IDLE state. Ethernet communication established. Power supply: 48Vdc (through PoE port, IEEE 802.3af (802.3at Type 1))

**Images:**

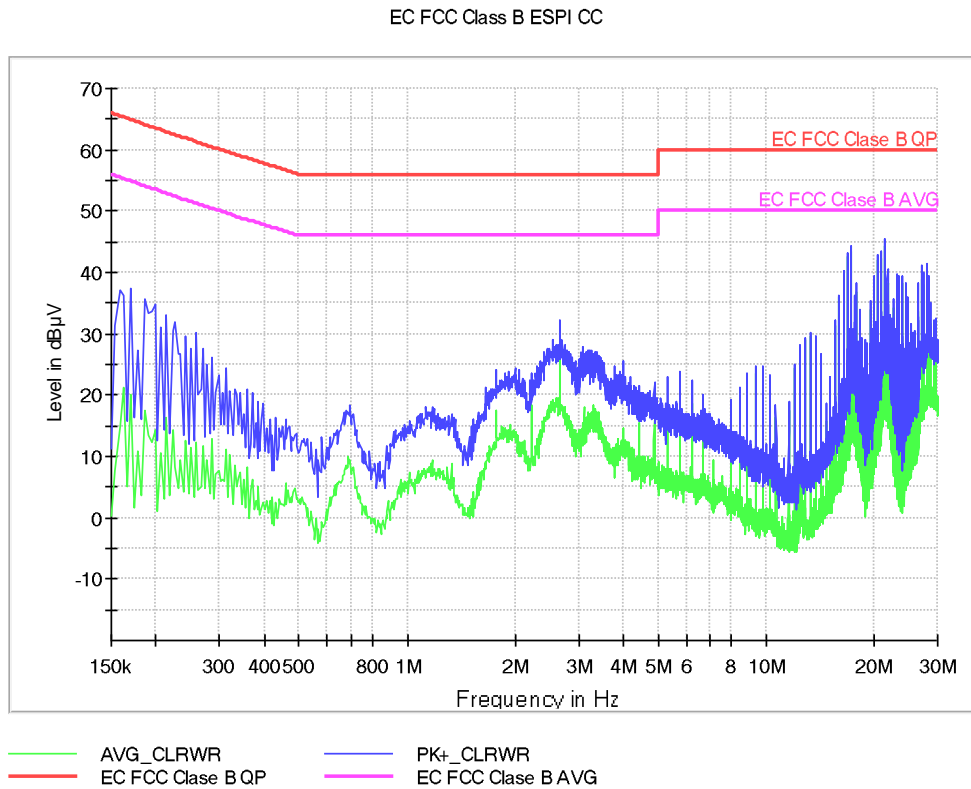

**Tables:**

Frequency (MHz)	PK+_CLRWR (dBµV)	AVG_CLRWR (dBµV)	Line
0.170000	37.5	20.2	N
0.258000	30.2	12.3	N
0.694000	18.3	9.4	N
1.126000	18.1	6.6	N
1.994000	24.3	13.2	N
2.662000	32.1	27.4	N
3.994000	25.4	14.7	N
9.314000	24.8	23.6	N
17.294000	44.5	43.3	N
21.286000	45.5	44.2	N


EMC Test Code = CE0101L1, Frequency Range MHz = [0.15, 30], Conducted Emissions - Tested Line = L1

Sample ID: S/01

Operation Mode: OM/01. EUT ON. Bluetooth LE and ZigBee (IEEE 802.15.4) in IDLE state. Ethernet communication established. Power supply: 48Vdc (through PoE port, IEEE 802.3af (802.3at Type 1))

Images:

EC FCC Class B ESPI CC

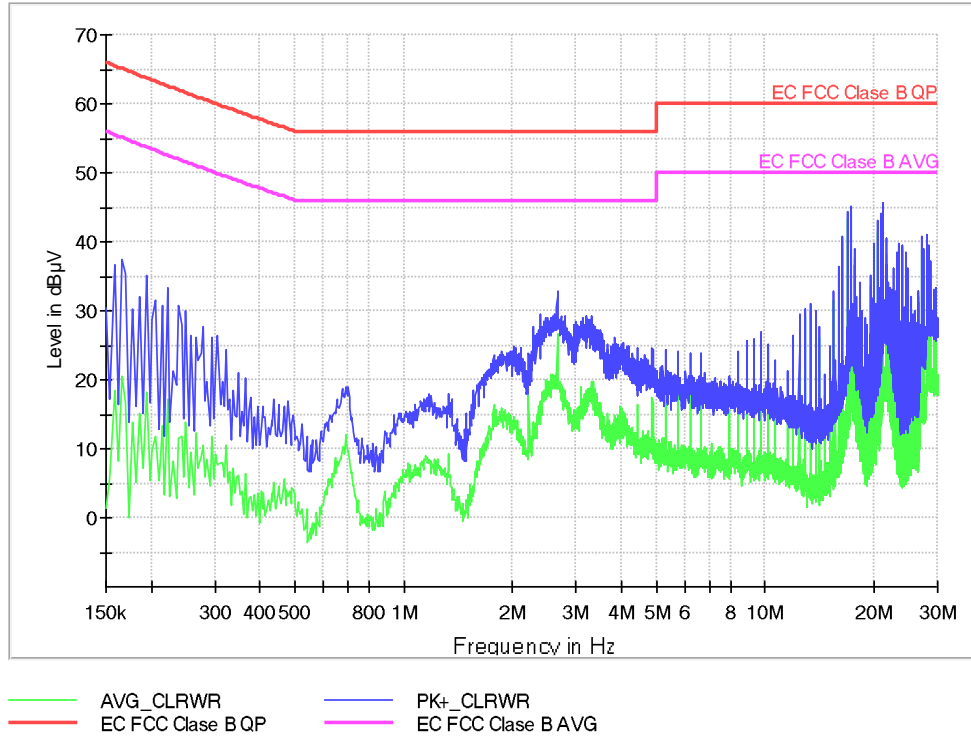

Tables:

Frequency (MHz)	PK+_CLRWR (dBµV)	AVG_CLRWR (dBµV)	Line
0.166000	37.3	20.6	L1
0.278000	27.6	10.6	L1
0.702000	18.9	9.6	L1
1.170000	18.0	8.3	L1
2.006000	24.8	14.2	L1
2.662000	32.8	26.0	L1
3.850000	26.1	14.8	L1
9.750000	27.0	23.8	L1
17.286000	45.2	44.5	L1
21.274000	45.5	44.6	L1


EMC Test Code = CE0102N, Frequency Range MHz = [0.15, 30], Conducted Emissions - Tested Line = N

Sample ID: S/01

Operation Mode: OM/02. EUT ON. Bluetooth LE, ZigBee (IEEE 802.15.4) and Ethernet communication established. Power supply: 48Vdc (through PoE port, IEEE 802.3af (802.3at Type 1))

Images:

EC FCC Class B ESPI CC

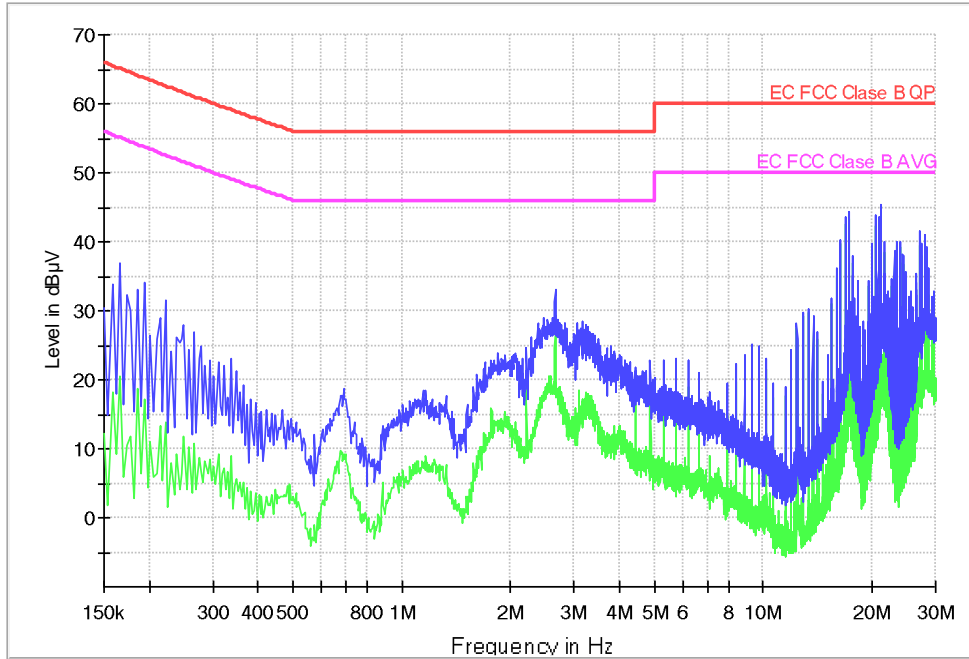

— AVG\_CLRWR      — PK+\_CLRWR  
— EC FCC Class B QP      — EC FCC Class B AVG

Tables:


Frequency(MHz)	PK+_CLRWR(dBµV)	AVG_CLRWR(dBµV)	Line
0.166000	36.9	20.6	N
0.266000	26.8	10.8	N
0.690000	18.6	9.3	N
1.146000	18.4	7.5	N
2.058000	23.9	11.4	N
2.658000	33.0	27.5	N
3.782000	24.9	10.6	N
9.302000	25.1	23.9	N
17.278000	44.3	43.2	N
21.262000	45.3	44.2	N

**EMC Test Code = CE0102L1, Frequency Range MHz = [0.15, 30], Conducted Emissions - Tested Line = L1**

Sample ID: S/01

Operation Mode: OM/02. EUT ON. Bluetooth LE, ZigBee (IEEE 802.15.4) and Ethernet communication established. Power supply: 48Vdc (through PoE port, IEEE 802.3af (802.3at Type 1))

**Images:**

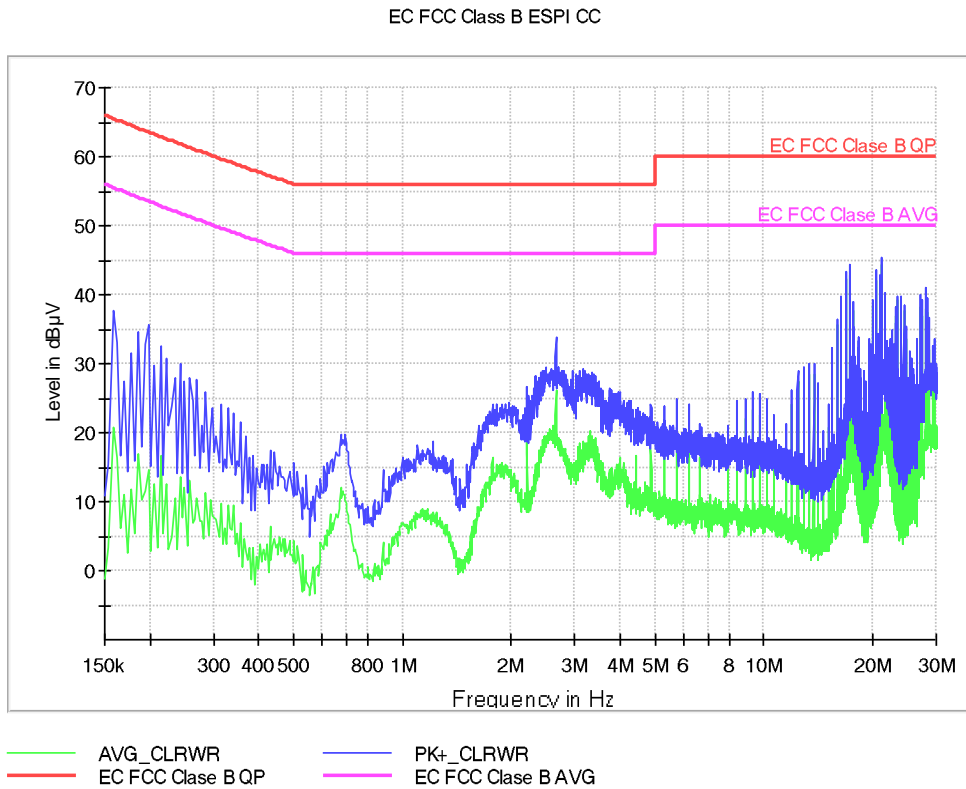

**Tables:**

Frequency(MHz)	PK+_CLRWR(dBµV)	AVG_CLRWR(dBµV)	Line
0.158000	37.7	20.8	L1
0.258000	28.0	13.0	L1
0.674000	19.8	12.0	L1
1.218000	18.6	7.3	L1
1.966000	24.3	14.2	L1
2.658000	33.9	26.2	L1
3.746000	26.4	14.0	L1
9.306000	25.9	23.4	L1
17.282000	44.4	42.8	L1
21.266000	45.4	44.5	L1