

ISED CABid: ES1909
Lab. Company Number: 4621A

Test Report No:
79578RRF.005

Test Report

USA FCC Part 15.225, 15.209

CANADA RSS-210, RSS-Gen

(*) Identification of item tested	Salto Neo Cylinder including all mechanical variants
(*) Trademark	Salto
(*) Model and /or type reference	N1M / Type reference: G1824
Other identification of the product	FCC ID: UKCN1M IC: 10088A-N1M
(*) Features	Bluetooth LE HW version: 1.0 SW version: 0195 (Control FW) + 0186 (FUS FW) + 0187 (BLE FW) + 0148 (Motor FW) + 0197 (HSE FW)
Applicant	SALTO SYSTEMS, S.L. Arkotz 9, Polígono Lanbarren 20180, Oiartzun, Guipúzcoa, Spain
Test method requested, standard	USA FCC Part 15.225 (10-1-23 Edition): Operation within the band 13.110 -14.010. USA FCC Part 15.209 (10-1-23 Edition): Radiated emission limits, general requirements. CANADA RSS-210 Issue 11 (June 2024). CANADA RSS-Gen Issue 5 Amendment 2 (February 2021). ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	José Manuel Gómez Galván EMC Consumer & RF Lab. Manager
Date of issue	2024-10-25
Report template No	FDT08_25 (*) "Data provided by the client"

Index

INDEX	2
ACRONYMS	3
COMPETENCES AND GUARANTEES	3
GENERAL CONDITIONS	3
UNCERTAINTY	4
DATA PROVIDED BY THE CLIENT.....	4
USAGE OF SAMPLES	4
TEST SAMPLE DESCRIPTION	5
IDENTIFICATION OF THE CLIENT	6
TESTING PERIOD AND PLACE	6
DOCUMENT HISTORY	6
ENVIRONMENTAL CONDITIONS	6
REMARKS AND COMMENTS	7
TESTING VERDICTS	8
SUMMARY.....	8
APPENDIX A: TEST RESULTS.....	9

Acronyms

Acronym ID	Acronym Description
Freq	Frequency
Freq Rng	Frequency Range
Mod	Modulation
Pol	Polarization
QuasiPeak	Radiated Quasi Peak Level

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor k=2) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 9 kHz to 30 MHz is: Measurement uncertainty $\leq \pm 3.08$ dB (with factor k = 2).

The total uncertainty of the measurement system for the radiated emissions of EUT for the field strength of emissions within the band $\leq \pm 3.08$ dB

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 200 MHz is: Measurement uncertainty $\leq \pm 5.35$ dB (with factor k = 2).

The total uncertainty of the measurement system for the conducted testing of EUT is:
Frequency Tolerance of the Carrier Signal: Measurement uncertainty $\leq \pm 12.3$ kHz
Occupied Bandwidth $\leq \pm 1.42$ kHz

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model N1M / Type reference: G1824 is a Salto Neo Cylinder with RFID Mifare (ISO 14443A & ISO 15693 standard based) and Bluetooth LE technology.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results. The laboratory is not responsible for such information and it is not covered by accreditation.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial Nº	Date of Reception	Application
S/01	79578_9.1	Salto Neo Cylinder	N1M	-	2024-07-26	Element Under Test
S/02	79578_1.1	Salto Neo Cylinder	N1M	-	2024-07-26	Element Under Test

Notes referenced to samples during the project:

Id	Type
S/01	Radiated tests.
S/02	Conducted tests.

Test sample description

Ports.....:	Port name and description	Cable					
		Specified max length [m]	Attached during test		Shielded		
	-	-	☐		☐		
Supplementary information to the ports.....:	-						
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: 6 Vdc (4 x LR1 batteries)					
Rated Power.....:	-						
Clock frequencies.....:	27.12 MHz, 32 MHz, 32.768 KHz						
Other parameters	N/A						
Software version.....:	0195 (Control FW) + 0186 (FUS FW) + 0187 (BLE FW) + 0148 (Motor FW) + 0197 (HSE FW)						
Hardware version	1.0						
Dimensions in cm (W x H x D) ...:	3.1 x 3.8 x 7.6 cm						
Mounting position	☐	Table top equipment					
	☐	Wall/Ceiling mounted equipment					
	☐	Floor standing equipment					
	☐	Hand-held equipment					
	☒	Other: Door mounting					
Modules/parts.....:	Module/parts of test item		Type		Manufacturer		
	SoC + Antenna		BLE		ST + TAOGLAS		
Accessories (not part of the test item)	Description		Type		Manufacturer		
	-		-		-		
Documents as provided by the applicant.....:	Description		File name		Issue date		
	User manual		-		-		
	FW Explanation		-		-		

Identification of the client

SALTO SYSTEMS, S.L.
Arkotz 9, Polígono Lanbarren, 20180, Oiartzun, Guipúzcoa, Spain

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2024-08-01
Date (finish)	2024-09-11

Document history

Report number	Date	Description
79578RRF.005	2024-10-25	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Valentin Andarias, Carmen Vázquez.

Used instrumentation:

Control No.	Equipment	Model	Manufacturer	Next Calibration
07760	DIGITAL MULTIMETER	175	FLUKE	2024-11-08
06615	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2025-04-04
06609	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2025-04-22
07193	MULTI-DEVICE CONTROLLER	CO3000	INNCO	N/A
00242	ACTIVE LOOP ANTENNA 9 KHZ-30 MHz	11966A	HEWLETT PACKARD	2024-08-18
06143	HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2027-01-22
06142	PRE-AMPLIFIER G>38dB 30MHz-6GHz	BLNA 0360-01N	BONN ELEKTRONIK	2025-07-25
06791	SEMIANECHOIC ABSORBER LINED CHAMBER IV	FACT 3 200 STP	ETS LINDGREN	N/A
00922	DC POWER SUPPLY 40V/40A	NGPE40	ROHDE & SCHWARZ	N/A
08002	TEMPERATURE CHAMBER	MK 56	BINDER	2025-01-23
06668	SIGNAL AND SPECTRUM ANALYZER 10 Hz - 40 GHz	FSV40	ROHDE AND SCHWARZ	2024-12-14
06611	TEMPERATURE AND HUMIDITY PROBE	HWg-STE	HW GROUP	2025-04-04

Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

NFC 13.56 MHz: ISO A, ISO V.

FCC PART 15 PARAGRAPH / RSS-210		
Requirement – Test case	Verdict	Remark
FCC 15.225 (a) / RSS-210 B.6 (a)(i) Field strength of emissions within the band 13.553 MHz -13.567 MHz	P	
FCC 15.225 (b) / RSS-210 B.6 (a)(ii) Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 – 13.710 MHz	P	
FCC 15.225 (c) / RSS-210 B.6 (a)(iii) Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 – 14.010 MHz	P	
FCC 15.225 (d) / RSS-210 B.6 (a)(iv) Field strength of emissions outside of the band 13.110 MHz -14.010 MHz	P	
FCC 15.225 (e) / RSS-210 B.6 (b) Frequency tolerance of the carrier signal	P	
<u>Supplementary information and remarks:</u> None.		

Appendix A: Test results

TEST CONDITIONS	11
TEST SETUP	12
TEST CASES DETAILS	14
<i>Occupied Bandwidth.....</i>	<i>14</i>
<i>FCC 15.225 (a) (b) (c) / RSS-210 B.6 (a) (b) (c). Field strength of emissions within the band 13.553 -13.567 MHz, 13.410 - 13.553 MHz and 13.567 - 13.710 MHz, 13.110 - 13.410 MHz and 13.710 - 14.010 MHz</i>	<i>16</i>
<i>FCC 15.225 (d) / RSS-210 B.6 (a)(iv) Field Strength of Emissions outside of the band 13.110 MHz - 14.010 MHz.....</i>	<i>20</i>
<i>FCC 15.225 (e) / RSS-210 B.6 (b) Frequency Tolerance of the Carrier Signal</i>	<i>23</i>

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (*):

Vnominal:	6 Vdc
Vminimum:	5.1 Vdc
Vmaximum:	6.9 Vdc
Type of Power Supply:	DC (4 x LR1 batteries)

ANTENNA (*):

Type of Antenna:	Integral (PCB)
Maximum Declared Antenna Gain:	Not provided

TEST FREQUENCIES (*):

Technology	Modulation	Frequency:
RFID	ISO 14443A	13.56 MHz
RFID	ISO 15693	13.56 MHz


During transmitter test the EUT was controlled by a SW tool provided by the client to operate in a continuous transmit mode on the modulation schemes as required. The equipment has no standby mode.

TEST SETUP

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer.

For frequency stability test the EUT was placed inside a climatic chamber and connected to a frequency meter using a low loss cable. An external DC power supply was connected to the EUT for voltage variation test.

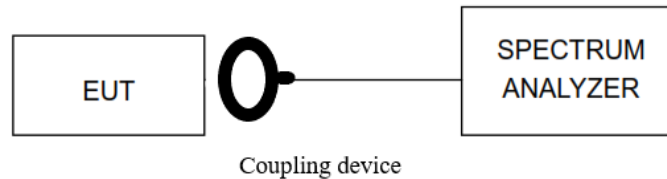

For extreme test conditions the EUT was placed inside a climatic chamber and connected to a spectrum analyzer using a low-loss cable and a coupling device. An external DC power supply was connected to the EUT for voltage variation test.


RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Loop antenna for the range between 9 kHz to 30 MHz and Bilog antenna for the range between 30 MHz to 200 MHz) is situated at a distance of 3 m.


For radiated emissions in the range 9 kHz to 30 MHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 40 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and in the range between 30 MHz and 200 MHz the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. In the range between 9 kHz and 30 MHz the measurements were made in the three different orientation planes of the loop antenna to determine the maximum received field. In the range between 30 MHz and 200 MHz the measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup 9 kHz to 30 MHz:

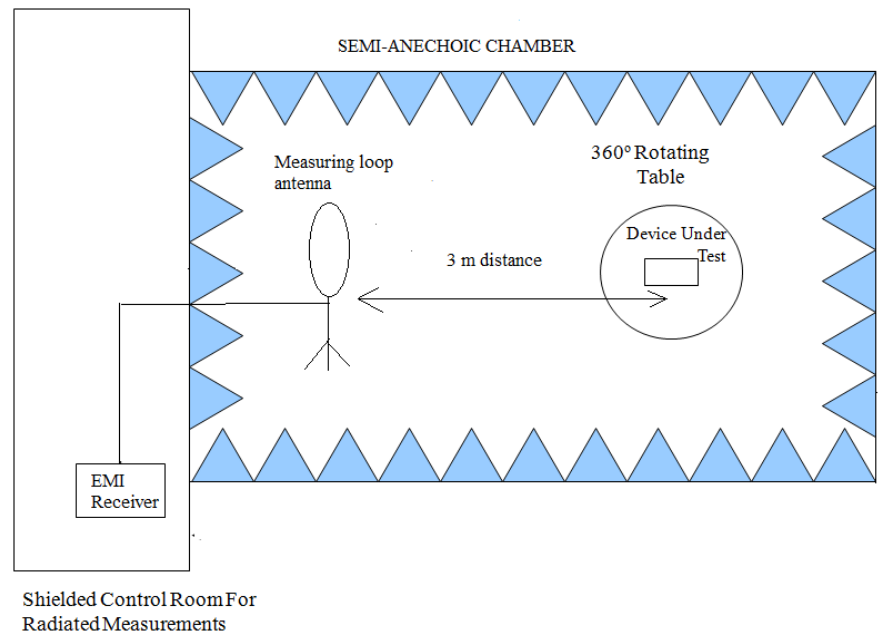

Radiated measurements setup 30 MHz to 200 MHz:

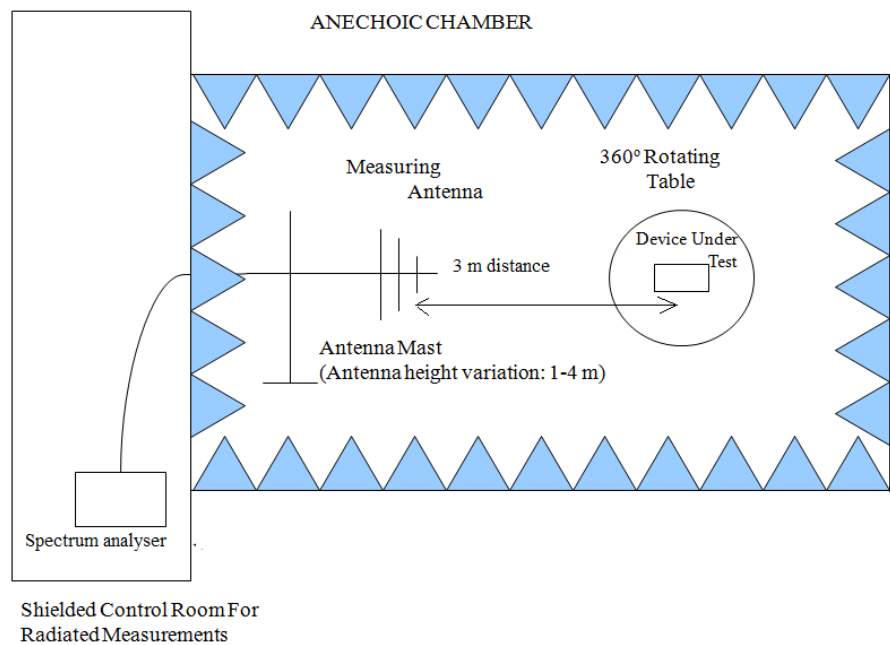

TEST CASES DETAILS

Occupied Bandwidth

Modulation: ISO 14443A

Results

Freq (MHz)	99 OBW (kHz)	20 dBw (kHz)
13.56	855	446.87


Verdict

Pass

Attachments

Modulation = ISO 14443A Frequency MHz = 13.56

Images:

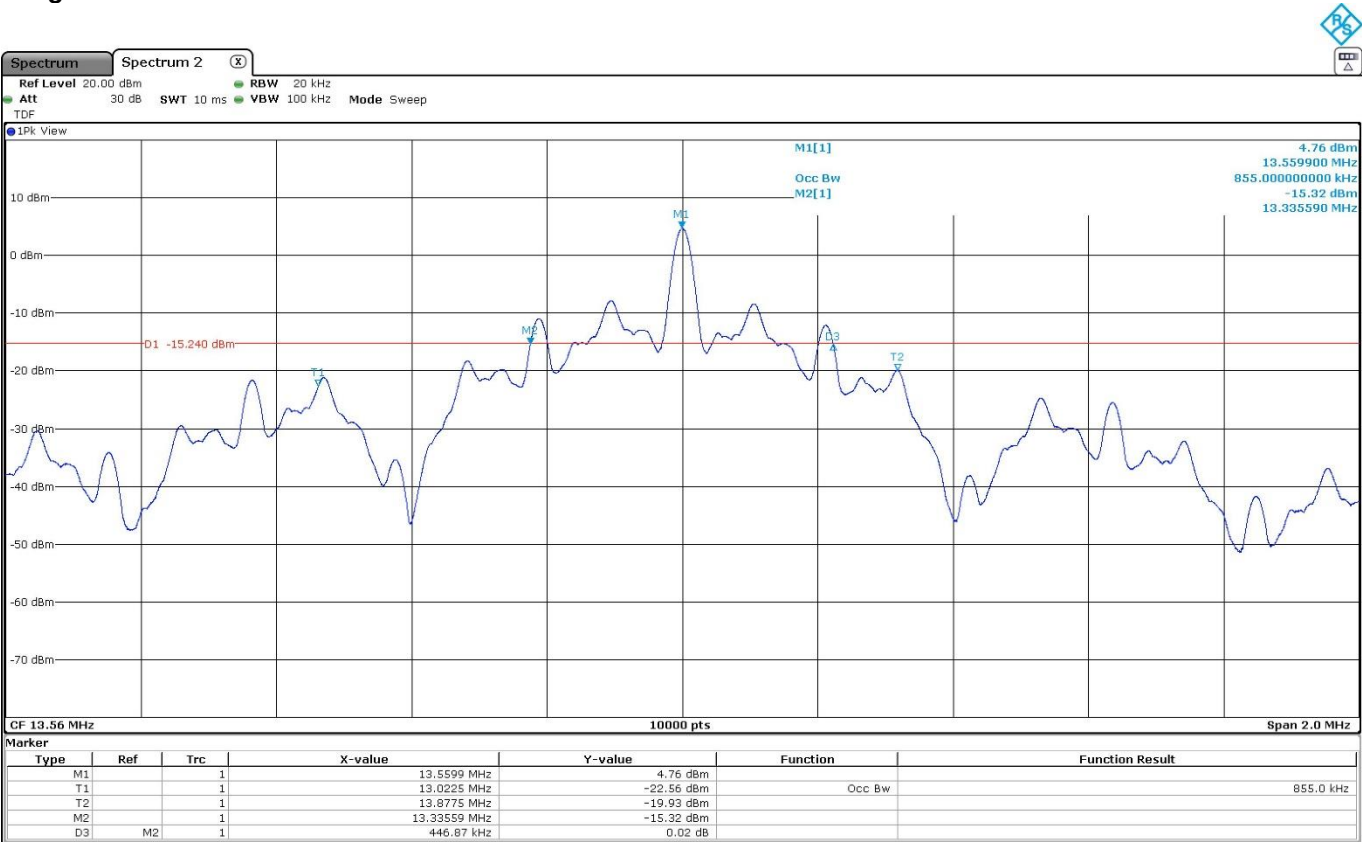

Modulation: ISO 15693

Results

Freq (MHz)	99OBW (kHz)	20dBw (kHz)
13.56	25.95	2.534


Verdict

Pass

Attachments

Modulation = ISO 15693 Frequency MHz = 13.56

Images:

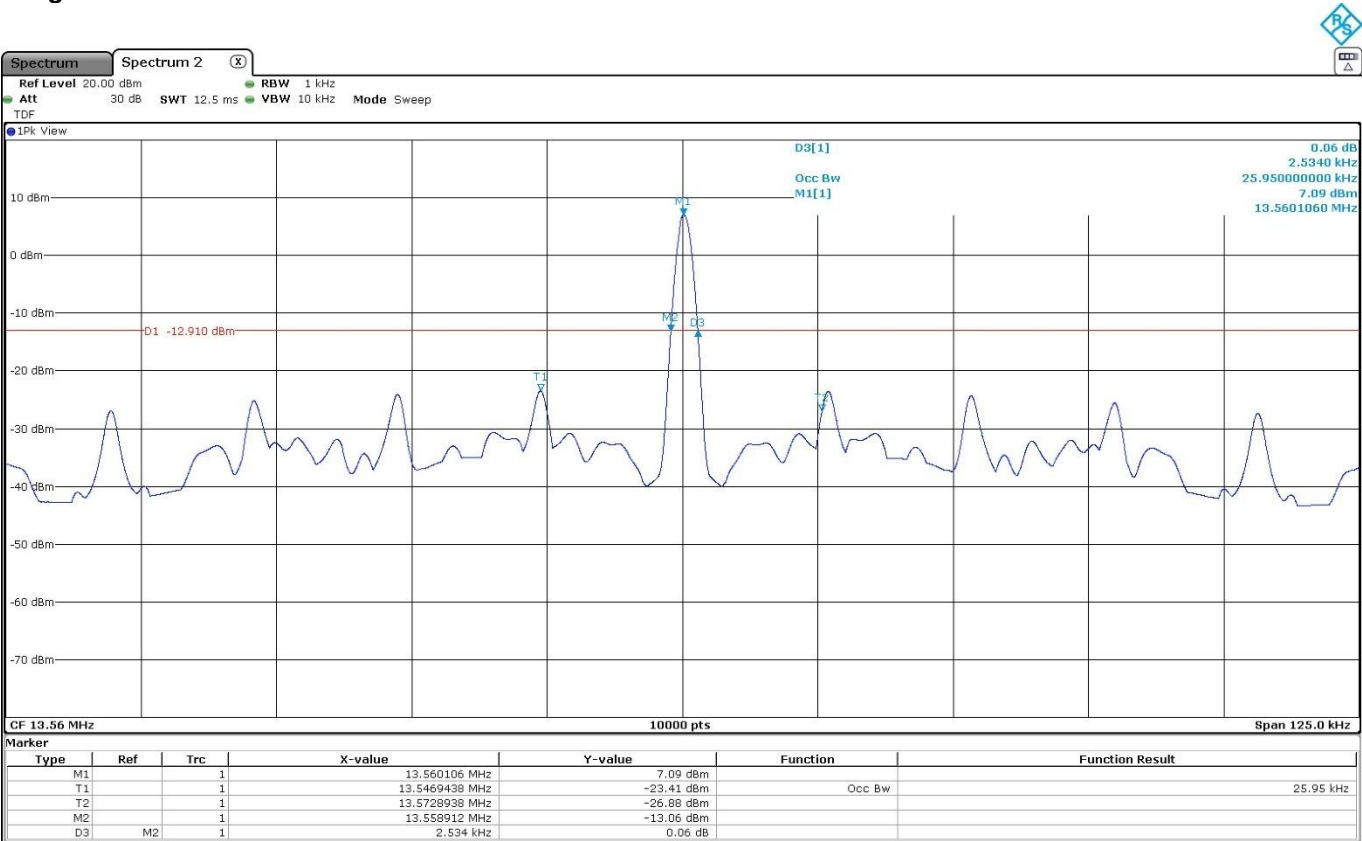

FCC 15.225 (a) (b) (c) / RSS-210 B.6 (a) (b) (c). Field strength of emissions within the band 13.553 -13.567 MHz, 13.410 - 13.553 MHz and 13.567 - 13.710 MHz, 13.110 - 13.410 MHz and 13.710 - 14.010 MHz

Limits

- FCC 15.225 (a) / RSS-210 B.6 (a). Field strength of emissions within the band 13.553 - 13.567 MHz**

The field strength of any emissions within the band 13.553 - 13.567 MHz shall not exceed 15,848 microvolts/meter (84 dBμV/m) at 30 meters.

- FCC 15.225 (b) / RSS-210 B.6 (b). Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 - 13.710 MHz**

Within the bands 13.410-13.553 MHz and 13.567 - 13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (50.47 dBμV/m) at 30 meters.

- FCC 15.225 (c) / RSS-210 B.6 (c). Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 - 14.010 MHz**

Within the bands 13.110-13.410 MHz and 13.710 - 14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter (40.51 dBμV/m) at 30 meters.

Modulation: ISO 14443A

Results

- Band 13.553 -13.567 MHz:

Frequency (MHz)	Maximum field strength (dBμV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBμV/m) extrapolated to 30 m (40 dB/decade)
13.560	13.13	-26.87

- Band 13.410 - 13.553 MHz:

Frequency (MHz)	Maximum field strength (dBμV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBμV/m) extrapolated to 30 m (40 dB/decade)
13.551	-11.58	-51.58

- Band 13.567-13.710 MHz:

Frequency (MHz)	Maximum field strength (dBμV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBμV/m) extrapolated to 30 m (40 dB/decade)
13.569	-9.53	-49.53

- Band 13.110-13.410 MHz:

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.349	-6.75	-46.75

- Band 13.710-14.010 MHz:

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.772	-8.49	-48.49


Verdict

Pass

Attachments

Modulation = ISO 14443A Frequency MHz = 13.56

Images:

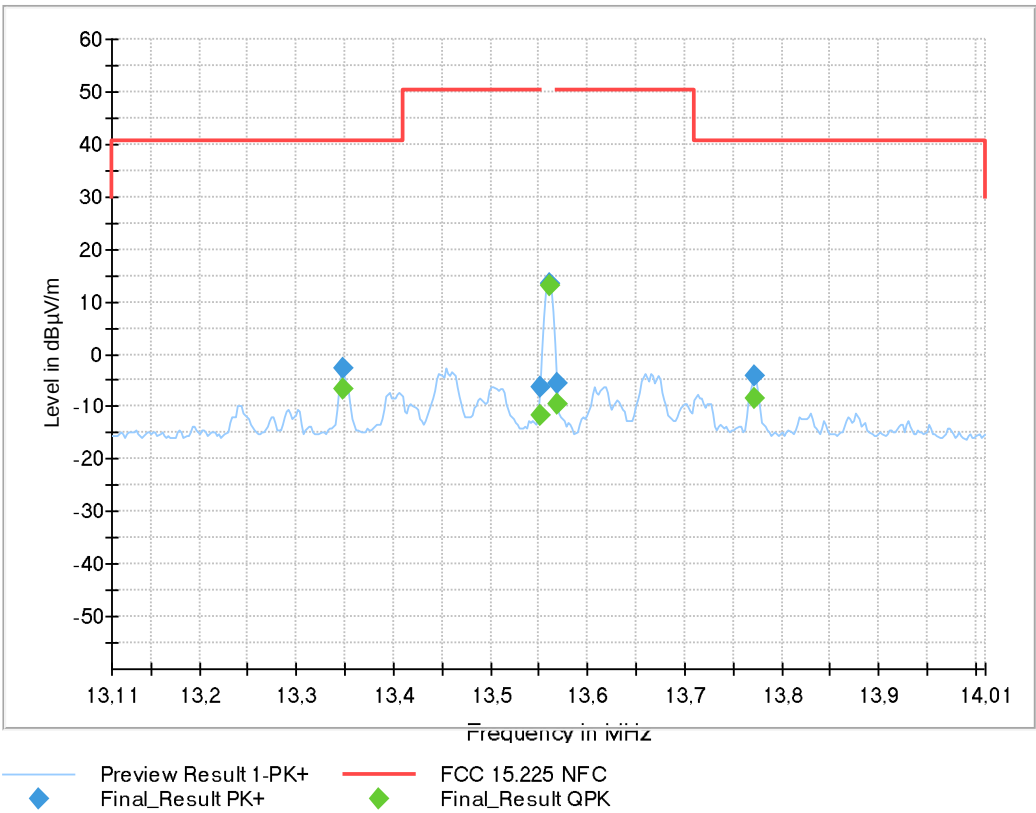

Spectrum analyzer parameters:

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
150 kHz - 30 MHz	2,25 kHz	PK+	9 kHz	0,1 s	0 dB

Modulation: ISO 15693

Results

- Band 13.553 -13.567 MHz:

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.560	12.76	-27.24

- Band 13.410 - 13.553 MHz:

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.551	-11.4	-51.4

- Band 13.567-13.710 MHz:

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.569	-9.42	-49.42

- Band 13.110-13.410 MHz:

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.191	-23.2	-63.2

- Band 13.710-14.010 MHz:

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.835	-23.12	-63.12


Verdict

Pass

Attachments

Modulation = ISO 15693 Frequency MHz = 13.56

Images:

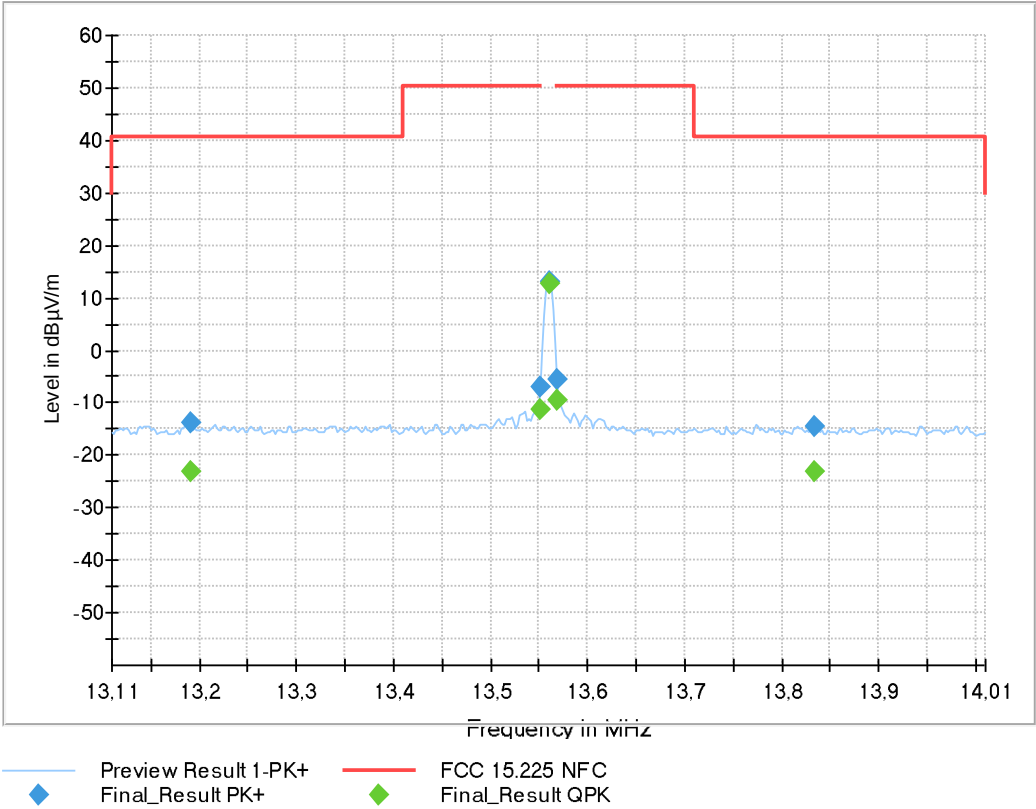

Spectrum analyzer parameters:

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamplifier
150 kHz - 30 MHz	2,25 kHz	PK+	9 kHz	0,1 s	0 dB

FCC 15.225 (d) / RSS-210 B.6 (a)(iv) Field Strength of Emissions
outside of the band 13.110 MHz - 14.010 MHz

Limits

Field strength of any emissions appearing outside of the band 13.110 MHz - 14.010 MHz band shall not exceed the general radiated emission limits in 15.209/RSS-Gen:

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	29.54	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Modulation: ISO 14443A

Results

Freq (MHz)	Freq Rng (MHz)	Pol	QuasiPeak (dBµV/m)	Freq (MHz)	Pol
13.56	[30, 200]	H/V	17.10	39.120500	V


Verdict

Pass

Attachments


Modulation = ISO 14443A Frequency MHz = 13.56
Frequency Range MHz = [0.009, 30] Polarization = Vertical Front

Images:

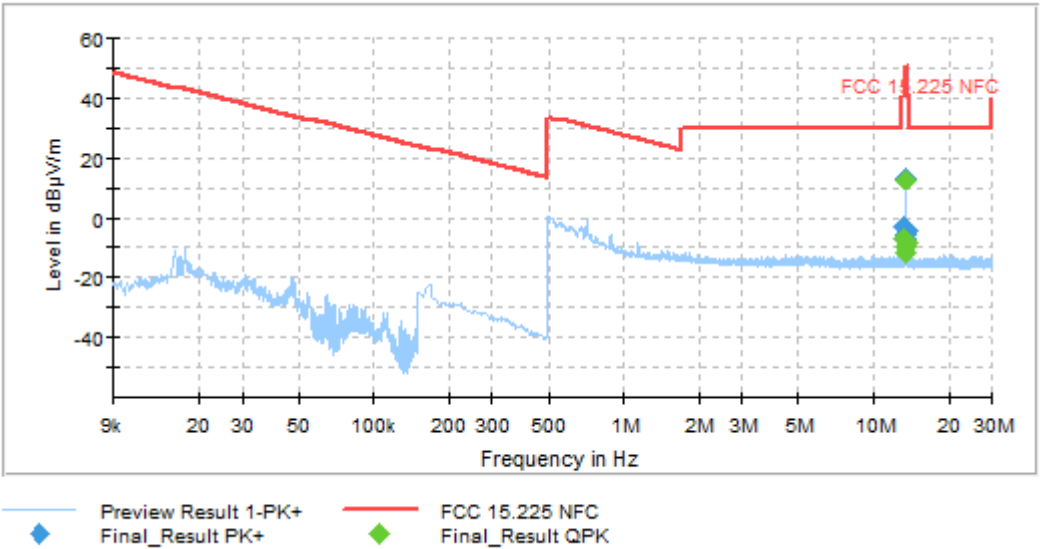

Modulation = ISO 14443A Frequency MHz = 13.56
Frequency Range MHz = [30, 200] Polarization = H/V

Images:

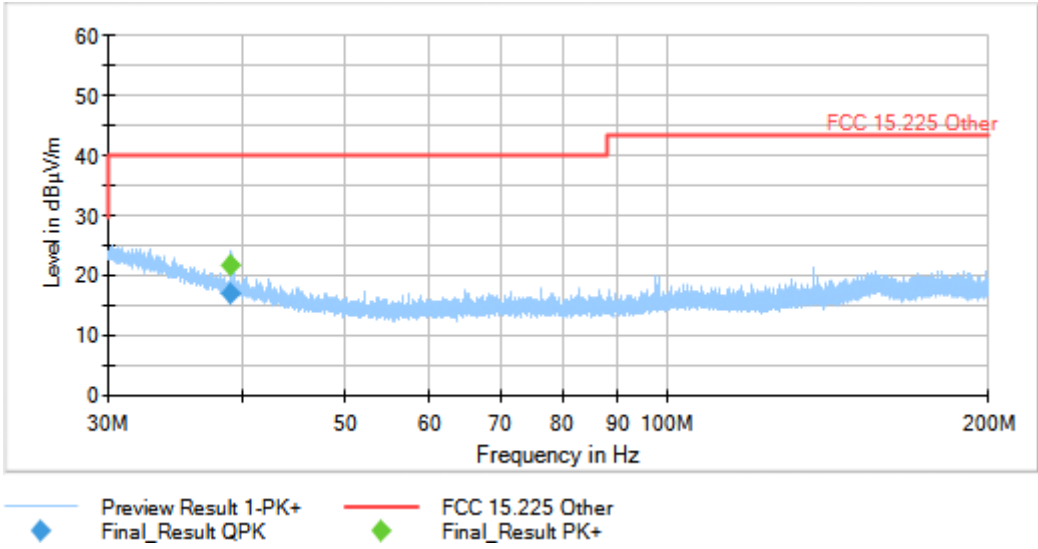

Modulation: ISO 15693

Results


Freq (MHz)	Freq Rng (MHz)	Pol	QuasiPeak (dBµV/m)	Freq (MHz)	Pol
13.56	[30, 200]	H/V	22.89	39.103500	V

Verdict


Pass

Attachments

Modulation = ISO 15693 Frequency MHz = 13.56
Frequency Range MHz = [0.009, 30] Polarization = Vertical Front

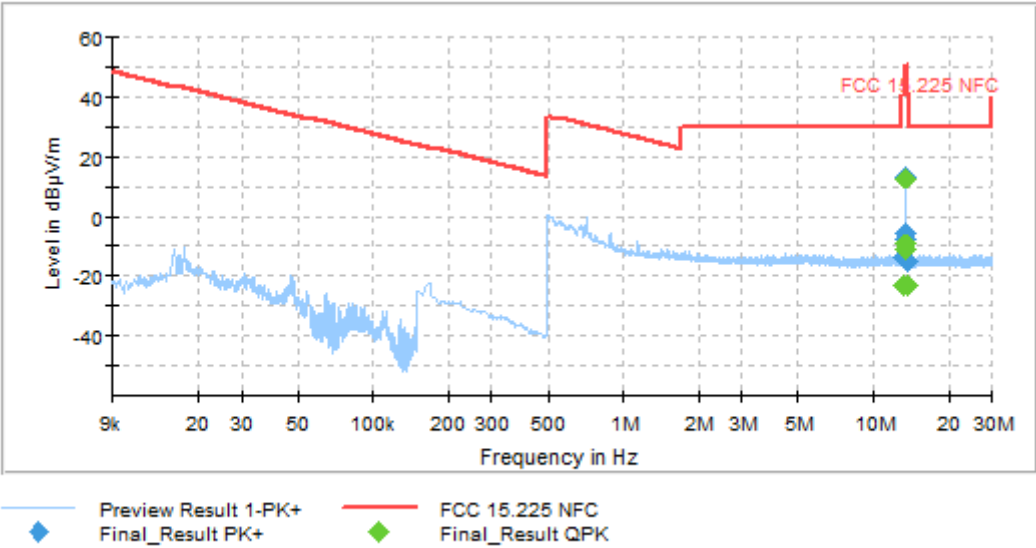

Modulation = ISO 15693 Frequency MHz = 13.56
Frequency Range MHz = [30, 200] Polarization = H/V

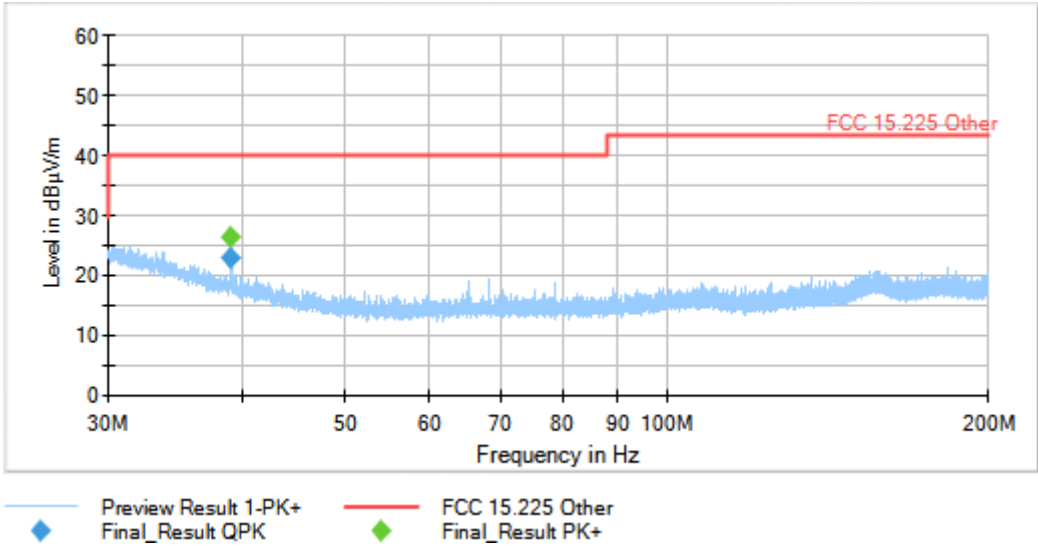

FCC 15.225 (e) / RSS-210 B.6 (b) Frequency Tolerance of the Carrier Signal

Limits

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

Modulation: ISO 14443A

Results

Frequency Stability over Temperature Variations:

T (°C)	Frequency Error (Hz)	Frequency Error (%)
+50	-0.106500	-0.000001
+40	-0.115500	-0.000001
+30	-0.124500	-0.000001
+20	-0.180000	-0.000001
+10	-0.214500	-0.000002
0	-0.253500	-0.000002
-10	-0.268500	-0.000002
-20	-0.258000	-0.000002

Frequency Stability over Voltage Variations:

V (V)	T (°C)	Frequency Error (Hz)	Frequency Error (%)
Vmaximum	20	-0.183000	-0.000001
Vminimum	20	-0.183000	-0.000001

Verdict

Pass

Modulation: ISO 15693

Results

Frequency Stability over Temperature Variations:

T (°C)	Frequency Error (Hz)	Frequency Error (%)
+50	-0.102000	-0.000752
+40	-0.105000	-0.000774
+30	-0.145505	-0.001073
+20	-0.153000	-0.001128
+10	-0.229500	-0.001692
0	-0.246000	-0.001814
-10	-0.267000	-0.001969
-20	-0.267000	-0.001969

Frequency Stability over Voltage Variations:

V (V)	T (°C)	Frequency Error (Hz)	Frequency Error (%)	LIMIT (0,01%) (kHz)
Vmaximum	20	-0.162000	-0.001195	0.01%
Vminimum	20	-0.165000	-0.001217	0.01%

Verdict

Pass