

ISED CABid: ES1909
 Lab. Company Number: 4621A

Test Report No:
 75859RRF.002

Test Report

USA FCC 15.225, 15.209
 CANADA RSS-210, RSS-Gen

(*) Identification of item tested	Design XS Reader including all mechanical variants
(*) Trademark	SALTO
(*) Model and /or type reference	WRD0M / Type reference: P1619
Other identification of the product	FCC ID: UKCW RD0M IC ID: 10088A-WRD0M
(*) Features	Contains a certified Bluetooth LE module HW version: 2.0 SW version: 0194 (Control FW), 0197 (HSE FW)
Applicant	SALTO SYSTEMS, S.L. Arkotz 9, Polígono Lanbarren 20180, Oiartzun, Guipúzcoa, Spain
Test method requested, standard	USA FCC Part 15.225 (10-1-21 Edition): Operation within the band 13.110 -14.010. USA FCC Part 15.209 (10-1-21 Edition): Radiated emission limits, general requirements. CANADA RSS-210 Issue 10 (December 2019). CANADA RSS-Gen Issue 5 Amendment 2 (February 2021). ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	José Manuel Gómez Galván EMC Consumer & RF Lab. Manager
Date of issue	2023-08-29
Report template No	FDT08_24 (*) "Data provided by the client"

Index

Competences and guarantees	3
General conditions	3
Uncertainty.....	3
Data provided by the client	3
Usage of samples	4
Test sample description.....	4
Identification of the client	5
Testing period and place	5
Document history.....	5
Environmental conditions	6
Remarks and comments.....	6
Testing verdicts.....	7
Summary	7
Appendix A: Test results.....	8

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document. **IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample model WRD0M / Type reference: P1619 is a Design XS Reader with Mifare (ISO14443A & ISO15693 standard based), RS-485 and Bluetooth LE technology.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	75859_5.1	Design XS Reader	WRD0M	--	2023-05-19	Element Under Test
S/01	75750_7.1	Electronic Control	CU42E0	--	2023-05-03	Auxiliary Element

Notes referenced to samples during the project:

Id	Type
S/01	Samples used for radiated test

Test sample description

Ports.....:	Port name and description	Cable			
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾
	RS-485	>3m	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supplementary information to the ports.....:	-				
Rated power supply	Voltage and Frequency		Reference poles		
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 12 Vdc from a SALTO CU			
Rated Power.....:	-				
Clock frequencies.....:	27.12 MHz				
Other parameters	RS-485				
Software version.....:	0194 (Control FW), 0197 (HSE FW)				
Hardware version	2.0				
Dimensions in cm (W x H x D) ...:	9.55 x 9.55 x 2.2/2.7 (conical/square base) cm / 9,55 x 14,1 x 2,95 cm (rectangular housing)				
Mounting position	<input type="checkbox"/>	Table top equipment			
	<input checked="" type="checkbox"/>	Wall/Ceiling mounted equipment			
	<input type="checkbox"/>	Floor standing equipment			
	<input type="checkbox"/>	Hand-held equipment			
	<input type="checkbox"/>	Other:			
Modules/parts.....:	Module/parts of test item		Type	Manufacturer	
	Bluetooth LE certified module		BLE	INSIGHT	
Accessories (not part of the test item)	Description		Type	Manufacturer	
	-		-	-	
Documents as provided by the applicant	Description		File name	Issue date	
	User manual				
	FW Explanation				

⁽³⁾ Only for Medical Equipment

Identification of the client

SALTO SYSTEMS, S.L.
 Arkotz 9, Polígono Lanbarren, 20180, Oiartzun, Guipúzcoa, Spain

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	29-05-2023
Date (finish)	31-05-2023

Document history

Report number	Date	Description
75859RRF.002	2023-08-29	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Rafael Fernández,.

Used instrumentation:

Conducted Measurements:

	Last Calibration	Due Calibration
1. Climatic Chamber BINDER MK 56	2023-03	2024-03
2. Signal and Spectrum Analyzer 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2022-05	2024-05
3. Near Field Probe ETS LINDGREN 7405-901	N/A	N/A
4. Shielded Room ETS LINDGREN S101	N/A	N/A

Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N/A	N/A
2. Shielded Room ETS LINDGREN S101	N/A	N/A
3. Active Loop Antenna HEWLETT PACKARD 11966A	2022-08	2024-08
4. EMI Test Receiver 2 Hz - 44 GHz, ROHDE AND SCHWARZ ESW44	2021-12	2023-12
5. Digital Multimeter, FLUKE 175	2022-11	2023-11
6. Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2020-10	2023-10
7. RF Preamplifier, G>38dB 30MHz-6GHz BONN ELEKTRONIK BLNA 0360-01N	2022-06	2023-06
8. EMC/RF Testing SW ROHDE AND SCHWARZ EMC32	N/A	N/A

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

RFID (NFC 13.56 MHz) ISO 14443A, ISO 15693:

FCC PART 15 PARAGRAPH / RSS-210		
Requirement – Test case	Verdict	Remark
FCC 15.225 (a) / RSS-210 B.6 (a)(i) Field strength of emissions within the band 13.553 MHz -13.567 MHz	P	--
FCC 15.225 (b) / RSS-210 B.6 (a)(ii) Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 – 13.710 MHz	P	--
FCC 15.225 (c) / RSS-210 B.6 (a)(iii) Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 – 14.010 MHz	P	--
FCC 15.225 (d) / RSS-210 B.6 (a)(iv) Field strength of emissions outside of the band 13.110 MHz -14.010 MHz	P	--
FCC 15.225 (e) / RSS-210 B.6 (b) Frequency tolerance of the carrier signal	P	--
<u>Supplementary information and remarks:</u>		
None.		

Appendix A: Test results

INDEX

TEST CONDITIONS	10
Occupied Bandwidth	13
FCC 15.225 (a) / RSS-210 B.6 (a)(i) Field Strength of Emissions within the band 13.553 MHz - 13.567 MHz	15
FCC 15.225 (b) / RSS-210 B.6 (a)(ii) Field Strength of Emissions within the band 13.410 MHz -13.553 MHz and 13.567 MHz -13.710 MHz	17
FCC 15.225 (c) / RSS-210 B.6 (a)(iii) Field Strength of Emissions within the band 13.110 MHz - 13.410 MHz and 13.710 MHz - 14.010 MHz	21
FCC 15.225 (d) / RSS-210 B.6 (a)(iv) Field Strength of Emissions outside of the band 13.110 MHz - 14.010 MHz	25
FCC 15.225 (e) / RSS-210 B.6 (b) Frequency Tolerance of the Carrier Signal.....	30

TEST CONDITIONS

(*) Data provided by the Applicant.

POWER SUPPLY (*):

Vnominal: 12 Vdc
Vminimum: 10.2 Vdc
Vmaximum: 13.8 Vdc
Type of Power Supply: DC (from a SALTO CU)

ANTENNA (*):

Type of Antenna: Integral (PCB).
Maximum Declared Antenna Gain: N/A

TEST FREQUENCY (*):


Nominal Operating Frequency: 13.56 MHz
Types: ISO 14443A, ISO 15693.

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer.

For frequency stability test the EUT was placed inside a climatic chamber and connected to a frequency meter using a low loss cable and a coupling device. An external DC power supply was connected to the EUT for voltage variation test.

For extreme test conditions the EUT was placed inside a climatic chamber and connected to a spectrum analyzer using a low-loss cable and a coupling device.

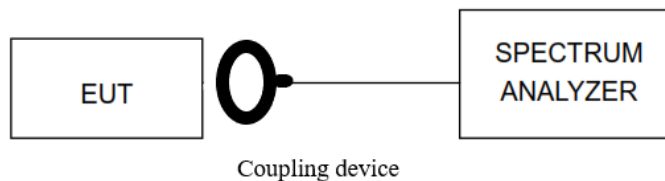


RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Loop antenna for the range between 9 kHz to 30 MHz and Bilog antenna for the range between 30 MHz to 200 MHz) is situated at a distance of 3 m.


For radiated emissions in the range 9 kHz to 30 MHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 40 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and in the range between 30 MHz and 200 MHz the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. In the range between 9 kHz and 30 MHz the measurements were made in the three different orientation planes of the loop antenna to determine the maximum received field. In the range between 30 MHz and 200 MHz the measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup 9 kHz to 30 MHz:

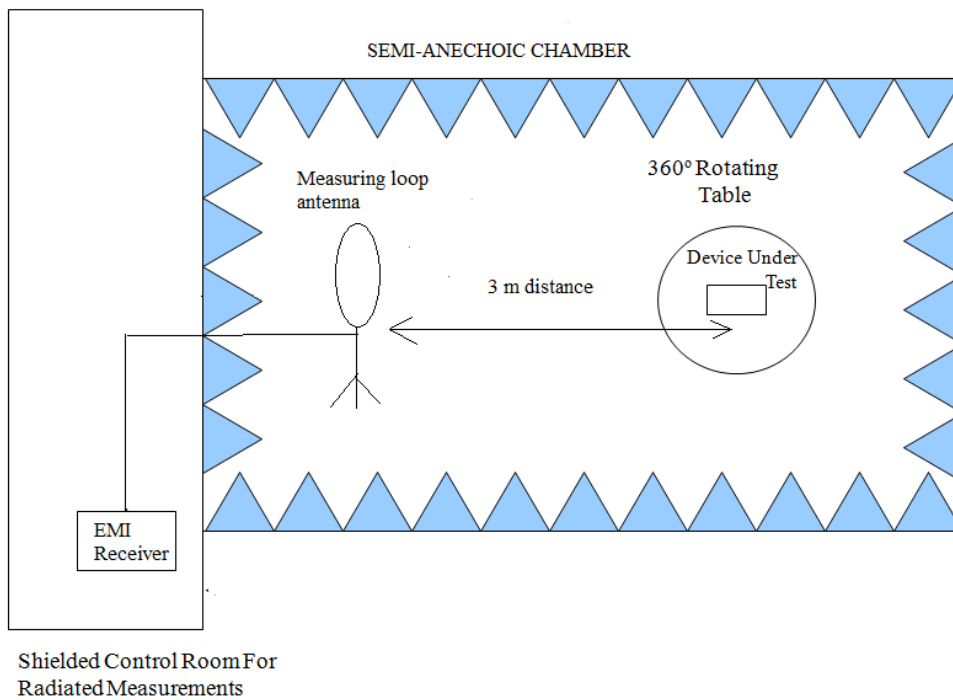

Radiated measurements setup 30 MHz to 200 MHz:

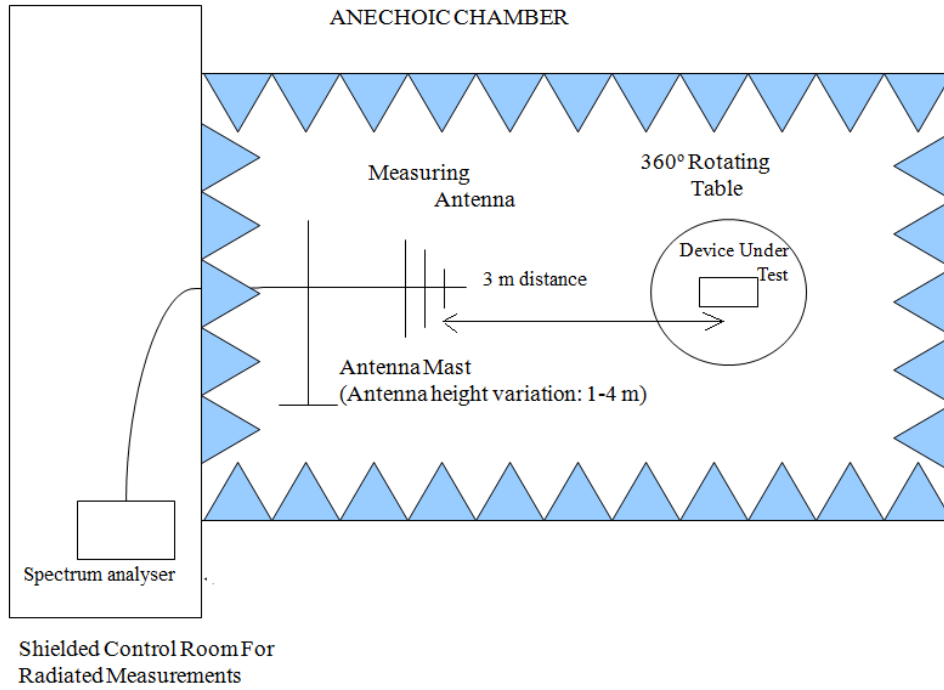


Occupied Bandwidth

RESULTS:

99 % Occupied Bandwidth and 20 dB Bandwidth.


- NFC mode ISO 14443A:**

Operation mode	99% Occupied Bandwidth (kHz)	20 dB Bandwidth (kHz)
NFC mode ISO 14443A	708,123	286,21
Measurement uncertainty (kHz)	<±1.42	

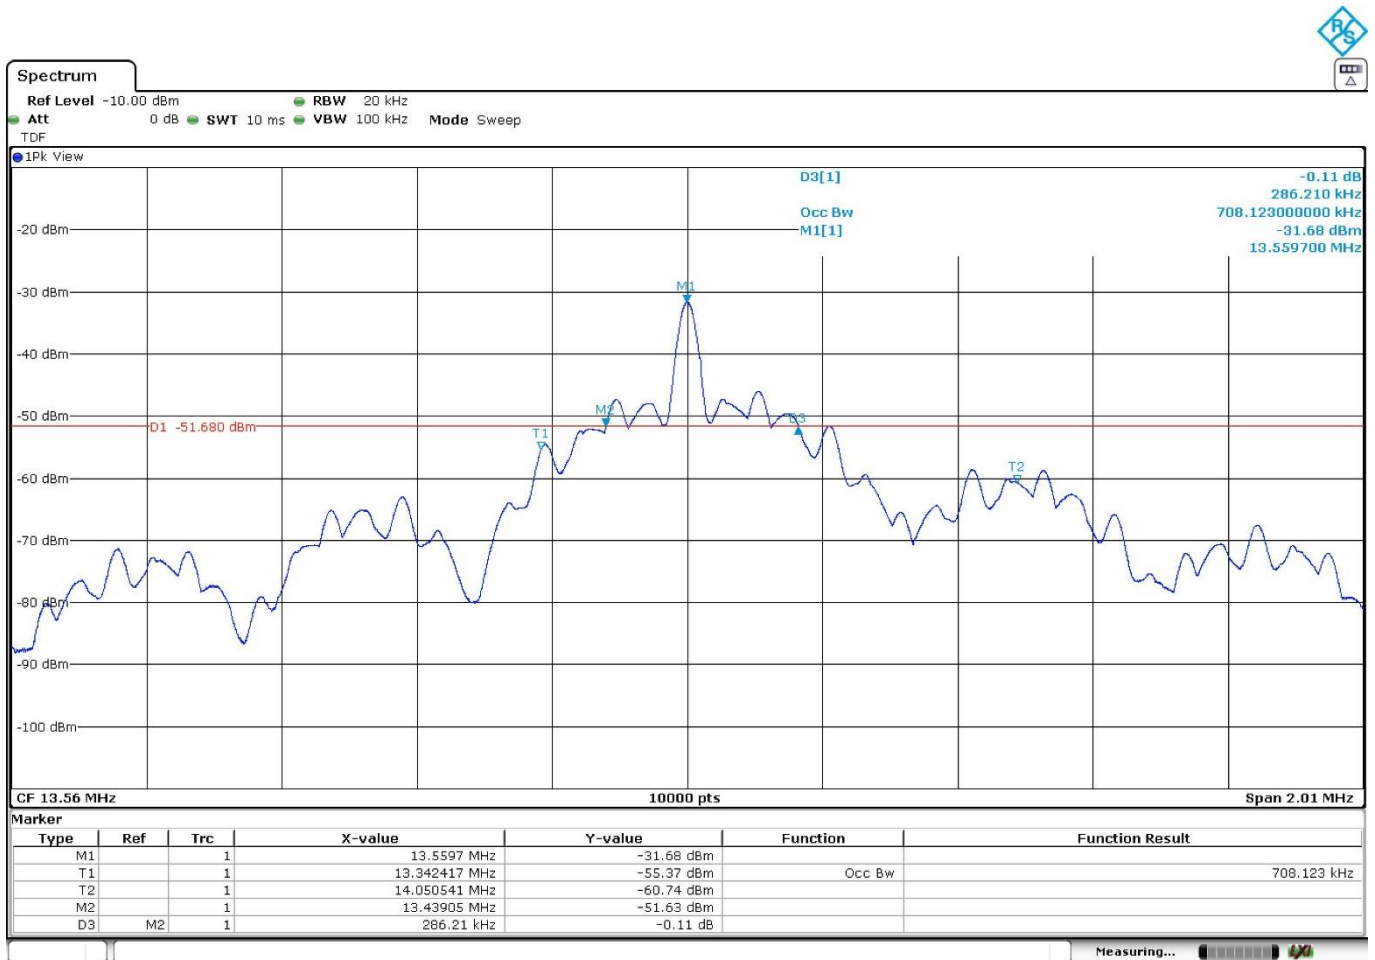

• **NFC mode ISO 15693:**

Operation mode	99% Occupied Bandwidth (kHz)	20 dB Bandwidth (kHz)
NFC mode ISO 15693	26.87	2.64
Measurement uncertainty (kHz)	<±1.42	

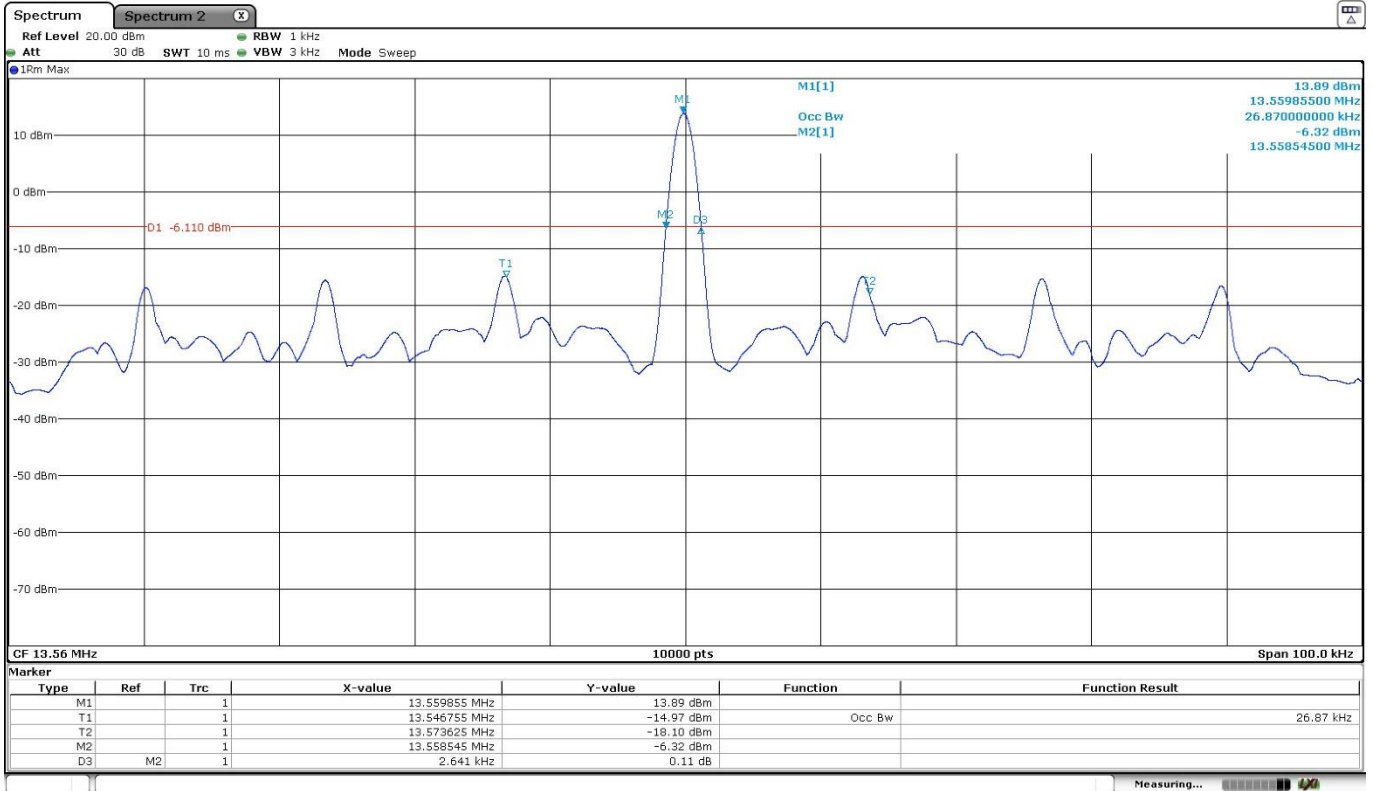

Verdict: PASS

FCC 15.225 (a) / RSS-210 B.6 (a)(i) Field Strength of Emissions within the band 13.553 MHz - 13.567 MHz

SPECIFICATION:


The field strength of any emissions within the band 13.553 - 13.567 MHz shall not exceed 15,848 microvolts/meter (84 dB μ V/m) at 30 meters.

RESULTS:

Measurement distance: 3 meters.

- **NFC mode ISO 14443A:**

Band 13.553 - 13.567 MHz:

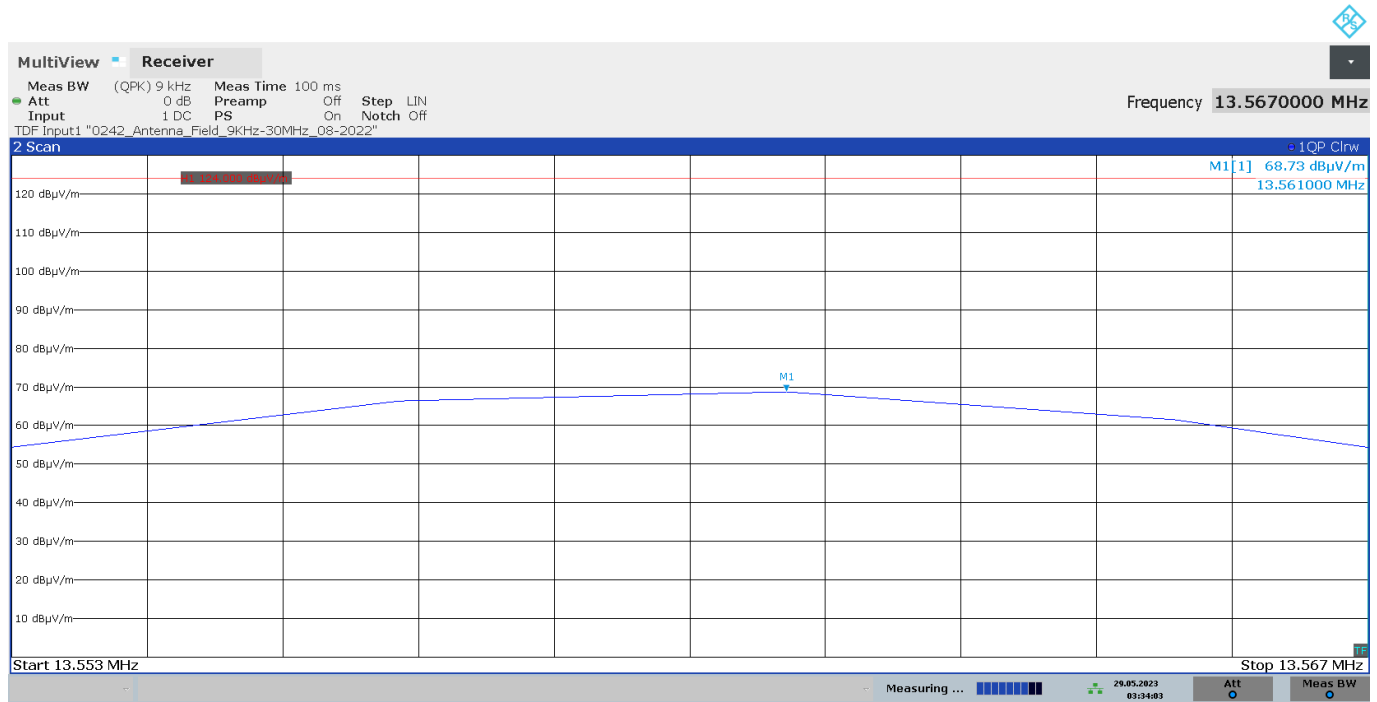

03:34:03 29.05.2023


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dB μ V/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dB μ V/m) extrapolated to 30 m (40 dB/decade)
13.561	68.73	28.73
Measurement uncertainty (dB)	± 3.04	

Verdict: PASS

- **NFC mode ISO 15693:**

Band 13.553 - 13.567 MHz:

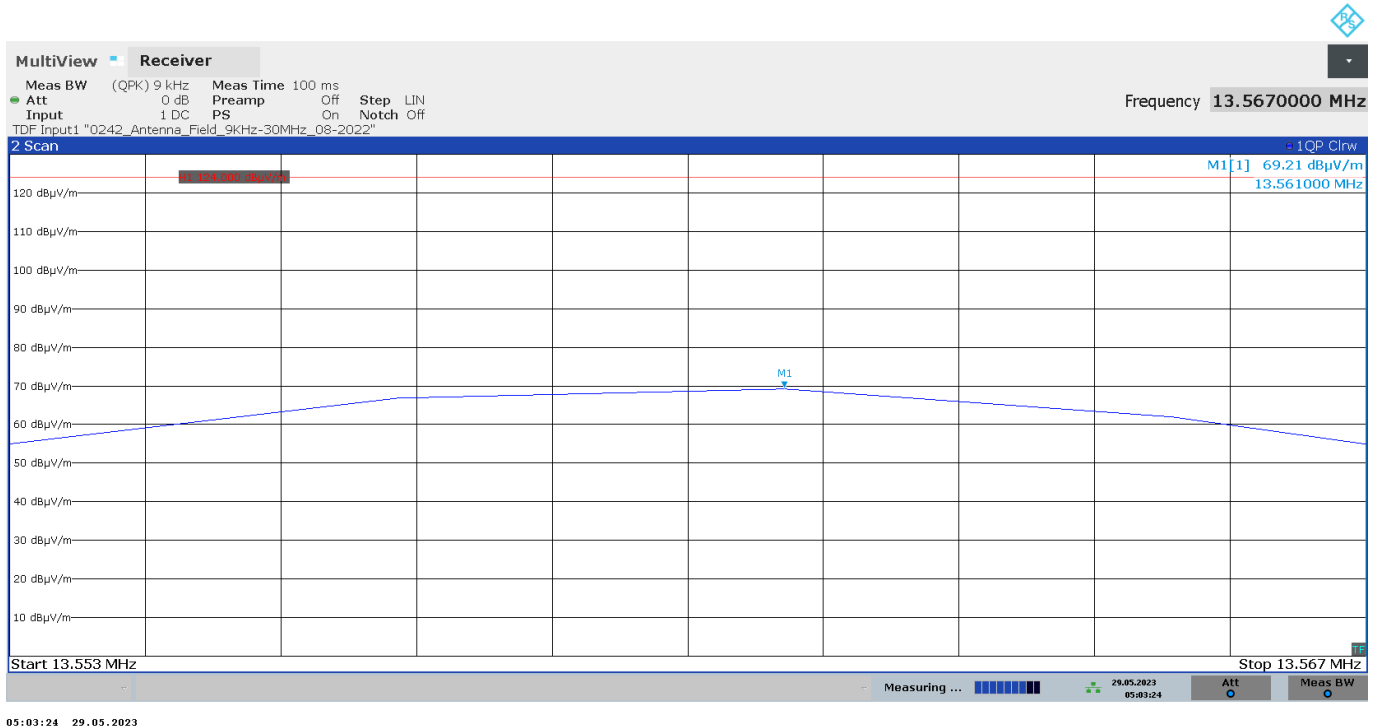

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.561	69.21	29.21
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

FCC 15.225 (b) / RSS-210 B.6 (a)(ii) Field Strength of Emissions within the band 13.410 MHz -13.553 MHz and 13.567 MHz - 13.710 MHz

SPECIFICATION:


Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (50.47 dBμV/m) at 30 meters.

RESULTS:

Measurement distance: 3 meters.

- **NFC mode ISO 14443A:**

Band 13.410 - 13.553 MHz:

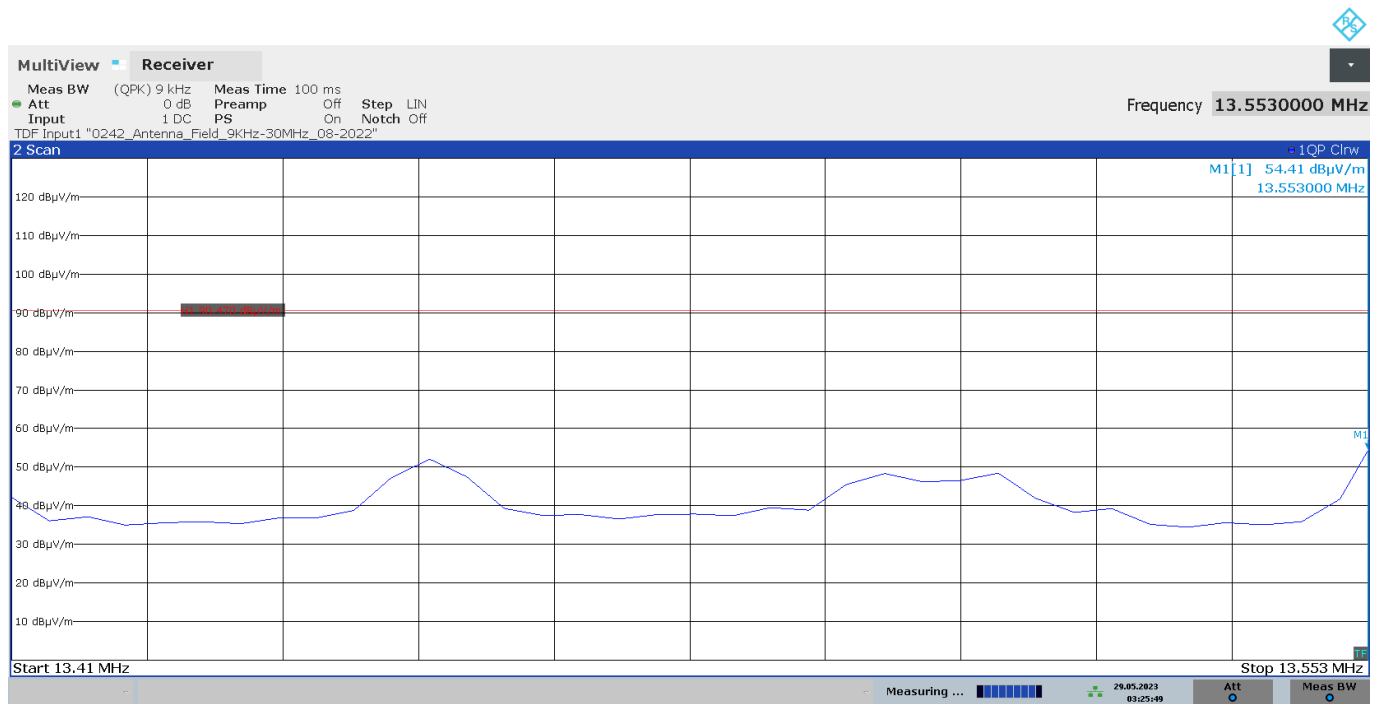


03:25:50 29.05.2023

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBμV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBμV/m) extrapolated to 30 m (40 dB/decade)
13.553	54.41	14.41
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

Band 13.567 - 13.710 MHz:

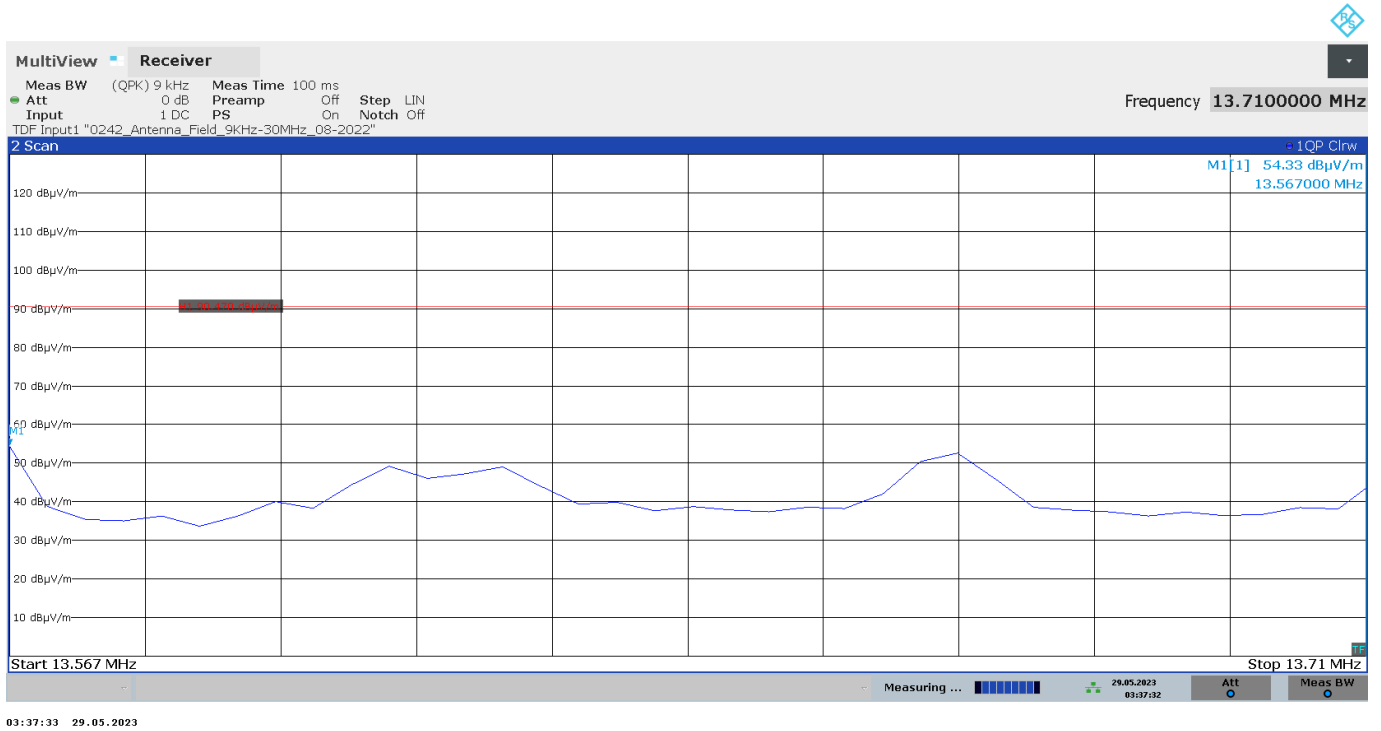


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.567	54.33	14.33
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

- **NFC mode ISO 15693:**

Band 13.410 - 13.553 MHz:

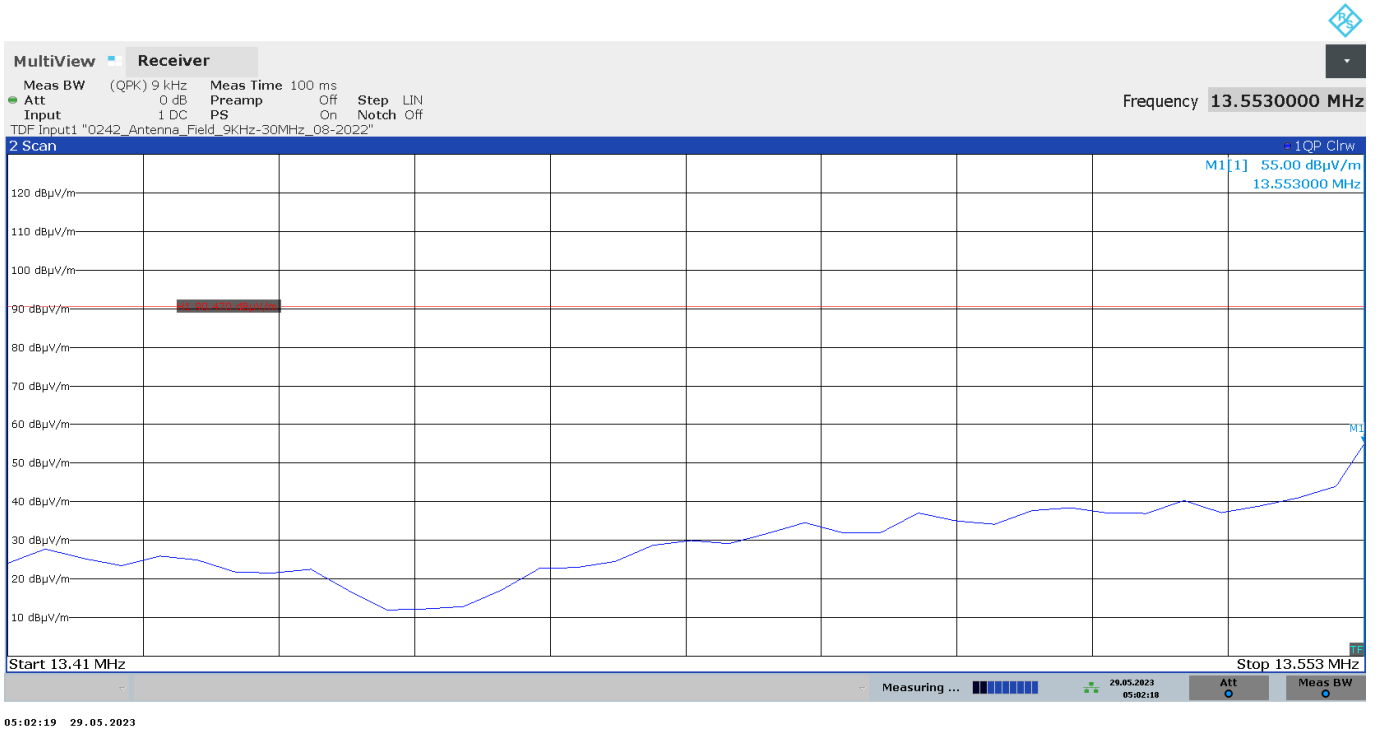


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.553	55	15
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

Band 13.567 - 13.710 MHz:

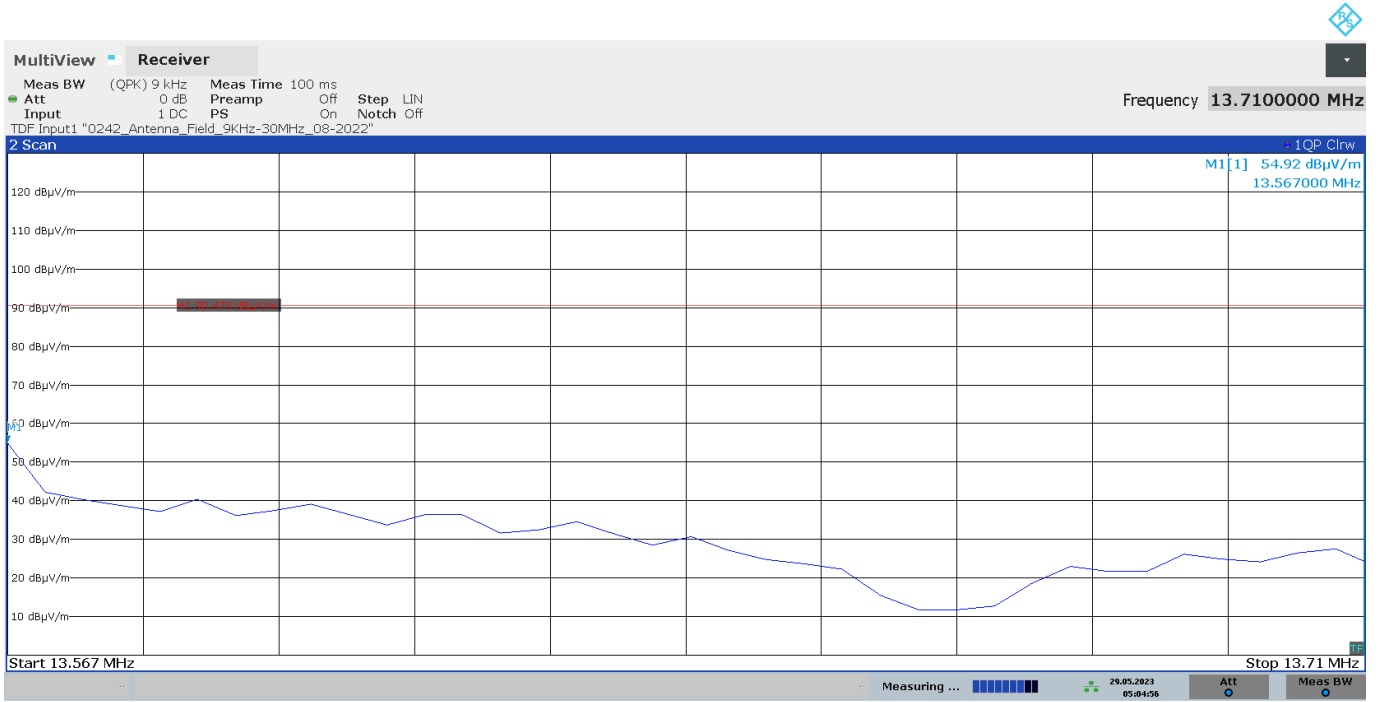

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.567	54.92	14.92
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

FCC 15.225 (c) / RSS-210 B.6 (a)(iii) Field Strength of Emissions within the band 13.110 MHz -13.410 MHz and 13.710 MHz - 14.010 MHz

SPECIFICATION:


Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter (40.51 dBµV/m) at 30 meters.

RESULTS:

Measurement distance: 3 meters.

- **NFC mode ISO 14443A:**

Band 13.110 - 13.410 MHz:

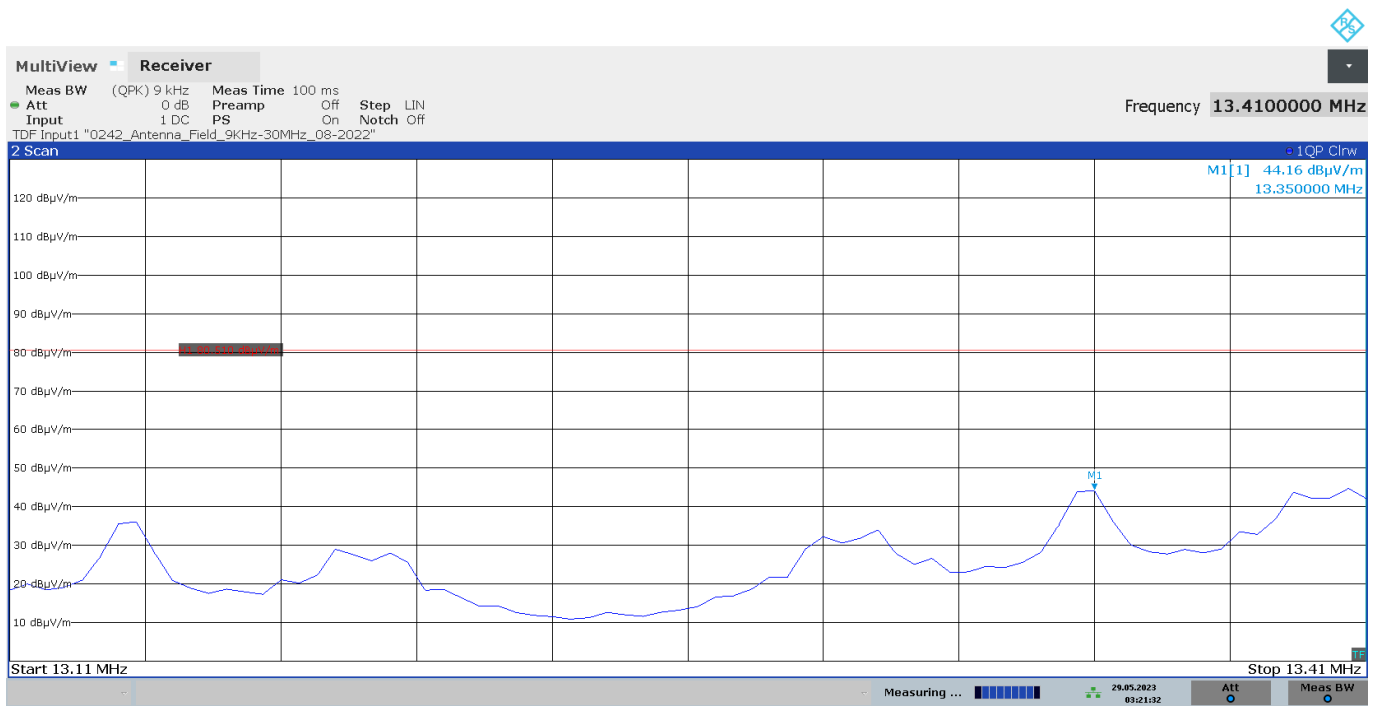


03:21:33 29.05.2023

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.350	44.16	4.16
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

Band 13.710 - 14.010 MHz:

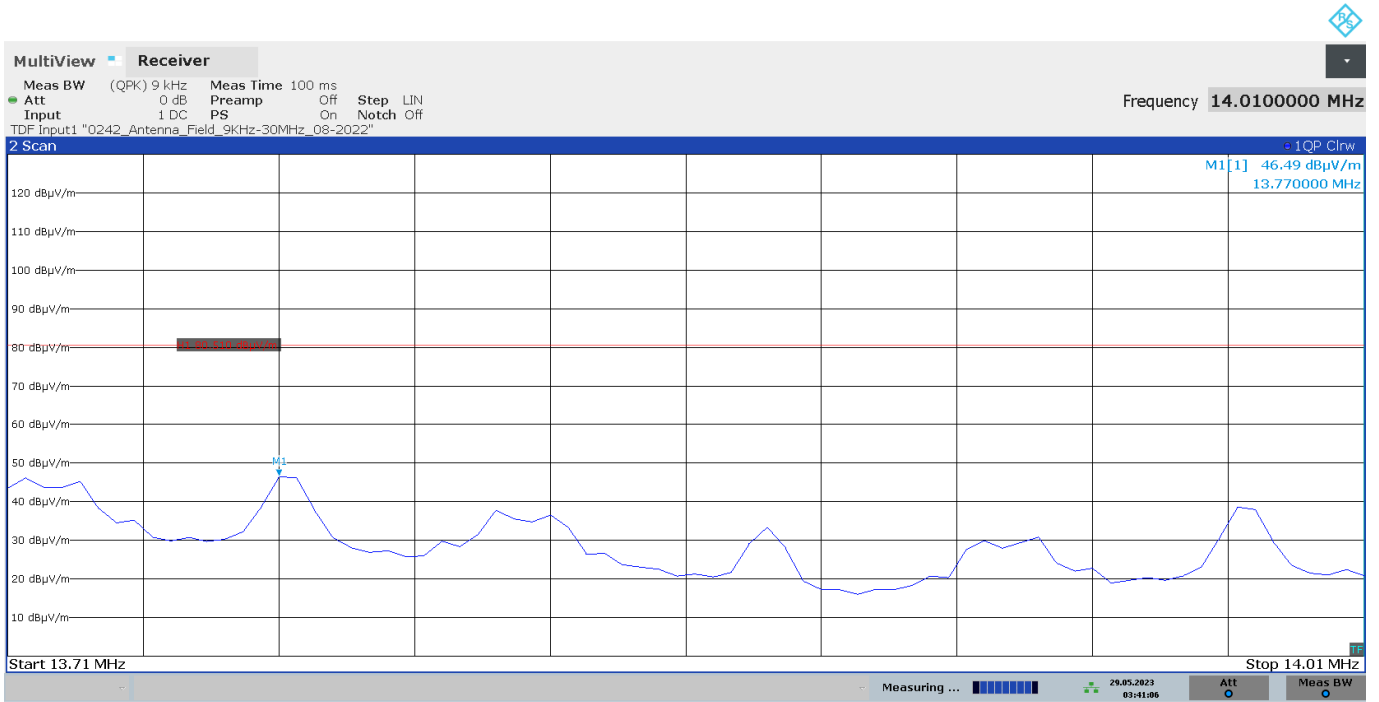

03:41:06 29.05.2023


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.770	46.49	6.49
Measurement uncertainty (dB)	±3.04	

Verdict: PASS

- **NFC mode ISO 15693:**

Band 13.110 - 13.410 MHz:

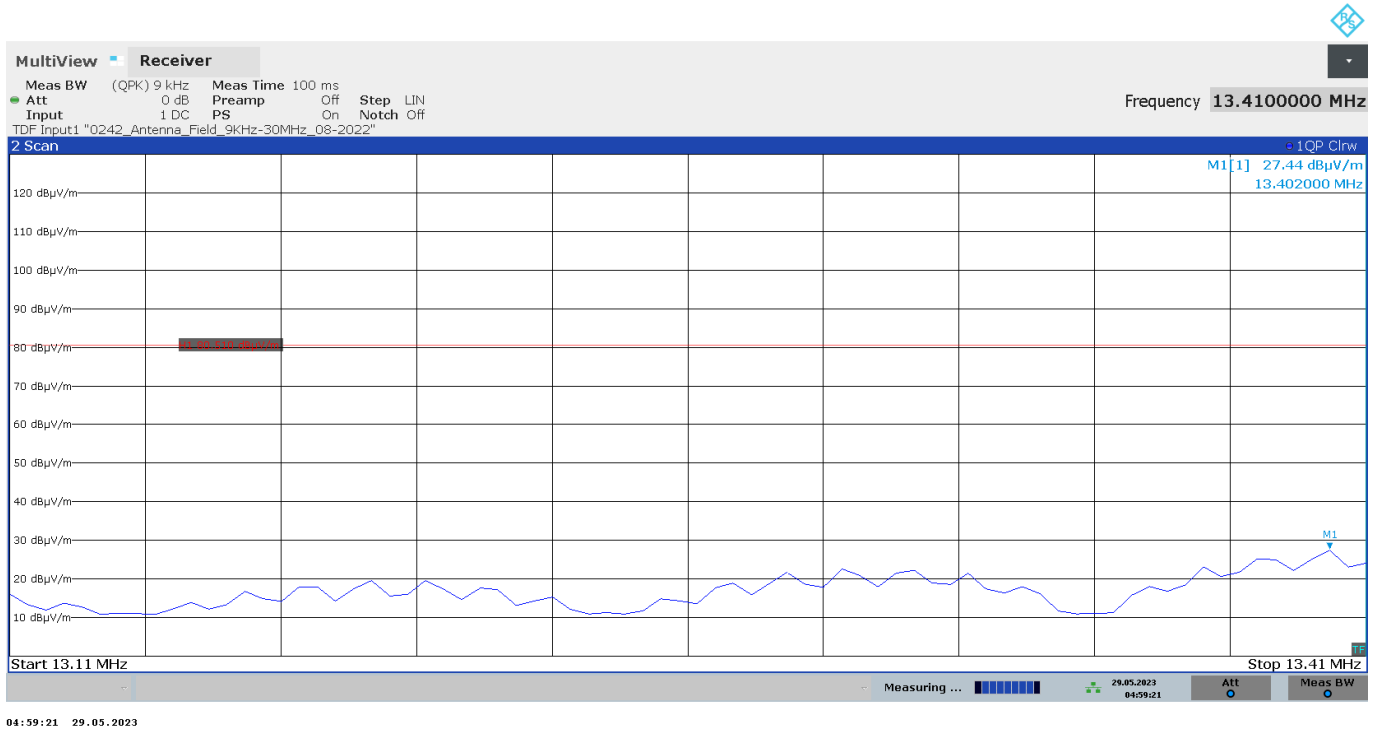


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.402	27.44	-12.56
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS

Band 13.710 - 14.010 MHz:

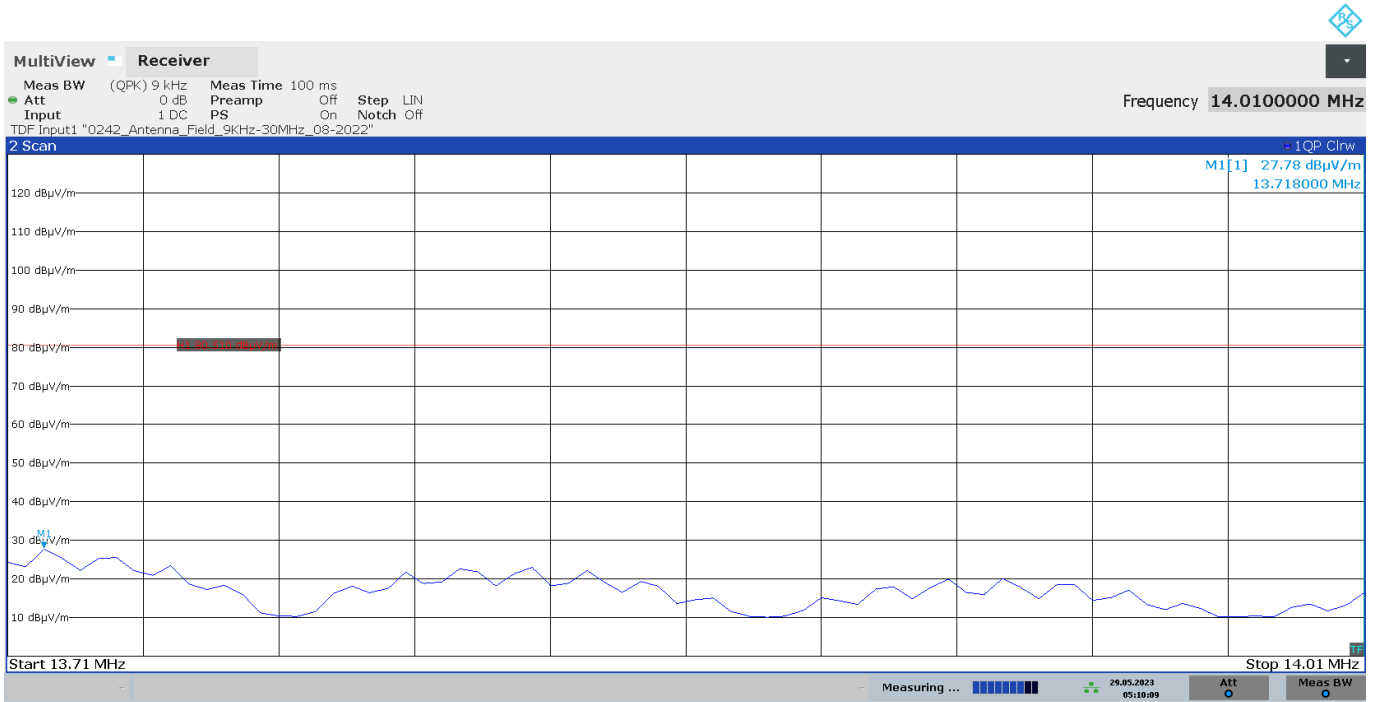

05:10:09 29.05.2023

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.718	27.78	-12.22
Measurement uncertainty (dB)	±3.04	

Verdict: PASS

FCC 15.225 (d) / RSS-210 B.6 (a)(iv) Field Strength of Emissions outside of the band 13.110 MHz - 14.010 MHz

SPECIFICATION:

Field strength of any emissions appearing outside of the band 13.110 MHz - 14.010 MHz band shall not exceed the general radiated emission limits in 15.209/RSS-Gen:

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	29.54	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

RESULTS:

All tests were performed in a semi-anechoic chamber at a distance of 3 m.


The spectrum was inspected from 9 kHz to 200 MHz searching for spurious signals.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifier gain.

- **NFC mode ISO 14443A:**

Frequency range 9 kHz - 30 MHz:

No spurious frequencies detected at less than 20 dB below the limit.

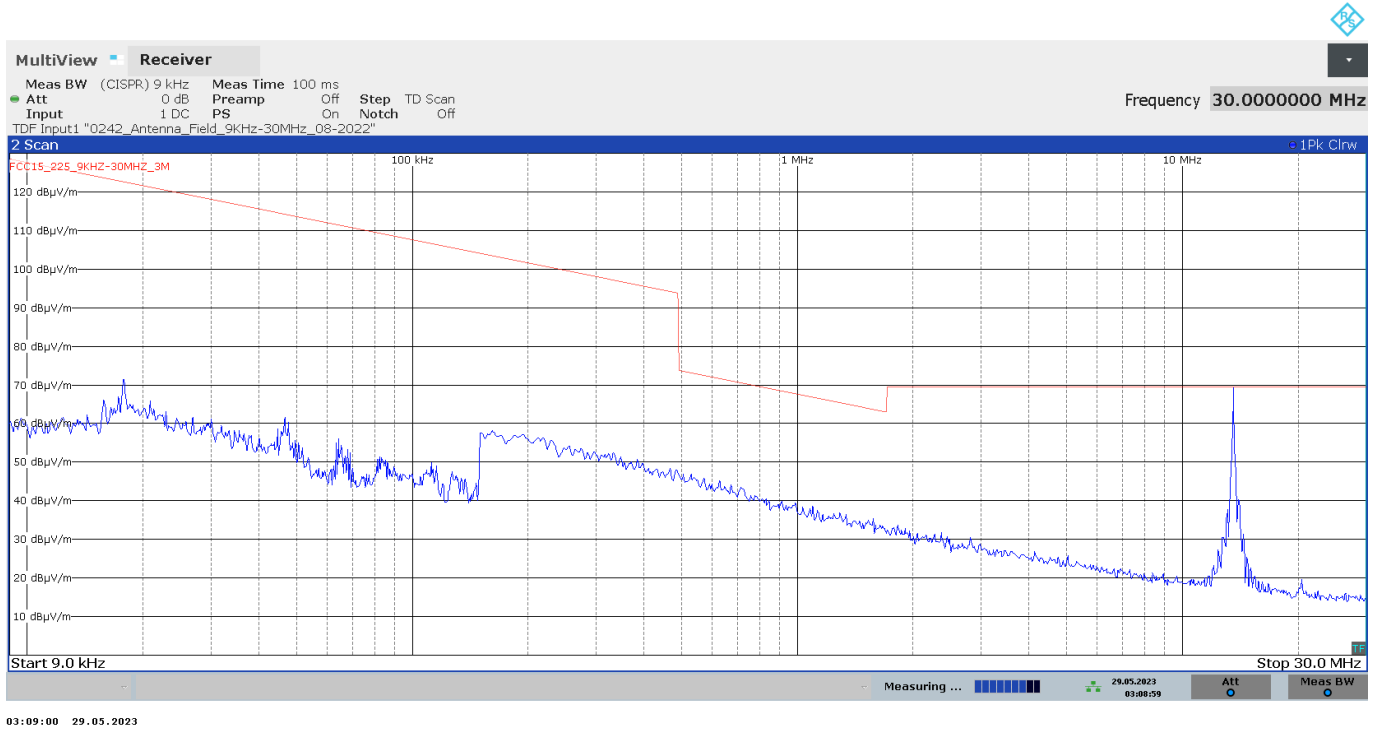

The limits shown in this plot are extrapolated to 3 m. The highest peak is the carrier frequency.


Resolution bandwidth:
 200 Hz for 9 kHz ≤ f ≤ 150 kHz
 9 kHz for 150 kHz ≤ f ≤ 30 MHz

Measurement Uncertainty (dB) <± 3.04

Frequency range 30 - 200 MHz:

Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level (dBµV/m)	Polarization	Detector
40.6845	27.4	V	Quasi peak
67.7995	21.6	V	Quasi peak

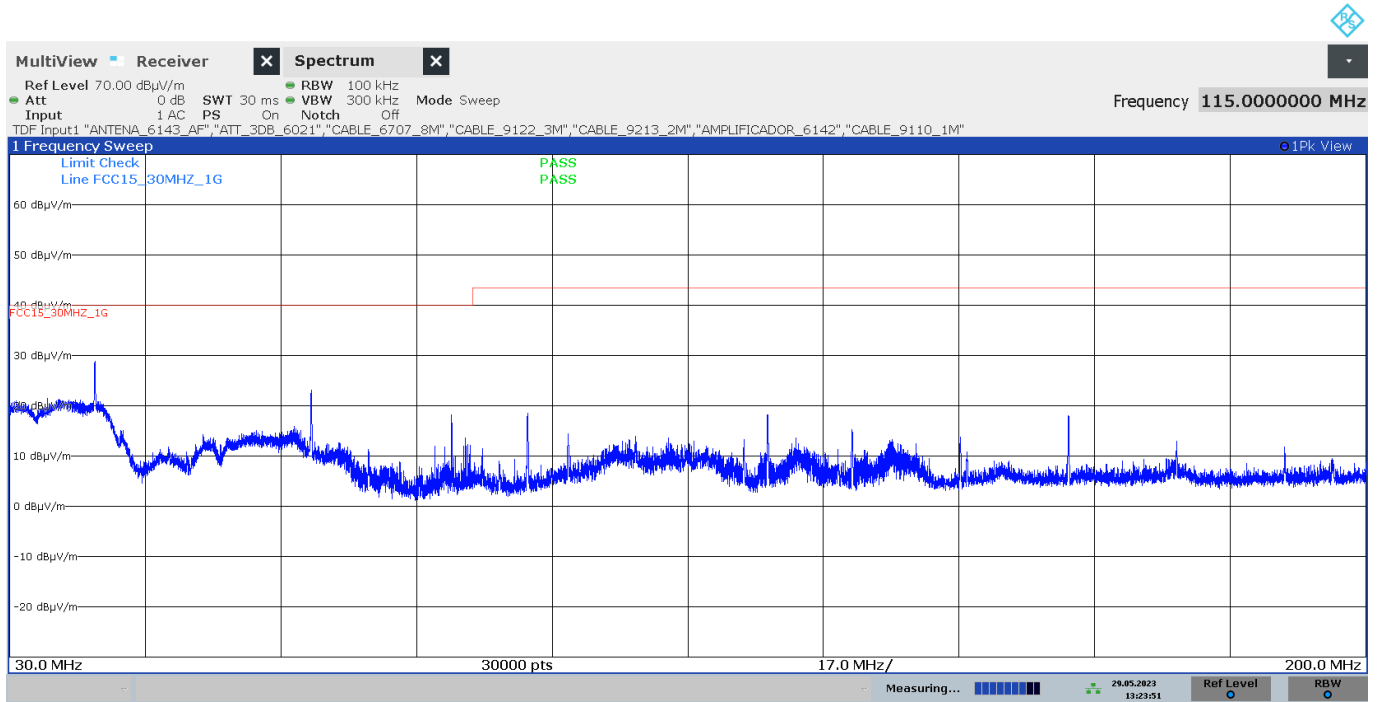

13:23:51 29.05.2023


This plot shows the results of the scan using peak detector.

Measurement Uncertainty (dB) ± 4.68

- **NFC mode ISO 15693:**

Frequency range 9 kHz - 30 MHz:

No spurious frequencies detected at less than 20 dB below the limit.

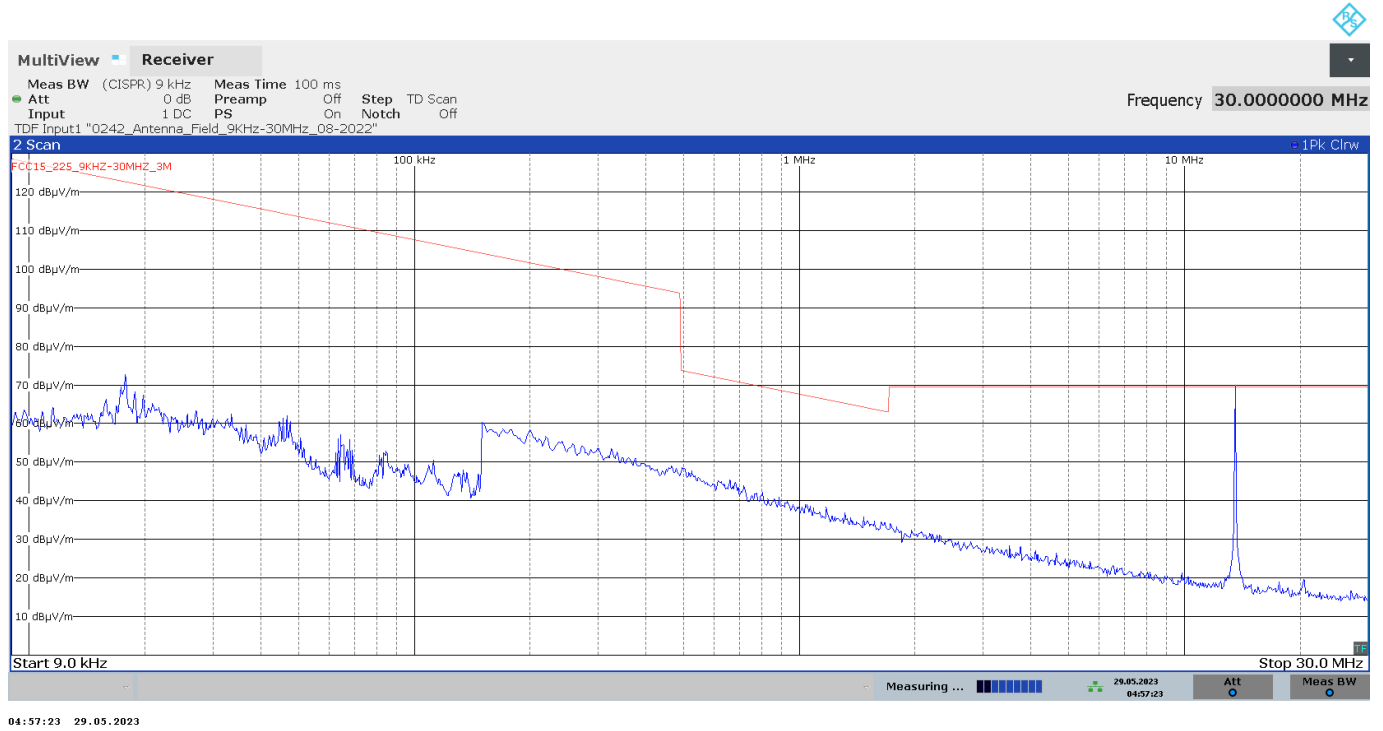

The limits shown in this plot are extrapolated to 3 m. The highest peak is the carrier frequency.


Resolution bandwidth:
 200 Hz for 9 kHz ≤ f ≤ 150 kHz
 9 kHz for 150 kHz ≤ f ≤ 30 MHz

Measurement Uncertainty (dB) <± 3.04

Frequency range 30 - 200 MHz:

Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level (dBµV/m)	Polarization	Detector
40.6732	24.3	V	Quasi peak

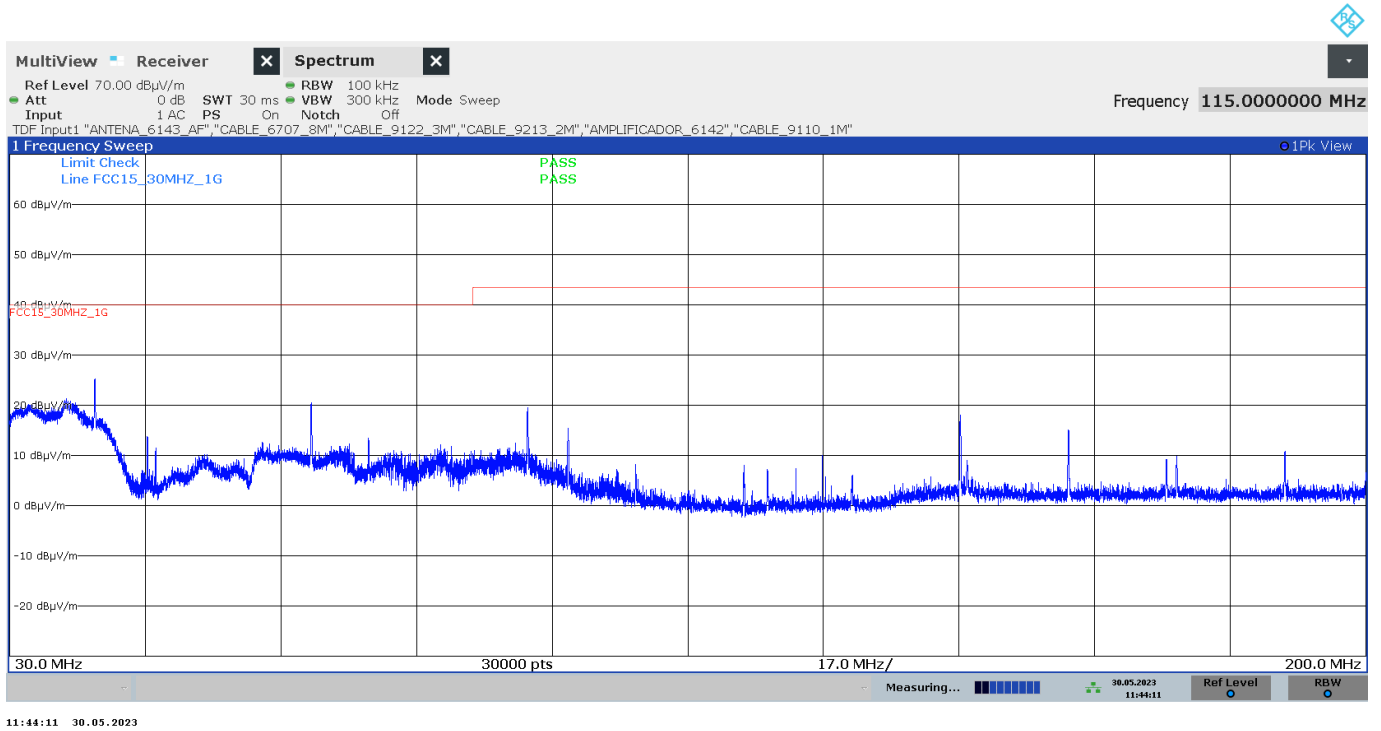

This plot shows the results of the scan using peak detector.

Measurement Uncertainty (dB) $\leq \pm 4.68$

Verdict: PASS

FCC 15.225 (e) / RSS-210 B.6 (b) Frequency Tolerance of the Carrier Signal

SPECIFICATION:

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

RESULTS:

Nominal Operating Frequency: 13.56 MHz.

- **NFC mode ISO 14443A:**
- **Frequency Stability over Temperature Variations:**

Temperature (°C)	Frequency Error (kHz)	Frequency Error (%)
+50	0.068000	0.000501
+40	0.068000	0.000501
+30	0.053000	0.000391
+20	0.038000	0.000280
+10	0.022000	0.000162
0	0.049000	0.000361
-10	0.060000	0.000442
-20	0.064000	0.000472

- **Frequency Stability over Voltage Variations:**

DC Voltage	Voltage (V)	Temperature (°C)	Frequency Error (kHz)	Frequency Error (%)
Vmax	13.8	20	0.020000	0.000147
Vmin	10.2	20	0.030000	0.000221

- **NFC mode ISO 15693:**

- **Frequency Stability over Temperature Variations:**

Temperature (°C)	Frequency Error (kHz)	Frequency Error (%)
+50	0.389000	0.002869
+40	0.066000	0.000487
+30	0.048000	0.000354
+20	0.044000	0.000324
+10	0.007000	0.000052
0	0.053000	0.000391
-10	0.061000	0.000450
-20	0.057000	0.000420

- **Frequency Stability over Voltage Variations:**

DC Voltage	Voltage (V)	Temperature (°C)	Frequency Error (kHz)	Frequency Error (%)
Vmax	13.8	20	0.020000	0.000147
Vmin	10.2	20	0.020000	0.000147

Verdict: PASS