

FCC Test Report

Product Name : TPMS
Trade Name : Mobiletron
Model No. : TX-N001, TX-C003M, TX-C003R, TX-C001US,
TX-C001USK, TX-C002US, TX-N003
FCC ID : ULZ-TXN001

Applicant : Mobiletron Electronics Co., Ltd.
Address : 85,Sec.4,Chung-Ching Rd.,Ta-Ya District, Taichung, Taiwan

Date of Receipt : May 12, 2020
Issued Date : Aug. 12, 2020
Report No. : 2050229R-E3032110105
Report Version : V1.0



The test results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd..

Test Report Certification

Issued Date : Aug. 12, 2020

Report No. : 2050229R-E3032110105



Product Name : TPMS
Applicant : Mobiletron Electronics Co., Ltd.
Address : 85,Sec.4,Chung-Ching Rd.,Ta-Ya District, Taichung, Taiwan
Manufacturer : Mobiletron Electronics Co., Ltd.
Address : 85,Sec.4,Chung-Ching Rd.,Ta-Ya District, Taichung, Taiwan
Trade Name : Mobiletron
Model No. : TX-N001, TX-C003M, TX-C003R, TX-C001US, TX-C001USK,
TX-C002US, TX-N003
FCC ID : ULZ-TXN001
EUT Test Voltage : DC 3V
Testing Voltage : DC 3V
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.231(b): 2019
Laboratory Name : Hsin Chu Laboratory
Address : No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu
County 310, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958
Test Result : Complied

Documented By :



(Carol Tsai / Senior Engineering Adm. Specialist)

Tested By :



(Scott Chang / Senior Engineer)

Approved By :



(Louis Hsu / Deputy Manager)

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Aug. 12, 2020

TABLE OF CONTENTS

Description	Page
1. General Information	5
1.1. EUT Description	5
1.2. Test Mode	6
1.3. Tested System Details	7
1.4. Configuration of tested System	7
1.5. Operation Descriptions	7
1.6. Comments and Remarks	8
1.7. Test Facility	9
1.8. Measurement Uncertainty	10
1.9. List of Test Equipment	11
2. Conducted Emission	12
2.1. Test Setup	12
2.2. Limits	12
2.3. Test Procedure	13
2.4. Test Specification	13
2.5. Test Result	13
3. Radiated Emission	14
3.1. Test Setup	14
3.2. Limits	15
3.3. Test Procedure	16
3.4. Test Specification	16
3.5. Test Result	17
4. 20dB Bandwidth	39
4.1. Test Setup	39
4.2. Limits	39
4.3. Test Specification	39
4.4. Test Result	40
5. Duty Cycle	42
5.1. Test Setup	42
5.2. Limits	42
5.3. Test Specification	42
5.4. Test Result	43
6. Trnsmmitter Time	45
6.1. Test Setup	45
6.2. Limits	45
6.3. Test Specification	45
6.4. Test Result	46
Attachment 1	50
Test Setup Photograph	50
Attachment 2	54
EUT External Photograph	54
Attachment 3	57
EUT Internal Photograph	57

1. General Information

1.1. EUT Description

Product Name	TPMS
Trade Name	Mobiletron
Model No.	TX-N001, TX-C003M, TX-C003R, TX-C001US, TX-C001USK, TX-C002US, TX-N003
Frequency Range / Channel Number / Type of Modulation	315.031 MHz / 1 Channel / ASK 315 MHz / 1 Channel / FSK

Antenna Information	
MFR. / Model No.	Mobiletron / 20010452
Antenna Type	LOOP Antenna
Antenna Gain	-10 dBi

ASK

Working Frequency of Each Channel	
Channel	Frequency
Channel 01	315.031 MHz

FSK

Working Frequency of Each Channel	
Channel	Frequency
Channel 01	315 MHz

Note:

1. Regards to the frequency band operation; the lowest , middle and highest frequency of channel were selected to perform the test, and then shown on this report.
2. The variation of model number is for different strategy of marketing.
3. The EUT description is from the customer declaration.

1.2. Test Mode

DEKRA has verified the construction and function in typical operation. The preliminary tests were performed in different data rate, and to find the worst condition, which was shown in this test report. The following table is the final test mode.

Test Mode	Mode 1: Transmit
-----------	------------------

Test Items	Modulation	Result
Conducted Emission	ASK / FSK	NA
Radiated Emission	ASK / FSK	Complies
Occupied Bandwidth	ASK / FSK	Complies
Duty Cycle	ASK / FSK	Complies
Transmitter Time	ASK / FSK	Complies


Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
N/A					

1.4. Configuration of tested System

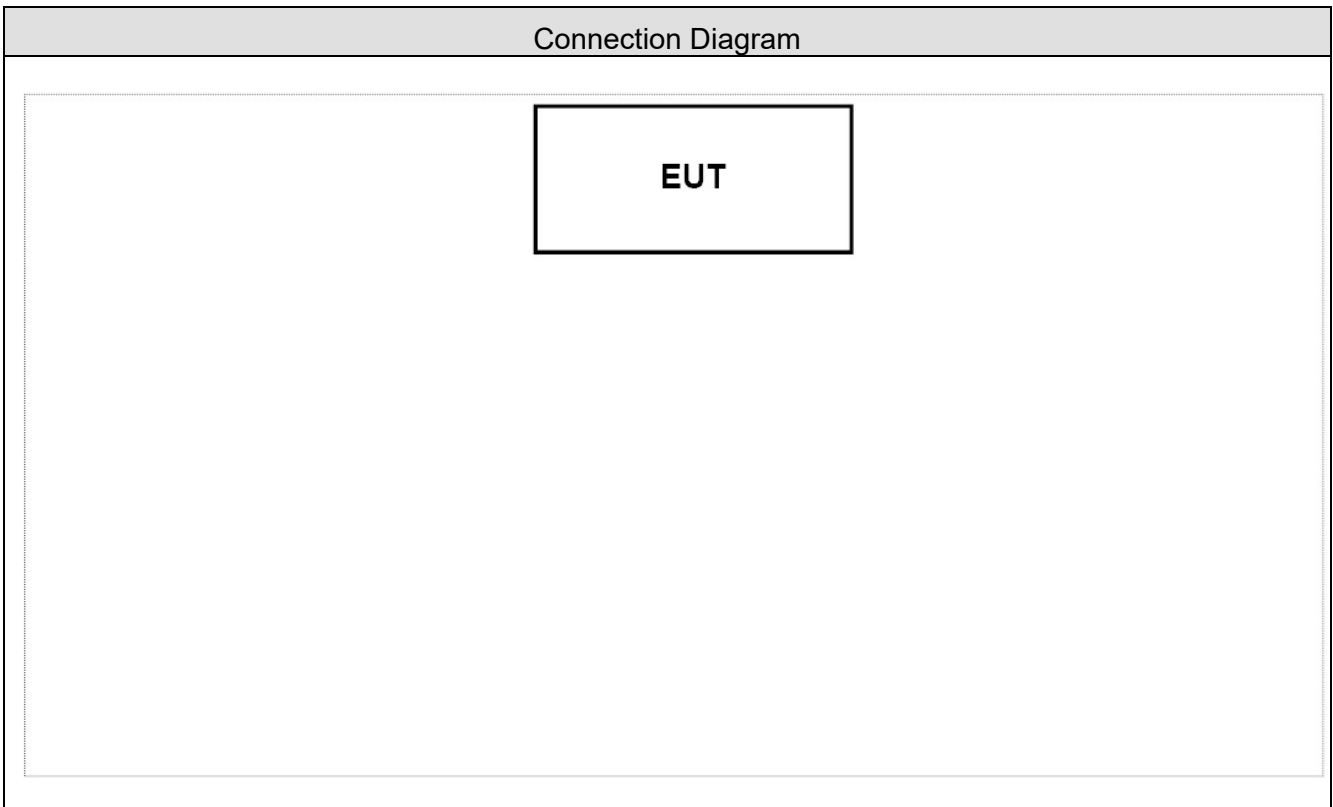

1.5. Operation Descriptions

1	Setup the EUT as shown in Section 1.5.
2	Execute the "QRCT" on the laptop.
3	Configure the test mode, the test channel, and the data rate.
4	Press "Start TX" to start the continuous transmitting.
5	Verify that the EUT works properly.

1.6. Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1.7. Test Facility

Ambient conditions in the laboratory:

Items	Test Item	Required	Test Site
Temperature (°C)	FCC PART 15 C 15.207	15 - 35	--
Humidity (%RH)	Conducted Emission	25 - 75	
Temperature (°C)	FCC PART 15 C 15.231	15 - 35	2
Humidity (%RH)	Radiated Emission	25 - 75	
Temperature (°C)	FCC PART 15 C 15.231	15 - 35	3
Humidity (%RH)	Occupied Bandwidth	25 - 75	
Temperature (°C)	FCC PART 15 C 15.231	15 - 35	3
Humidity (%RH)	Duty Cycle	25 - 75	
Temperature (°C)	FCC PART 15 C 15.231	15 - 35	3
Humidity (%RH)	Transmitter Time	25 - 75	

Note: Test site information refers to Laboratory Information.

USA : FCC Registration Number: TW3024

Canada IC Registration Number: 22397-1 / 22397-2 / 22397-3

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our

Web site: <http://www.dekra.com.tw>

If you have any comments, please don't hesitate to contact us. Our test sites as below:

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
Address	<ol style="list-style-type: none"> No. 75-2, 3rd Lin, WangYe Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C. No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
Phone number	<ol style="list-style-type: none"> +886-3-592-8858 +886-3-582-8001 +886-3-582-8001
Fax number	<ol style="list-style-type: none"> +886-3-592-8859 +886-3-582-8958 +886-3-582-8958
E mail address	info.tw@dekra.com
Website	http://www.dekra.com.tw

1.8. Measurement Uncertainty

Test item	Uncertainty
Conducted Emission	$\pm 2.1\text{dB}$
Radiated Emission	$\pm 3.40\text{ dB below 1GHz}$ $\pm 3.46\text{ dB above 1GHz}$
Occupied Bandwidth	$\pm 50\text{Hz}$
Duty Cycle	N/A
Transmitter Time	N/A

1.9. List of Test Equipment

Radiated Emission / CB2-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	2019/10/21	2020/10/20
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Bilog Antenna	Teseq	CBL6112D	23191	2019/06/17	2020/06/16
Horn Antenna	Schwarzbeck	BBHA 9120D	639	2020/06/04	2021/06/03
Horn Antenna	Schwarzbeck	BBHA 9170	202	2019/12/27	2020/12/26
Pre-Amplifier	DEKRA	AP-025C	12183122	2019/09/24	2020/09/23
Pre-Amplifier	EMCI	EMC11830I	980366	2019/12/03	2020/12/02
Pre-Amplifier	DEKRA	AP-400C	201801231	2019/12/03	2020/12/02
Horn Antenna	Schwarzbeck	BBHA 9120D	01656	2019/10/25	2020/10/24
Band Reject Filter	Micro-Tronics	BRM50702	G192	2020/03/09	2021/03/08
Signal Analyzer	R&S	FSV40	101435	2019/07/08	2020/07/07
Coaxial Cable(16m)	Huber+Suhner	SF104	CB2-H	2019/07/25	2020/07/24
EMI system	DEKRA	Version 1.0	CB2-H	NA	NA

Occupied Bandwidth / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Spectrum Analyzer	Agilent	N9010A	US47140172	2019/06/28	2020/06/27
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29

Duty Cycle / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Spectrum Analyzer	Agilent	N9010A	US47140172	2019/06/28	2020/06/27
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29


Transmitter Time / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Spectrum Analyzer	Agilent	N9010A	US47140172	2019/06/28	2020/06/27
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Conducted Emission

2.1. Test Setup

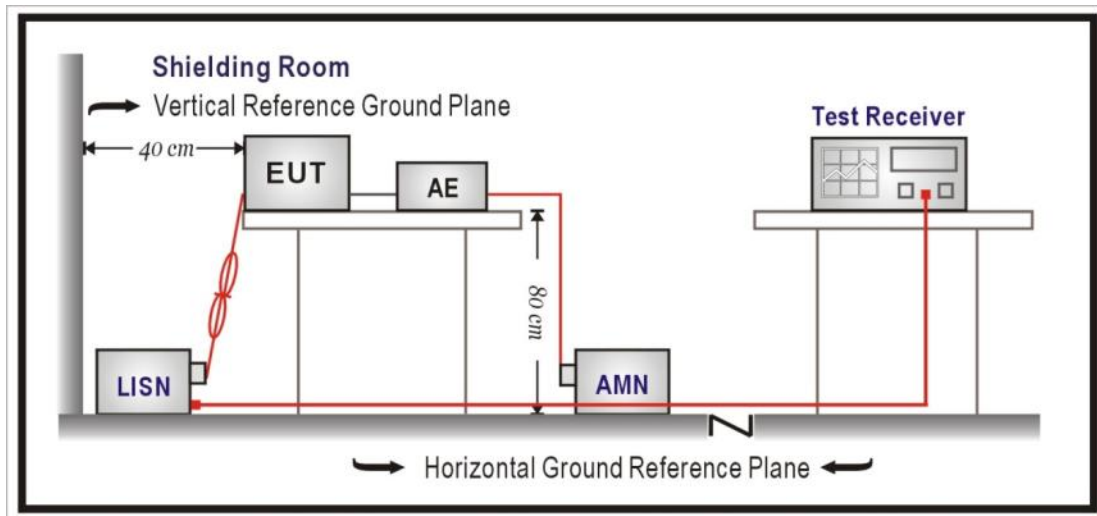

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207		
Frequency	QP	AV
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9KHz.

2.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.207


2.5. Test Result

EUT using DC input voltage, so the project does not have to test for testing.


3. Radiated Emission

3.1. Test Setup

Under 1GHz Test Setup:

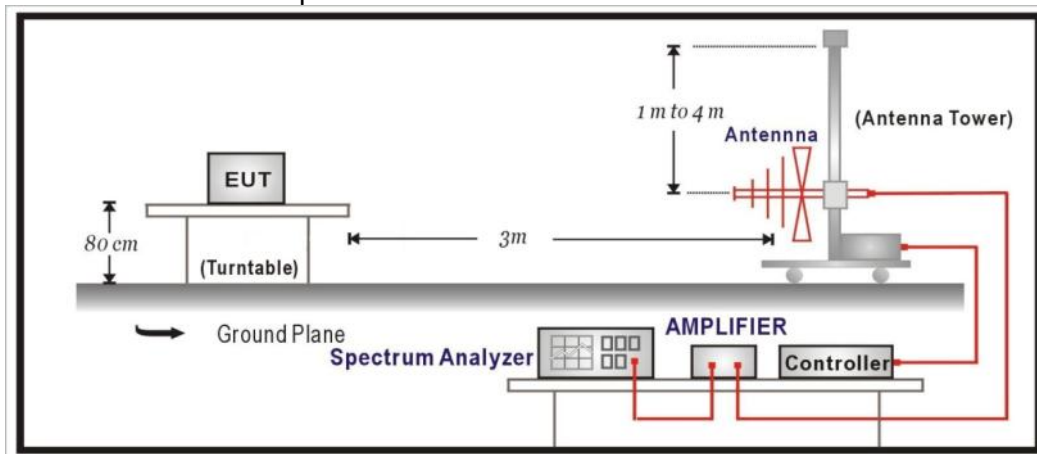

Above 1GHz Test Setup:

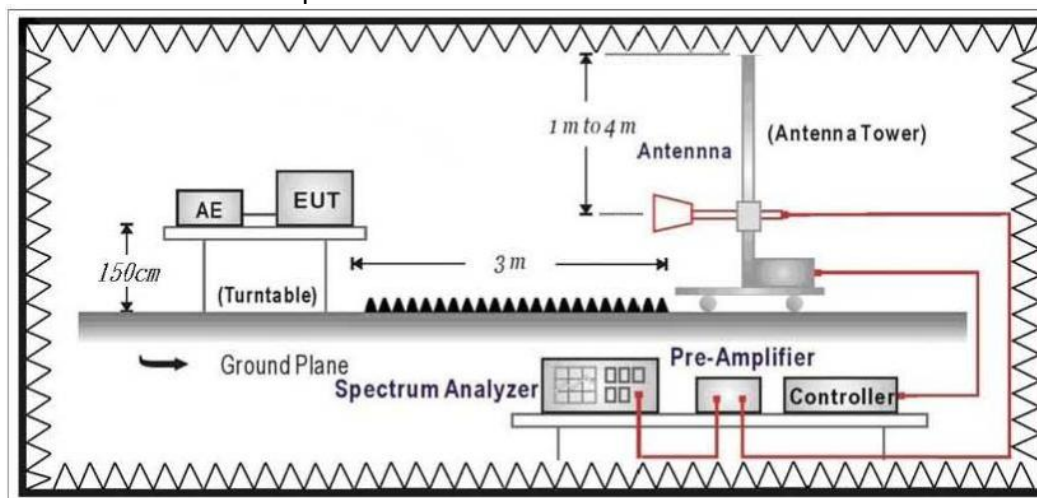

3.2. Limits

Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.231				
Frequency (MHz)	Field Strength of Fundamental		Field Strength of Harmonics	
	uV/m	dBuV/m	uV/m	dBuV/m
40.66 – 40.70	2250	67.04	225	47.04
70 – 130	1250	61.94	125	41.94
130 - 174	1250 - 3750	61.94 – 71.48	125 – 375	41.94 – 51.48
174 – 260	3750	71.48	375	51.48
260 – 470	3750 – 12500	71.48 – 81.94	375 – 1250	51.48 – 61.94
Above 470	12500	81.94	1250	61.94

Remarks:

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

Spurious electric field strength limits

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	dBuV/m	dBuV/m
1.705 - 30	30	29.5
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Remarks:

1. E field strength (dBuV/m) = 20 log E field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9KHz(include The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limits shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit. The bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

3.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.209


3.5. Test Result

Product	TPMS		
Test Item	Fundamental Radiated Emission		
Test Mode	Mode 1: Transmit		
Date of Test	2020/06/04	Test Site	CB2-H
Temperature(°C)	24	Humidity (%RH)	57

Test Conditions	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	
Horizontal							
ASK	X-axis	315.031	66.83	75.62	-8.79	43.58	23.25
		315.031	46.83	55.62	-8.79	23.58	23.25
	Y-axis	315.031	67.67	75.62	-7.95	44.42	23.25
		315.031	47.67	55.62	-7.95	24.42	23.25
	Z-axis	315.031	73.07	75.62	-2.55	49.82	23.25
		315.031	53.07	55.62	-2.55	29.82	23.25
Vertical							
ASK	X-axis	315.031	72.34	75.62	-3.28	49.09	23.25
		315.031	52.34	55.62	-3.28	29.09	23.25
	Y-axis	315.031	72.18	75.62	-3.44	48.93	23.25
		315.031	52.18	55.62	-3.44	28.93	23.25
	Z-axis	315.031	62.39	75.62	-13.23	39.14	23.25
		315.031	42.39	55.62	-13.23	19.14	23.25

Note1: Emission Level = Reading Level +Correct factor

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	ASK_315M_X axis	Humidity (%RH)	57.0

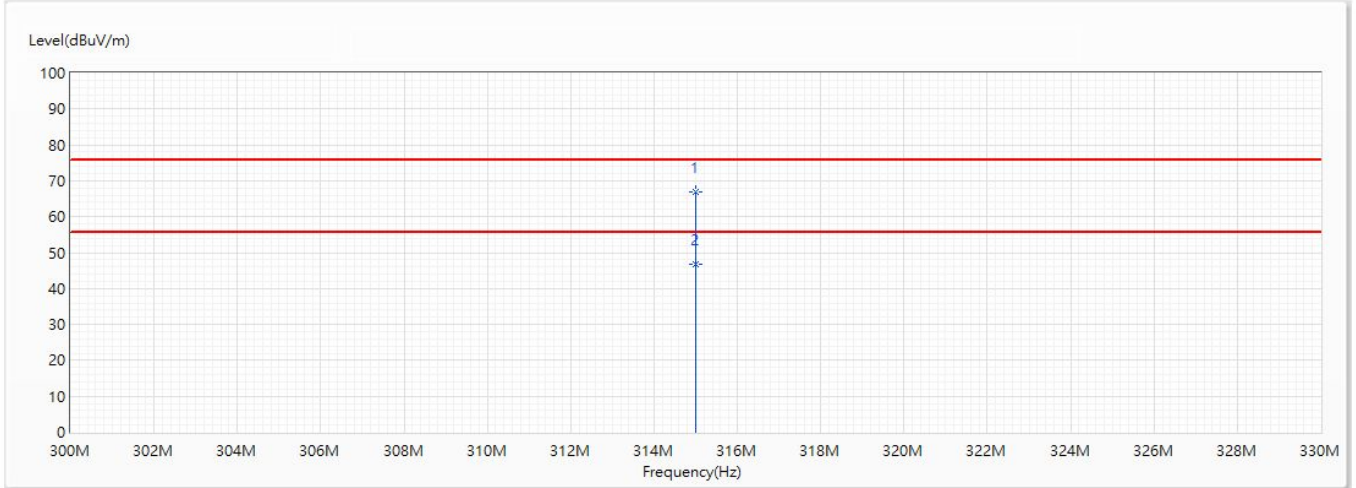


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	66.83	75.62	-8.79	43.58	23.25	PK
2	315	46.83	55.62	-8.79	23.58	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	ASK_315M_X axis	Humidity (%RH)	57.0

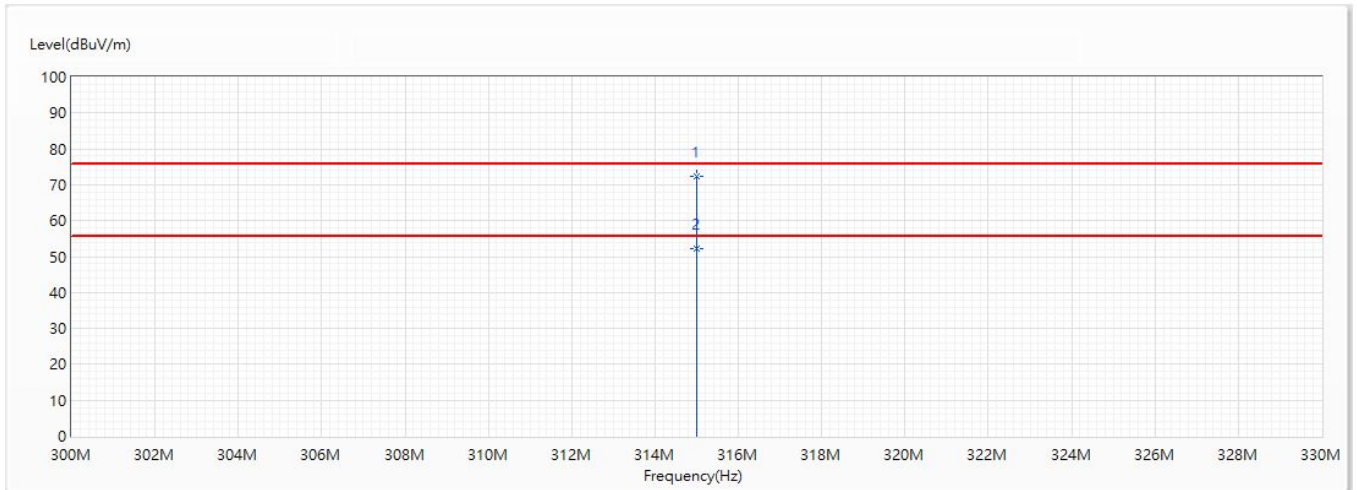


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	72.34	75.62	-3.28	49.09	23.25	PK
2	315	52.34	55.62	-3.28	29.09	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	ASK_315M_Y axis	Humidity (%RH)	57.0

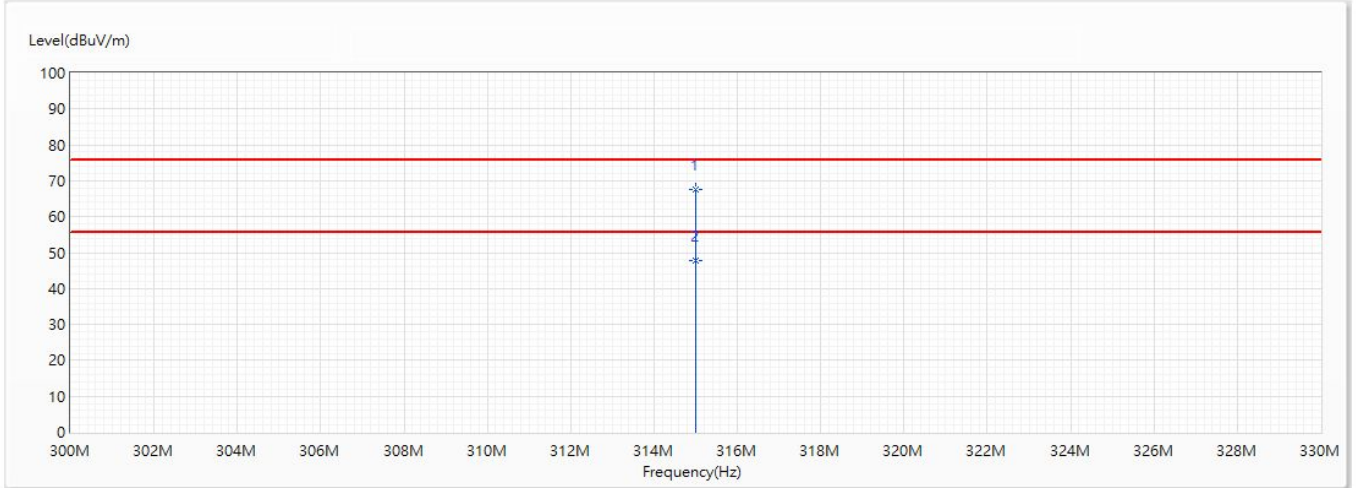


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	67.67	75.62	-7.95	44.42	23.25	PK
2	315	47.67	55.62	-7.95	24.42	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	ASK_315M_Y axis	Humidity (%RH)	57.0

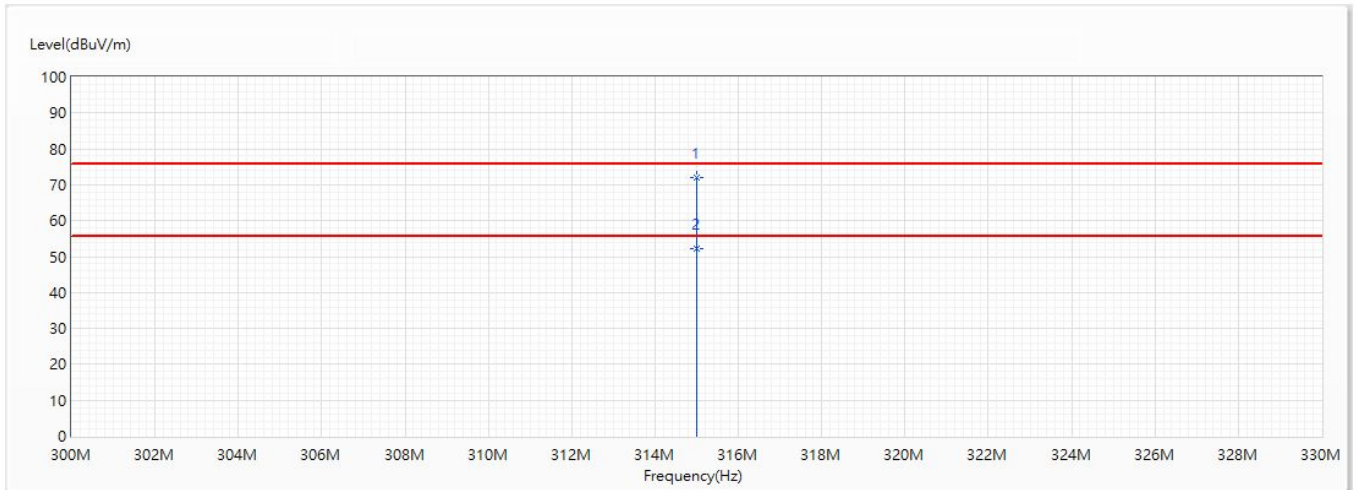


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	72.18	75.62	-3.44	48.93	23.25	PK
2	315	52.18	55.62	-3.44	28.93	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	ASK_315M_Z axis	Humidity (%RH)	57.0

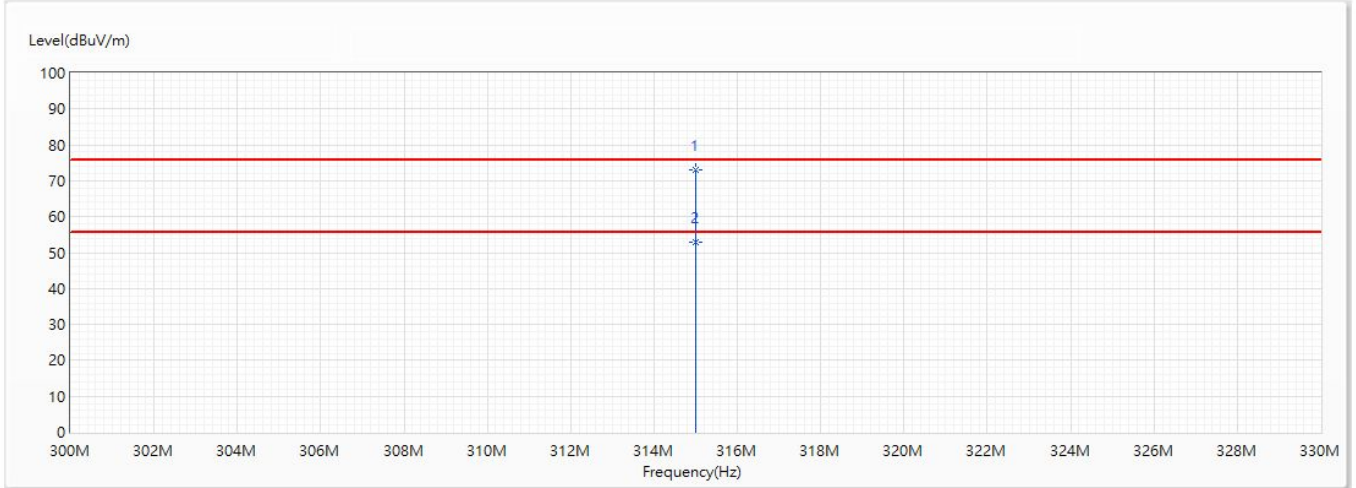


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	73.07	75.62	-2.55	49.82	23.25	PK
2	315	53.07	55.62	-2.55	29.82	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	ASK_315M_Z axis	Humidity (%RH)	57.0

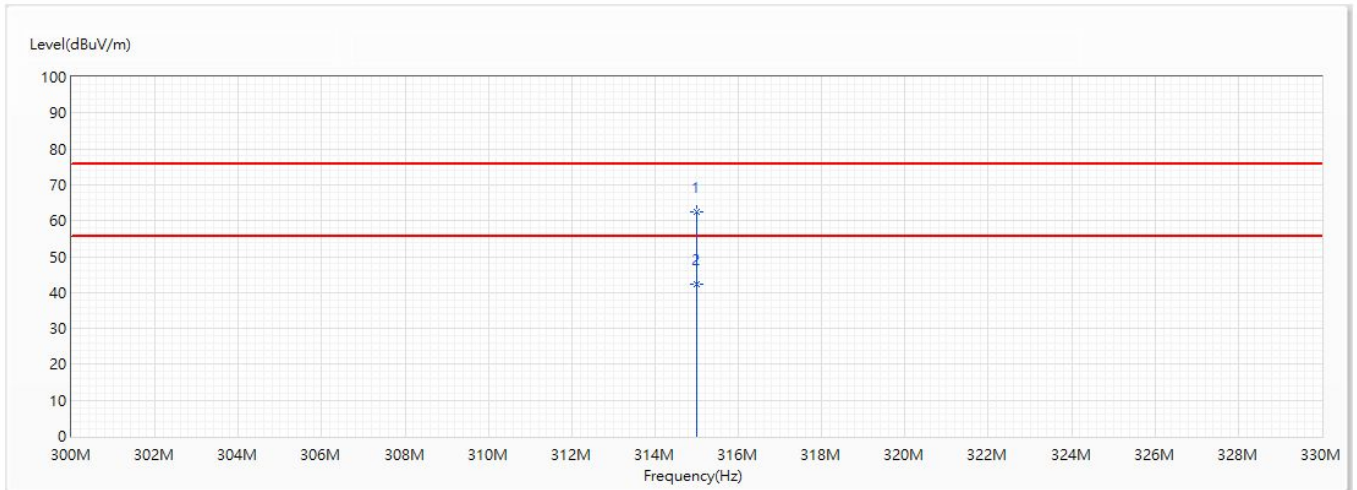

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	62.39	75.62	-13.23	39.14	23.25	PK
2	315	42.39	55.62	-13.23	19.14	23.25	AV

Note:


1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Product	TPMS		
Test Item	Fundamental Radiated Emission		
Test Mode	Mode 1: Transmit		
Date of Test	2020/06/02	Test Site	CB2-H
Temperature(°C)	24	Humidity (%RH)	57

Test Conditions	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	
Horizontal							
FSK	X-axis	315	68.96	87.66	-18.70	45.71	23.25
		315	48.96	67.66	-18.70	25.71	23.25
	Y-axis	315	69.26	87.66	-18.40	46.01	23.25
		315	49.26	67.66	-18.40	26.01	23.25
	Z-axis	315	73.56	87.66	-14.10	50.31	23.25
		315	53.56	67.66	-14.10	30.31	23.25
Vertical							
FSK	X-axis	315	72.15	87.66	-15.51	48.90	23.25
		315	52.15	67.66	-15.51	28.90	23.25
	Y-axis	315	72.74	87.66	-14.92	49.49	23.25
		315	52.74	67.66	-14.92	29.49	23.25
	Z-axis	315	63.39	87.66	-24.27	40.14	23.25
		315	43.39	67.66	-24.27	20.14	23.25

Note1: Emission Level = Reading Level +Correct factor

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	FSK_315MHz_X axis	Humidity (%RH)	57.0

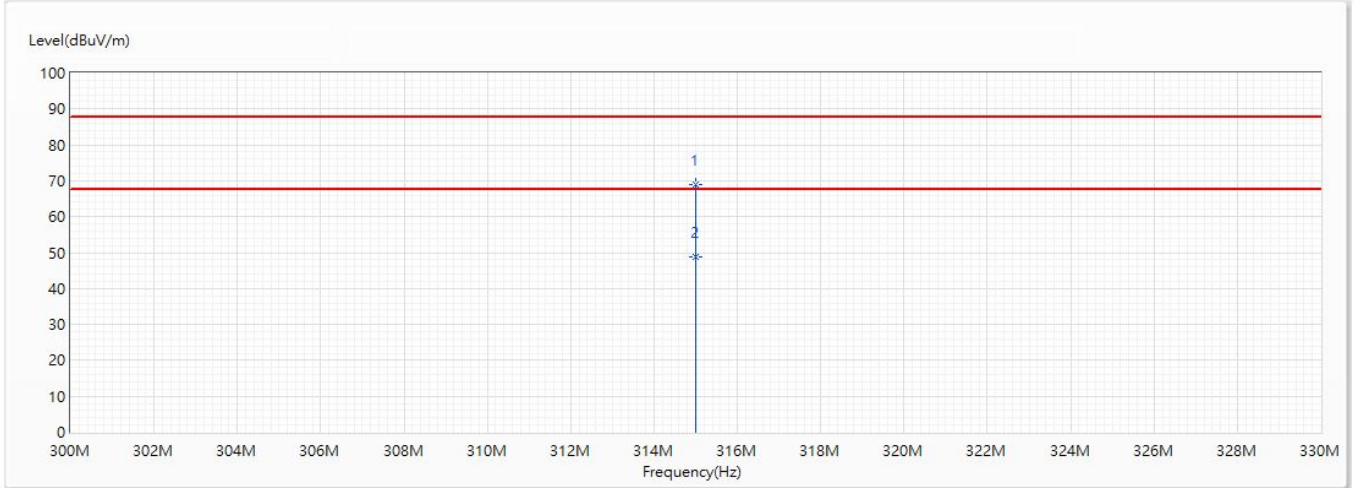


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	68.96	87.66	-18.70	45.71	23.25	PK
2	315	48.96	67.66	-18.70	25.71	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	FSK_315MHz_X axis	Humidity (%RH)	57.0

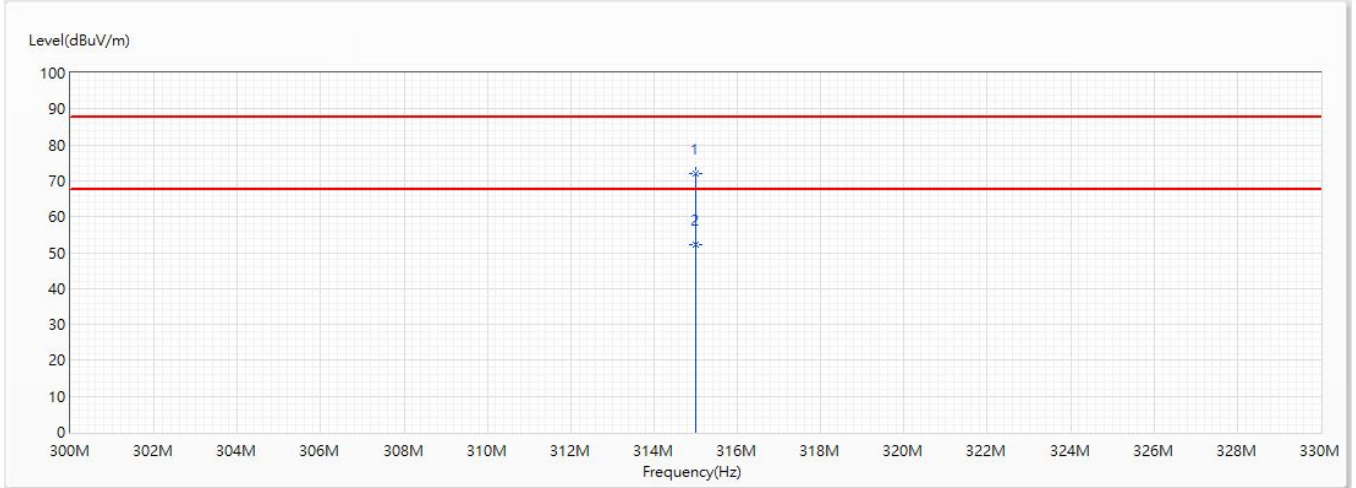


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	72.15	87.66	-15.51	48.90	23.25	PK
2	315	52.15	67.66	-15.51	28.90	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	FSK_315MHz_Y axis	Humidity (%RH)	57.0

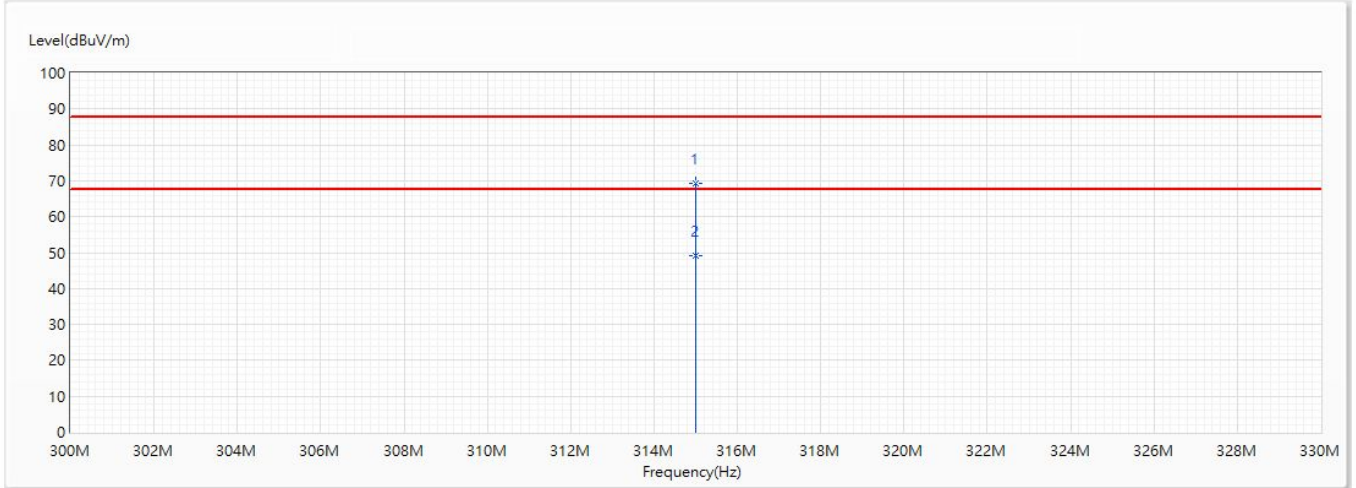


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	69.26	87.66	-18.40	46.01	23.25	PK
2	315	49.26	67.66	-18.40	26.01	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	FSK_315MHz_Y axis	Humidity (%RH)	57.0

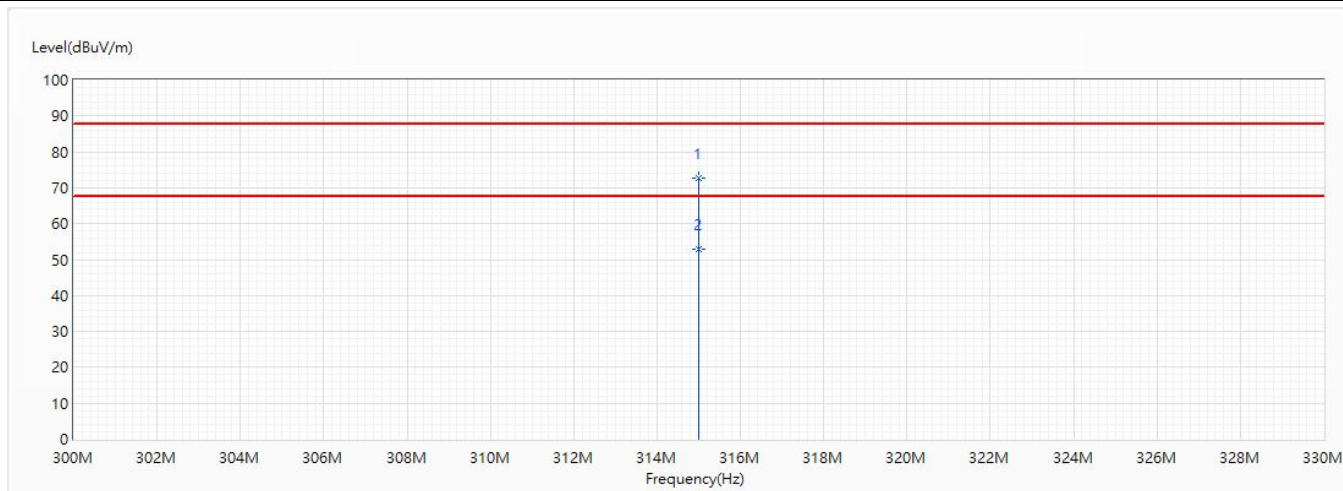


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	72.74	87.66	-14.92	49.49	23.25	PK
2	315	52.74	67.66	-14.92	29.49	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	FSK_315MHz_Z axis	Humidity (%RH)	57.0

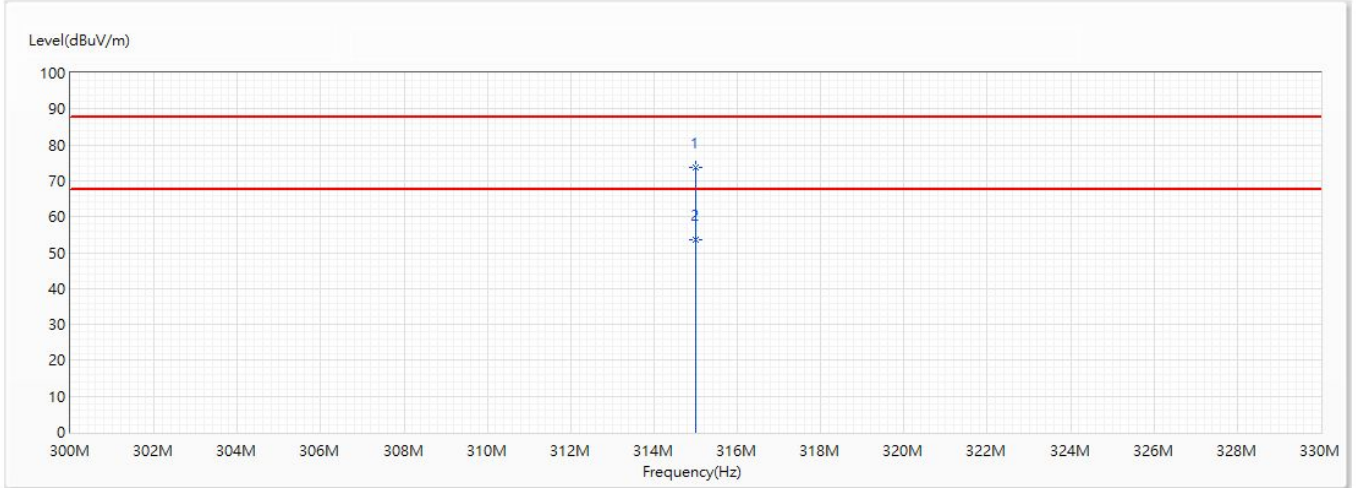


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	73.56	87.66	-14.10	50.31	23.25	PK
2	315	53.56	67.66	-14.10	30.31	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	FSK_315MHz_Z axis	Humidity (%RH)	57.0

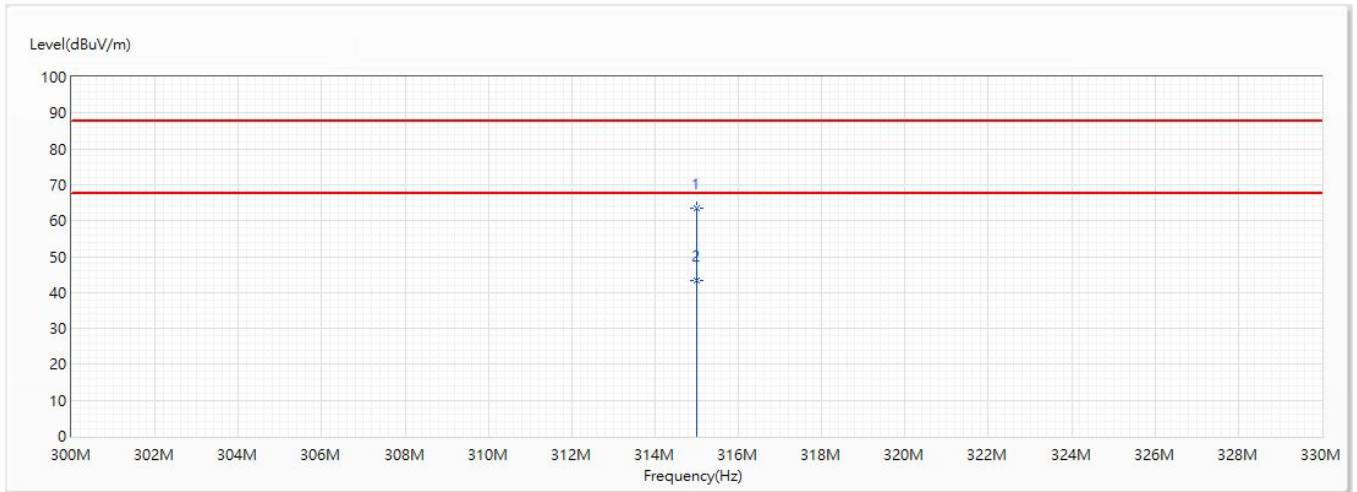


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	315	63.39	87.66	-24.27	40.14	23.25	PK
2	315	43.39	67.66	-24.27	20.14	23.25	AV

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

30MHz-1GHz Spurious

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	ASK_315.031MHz	Humidity (%RH)	57.0

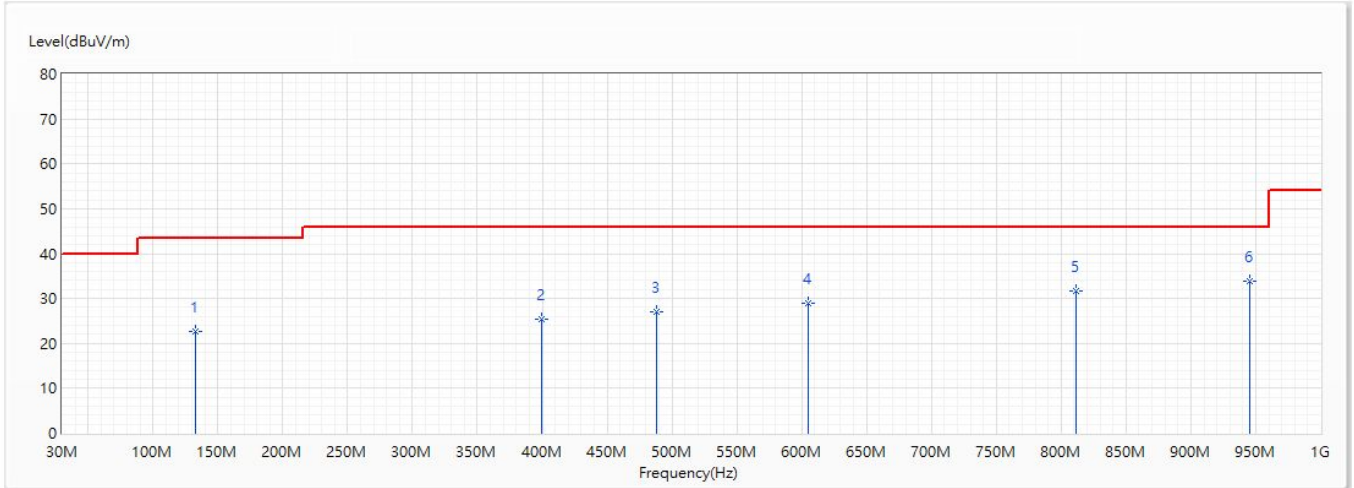


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	132.82	22.54	43.50	-20.96	24.63	-2.09	QP
2	399.813	25.32	46.00	-20.68	22.49	2.83	QP
3	488.083	26.98	46.00	-19.02	22.53	4.45	QP
4	605.21	28.85	46.00	-17.15	22.82	6.03	QP
5	811.578	31.78	46.00	-14.22	23.34	8.44	QP
* 6	945.195	33.91	46.00	-12.09	23.64	10.27	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	ASK_315.031MHz	Humidity (%RH)	57.0

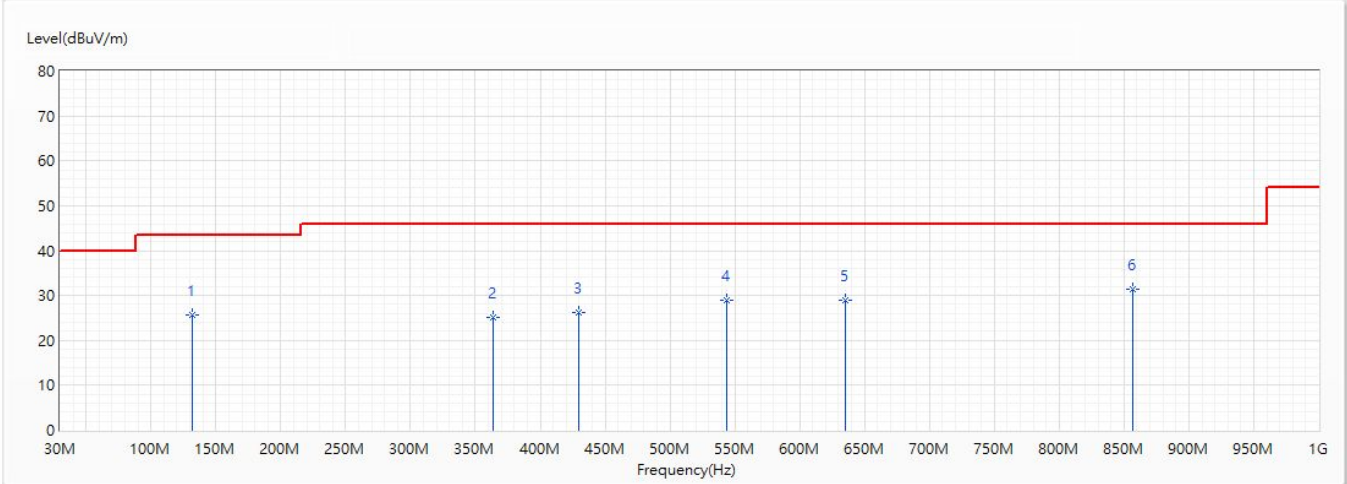


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	131.608	25.58	43.50	-17.92	27.64	-2.06	QP
2	364.165	25.21	46.00	-20.79	23.52	1.69	QP
3	429.398	26.34	46.00	-19.66	22.93	3.41	QP
4	543.373	28.92	46.00	-17.08	23.68	5.24	QP
5	635.038	28.92	46.00	-17.08	22.57	6.35	QP
* 6	857.168	31.47	46.00	-14.53	22.46	9.01	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	FSK_315MHz	Humidity (%RH)	57.0

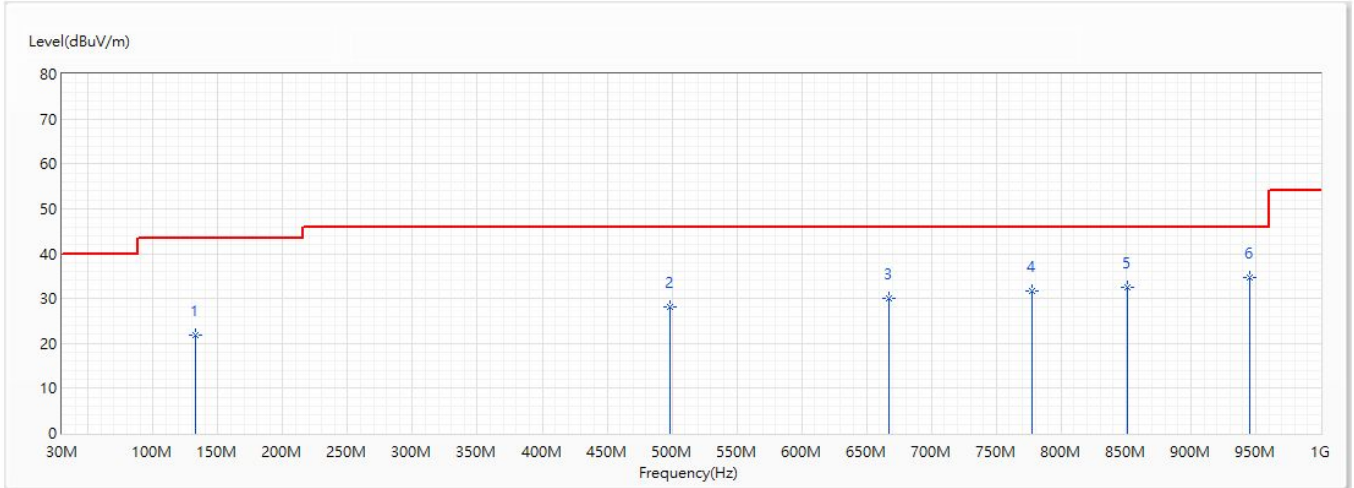


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	132.82	21.90	43.50	-21.60	23.99	-2.09	QP
2	498.51	28.00	46.00	-18.00	23.35	4.65	QP
3	667.29	29.97	46.00	-16.03	23.29	6.68	QP
4	777.87	31.71	46.00	-14.29	23.67	8.04	QP
5	851.348	32.42	46.00	-13.58	23.48	8.94	QP
* 6	945.195	34.77	46.00	-11.23	24.50	10.27	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/2
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	FSK_315MHz	Humidity (%RH)	57.0

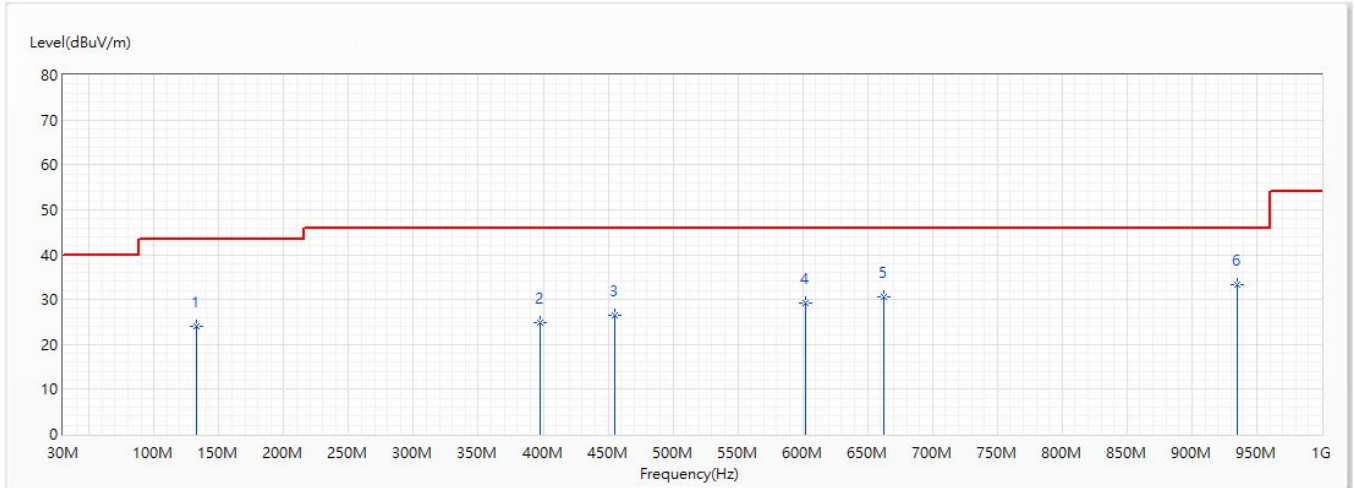


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	133.063	23.99	43.50	-19.51	26.09	-2.10	QP
2	397.873	24.95	46.00	-21.05	22.17	2.78	QP
3	455.345	26.42	46.00	-19.58	22.55	3.87	QP
4	601.815	29.33	46.00	-16.67	23.34	5.99	QP
5	662.925	30.71	46.00	-15.29	24.05	6.66	QP
* 6	935.253	33.20	46.00	-12.80	23.09	10.11	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Above 1GHz Spurious

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	ASK_315.031MHz	Humidity (%RH)	57.0

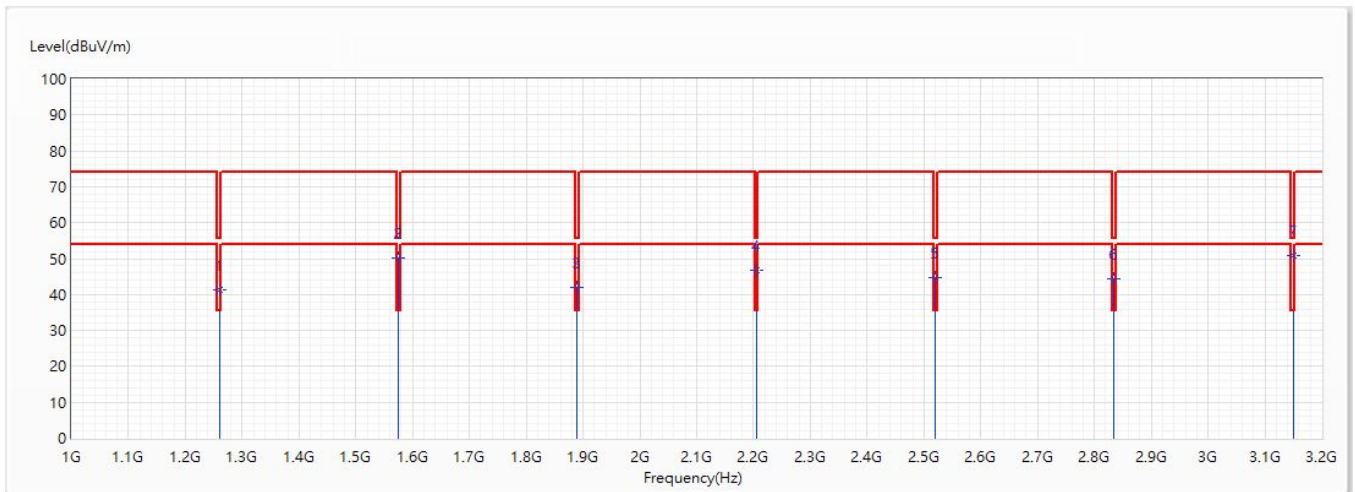


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	1260	41.41	55.62	-14.21	67.11	-25.70	PK
2	1575	50.22	55.62	-5.40	74.33	-24.11	PK
3	1890	41.83	55.62	-13.79	64.60	-22.77	PK
4	2205	46.77	55.62	-8.85	68.05	-21.28	PK
5	2520	44.59	55.62	-11.03	64.32	-19.73	PK
6	2835	44.25	55.62	-11.37	62.56	-18.31	PK
* 7	3150	50.89	55.62	-4.73	68.29	-17.40	PK

Note:

- 1.All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
- 3.Emission Level = Reading Level + Correct Factor.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	ASK_315.031MHz	Humidity (%RH)	57.0

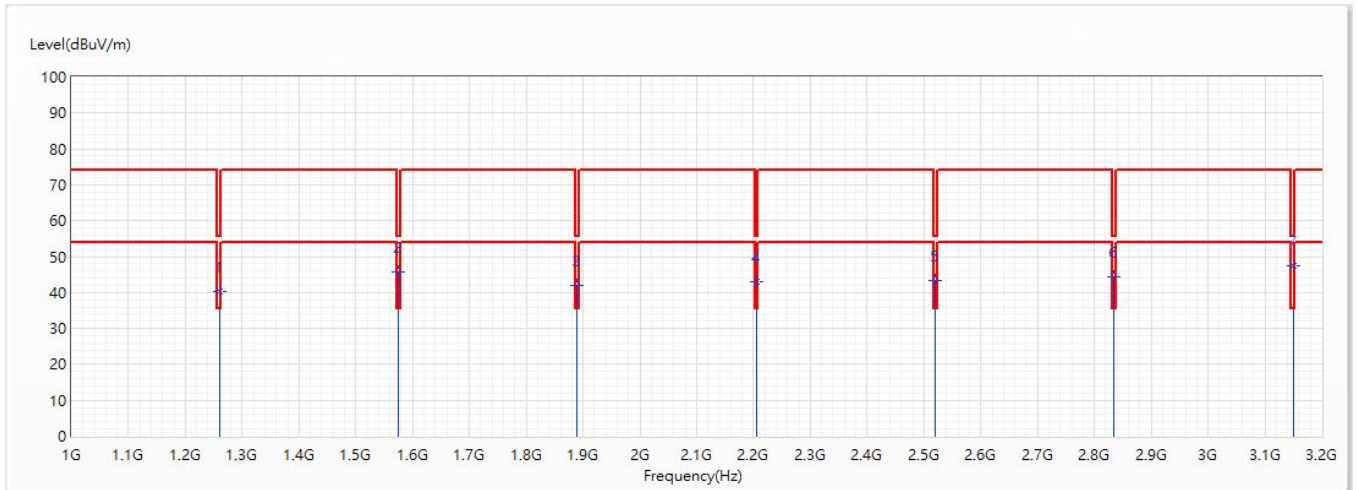


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	1260	40.15	55.62	-15.47	65.85	-25.70	PK
2	1575	45.81	55.62	-9.81	69.92	-24.11	PK
3	1890	42.14	55.62	-13.48	64.91	-22.77	PK
4	2205	42.92	55.62	-12.70	64.20	-21.28	PK
5	2520	43.49	55.62	-12.13	63.22	-19.73	PK
6	2835	44.46	55.62	-11.16	62.77	-18.31	PK
* 7	3150	47.37	55.62	-8.25	64.77	-17.40	PK

Note:

- 1.All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
- 3.Emission Level = Reading Level + Correct Factor.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	FSK_315MHz	Humidity (%RH)	57.0

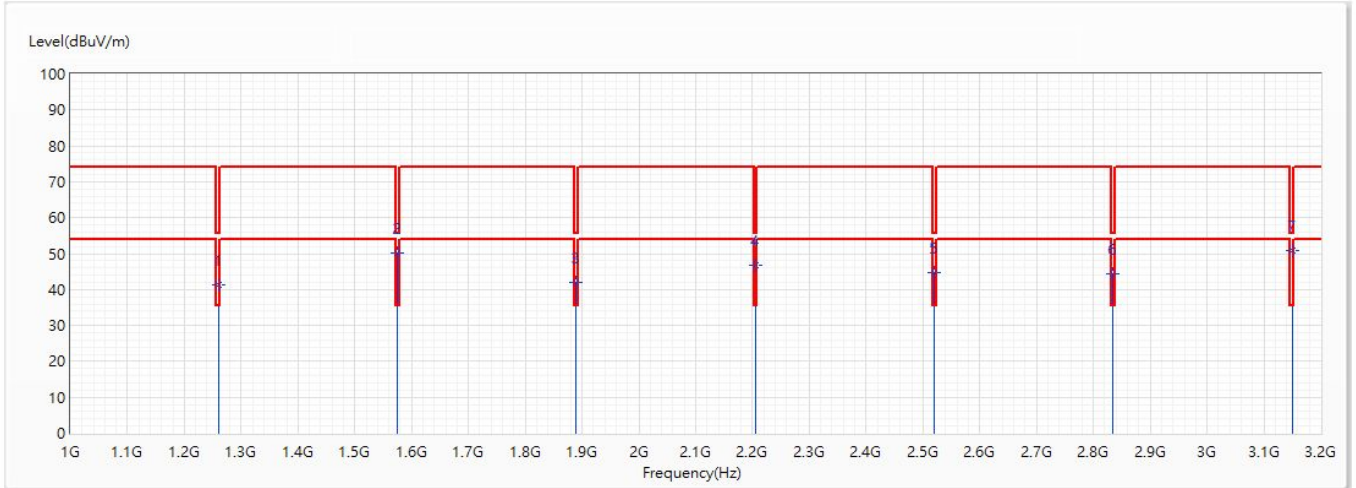


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	1260	41.41	55.62	-14.21	67.11	-25.70	PK
2	1575	50.22	55.62	-5.40	74.33	-24.11	PK
3	1890	41.83	55.62	-13.79	64.60	-22.77	PK
4	2205	46.77	55.62	-8.85	68.05	-21.28	PK
5	2520	44.59	55.62	-11.03	64.32	-19.73	PK
6	2835	44.25	55.62	-11.37	62.56	-18.31	PK
* 7	3150	50.89	55.62	-4.73	68.29	-17.40	PK

Note:

- 1.All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
- 3.Emission Level = Reading Level + Correct Factor.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	TX-N001	Site	CB2-H
Test Voltage	DC 3V	Test Date	2020/6/4
Test Mode	Mode 1: Transmit	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	FSK_315MHz	Humidity (%RH)	57.0

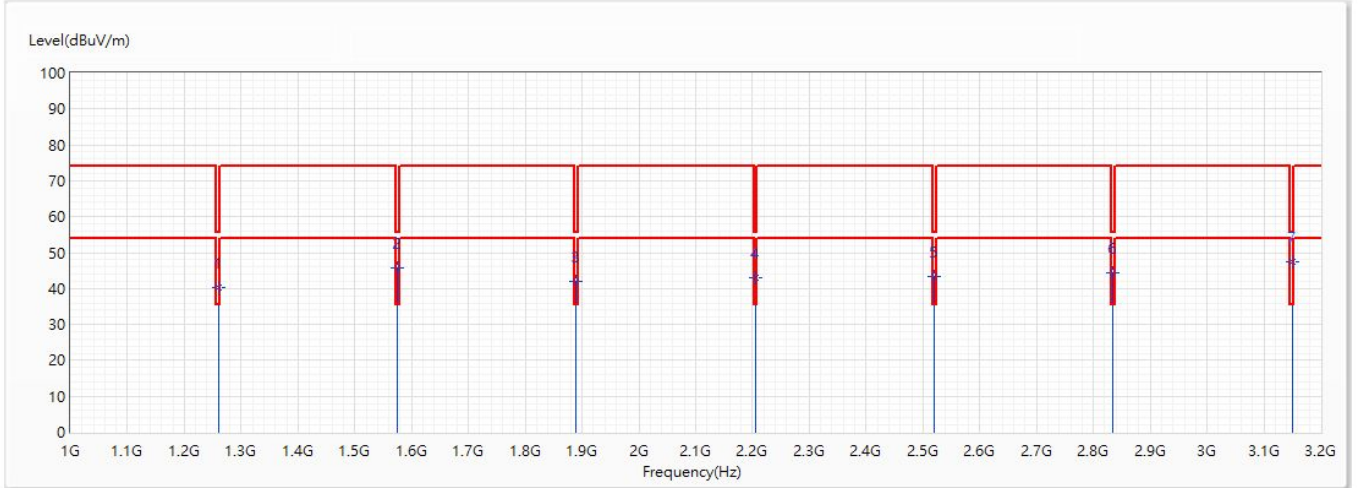


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	1260	40.15	55.62	-15.47	65.85	-25.70	PK
2	1575	45.81	55.62	-9.81	69.92	-24.11	PK
3	1890	42.14	55.62	-13.48	64.91	-22.77	PK
4	2205	42.92	55.62	-12.70	64.20	-21.28	PK
5	2520	43.49	55.62	-12.13	63.22	-19.73	PK
6	2835	44.46	55.62	-11.16	62.77	-18.31	PK
* 7	3150	47.37	55.62	-8.25	64.77	-17.40	PK

Note:

- 1.All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
- 3.Emission Level = Reading Level + Correct Factor.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

4. 20dB Bandwidth

4.1. Test Setup

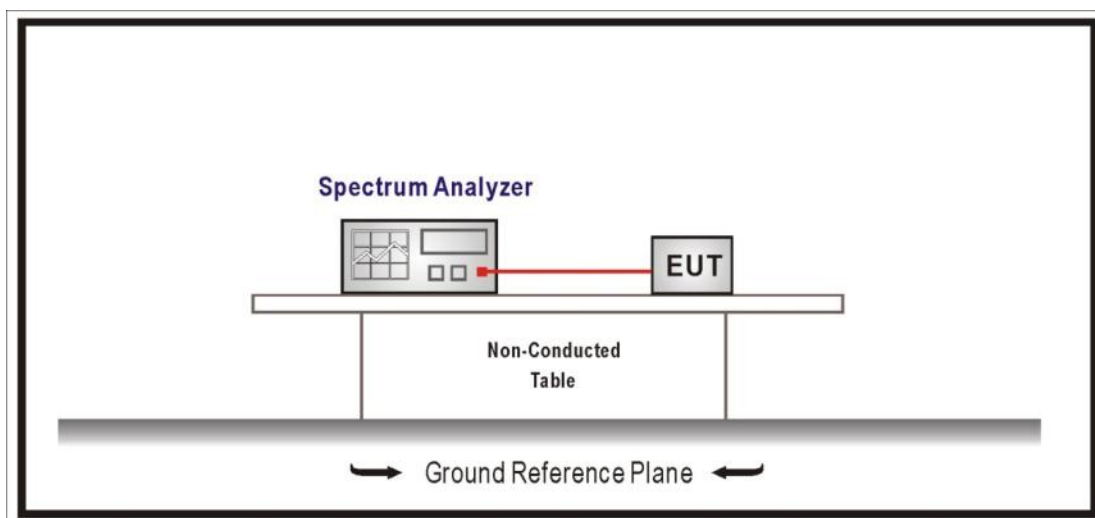

4.2. Limits

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.


4.3. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231(b): 2019

4.4. Test Result

Product	TPMS		
Test Item	20dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2020/06/02	Test Site	SR12-H
Temperature(°C)	24	Humidity (%RH)	58


Frequency (MHz)	Measure Value (MHz)	Limit (MHz)
315.000	0.034	0.78759

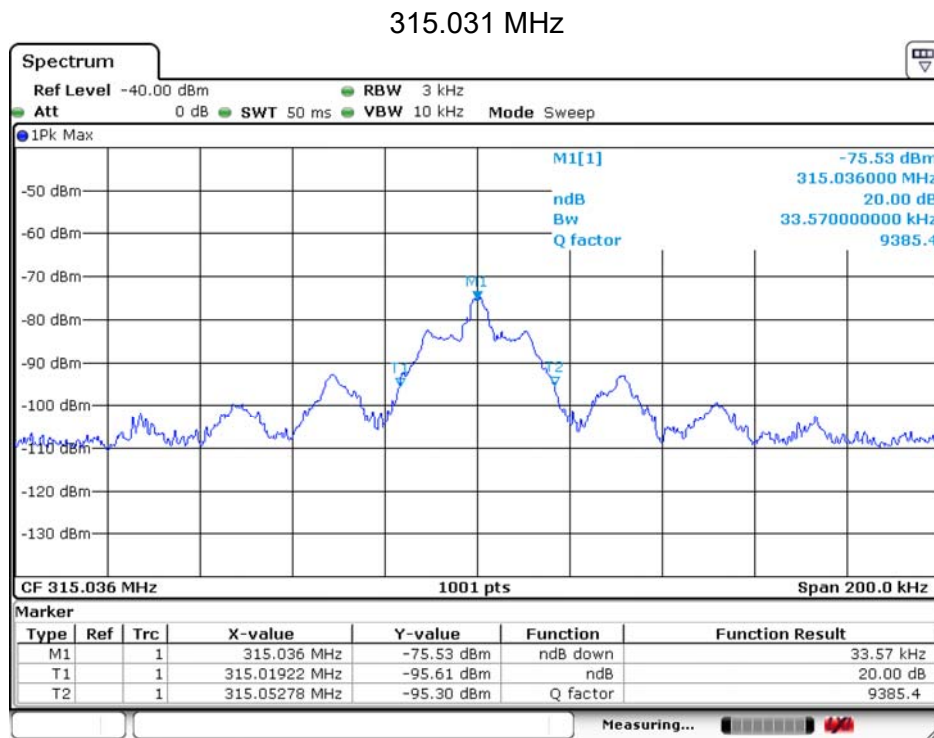

Date: 2.JUN.2020 10:57:29

Product	TPMS		
Test Item	20dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2020/06/02	Test Site	SR12-H
Temperature(°C)	24	Humidity (%RH)	58


FSK		
Frequency (MHz)	Measure Value (MHz)	Limit (MHz)
315.000	0.167	0.7875

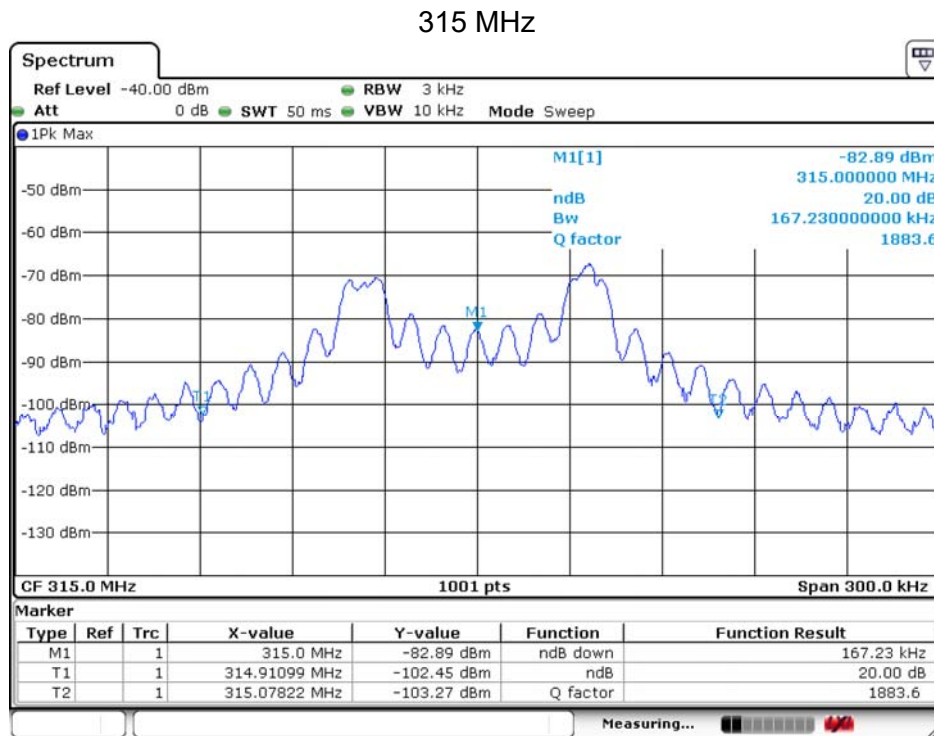

Date: 2.JUN.2020 10:51:37

5. Duty Cycle

5.1. Test Setup

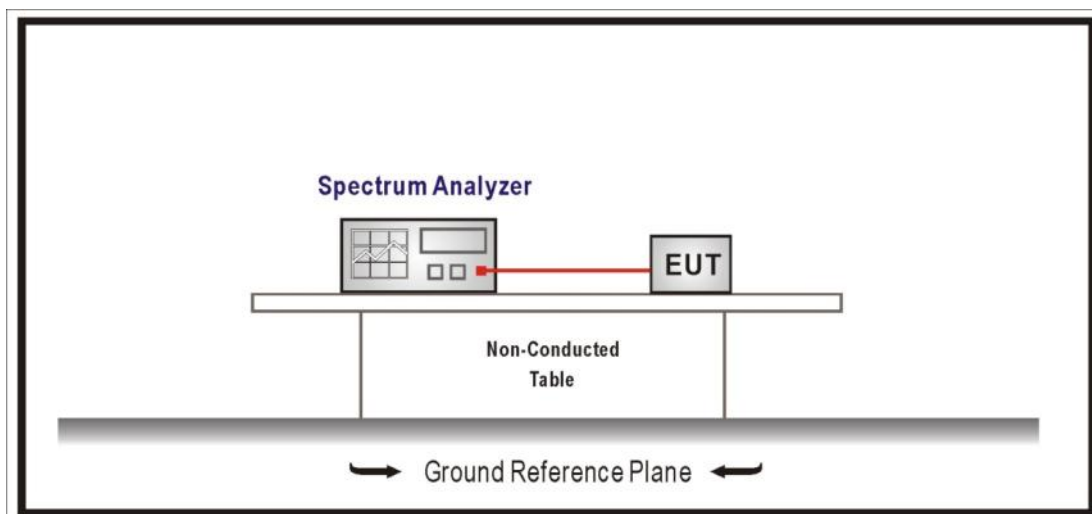

5.2. Limits

N/A


5.3. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231(b): 2019

5.4. Test Result

Product	TPMS		
Test Item	Duty Cycle		
Test Mode	Mode 1: Transmit		
Date of Test	2020/06/02	Test Site	SR12-H
Temperature(°C)	24	Humidity (%RH)	58


Modulation	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	Duty Factor(dB)
ASK	5.400	100.000	5.40%	-25.35

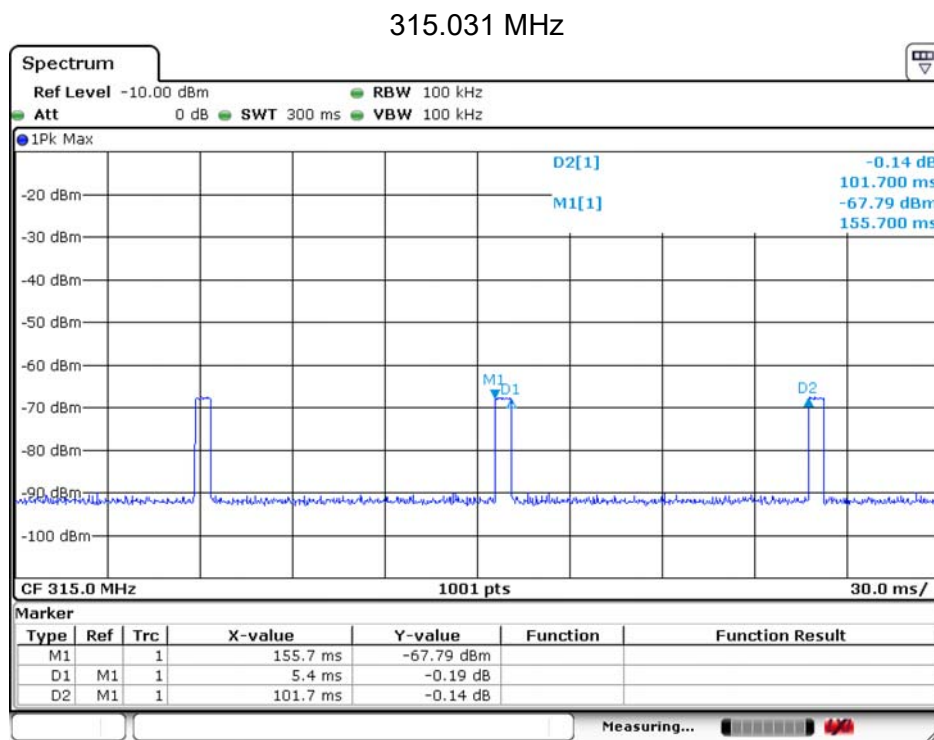

Date: 2.JUN.2020 10:19:58

Product	TPMS		
Test Item	Duty Cycle		
Test Mode	Mode 1: Transmit		
Date of Test	2020/06/15	Test Site	SR12-H
Temperature(°C)	26	Humidity (%RH)	55


Modulation	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	Duty Factor(dB)
FSK	5.100	100.000	5.10%	-25.85

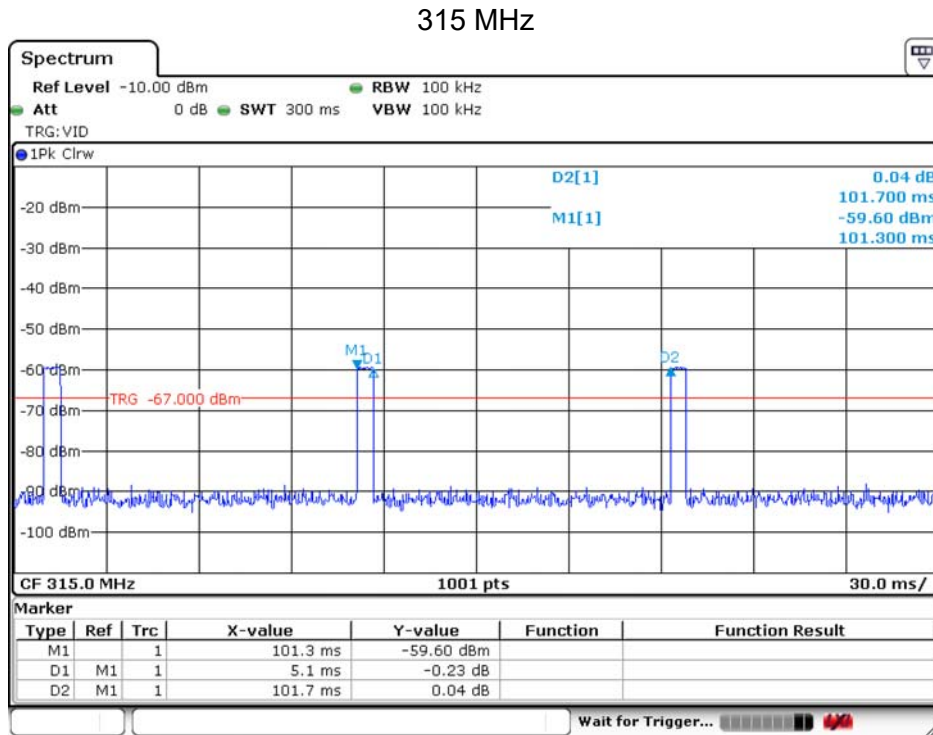

Date: 15 JUN 2020 11:21:38

6. Trnasmmitter Time

6.1. Test Setup

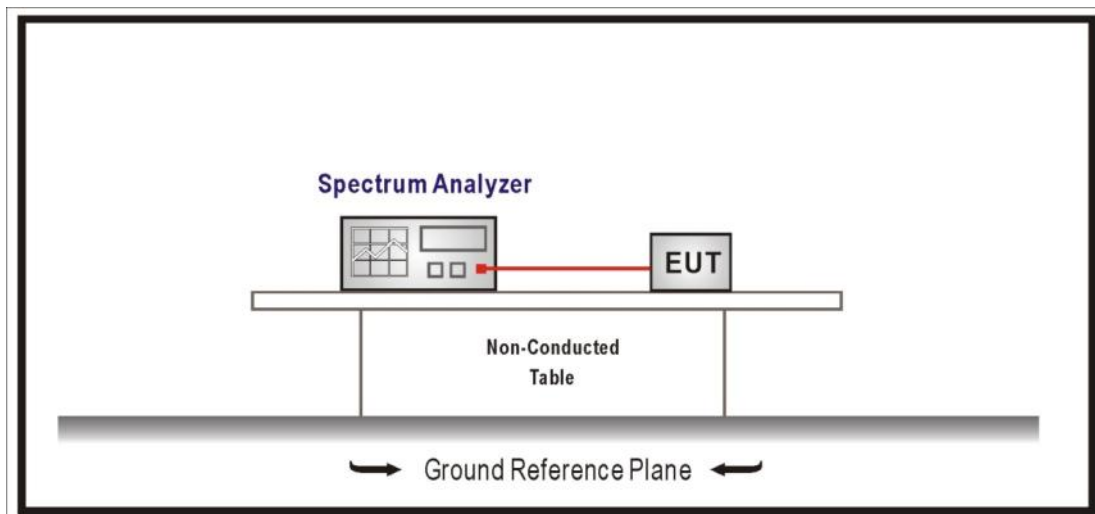

6.2. Limits

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.


6.3. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231(b): 2019

6.4. Test Result


Product	TPMS		
Test Item	Trnsmmitter Time		
Test Mode	Mode 1: Transmit		
Date of Test	2020/06/15	Test Site	SR12-H
Temperature(°C)	26	Humidity (%RH)	55

Frequency (MHz)	Measure Value (s)	Limit (s)
315.000	0.208	≤ 5

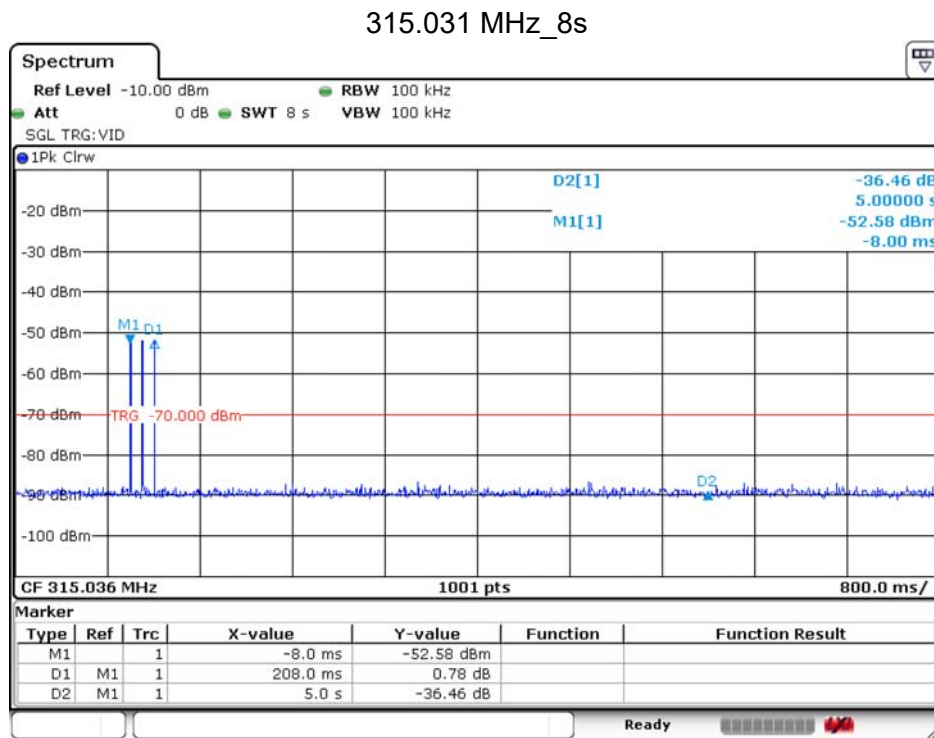

Date: 15 JUN 2020 12:32:41


315.031 MHz_200s

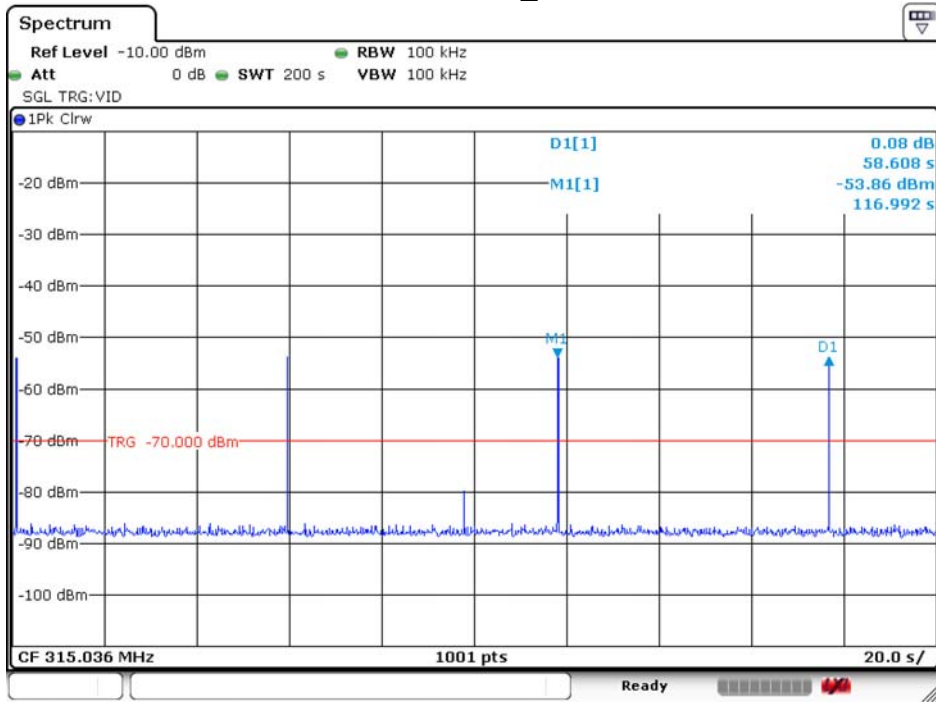

Date: 15 JUN 2020 12:31:14


Product	TPMS		
Test Item	Trnsmmitter Time		
Test Mode	Mode 1: Transmit		
Date of Test	2020/06/15	Test Site	SR12-H
Temperature(°C)	26	Humidity (%RH)	55

FSK		
Frequency (MHz)	Measure Value (s)	Limit (s)
315.000	0.208	≤ 5

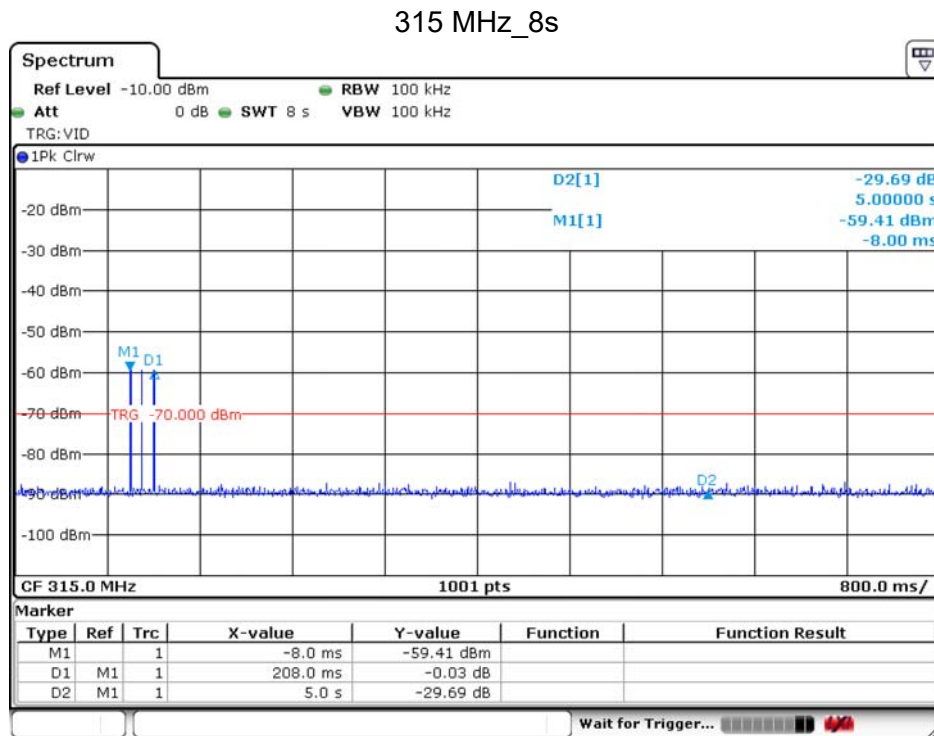

Date: 15 JUN 2020 11:29:47

315 MHz_200ms

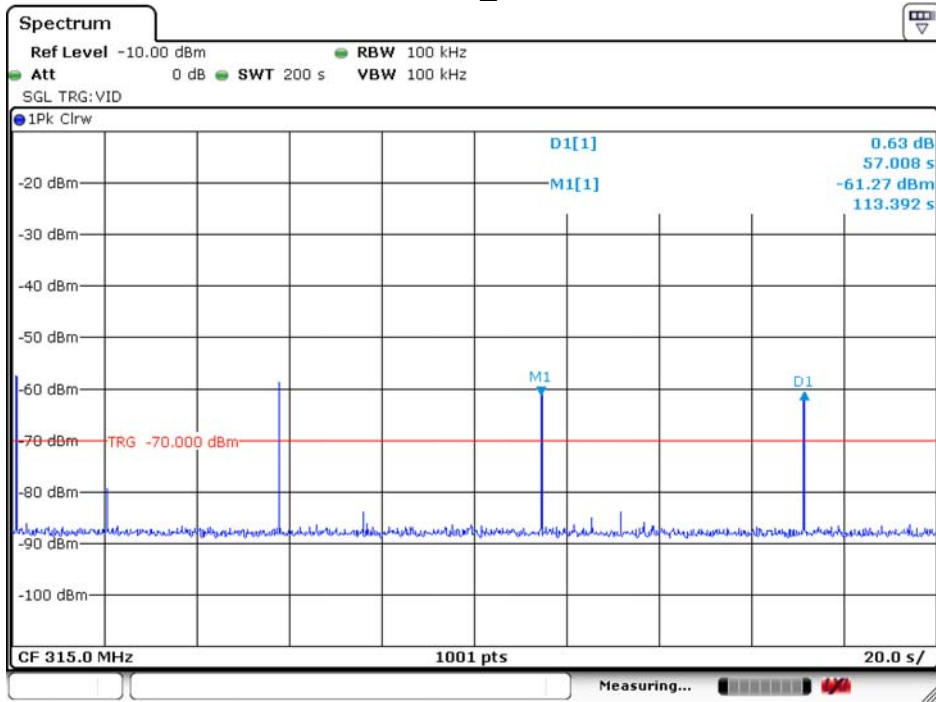

Date: 15 JUN 2020 11:50:18