
# 650+RFA BASIC REMOTE MODULATION INSTRUCTIONS

THIS SYSTEMS RECIVER CAN OPERATE ON EITHER AC OR DC POWER.


1) PLUG IN 120V, DC 6V ADAPTER OR PLACE 4AA BATTERIES IN RECEIVER.



2) PLACE A 12V BATTERY INTO TRANSMITTER.

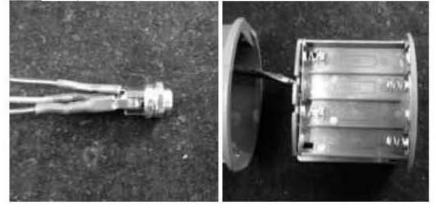


3) TO WIRE THE SYSTEM, PLACE THE TAILS FROM THE BROWN SWITCH WIRES INTO THE HOLDERS MARKED BROWN. PLACE THE RED AND BLACK HI/LO DRIVER WIRES INTO HOLDERS MARKED RED AND BLACK.

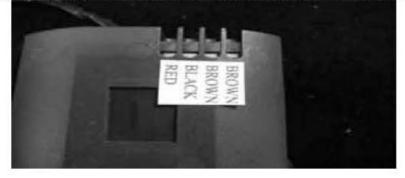


PG. 1

### 4) TO PROGRAM REMOTE AND RECEIVER PRESS SMALL BLACK BUTTON ON RECEIVER UNIT YOU HEAR 2 BEEPS. UPON HEARING TWO BEEPS PRESS MIDDLE BUTTON ON REMOTE TRANSMITTER.

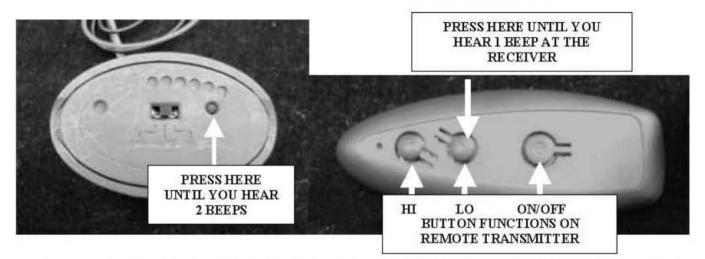

5) TO OPERATE THE SYSTEM WITHOUT REMOTE TRANSMITTER PUT RECEIVER SWITCH TO THE FAR RIGHT (ON) POSITION. THIS WILL TURN THE SYSTEM ON. YOU WILL NOT HAVE THE HI/LO FUNCTION ON THE GAS VALVE WITH

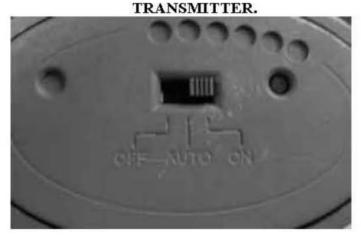

6) TO OPERATE THE SYSTEM WITH THE REMOTE TRANSMITTER PUT RECEIVER SWITCH TO THE AUTO CENTER POSITION. PRESS THE ON/OFF BUTTON ON REMOTE TRANSMITTER. THIS WILL START IGNITION CYCLE. ONCE THE PILOT HAS IGNITED THE BURNER WILL COME ON. THE ADJUST BURNER FLAME PRESS EITHER THE HI OR LO BUTTON.



PG. 2

## **Federal Communication Commission Interference Statement**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### CAUTION:

#### Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

*Note* This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.