

RF Test Report

Applicant : Grand Mate Co., Ltd
 Product Name : Automatic Burner control
 Trade Name : GRAND MATE
 Model Number : GM9K3A-C-120VAC, GM9K3A-A-120VAC, GM9K3B-A-120VAC, GM9K3C-A-120VAC, GM9K3D-A-120VAC, GM9K3B-C-120VAC, GM9K3C-C-120VAC, GM9K3D-C-120VAC, GM9K3A-E-120VAC, GM9K3B-E-120VAC, GM9K3C-E-120VAC, GM9K3D-E-120VAC, GM9K3A-G-120VAC, GM9K3B-G-120VAC, GM9K3C-G-120VAC, GM9K3D-G-120VAC, GM9K3A-I-120VAC, GM9K3B-I-120VAC, GM9K3C-I-120VAC, GM9K3D-I-120VAC, GM9K3A-K-120VAC, GM9K3B-K-120VAC, GM9K3C-K-120VAC, GM9K3D-K-120VAC, GM9K3E, GM9K3F
 Applicable Standard : FCC 47 CFR PART 15 SUBPART C
 ANSI C63.10:2013
 Received Date : May 17, 2022
 Test Period : Aug. 22 ~ Oct. 13, 2022
 Issued Date : Dec. 23, 2022

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
 No. 140-1, Changan Street, Bade District,
 Taoyuan City 334025, Taiwan (R.O.C.)
 Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
 Frequency Range: 9 kHz to 325 GHz (Bade test site)
 Frequency Range: 9 kHz to 40 GHz (Wugu test site)
 Test Firm MRA designation number: TW0010

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Version	Issued Date	Revisions	Revised By
00	Nov. 08, 2022	Initial Issue	Abby Huang
01	Dec. 23, 2022	Update Model Number (P.1/3/7) Update chapter 2 (P.7) Update chapter 3.1 (P.8) Update chapter 5.2 (P.29)	Abby Huang

Verification of Compliance

Applicant : Grand Mate Co., Ltd

Product Name : Automatic Burner control

Trade Name : GRAND MATE

Model Number : GM9K3A-C-120VAC, GM9K3A-A-120VAC, GM9K3B-A-120VAC, GM9K3C-A-120VAC, GM9K3D-A-120VAC, GM9K3B-C-120VAC, GM9K3C-C-120VAC, GM9K3D-C-120VAC, GM9K3A-E-120VAC, GM9K3B-E-120VAC, GM9K3C-E-120VAC, GM9K3D-E-120VAC, GM9K3A-G-120VAC, GM9K3B-G-120VAC, GM9K3C-G-120VAC, GM9K3D-G-120VAC, GM9K3A-I-120VAC, GM9K3B-I-120VAC, GM9K3C-I-120VAC, GM9K3D-I-120VAC, GM9K3A-K-120VAC, GM9K3B-K-120VAC, GM9K3C-K-120VAC, GM9K3D-K-120VAC, GM9K3E, GM9K3F

FCC ID : UMPGM9K3

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Measurement Uncertainty	6
2	EUT Description.....	7
3	Test Methodology.....	8
3.1.	Mode of Operation.....	8
3.2.	EUT Test Step.....	8
3.3.	Configuration of Test System Details.....	9
3.4.	Test Instruments	11
3.5.	Test Site Environment.....	14
4	Measurement Procedure.....	15
4.1.	AC Power Line Conducted Emission Measurement.....	15
4.2.	Radiated Emission Measurement.....	17
4.3.	Maximum Conducted Output Power Measurement.....	21
4.4.	6 dB RF Bandwidth Measurement.....	22
4.5.	Maximum Power Density Measurement.....	23
4.6.	Out of Band Conducted Emissions Measurement.....	24
4.7.	Antenna Measurement	24
5	Test Results	25
5.1.	Conducted Emission.....	25
5.2.	Conducted Test Results.....	27
5.3.	Radiated Emission Measurement.....	42
 Appendix A. Test Setup Photographs		

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

1.2. Testing Location

Site Name: Eurofins E&E Wireless Taiwan Co., Ltd.
 Site Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)
 Site Address: No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.2 dB
	18000 MHz ~ 26500 MHz	4.6 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power	1.1 dB	
RF Bandwidth	4.7 %	
Power Spectral Density	1.1 dB	

2 EUT Description

Applicant	Grand Mate Co., Ltd No.30, Lugong S. 2nd Rd., Lukang Township, Changhua County 50544, Taiwan	
Product Name	Automatic Burner control	
Trade Name	GRAND MATE	
Model No.	GM9K3A-C-120VAC, GM9K3A-A-120VAC, GM9K3B-A-120VAC, GM9K3C-A-120VAC, GM9K3D-A-120VAC, GM9K3B-C-120VAC, GM9K3C-C-120VAC, GM9K3D-C-120VAC, GM9K3A-E-120VAC, GM9K3B-E-120VAC, GM9K3C-E-120VAC, GM9K3D-E-120VAC, GM9K3A-G-120VAC, GM9K3B-G-120VAC, GM9K3C-G-120VAC, GM9K3D-G-120VAC, GM9K3A-I-120VAC, GM9K3B-I-120VAC, GM9K3C-I-120VAC, GM9K3D-I-120VAC, GM9K3A-K-120VAC, GM9K3B-K-120VAC, GM9K3C-K-120VAC, GM9K3D-K-120VAC, GM9K3E, GM9K3F	
Models Different Description	This control module applied in gas burner control systems. The fire control function built in in Control Board (CB). The CB can work independent by adapter, but normally used combination of CB and PB (the powersupply by PB). The Power Board (PB) can output voltage of AC or DC to control loads. The CB's code is 9K3X (X=A to G); PB's code is -Y (Y= A to J); Their combination code is GM9K3X-Y-ZVAC (Z= 120. They represent criterions of markets, 120=CSA)	
FCC ID	UMPGM9K3	
Frequency Range	2402 ~ 2480 MHz	
Modulation Type	GFSK	
Operate Temp. Range	-20 ~ +80 °C	
EUT Power Rating	AC 120 V, 60 Hz	
Antenna information	Type	Max. Gain (dBi)
	Chip Antenna	2
RF Output Power	LE, GFSK:	0.0004256 W
	2LE, GFSK:	0.0004276 W

3 Test Methodology

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: LE, GFSK Continuous TX Mode
Mode 3: 2LE, GFSK Continuous TX Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Y axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %.


Note 2: AC Power Conducted Emission Verification GM9K3A-K-120VAC, GM9K3E+9KPB-D-120VAC(Power Board), GM9K3E+9KPB-F-120VAC(Power Board), GM9K3E+9KPB-J-120VAC(Power Board), GM9K3E+9KPB-L-120VAC (Power Board), the result is that GM9K3E+9KPB-J-120VAC (Power Board) is the worst.

3.2. EUT Test Step


1	Setup the EUT shown on “Configuration of Test System Details”.
2	Turn on the power of all equipment.
3	Turn on TX function.
4	EUT run test program.

3.3. Configuration of Test System Details

Conduction Emission

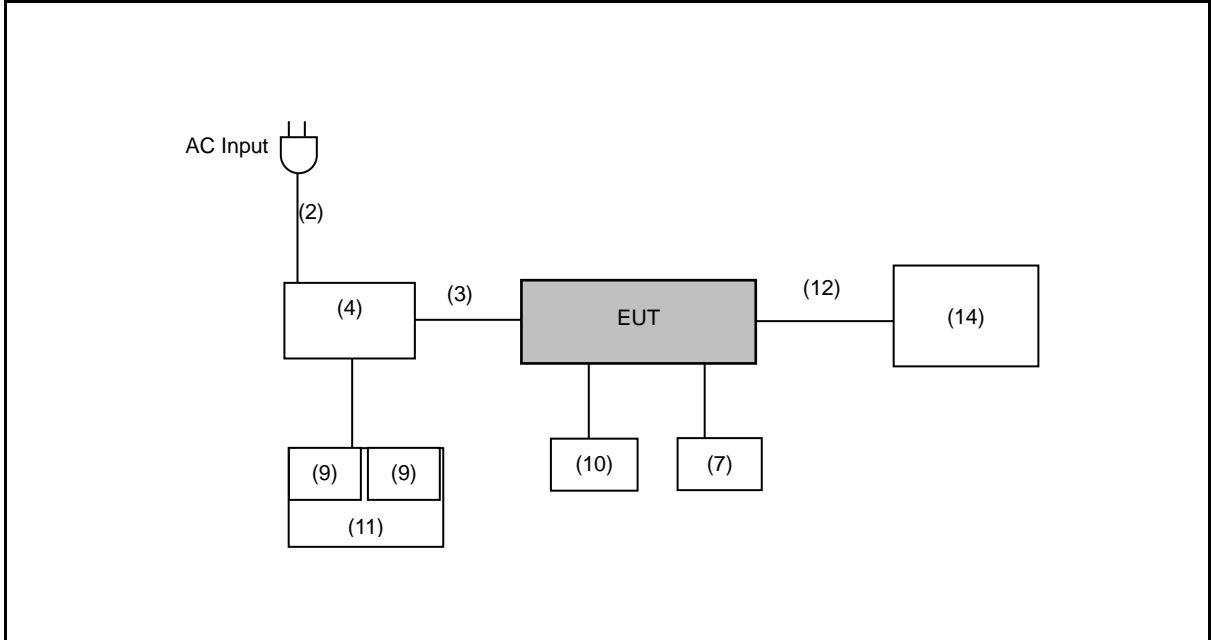

Radiated Emission

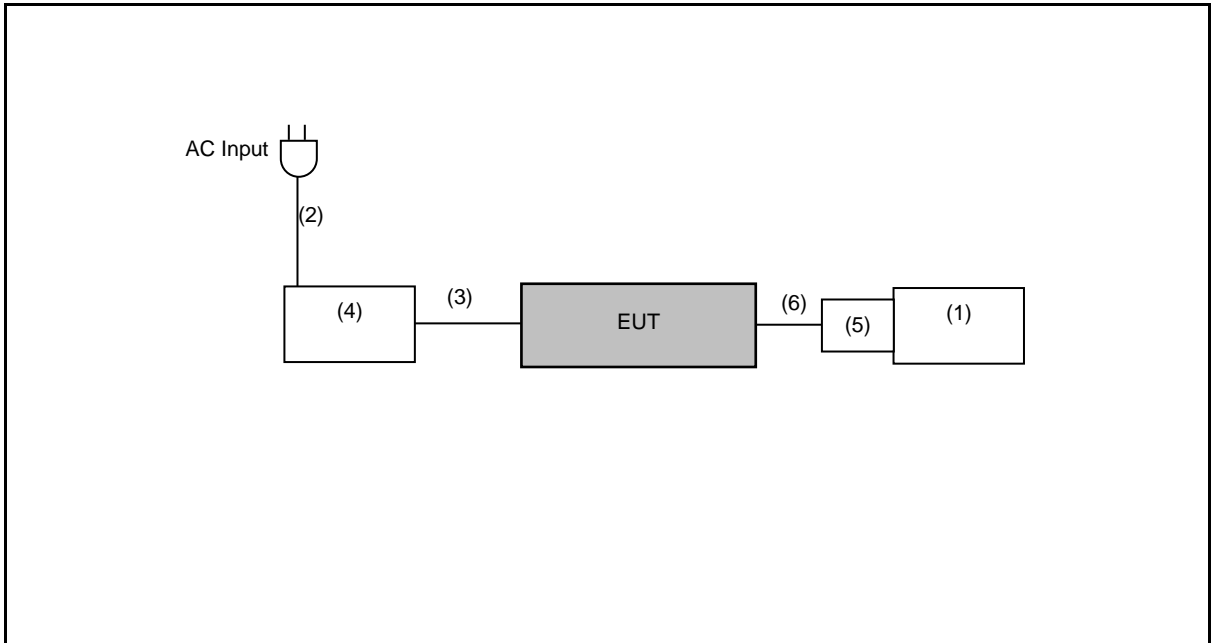

	Product	Manufacturer	Model Number
(1)	Notebook PC	HP	HP 440G1
(2)	AC power cord	N/A	N/A
(3)	(W to B) Wire	N/A	N/A
(4)	9KPB Module (D,J,F,L)	N/A	N/A
(5)	Fixture board	N/A	N/A
(6)	Fixture cable	N/A	N/A
(7)	Power Board COM3 6VDC Latch Solenoid Wire	N/A	GM918
(8)	Test AC Wire of CON3 to CON2	N/A	CSA SPT-1 VW-1 2*0.824mm(18AWG) 105C/300V
(9)	Light Bulb (110V)	TOA Lighting	N/A
(10)	Learn Button Extension Cord	N/A	N/A
(11)	GM9K1&2 120VAC LOADS BENCH	GRAND MATE	GM9K1&2 120VAC LOADS BENCH
(12)	Auxiliary channel valve cable	N/A	N/A
(13)	DC RGB LED Strip (5V)	Awakening Optoelectronics	5V RGB LED
(14)	GM9K1&2 TEST BENCH	GRAND MATE	GM9K1&2 TEST BENCH D2-05

3.4. Test Instruments

For Conducted Emission

Test Period: Oct. 14 , 2022

Testing Engineer: Jayson Hsieh

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI	100367	May 19, 2022	1 year
<input type="checkbox"/>	Test Receiver	R&S	ESCI	100722	Nov. 02, 2021	1 year
<input type="checkbox"/>	Test Receiver	R&S	ESCI	101000	Nov. 26, 2021	1 year
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	101040	Apr. 06, 2022	1 year
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	101140	Jan. 25, 2022	1 year
<input checked="" type="checkbox"/>	RF Cable	Woken	00100D1380194M	TE-02-03	May 27, 2022	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

For Conducted

Test Period: Aug. 23, 2022

Testing Engineer: Peter Shui

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Power Sensor	Anritsu	MA2411B	1126022	Sep. 03, 2021	1 year
<input checked="" type="checkbox"/>	Power Meter	Anritsu	ML2495A	1135009	Sep. 03, 2021	1 year
<input type="checkbox"/>	Power Sensor	Agilent	N1921A	MY45241957	Dec. 06, 2021	1 year
<input type="checkbox"/>	Power Meter	Agilent	N1911A	MY45101619	Dec. 06, 2021	1 year
<input type="checkbox"/>	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 16, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 21, 2022	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 09, 2021	1 year
<input type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
<input type="checkbox"/>	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 28, 2022	1 year
<input type="checkbox"/>	Signal Generator	Keysight	N5182B	MY53052569	Apr. 16, 2022	1 year
<input type="checkbox"/>	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 16, 2022	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022	1 year
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Aug. 22 ~ Oct. 13, 2022

Testing Engineer: Hung Chou

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 13, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 14, 2022	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9020B	MY60112363	Feb. 27, 2022	1 year
<input checked="" type="checkbox"/>	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 14, 2022	1 year
<input type="checkbox"/>	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A10961	Jul. 07, 2022	1 year
<input type="checkbox"/>	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330A1F	001	Jul. 21, 2022	1 year
<input type="checkbox"/>	Amplifier (1 GHz~26.5 GHz)	Agilent	8449B	3008A02237	Oct. 21, 2021	1 year
<input checked="" type="checkbox"/>	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025A1F	002	Jul. 21, 2022	1 year
<input type="checkbox"/>	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Sep. 02, 2022	1 year
<input type="checkbox"/>	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Mar. 28, 2022	1 year
<input type="checkbox"/>	Active Loop Antenna (9 kHz~30 MHz)	Schwarzbeck Mess-Elektronik	FMZB 1513-60	1513-60-031	Feb. 17, 2022	1 year
<input type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 22, 2022	1 year
<input checked="" type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 17, 2021	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 13, 2022	1 year
<input type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 25, 2022	1 year
<input type="checkbox"/>	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 25, 2022	1 year
<input checked="" type="checkbox"/>	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 03, 2021	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Aug. 22 ~ Oct. 13, 2022

Testing Engineer: Hung Chou

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	RF Cable	EMCI	EMC104-N-N-6000	TE01-1	Feb. 18, 2022	1 year
<input type="checkbox"/>	Microwave Cable	EMCI	EMC104-SM-SM-13000	170814	Feb. 18, 2022	1 year
<input type="checkbox"/>	Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	Feb. 18, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A100	J11005	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A900	J11004	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 04, 2022	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022	1 year
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

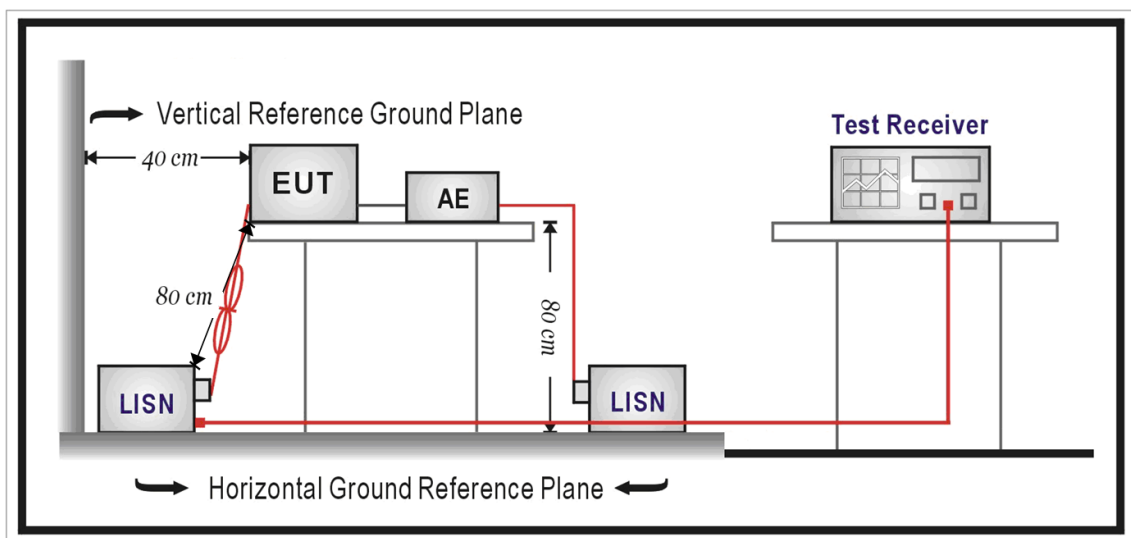

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50 \Omega // 50 \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50 \Omega // 50 \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

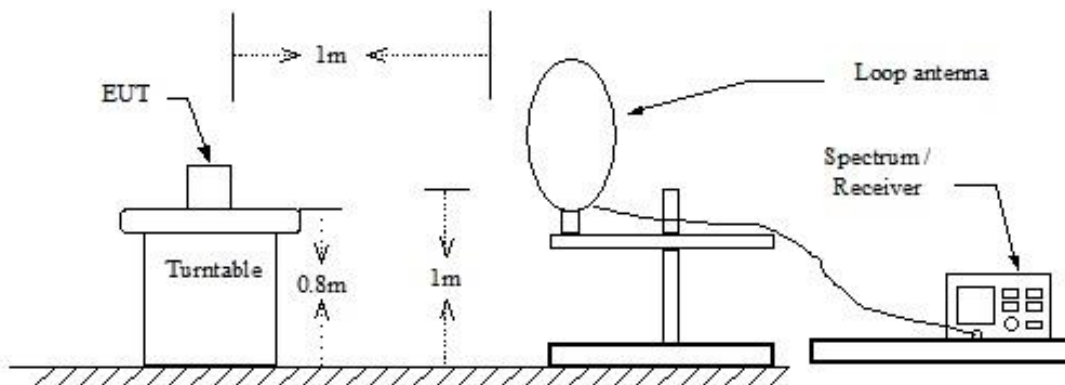

Below 1 GHz

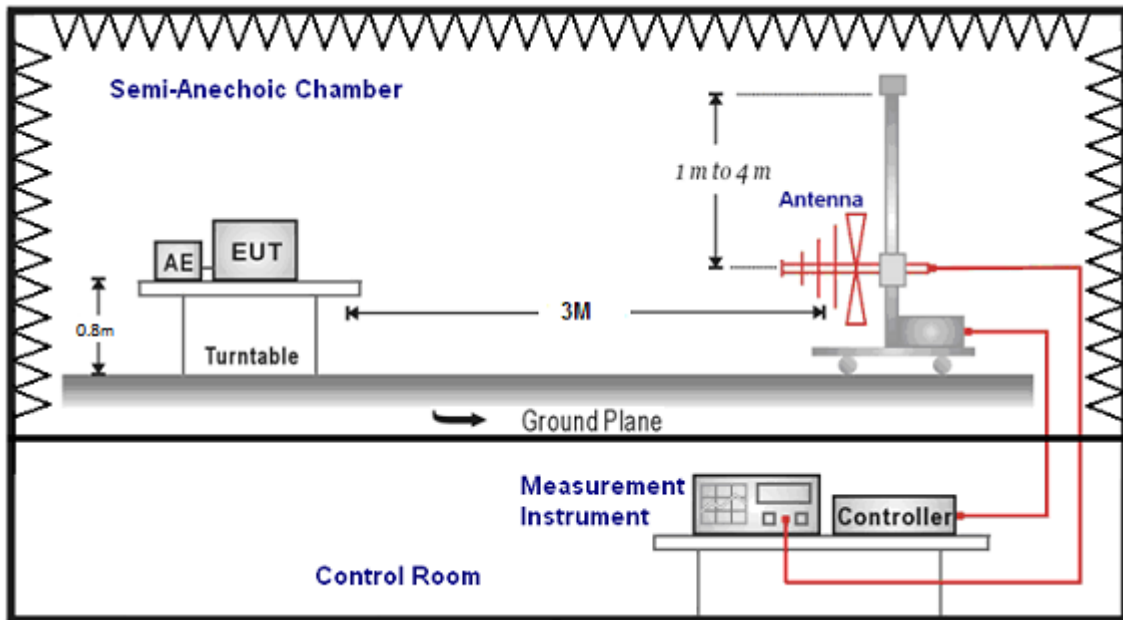

Above 1 GHz

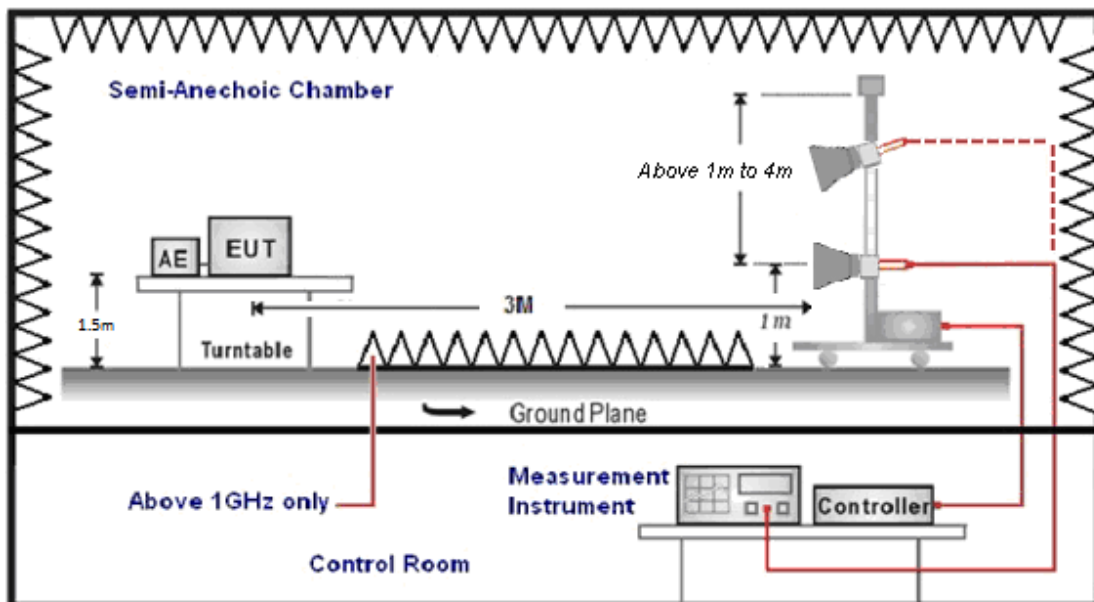

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.3. Maximum Conducted Output Power Measurement

■ **Limit**

For systems using digital modulation in the 2400-2483.5 MHz, the limit for peak output power is 30 dBm.

■ **Test Setup**

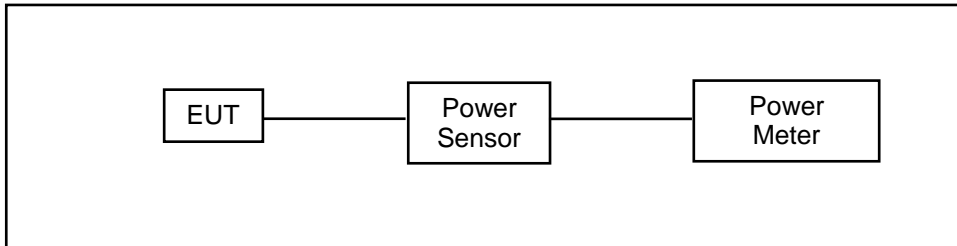

■ **Test Procedure**

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..


4.4. 6 dB RF Bandwidth Measurement

■ **Limit**

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

■ **Test Setup**

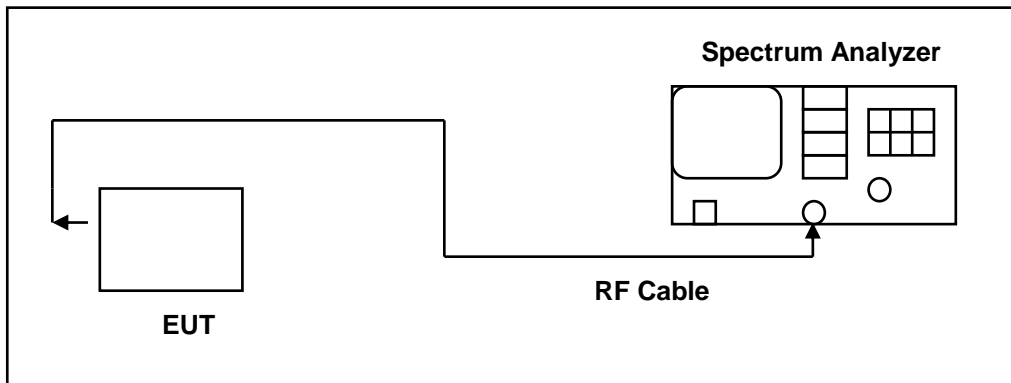

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Setup

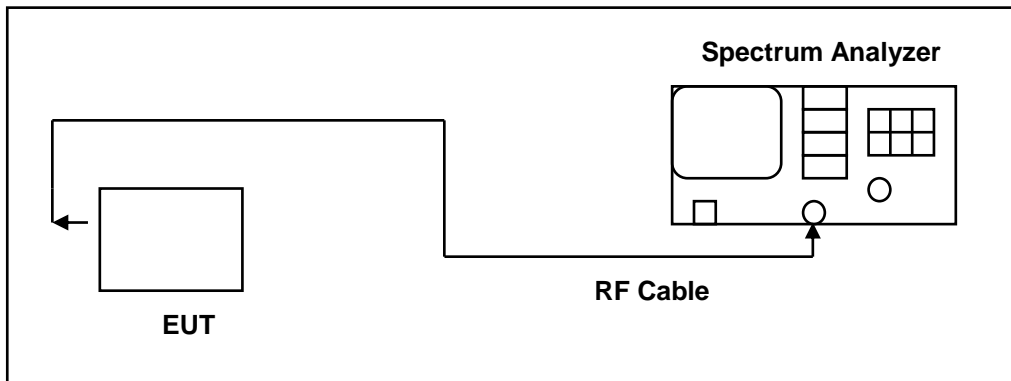

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

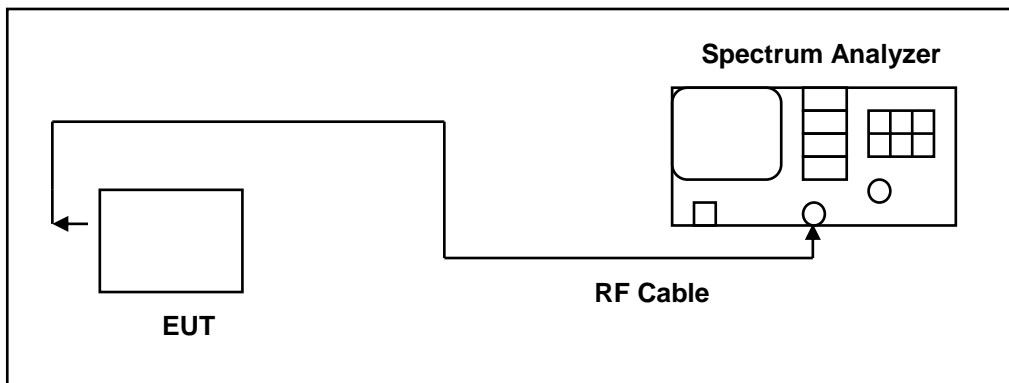

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


■ Antenna Connector Construction

See section 2 – antenna information.

5 Test Results

5.1. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

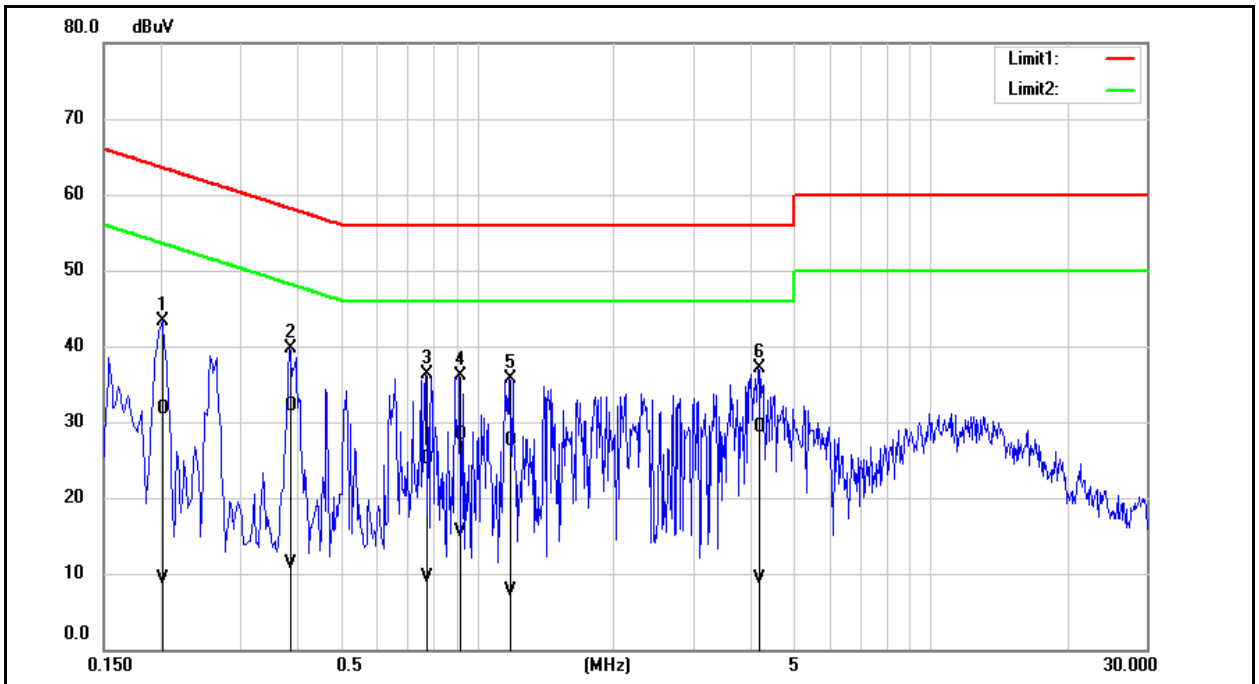


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2020	22.18	-0.19	9.54	31.72	9.35	63.53	53.53	-31.81	-44.18	Pass
2	0.3860	22.55	1.72	9.55	32.10	11.27	58.15	48.15	-26.05	-36.88	Pass
3	0.7740	15.55	-0.03	9.57	25.12	9.54	56.00	46.00	-30.88	-36.46	Pass
4	0.9180	18.63	5.90	9.58	28.21	15.48	56.00	46.00	-27.79	-30.52	Pass
5	1.1820	17.82	-1.93	9.59	27.41	7.66	56.00	46.00	-28.59	-38.34	Pass
6	4.1580	19.69	-0.45	9.67	29.36	9.22	56.00	46.00	-26.64	-36.78	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

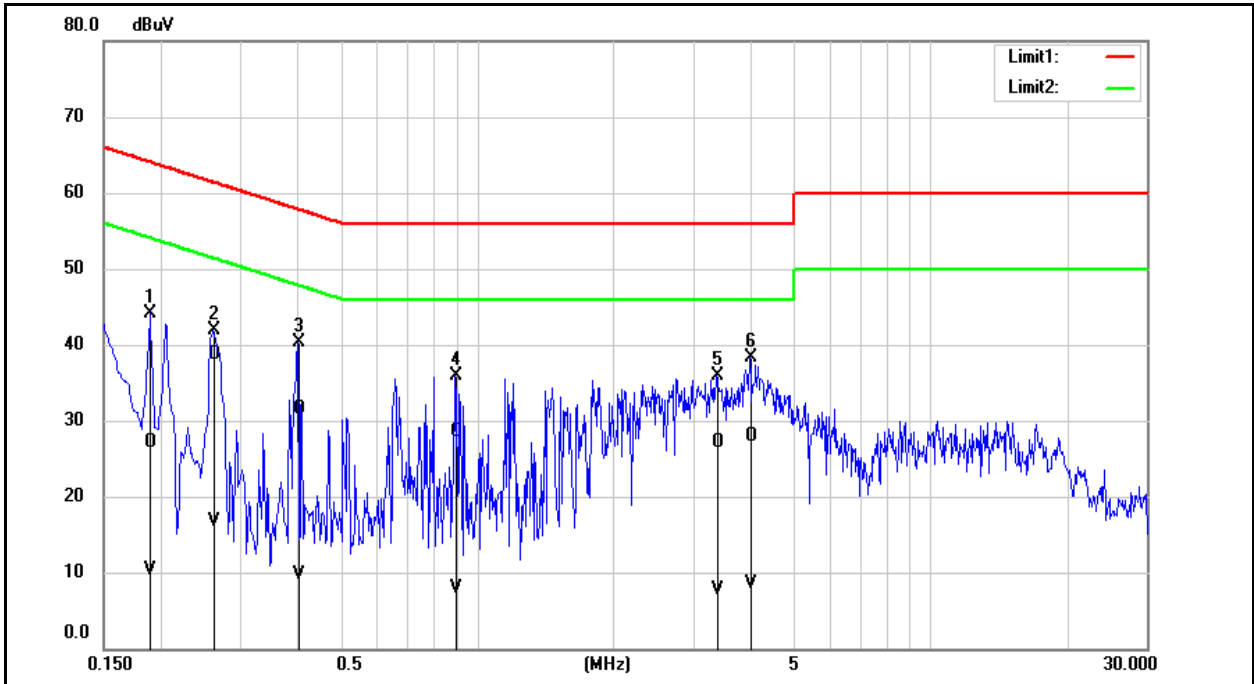



No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1900	17.51	0.74	9.60	27.11	10.34	64.04	54.04	-36.93	-43.70	Pass
2	0.2620	29.02	7.16	9.60	38.62	16.76	61.37	51.37	-22.75	-34.61	Pass
3	0.4020	21.91	0.09	9.61	31.52	9.70	57.81	47.81	-26.29	-38.11	Pass
4	0.8980	18.94	-1.68	9.64	28.58	7.96	56.00	46.00	-27.42	-38.04	Pass
5	3.3740	17.46	-1.96	9.72	27.18	7.76	56.00	46.00	-28.82	-38.24	Pass
6	3.9860	18.26	-1.14	9.73	27.99	8.59	56.00	46.00	-28.01	-37.41	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5.2. Conducted Test Results

Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	2402	0.403	0.624	0.646	1.899	2.480
Mode 3	2402	0.218	0.624	0.350	4.562	4.579

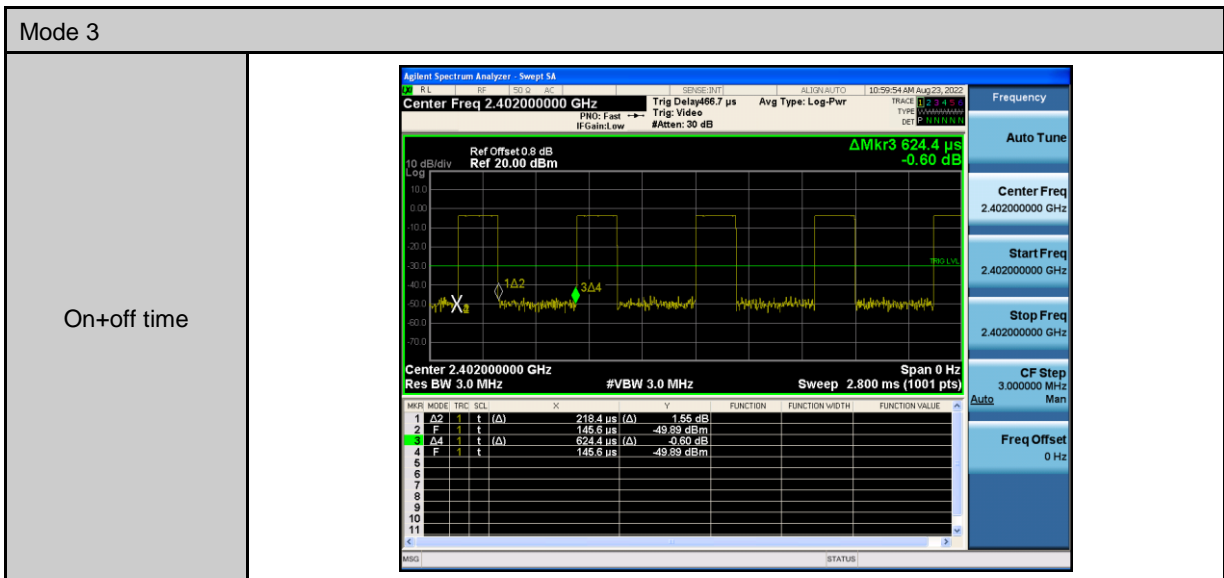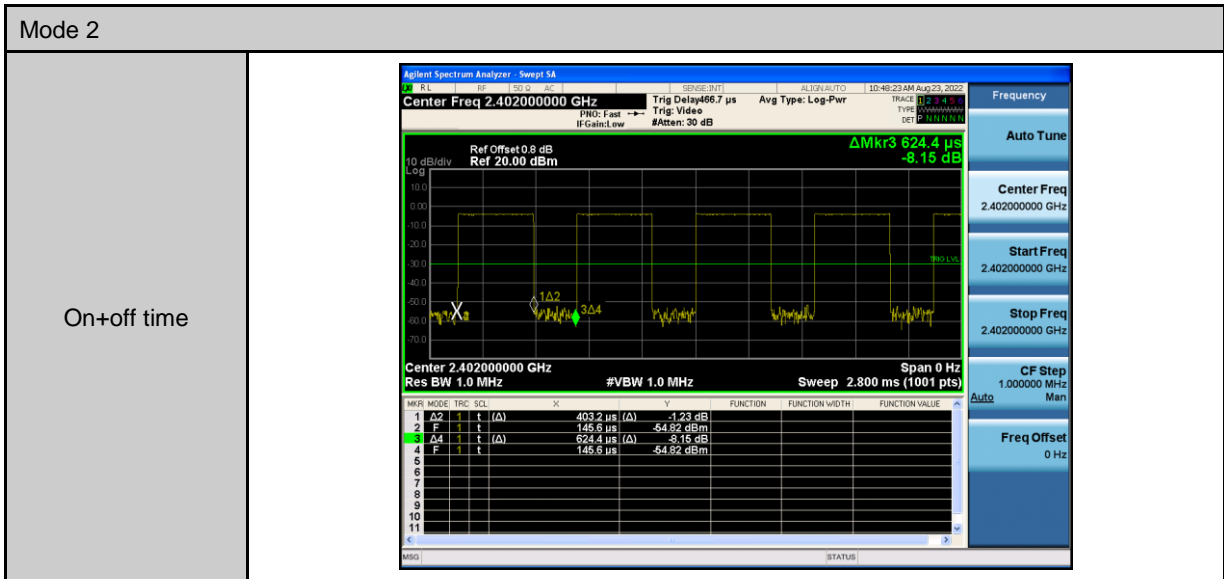

Maximum Conducted Output Power Measurement

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
Mode 2	2402	3.00	Direct Test Mode v2.0.2
	2440	3.00	
	2480	3.00	
Mode 3	2402	3.00	
	2440	3.00	
	2480	3.00	

Test Mode	Mode 2				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	-3.80	0.0004169	-3.71	0.0004256	≤ 30
2440	-3.96	0.0004018	-3.86	0.0004111	≤ 30
2480	-4.09	0.0003899	-3.97	0.0004009	≤ 30

Test Mode	Mode 3				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	-3.80	0.0004169	-3.69	0.0004276	≤ 30
2440	-3.96	0.0004018	-3.87	0.0004102	≤ 30
2480	-4.10	0.0003890	-3.98	0.0003999	≤ 30

Note: The relevant measured result has the offset with cable loss already.

6 dB RF Bandwidth Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	697.5000	≥ 500
2440	701.0000	≥ 500
2480	696.3000	≥ 500

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	1157.0000	≥ 500
2440	1155.0000	≥ 500
2480	1166.0000	≥ 500

■ Test Graphs

Mode 2	
2402 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.0684 MHz</p> <p>Total Power 3.06 dBm</p> <p>Transmit Freq Error 13.011 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 697.5 kHz</p> <p>x dB -6.00 dB</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz</p> <p>Center Freq: 2.440000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center 2.44 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.0736 MHz</p> <p>Total Power 2.72 dBm</p> <p>Transmit Freq Error 12.437 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 701.0 kHz</p> <p>x dB -6.00 dB</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 20.00 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.0741 MHz</p> <p>Total Power 2.93 dBm</p> <p>Transmit Freq Error 11.540 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 696.3 kHz</p> <p>x dB -6.00 dB</p>

Mode 3	
2402 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 2.0880 MHz</p> <p>Total Power 3.59 dBm</p> <p>Transmit Freq Error 21.080 kHz</p> <p>x dB Bandwidth 1.157 MHz</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 2.0916 MHz</p> <p>Total Power 3.29 dBm</p> <p>Transmit Freq Error 22.943 kHz</p> <p>x dB Bandwidth 1.155 MHz</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 2.0925 MHz</p> <p>Total Power 3.48 dBm</p> <p>Transmit Freq Error 22.579 kHz</p> <p>x dB Bandwidth 1.166 MHz</p>

Maximum Power Density Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-18.905	≤ 8
2440	-19.371	≤ 8
2480	-19.250	≤ 8

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-21.298	≤ 8
2440	-21.771	≤ 8
2480	-21.745	≤ 8

■ Test Graphs

Mode 2	
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset: 0.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.401 986 4 GHz -18.905 dBm</p> <p>Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 110.3 ms (1001 pts)</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44000000 GHz</p> <p>Ref Offset: 0.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.439 968 5 GHz -19.371 dBm</p> <p>Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 110.9 ms (1001 pts)</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset: 0.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.479 969 7 GHz -19.250 dBm</p> <p>Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 110.1 ms (1001 pts)</p>

Mode 3	
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.4020000 GHz</p> <p>Mkr1 2.401 993 1 GHz -21.298 dBm</p> <p>Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 183.1 ms (1001 pts)</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.4400000 GHz</p> <p>Mkr1 2.440 006 9 GHz -21.771 dBm</p> <p>Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 182.7 ms (1001 pts)</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.4800000 GHz</p> <p>Mkr1 2.480 007 0 GHz -21.745 dBm</p> <p>Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 184.5 ms (1001 pts)</p>

Out of Band Conducted Emissions Measurement

■ Test Graphs

Reference level

Mode 2	
2402 MHz	
2440 MHz	
2480 MHz	


Mode 3	
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.4020000 GHz</p> <p>Mkr1 2.402 008 7 GHz -3.72 dBm</p> <p>Center 2.4020000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.4400000 GHz</p> <p>Mkr1 2.440 012 1 GHz -3.98 dBm</p> <p>Center 2.4400000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.4800000 GHz</p> <p>Mkr1 2.480 014 0 GHz -3.79 dBm</p> <p>Center 2.4800000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)</p>


Out of Band Conducted Emissions

Mode 2																												
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Mkr2 23.830 8 GHz -48.61 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 2 GHz</td> <td>-4.39 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>23.830 8 GHz</td> <td>-48.61 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 2 GHz	-4.39 dBm				2	N	1	f	23.830 8 GHz	-48.61 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.402 2 GHz	-4.39 dBm																							
2	N	1	f	23.830 8 GHz	-48.61 dBm																							
2440 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Mkr2 23.745 9 GHz -48.97 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.439 6 GHz</td> <td>-4.96 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>23.745 9 GHz</td> <td>-48.97 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 6 GHz	-4.96 dBm				2	N	1	f	23.745 9 GHz	-48.97 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.439 6 GHz	-4.96 dBm																							
2	N	1	f	23.745 9 GHz	-48.97 dBm																							
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Mkr2 23.908 2 GHz -48.25 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 2 GHz</td> <td>-6.23 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>23.908 2 GHz</td> <td>-48.25 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-6.23 dBm				2	N	1	f	23.908 2 GHz	-48.25 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.480 2 GHz	-6.23 dBm																							
2	N	1	f	23.908 2 GHz	-48.25 dBm																							

Mode 3																												
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Mkr2 24.032 4 GHz -48.60 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 2 GHz</td> <td>-5.92 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.032 4 GHz</td> <td>-48.60 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 2 GHz	-5.92 dBm				2	N	1	f	24.032 4 GHz	-48.60 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.402 2 GHz	-5.92 dBm																							
2	N	1	f	24.032 4 GHz	-48.60 dBm																							
2440 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Mkr2 24.564 9 GHz -48.32 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 2 GHz</td> <td>-7.83 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.564 9 GHz</td> <td>-48.32 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 2 GHz	-7.83 dBm				2	N	1	f	24.564 9 GHz	-48.32 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.440 2 GHz	-7.83 dBm																							
2	N	1	f	24.564 9 GHz	-48.32 dBm																							
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Mkr2 24.028 7 GHz -49.24 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 2 GHz</td> <td>-7.37 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.028 7 GHz</td> <td>-49.24 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-7.37 dBm				2	N	1	f	24.028 7 GHz	-49.24 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.480 2 GHz	-7.37 dBm																							
2	N	1	f	24.028 7 GHz	-49.24 dBm																							

Conducted Band Edge

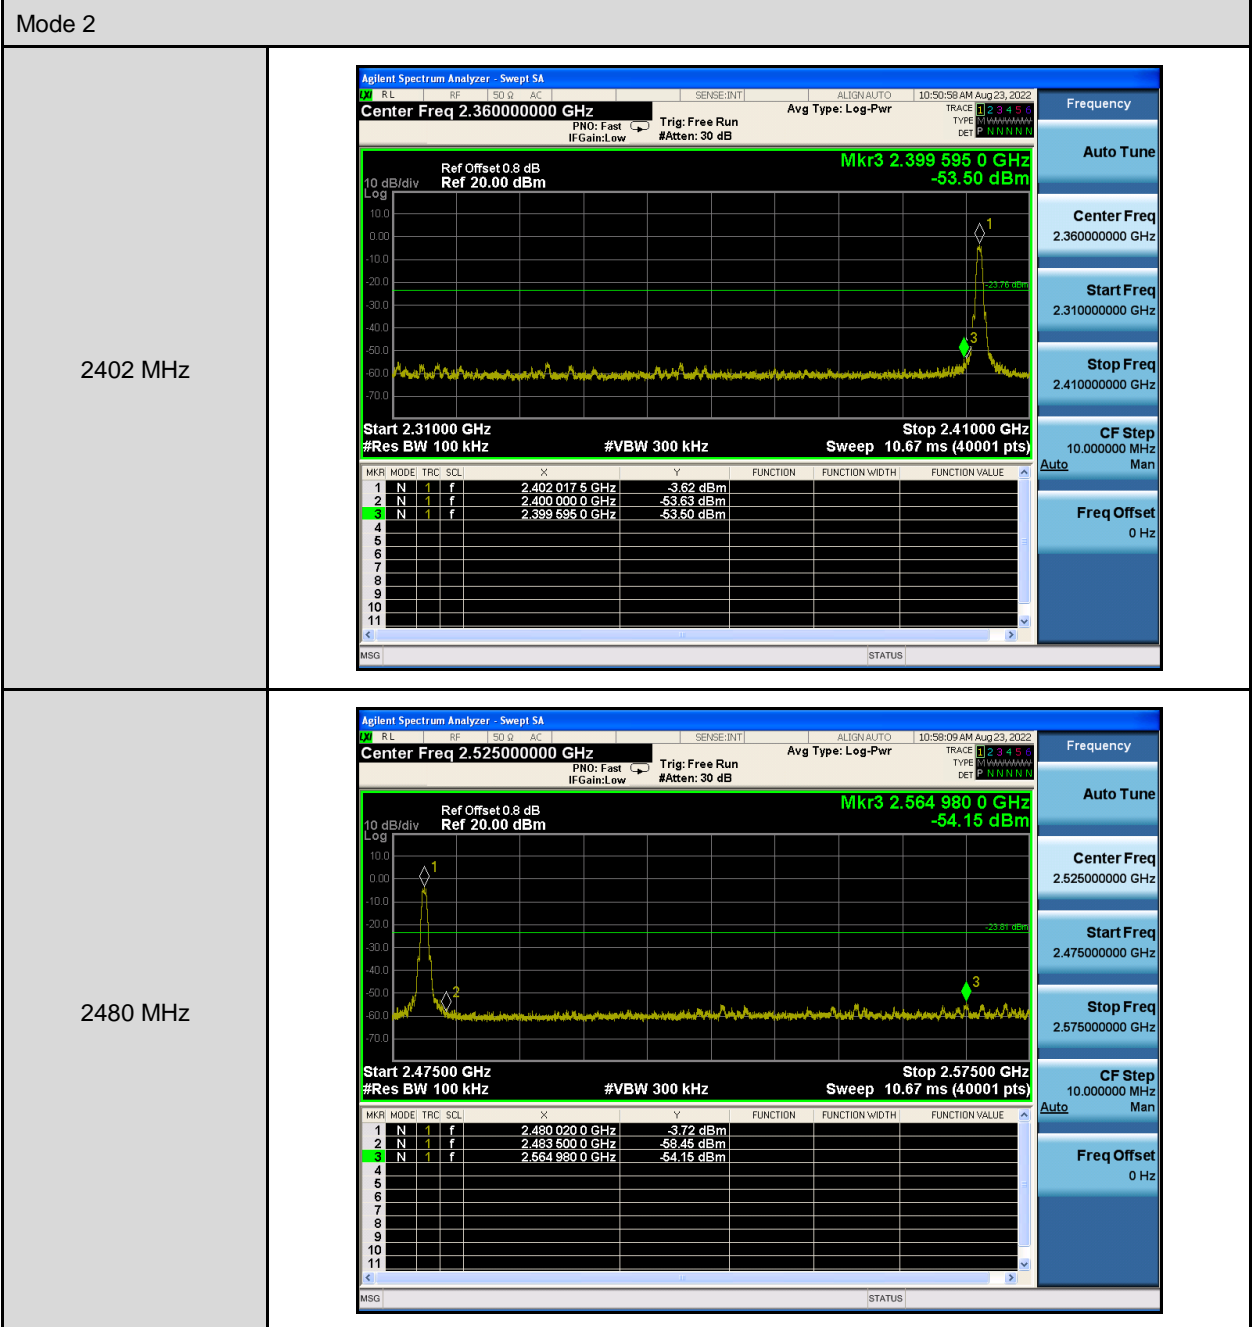


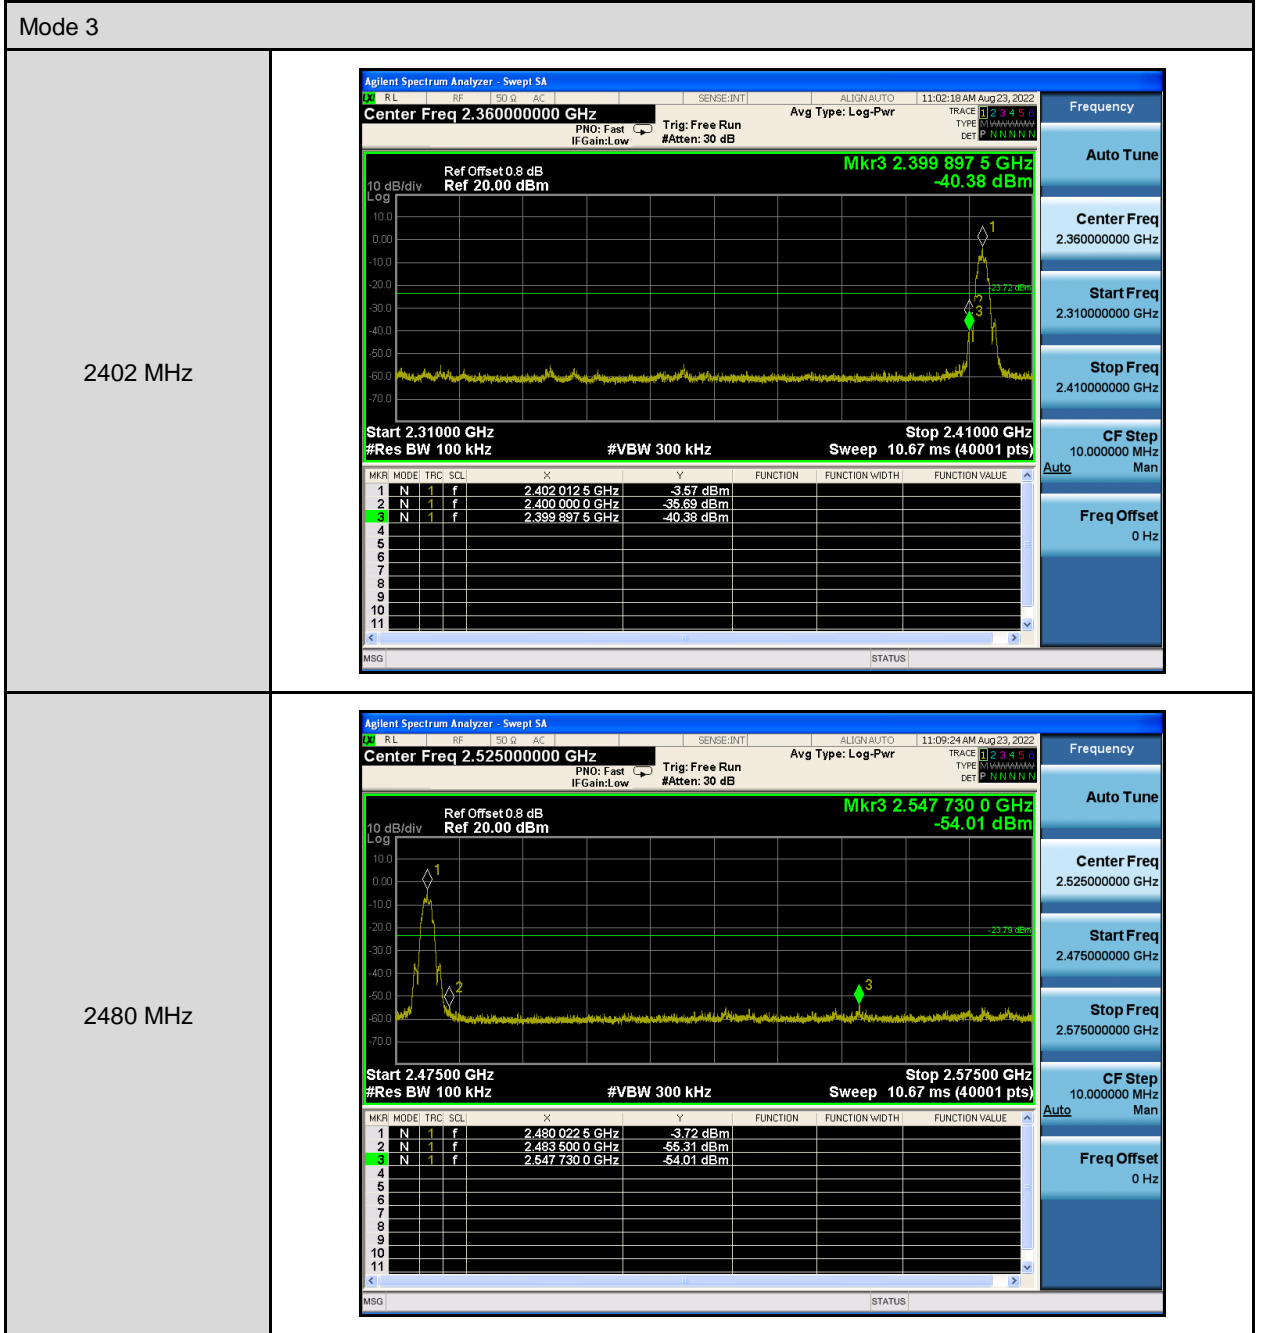

5.3. Radiated Emission Measurement

Below 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

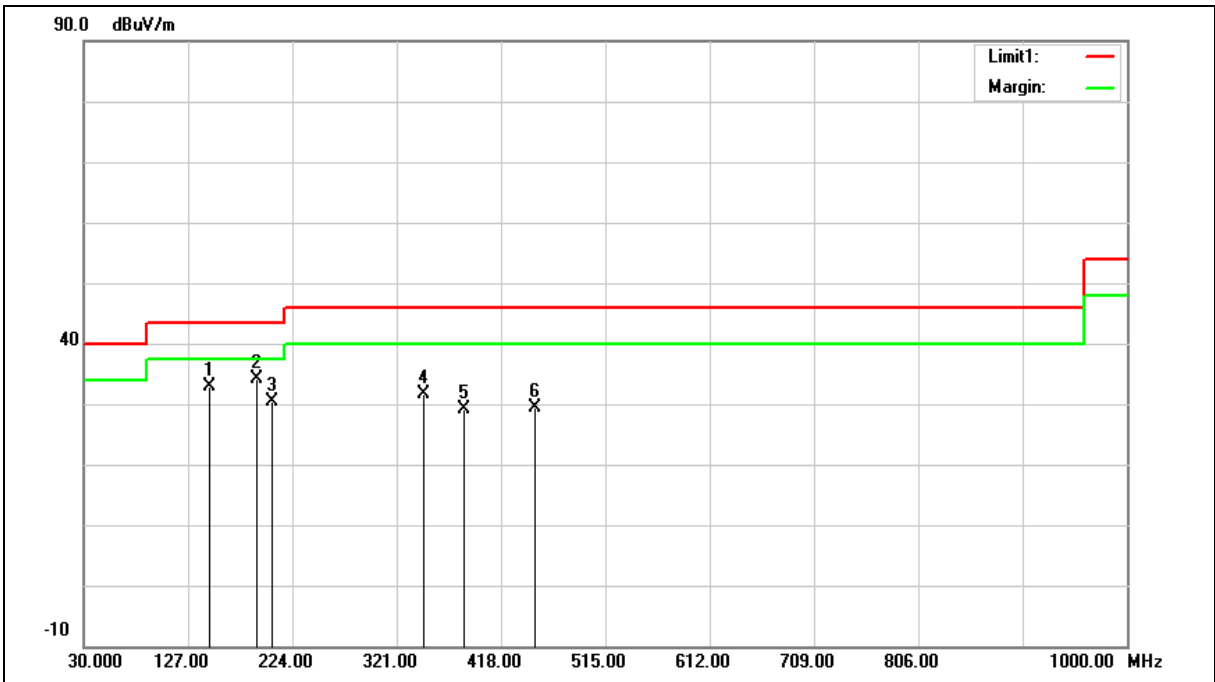


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	147.3700	40.40	-7.40	33.00	43.50	-10.50	QP
2*	191.0200	43.79	-9.61	34.18	43.50	-9.32	QP
3	204.6000	40.64	-10.18	30.46	43.50	-13.04	QP
4	346.2200	37.59	-5.88	31.71	46.00	-14.29	QP
5	383.0800	34.01	-4.82	29.19	46.00	-16.81	QP
6	449.0400	32.55	-3.07	29.48	46.00	-16.52	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

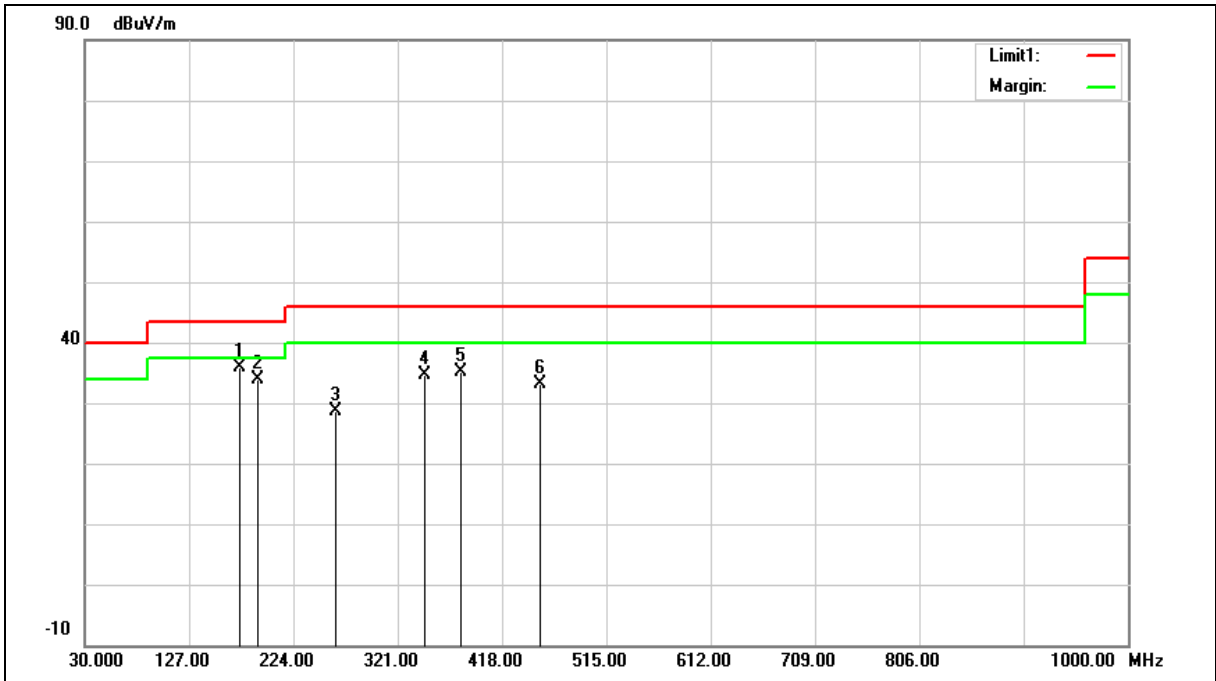

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	173.5600	44.03	-8.08	35.95	43.50	-7.55	QP
2	191.0200	43.37	-9.61	33.76	43.50	-9.74	QP
3	263.7700	36.37	-7.77	28.60	46.00	-17.40	QP
4	346.2200	40.43	-5.88	34.55	46.00	-11.45	QP
5	379.2000	40.13	-4.93	35.20	46.00	-10.80	QP
6	453.8900	36.05	-2.98	33.07	46.00	-12.93	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Harmonic


Above 1 GHz

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 1 M 2402 MHz		
Remark:			

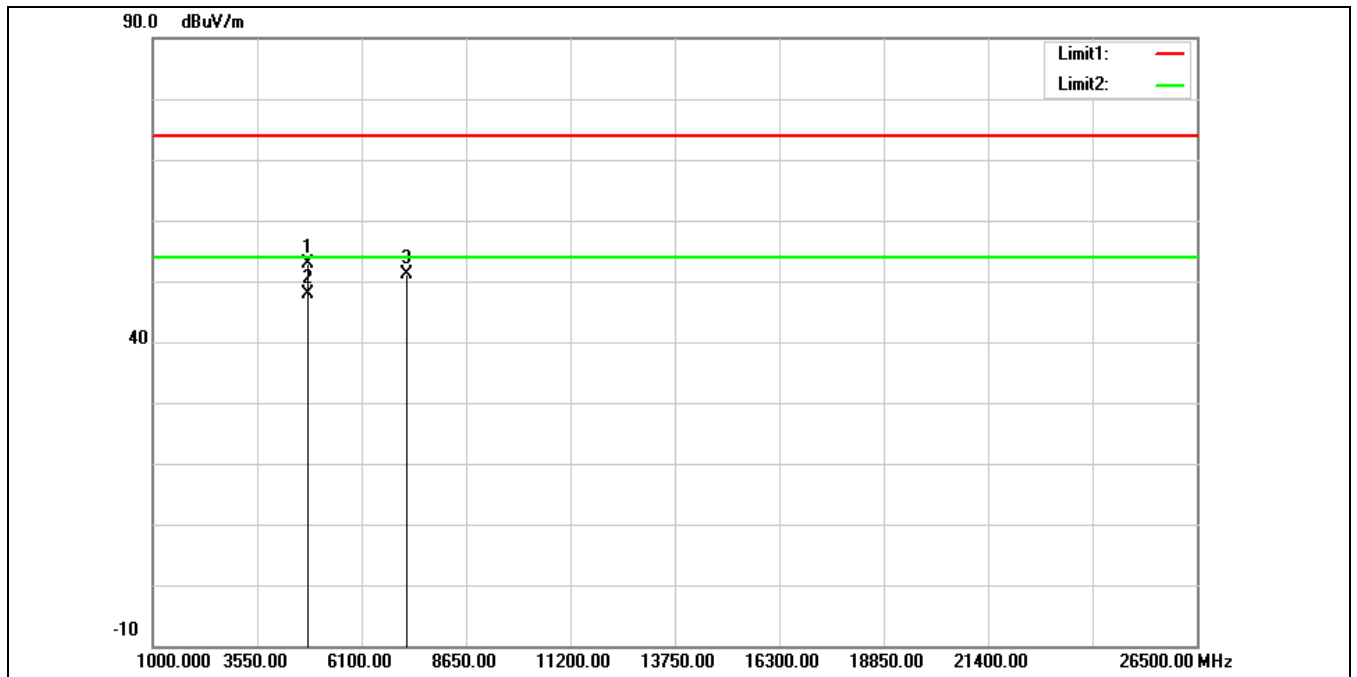


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	53.61	-0.83	52.78	74.00	-21.22	peak
2*	4804.000	48.59	-0.83	47.76	54.00	-6.24	AVG
3	7206.000	44.63	6.54	51.17	74.00	-22.83	peak

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 1 M 2402 MHz		
Remark:			

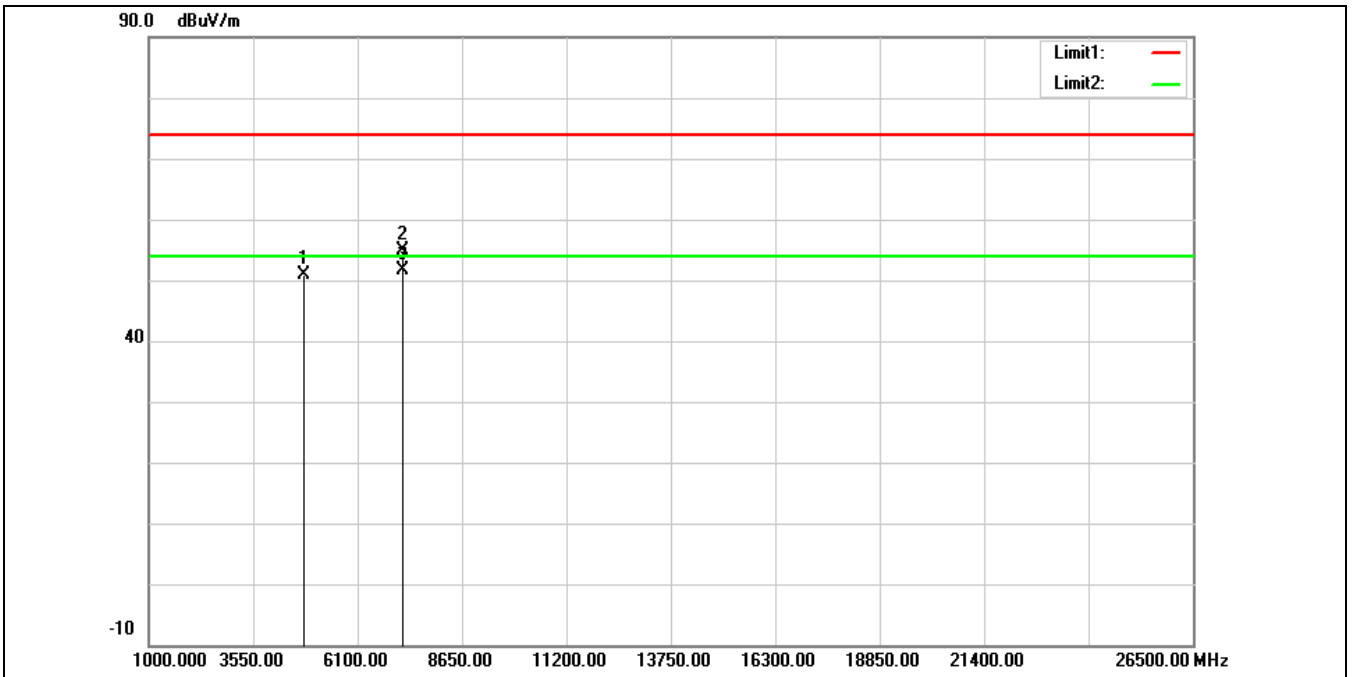


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	51.72	-0.83	50.89	74.00	-23.11	peak
2	7206.000	48.44	6.54	54.98	74.00	-19.02	peak
3*	7206.000	45.07	6.54	51.61	54.00	-2.39	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 1 M 2440 MHz		
Remark:			

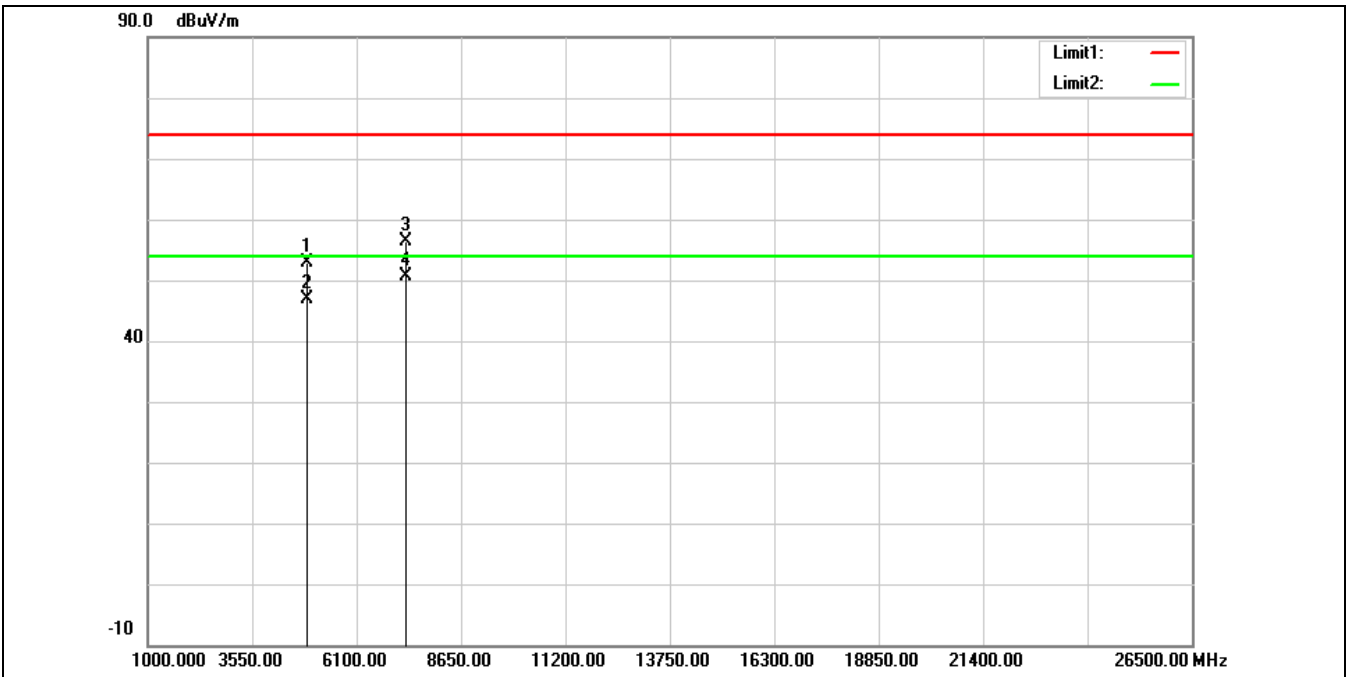


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	53.59	-0.73	52.86	74.00	-21.14	peak
2	4880.000	47.70	-0.73	46.97	54.00	-7.03	AVG
3	7320.000	49.55	6.75	56.30	74.00	-17.70	peak
4*	7320.000	43.98	6.75	50.73	54.00	-3.27	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 1 M 2440 MHz		
Remark:			

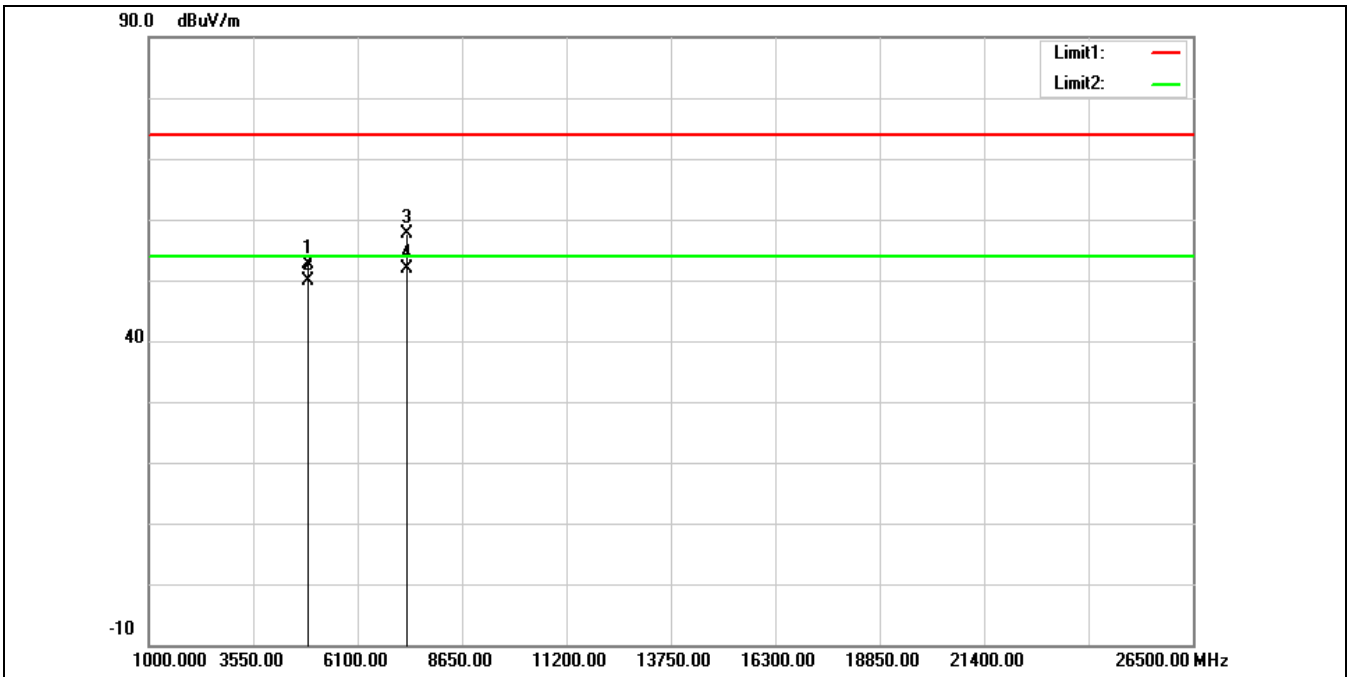


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	53.43	-0.73	52.70	74.00	-21.30	peak
2	4880.000	50.50	-0.73	49.77	54.00	-4.23	AVG
3	7320.000	50.98	6.75	57.73	74.00	-16.27	peak
4*	7320.000	45.23	6.75	51.98	54.00	-2.02	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 1 M 2480 MHz		
Remark:			

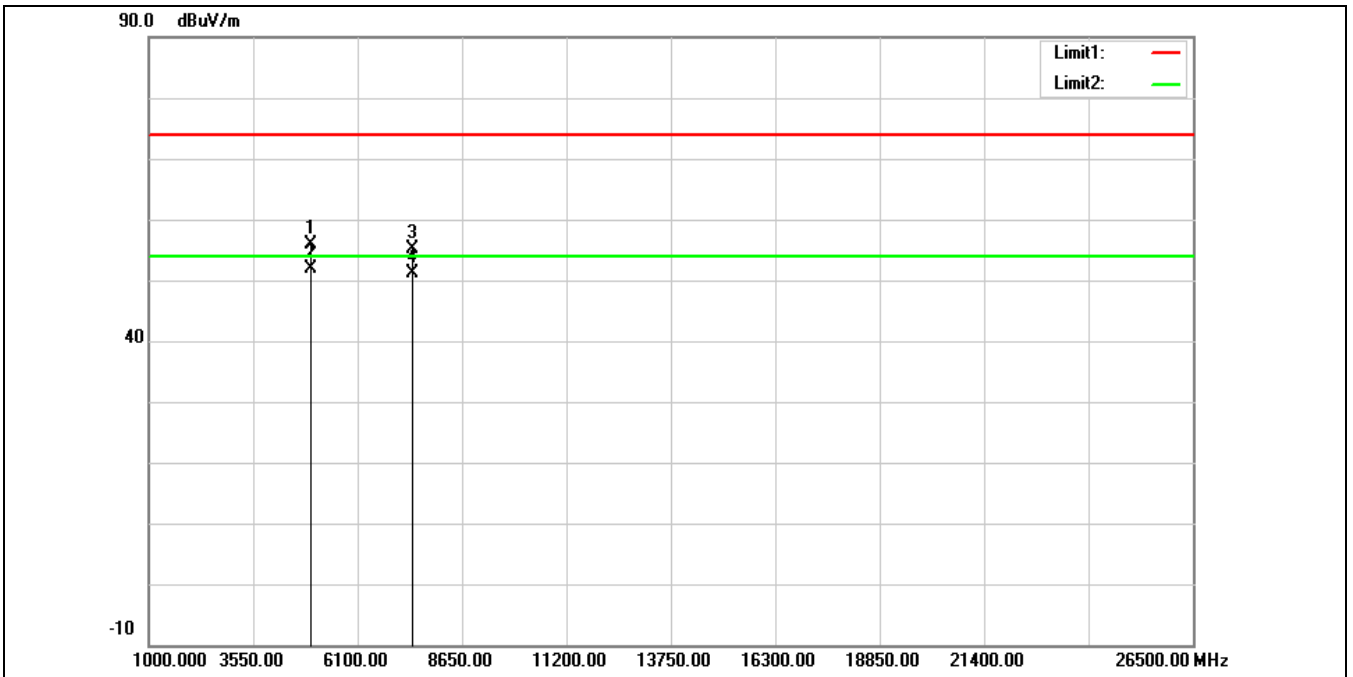


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.33	-0.54	55.79	74.00	-18.21	peak
2*	4960.000	52.50	-0.54	51.96	54.00	-2.04	AVG
3	7440.000	47.89	7.14	55.03	74.00	-18.97	peak
4	7440.000	43.89	7.14	51.03	54.00	-2.97	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 1 M 2480 MHz		
Remark:			

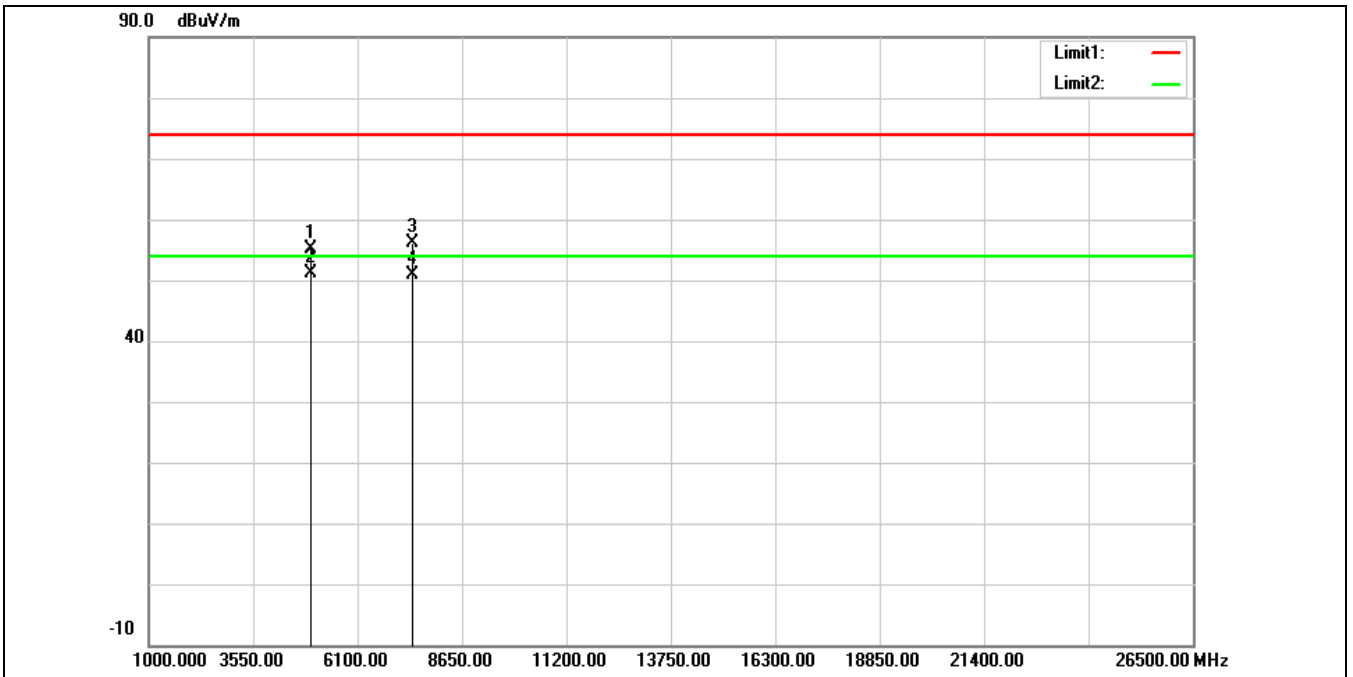


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	55.73	-0.54	55.19	74.00	-18.81	peak
2*	4960.000	51.56	-0.54	51.02	54.00	-2.98	AVG
3	7440.000	49.01	7.14	56.15	74.00	-17.85	peak
4	7440.000	43.79	7.14	50.93	54.00	-3.07	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 2 M 2402 MHz		
Remark:			

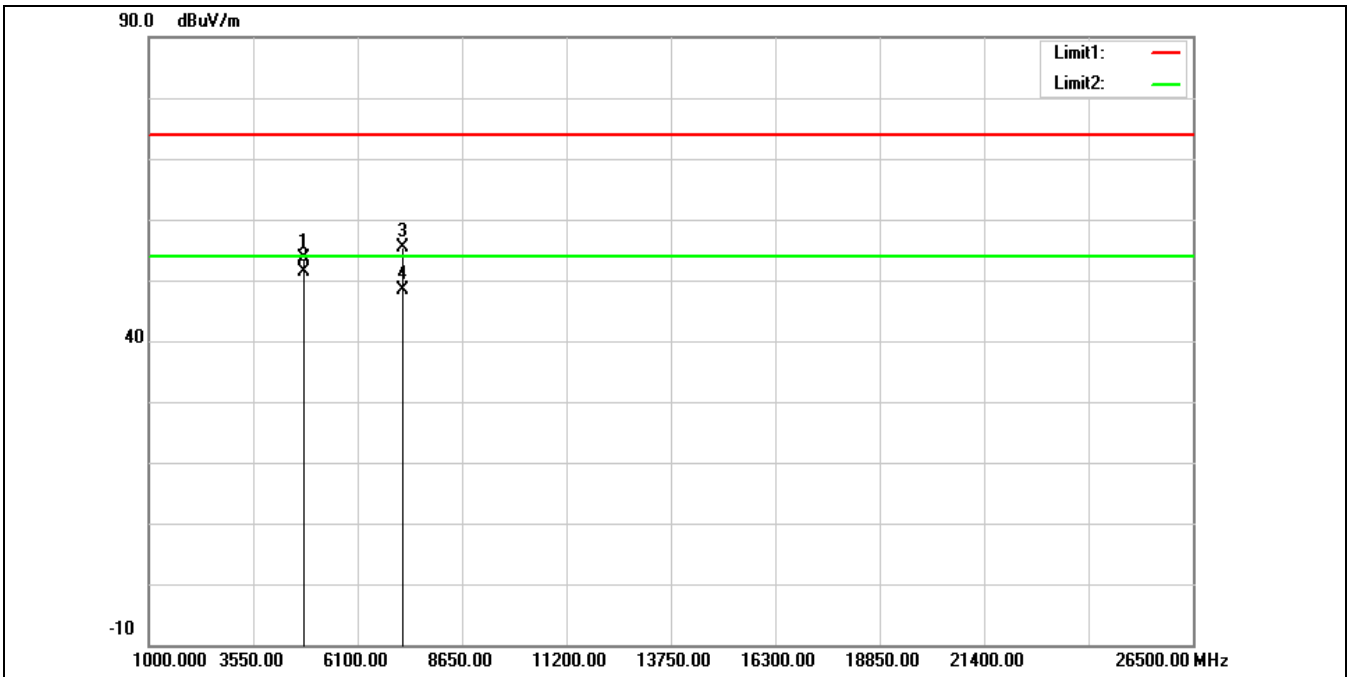


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	54.55	-0.83	53.72	74.00	-20.28	peak
2*	4804.000	52.19	-0.83	51.36	54.00	-2.64	AVG
3	7206.000	48.94	6.54	55.48	74.00	-18.52	peak
4	7206.000	41.84	6.54	48.38	54.00	-5.62	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 2 M 2402 MHz		
Remark:			

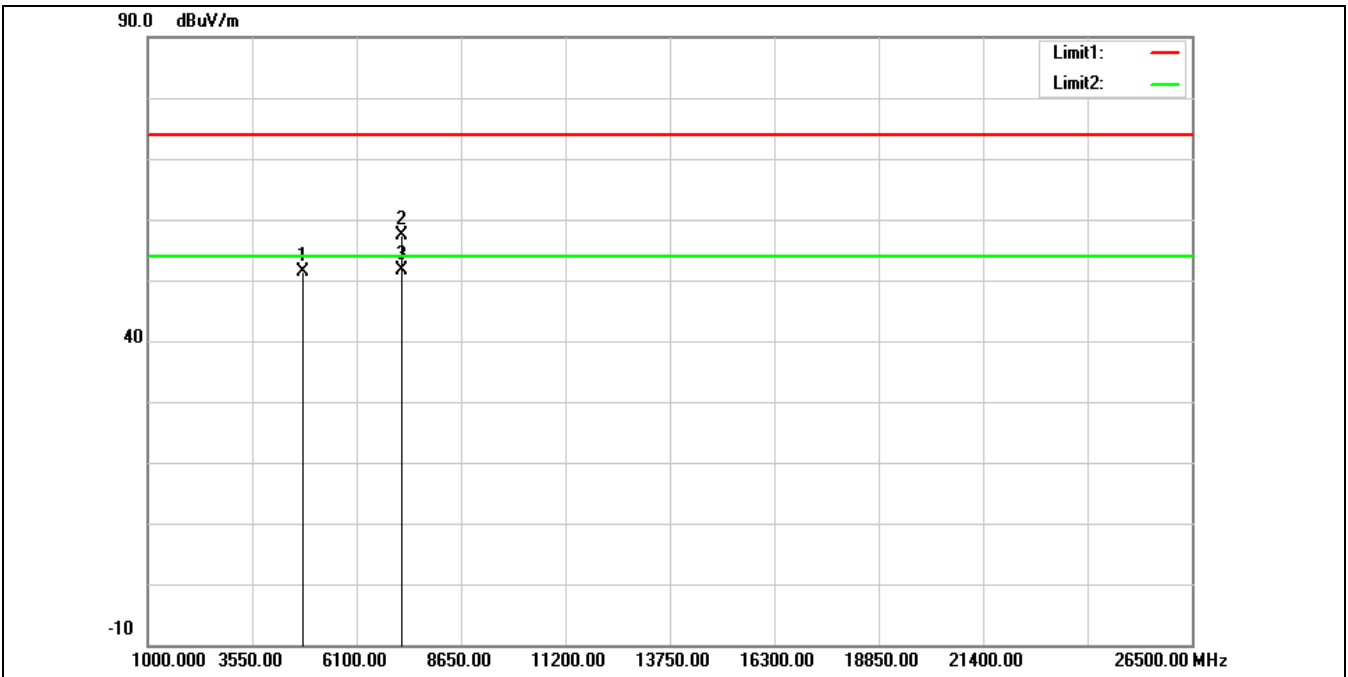


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	52.15	-0.83	51.32	74.00	-22.68	peak
2	7206.000	50.88	6.54	57.42	74.00	-16.58	peak
3*	7206.000	45.19	6.54	51.73	54.00	-2.27	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 2 M 2440 MHz		
Remark:			

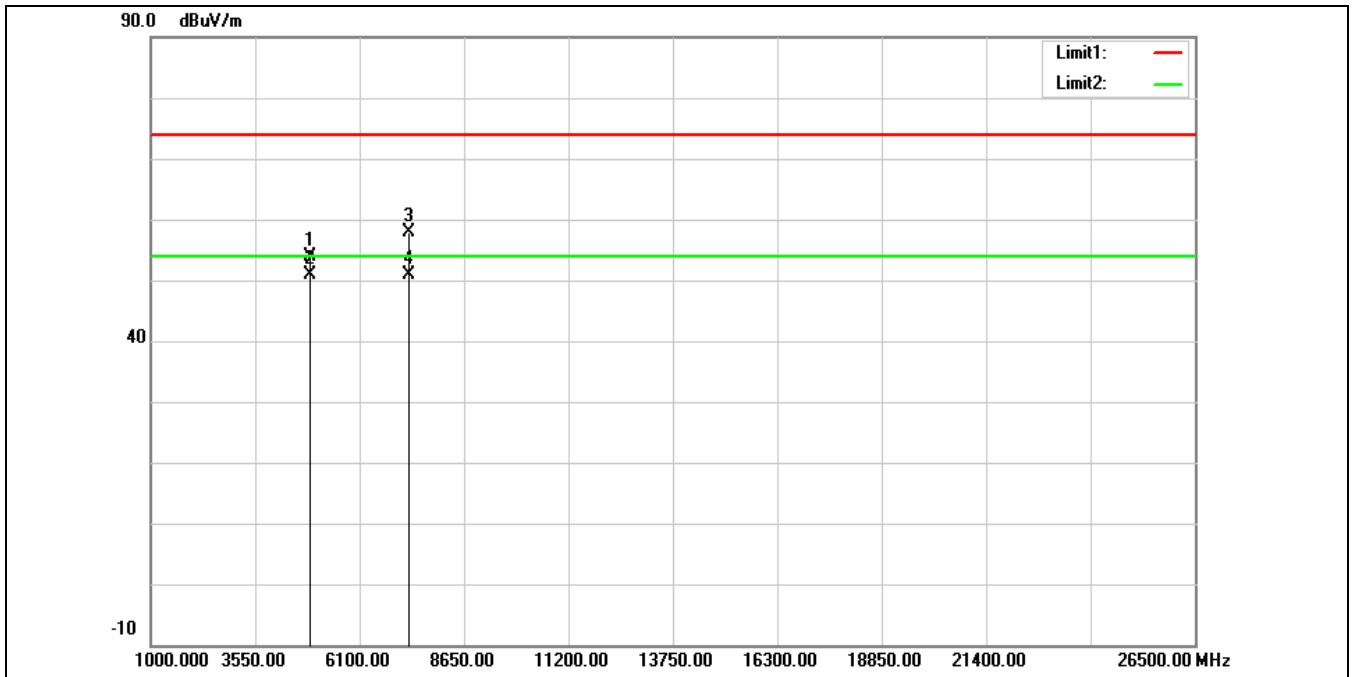


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	54.65	-0.73	53.92	74.00	-20.08	peak
2*	4880.000	51.65	-0.73	50.92	54.00	-3.08	AVG
3	7320.000	51.07	6.75	57.82	74.00	-16.18	peak
4	7320.000	44.07	6.75	50.82	54.00	-3.18	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 2 M 2440 MHz		
Remark:			

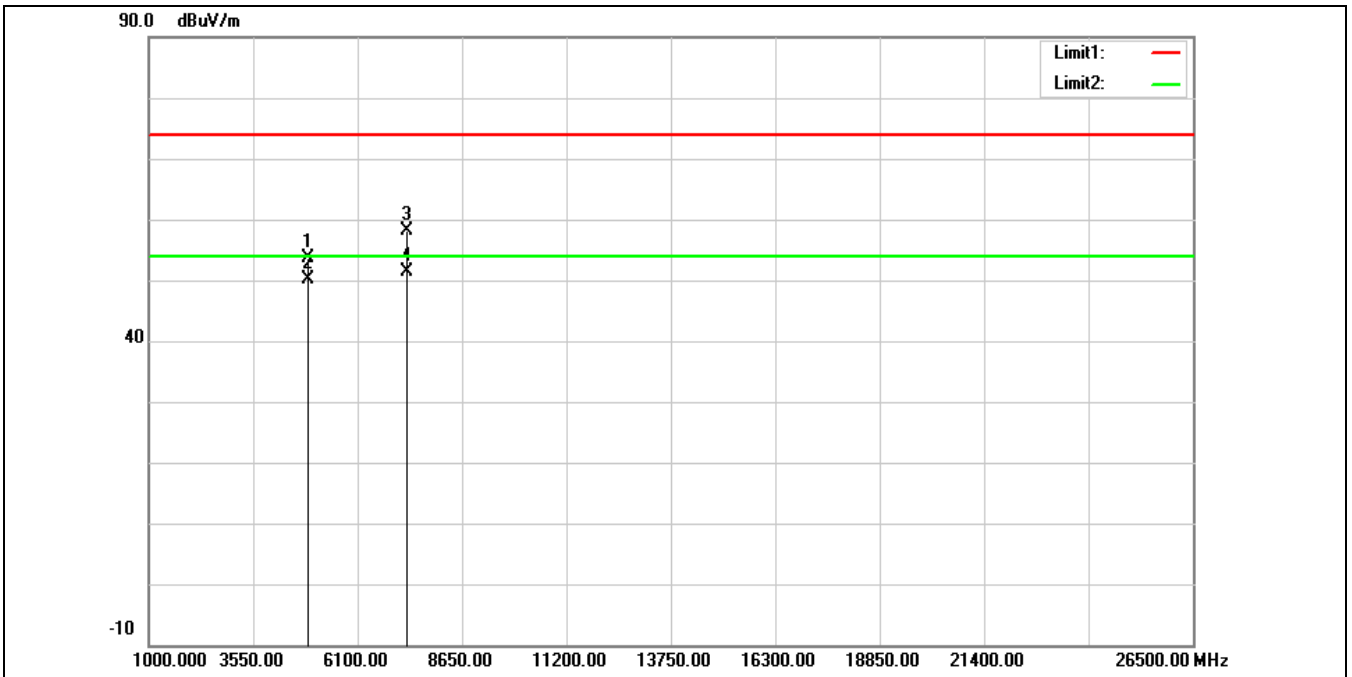


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	54.30	-0.73	53.57	74.00	-20.43	peak
2	4880.000	50.85	-0.73	50.12	54.00	-3.88	AVG
3	7320.000	51.37	6.75	58.12	74.00	-15.88	peak
4*	7320.000	44.75	6.75	51.50	54.00	-2.50	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 2 M 2480 MHz		
Remark:			

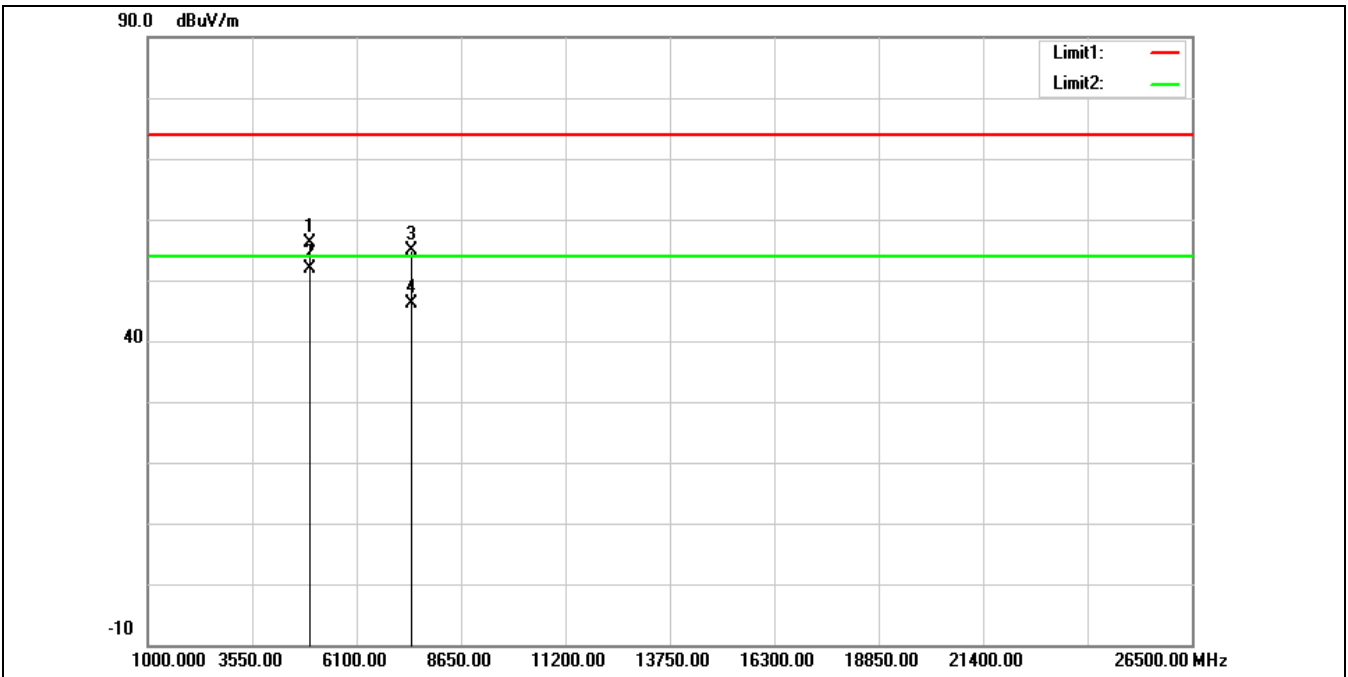

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.74	-0.54	56.20	74.00	-17.80	peak
2*	4960.000	52.47	-0.54	51.93	54.00	-2.07	AVG
3	7440.000	47.63	7.14	54.77	74.00	-19.23	peak
4	7440.000	38.91	7.14	46.05	54.00	-7.95	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 2 M 2480 MHz		
Remark:			

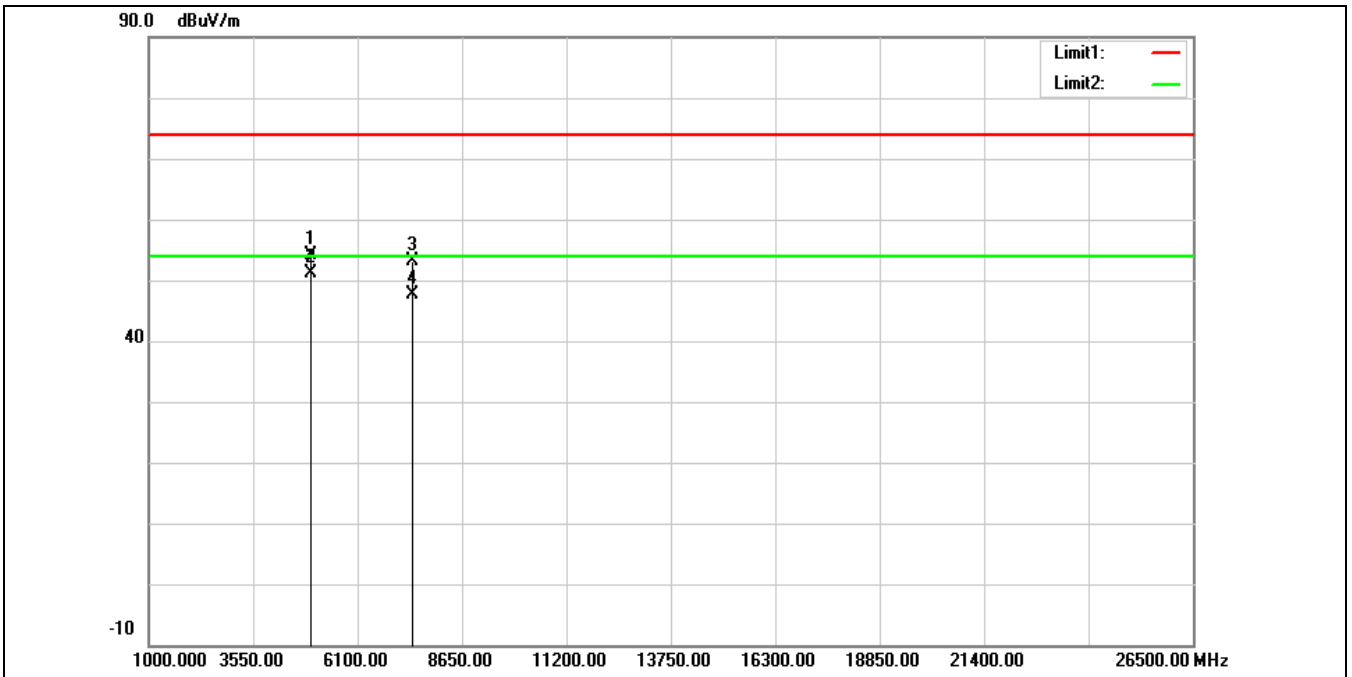


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	54.64	-0.54	54.10	74.00	-19.90	peak
2*	4960.000	51.55	-0.54	51.01	54.00	-2.99	AVG
3	7440.000	45.97	7.14	53.11	74.00	-20.89	peak
4	7440.000	40.55	7.14	47.69	54.00	-6.31	AVG

Band Edge


Peak

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 1 M 2402 MHz		
Remark:			

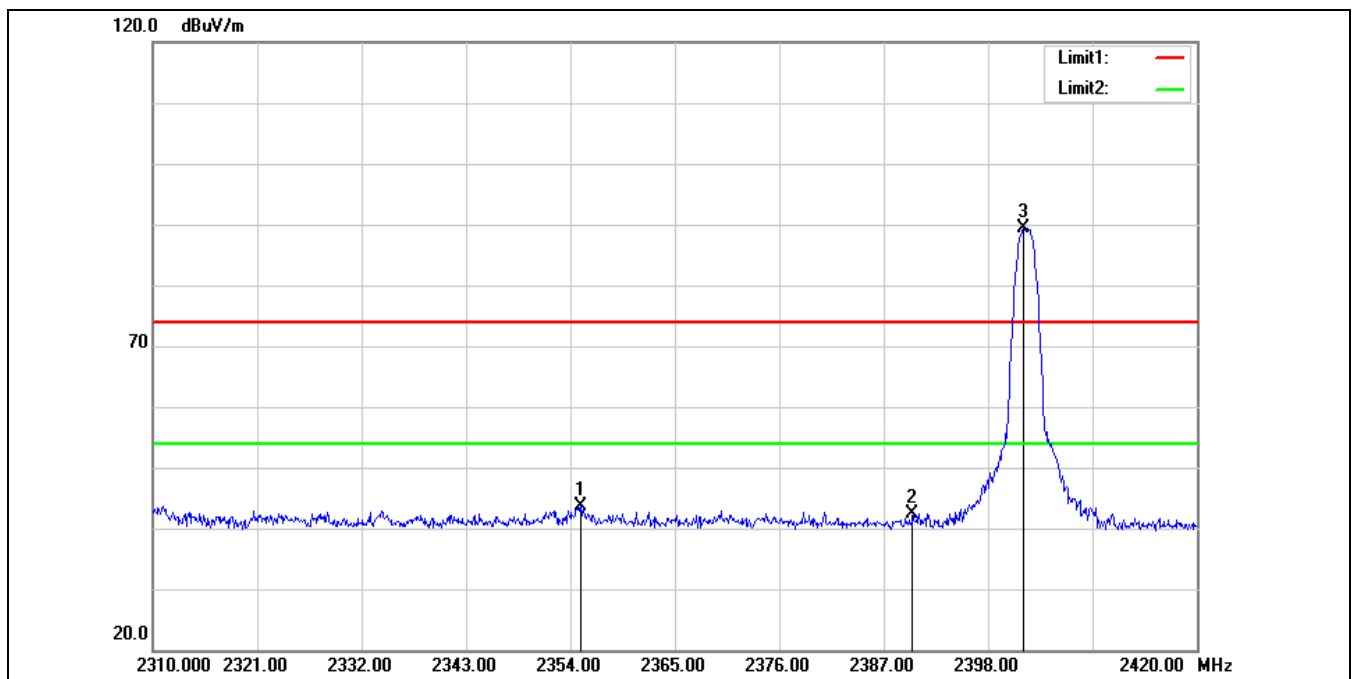


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2355.100	50.15	-6.60	43.55	74.00	-30.45	peak
2	2390.000	49.03	-6.76	42.27	74.00	-31.73	peak
3*	2401.740	96.09	-6.82	89.27	74.00	15.27	peak

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 1 M 2402 MHz		
Remark:			

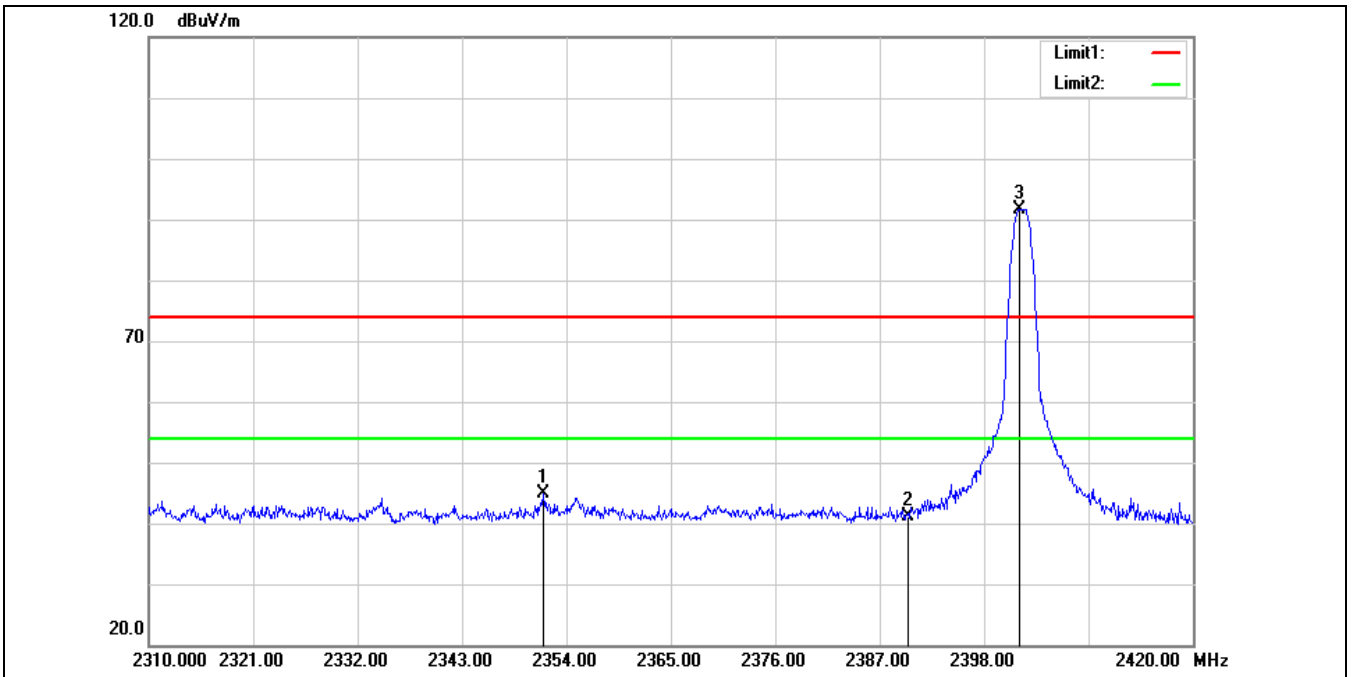


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2351.580	51.43	-6.58	44.85	74.00	-29.15	peak
2	2390.000	47.92	-6.76	41.16	74.00	-32.84	peak
3*	2401.740	98.49	-6.82	91.67	74.00	17.67	peak

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 1 M 2480 MHz		
Remark:			

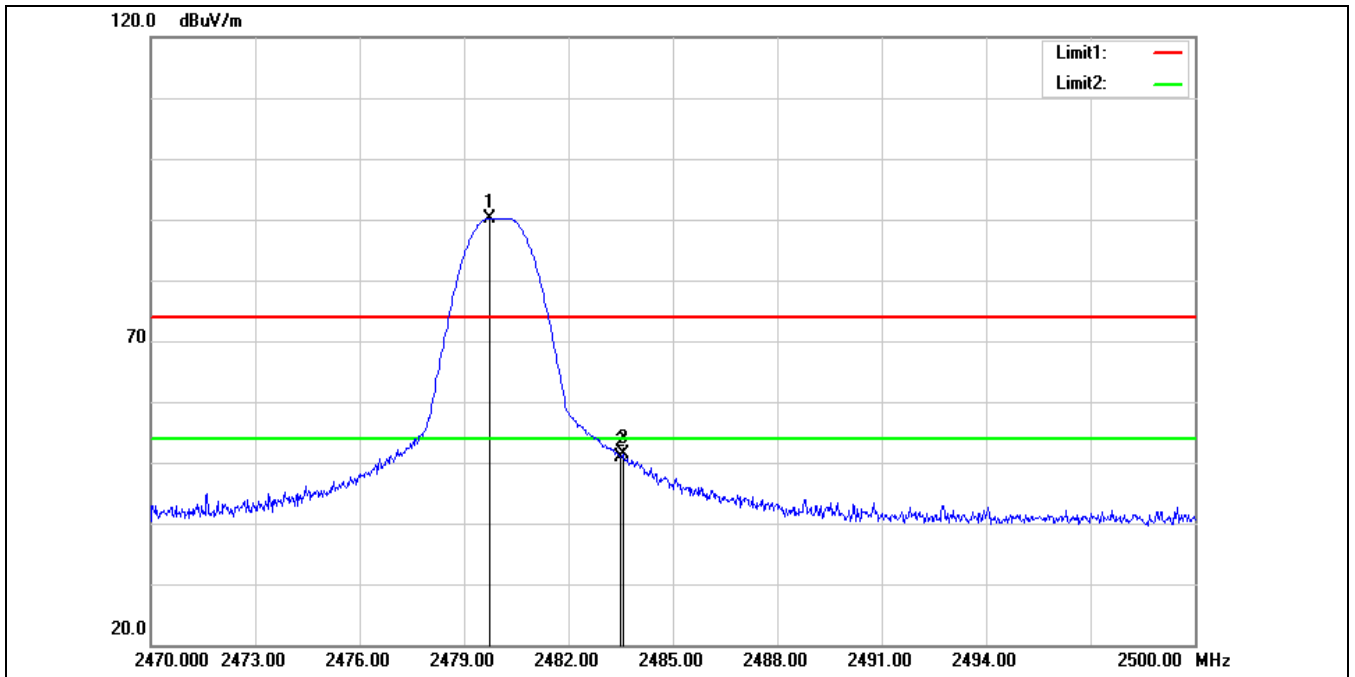


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2479.750	97.20	-7.04	90.16	74.00	16.16	peak
2	2483.500	57.80	-7.04	50.76	74.00	-23.24	peak
3	2483.560	58.34	-7.04	51.30	74.00	-22.70	peak

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 1 M 2480 MHz		
Remark:			

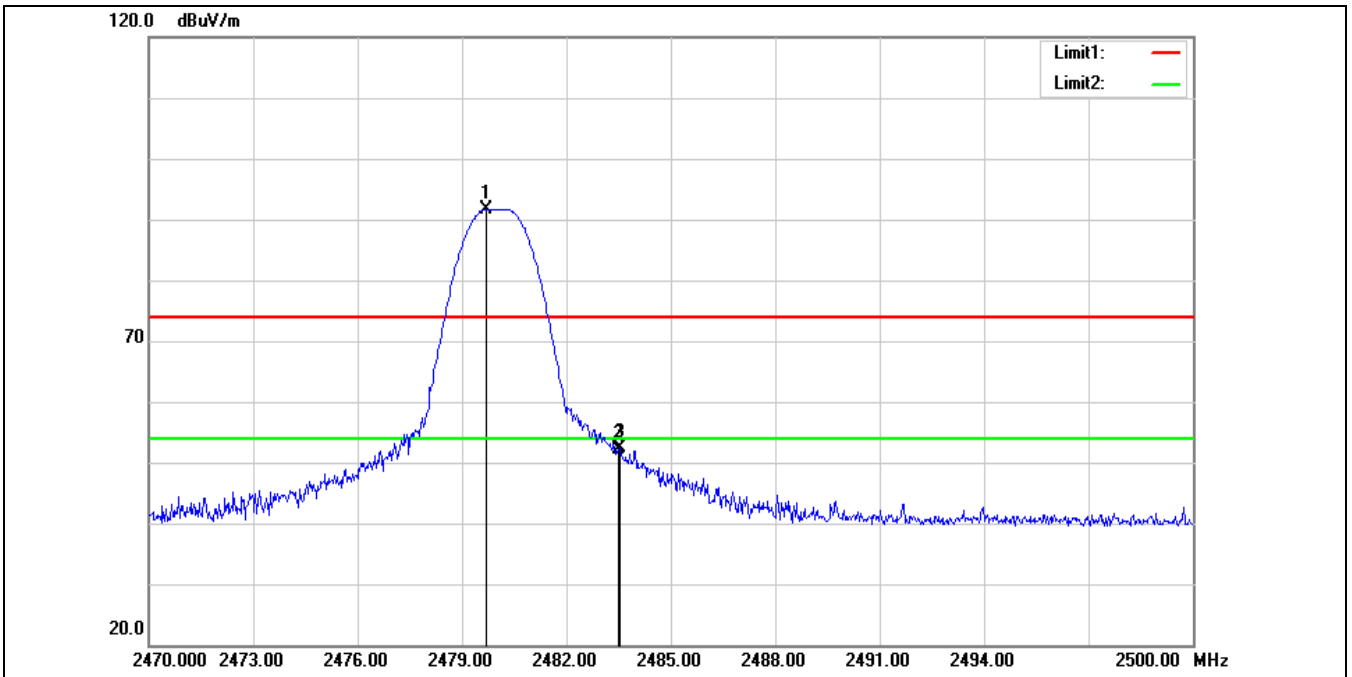


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2479.690	98.75	-7.04	91.71	74.00	17.71	peak
2	2483.500	59.07	-7.04	52.03	74.00	-21.97	peak
3	2483.530	59.50	-7.04	52.46	74.00	-21.54	peak

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 2 M 2402 MHz		
Remark:			

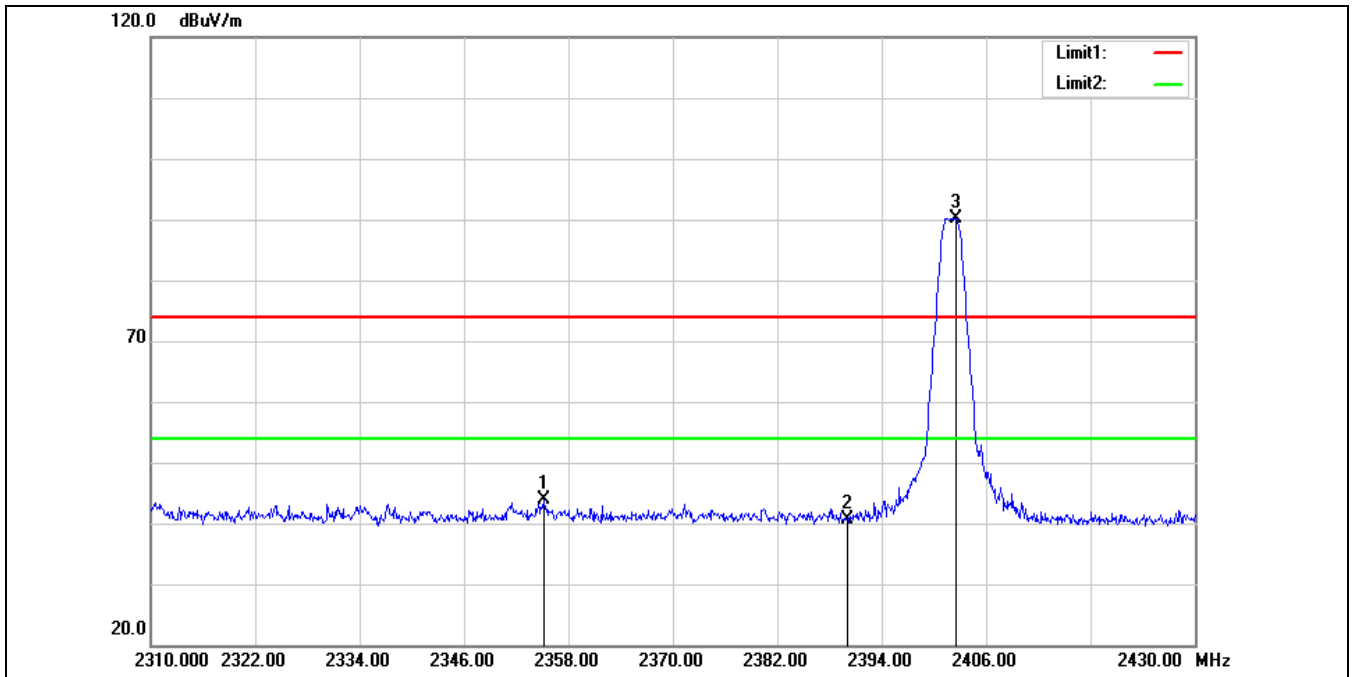


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2355.120	50.39	-6.60	43.79	74.00	-30.21	peak
2	2390.000	47.49	-6.76	40.73	74.00	-33.27	peak
3*	2402.520	97.01	-6.82	90.19	74.00	16.19	peak

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 2 M 2402 MHz		
Remark:			

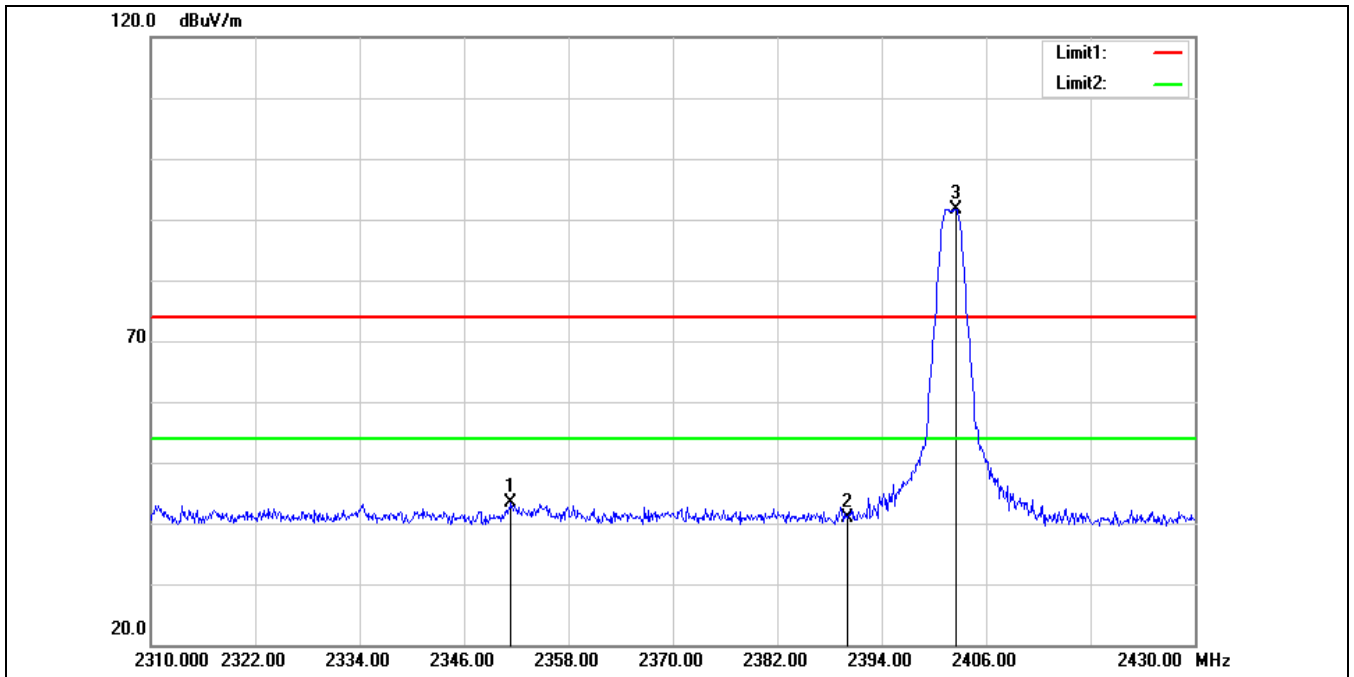


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2351.400	49.87	-6.58	43.29	74.00	-30.71	peak
2	2390.000	47.59	-6.76	40.83	74.00	-33.17	peak
3*	2402.520	98.54	-6.82	91.72	74.00	17.72	peak

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 2 M 2480 MHz		
Remark:			

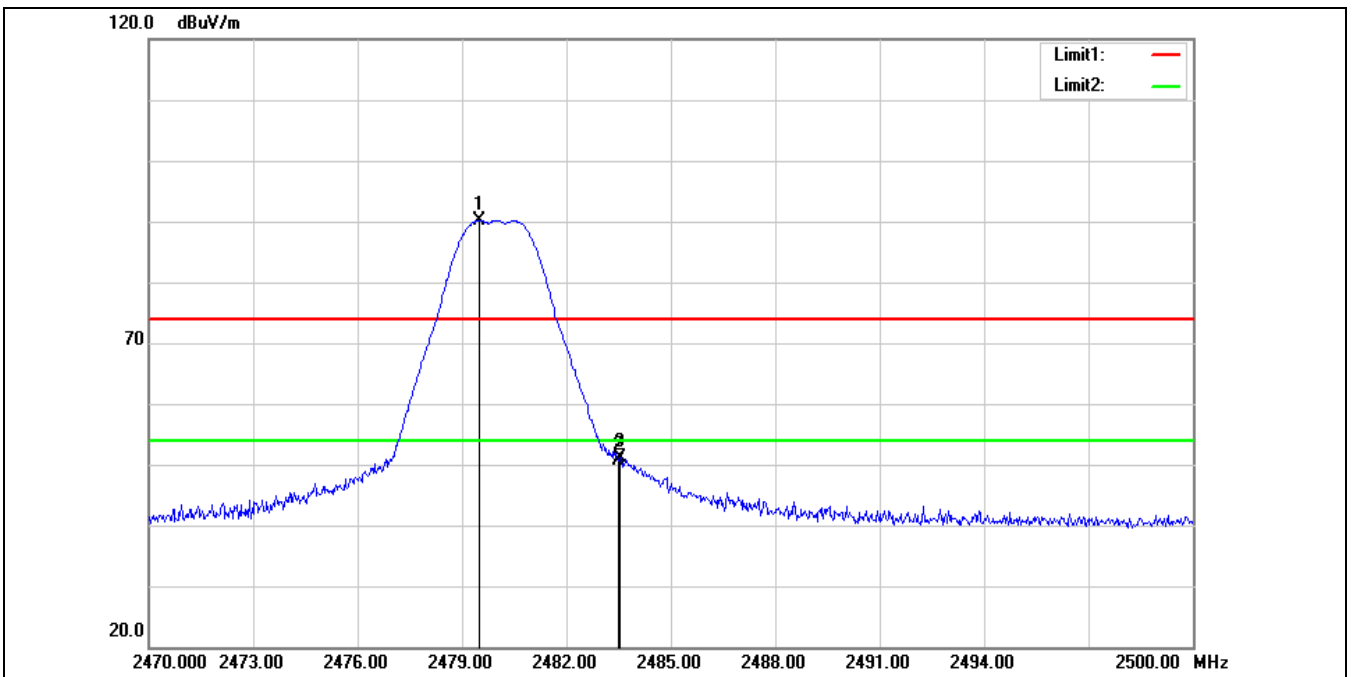

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2479.510	97.21	-7.04	90.17	74.00	16.17	peak
2	2483.500	57.79	-7.04	50.75	74.00	-23.25	peak
3	2483.530	58.20	-7.04	51.16	74.00	-22.84	peak


Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 2 M 2480 MHz		
Remark:			

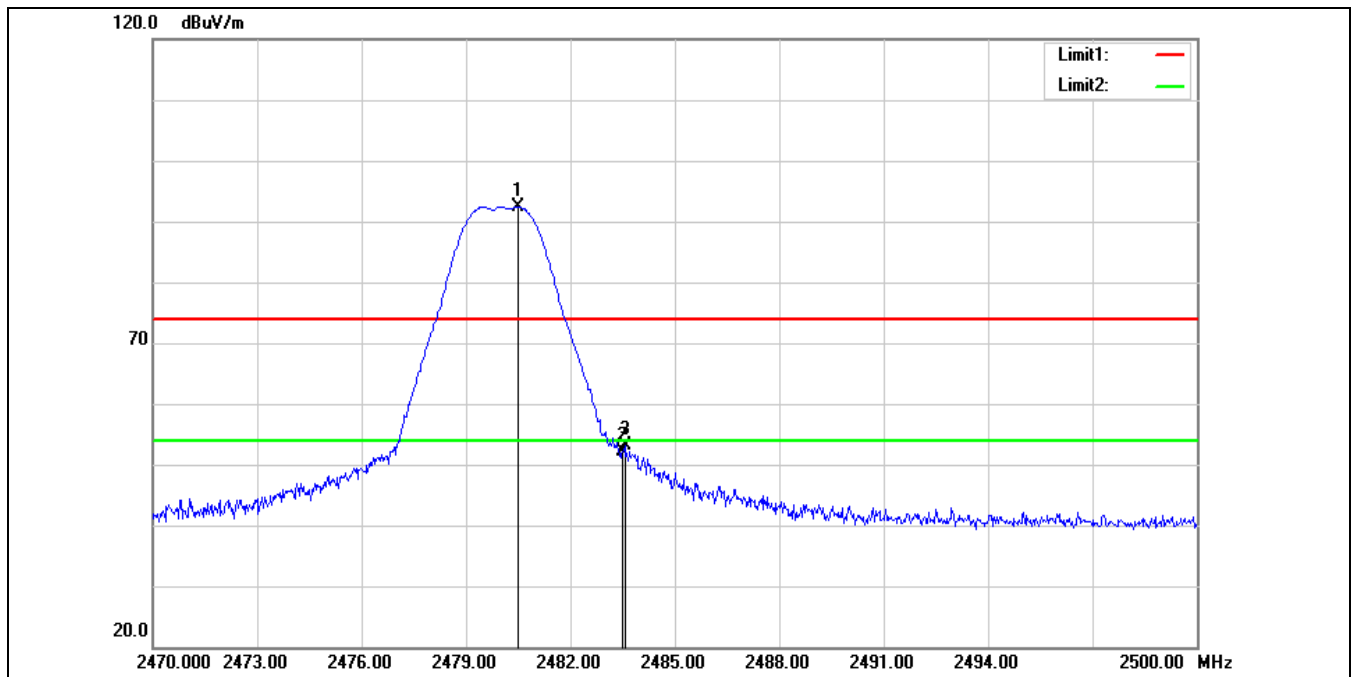

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2480.500	99.43	-7.04	92.39	74.00	18.39	peak
2	2483.500	59.15	-7.04	52.11	74.00	-21.89	peak
3	2483.560	60.16	-7.04	53.12	74.00	-20.88	peak


Average

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 1 M 2480 MHz		
Remark:			

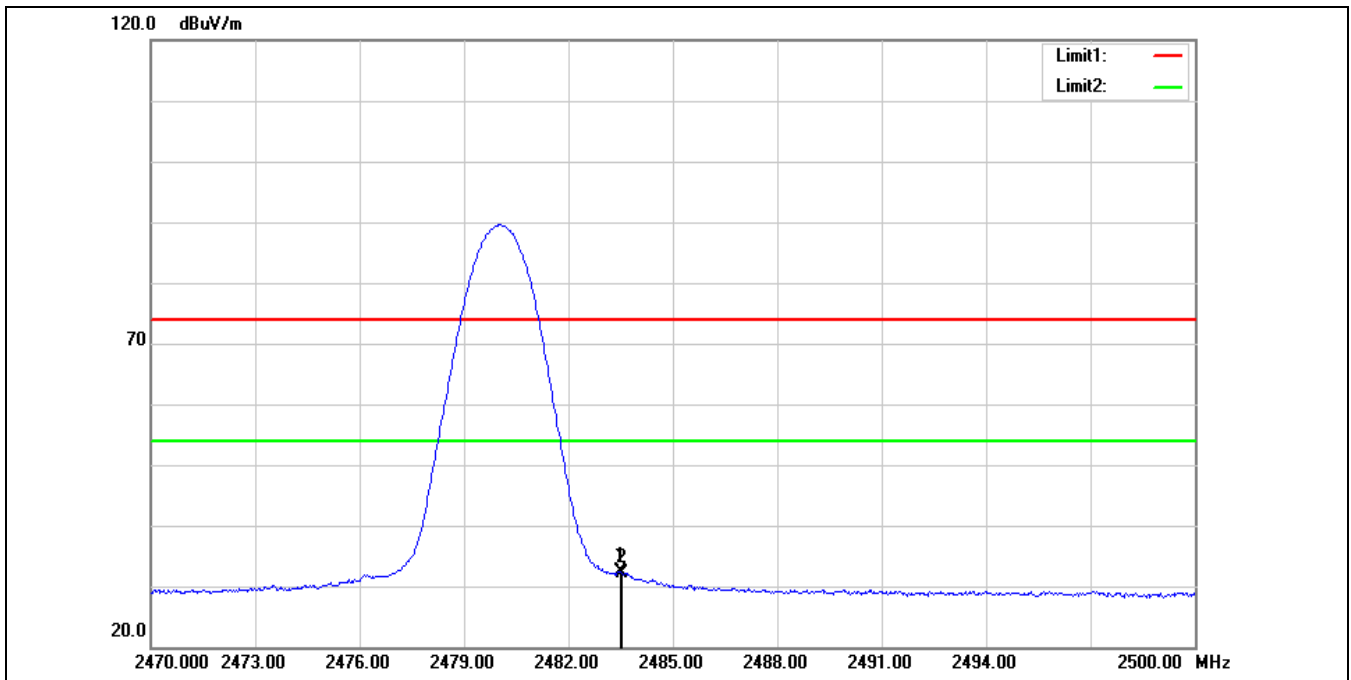


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	39.44	-7.04	32.40	54.00	-21.60	AVG
2	2483.530	39.28	-7.04	32.24	54.00	-21.76	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 1 M 2480 MHz		
Remark:			

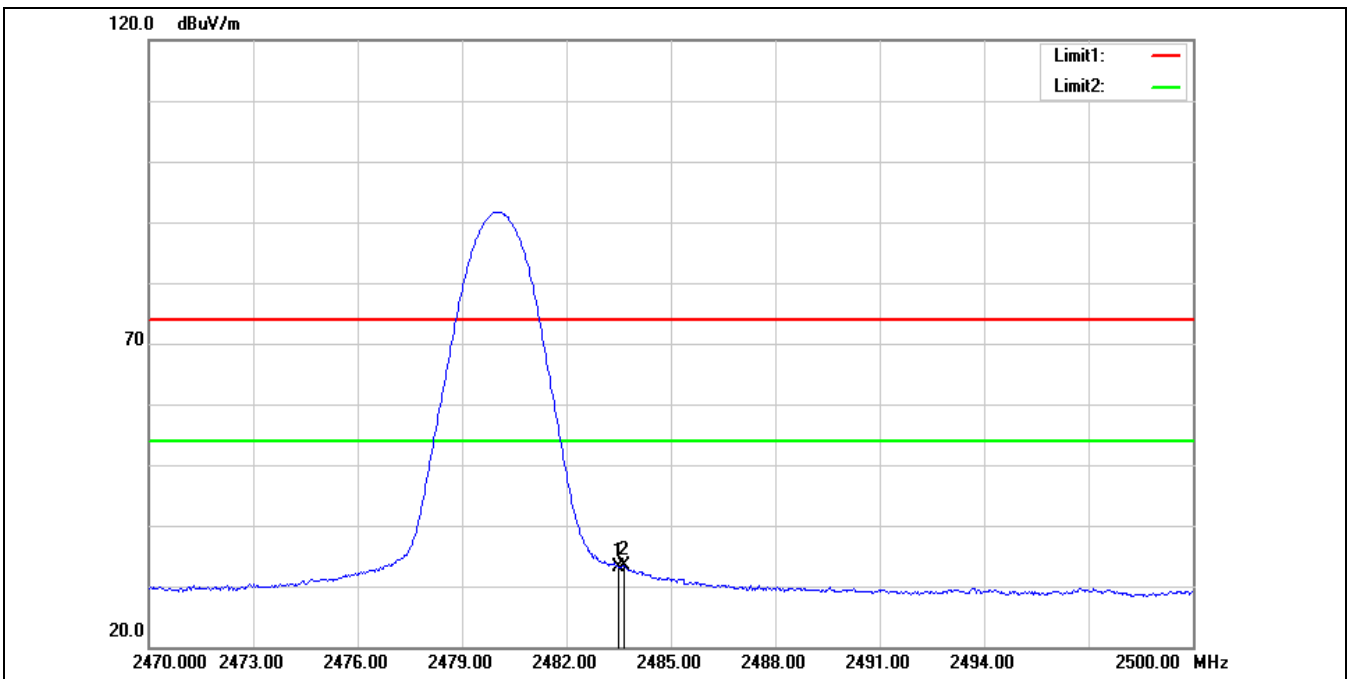


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	40.14	-7.04	33.10	54.00	-20.90	AVG
2*	2483.650	40.40	-7.04	33.36	54.00	-20.64	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	BLE 2 M 2480 MHz		
Remark:			

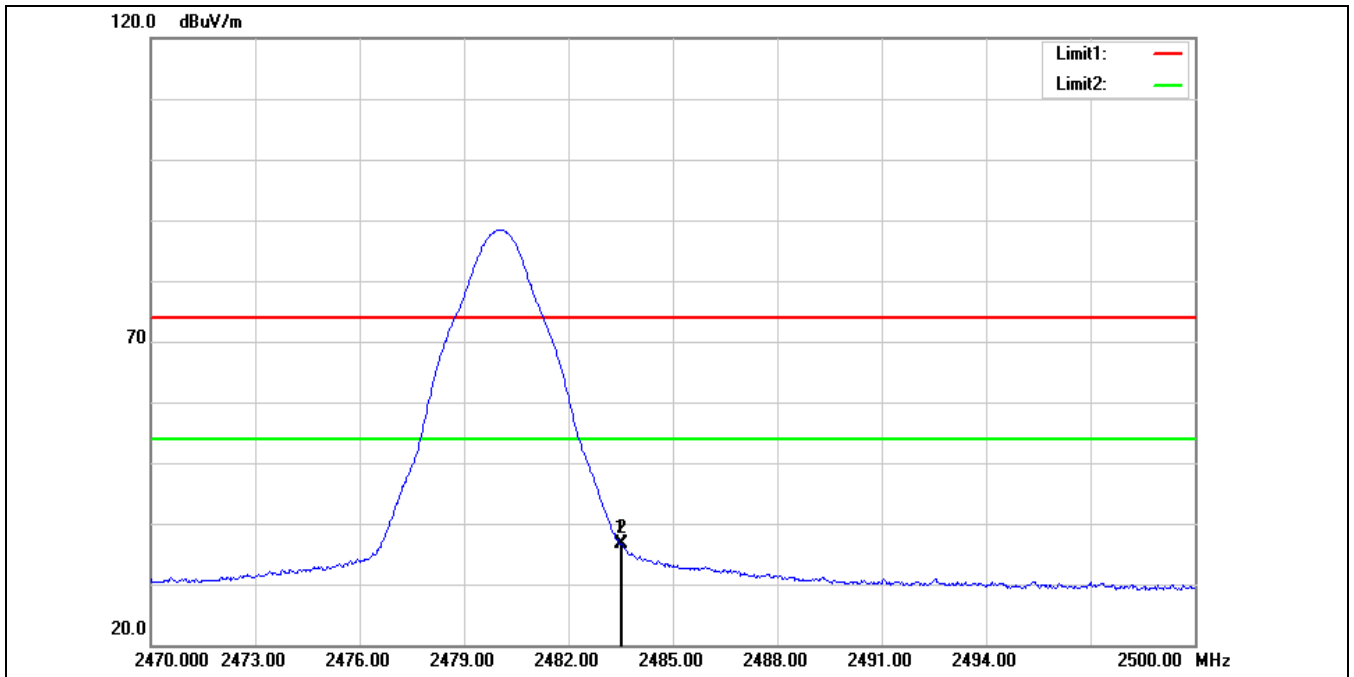

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	43.63	-7.04	36.59	54.00	-17.41	AVG
2	2483.530	43.60	-7.04	36.56	54.00	-17.44	AVG

Standard:	FCC Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	BLE 2 M 2480 MHz		
Remark:			

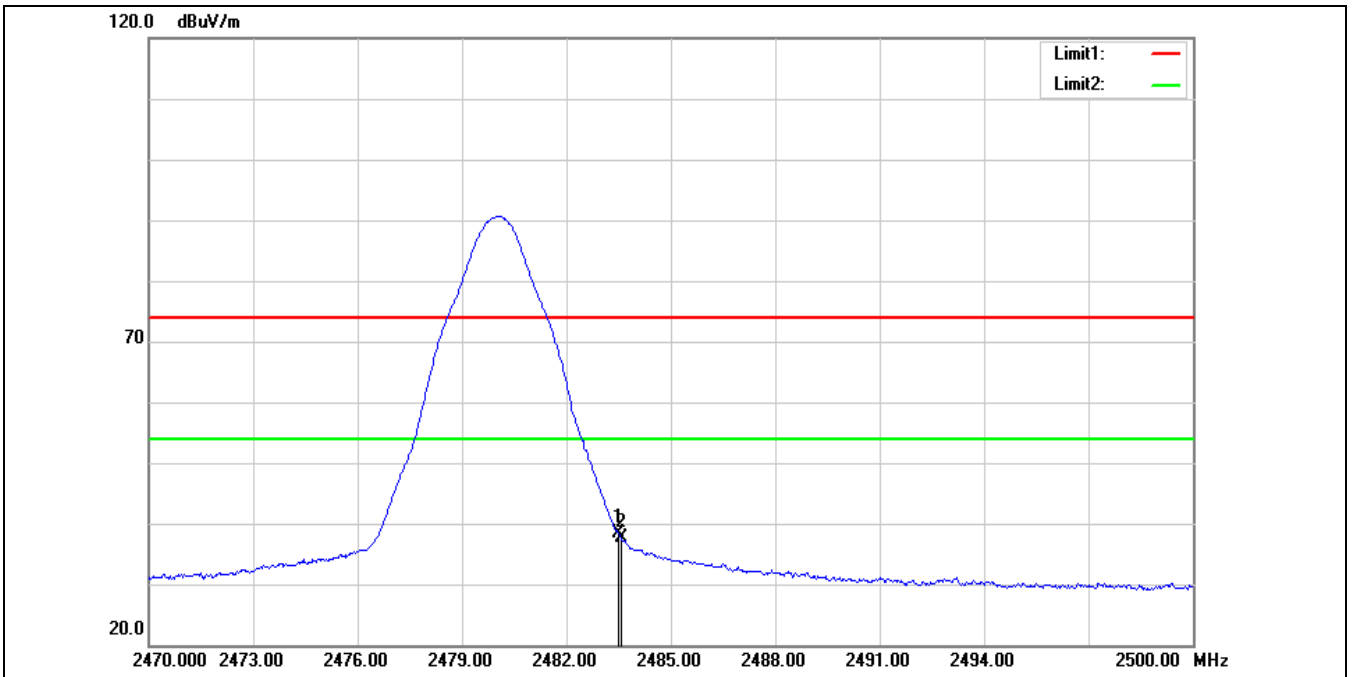

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	45.48	-7.04	38.44	54.00	-15.56	AVG
2	2483.590	44.58	-7.04	37.54	54.00	-16.46	AVG

---END---