

Measurements Results

No.1-3180/21-01-02_Annex_Frequency Stability

Test logging

This document is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Test/s performed:

Thomas Vogler
Lab Manager
Radio Labs

Meheza Walla
Lab Manager
Radio Labs

Table of Content

EUT Information

3

EUT Information

EUT DEFINITION

Manufacturer	ifm electronic gmbh
Type	R1D200 (TR23)
Serial Number	000000000097
Setup Number	1.0
Version SW	NI
Version FW	NI
Version HW	NI
Comment 1	
Comment 2	
Temperature [°C] Min	-40
Temperature [°C] Nom	20
Temperature [°C] Max	85
Voltage [V] Min	10
Voltage [V] Nom	24
Voltage [V] Max	30

Test References

TC Start	15.03.2023 18:25:11
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	4.0.0.0
Test Specification	Systems FCC -
Test Method	
TC Version	0.0.1
My Description	Systems FCC Freq stability over temp/volt
Add. Information	

Test Parameter

Switched Path	none
Temp Variation enabled Voltage Variation enabled	Yes Yes
Additional Information	


Test Equipment

Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

Test for Temperature[°C]: 20 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

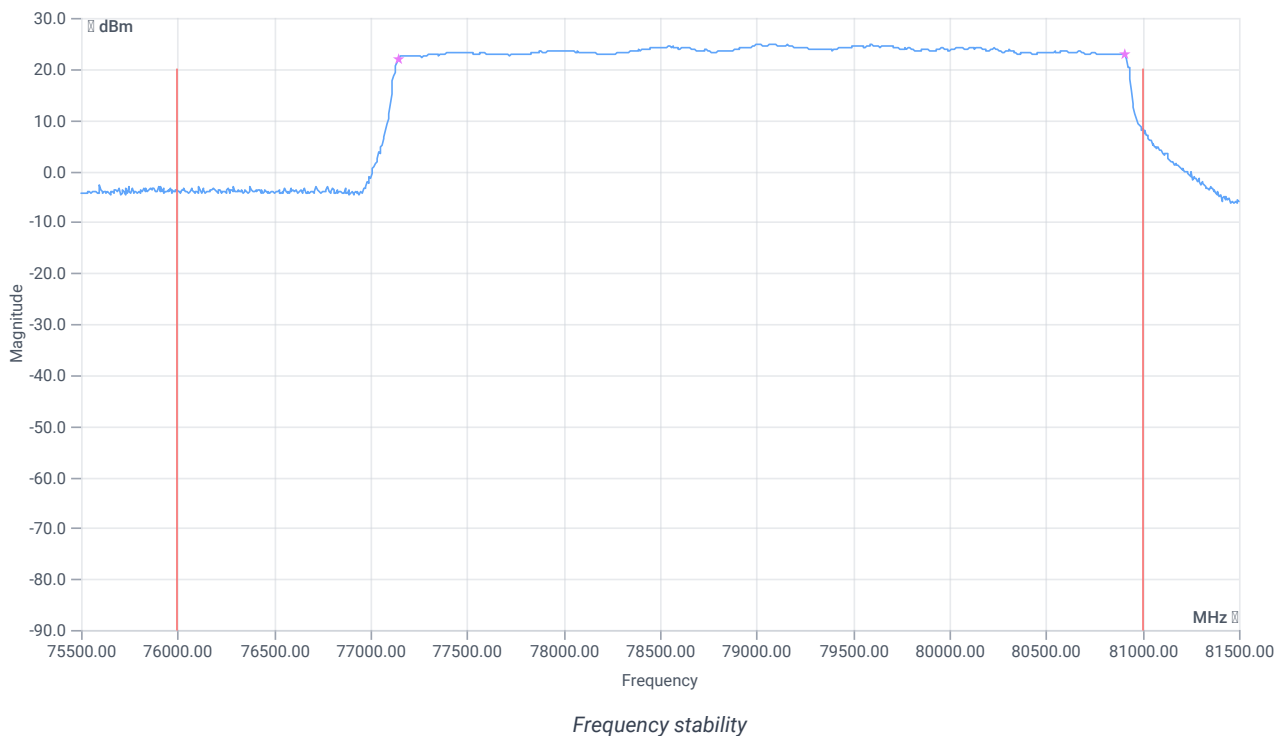


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3764.853	MHz	INFO
T1 99%	76000	---	77146.3678	MHz	PASS
T2 99%	---	81000	80911.2208	MHz	PASS

Test for Temperature[°C]: 20 | Voltage [V]: 20.4

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

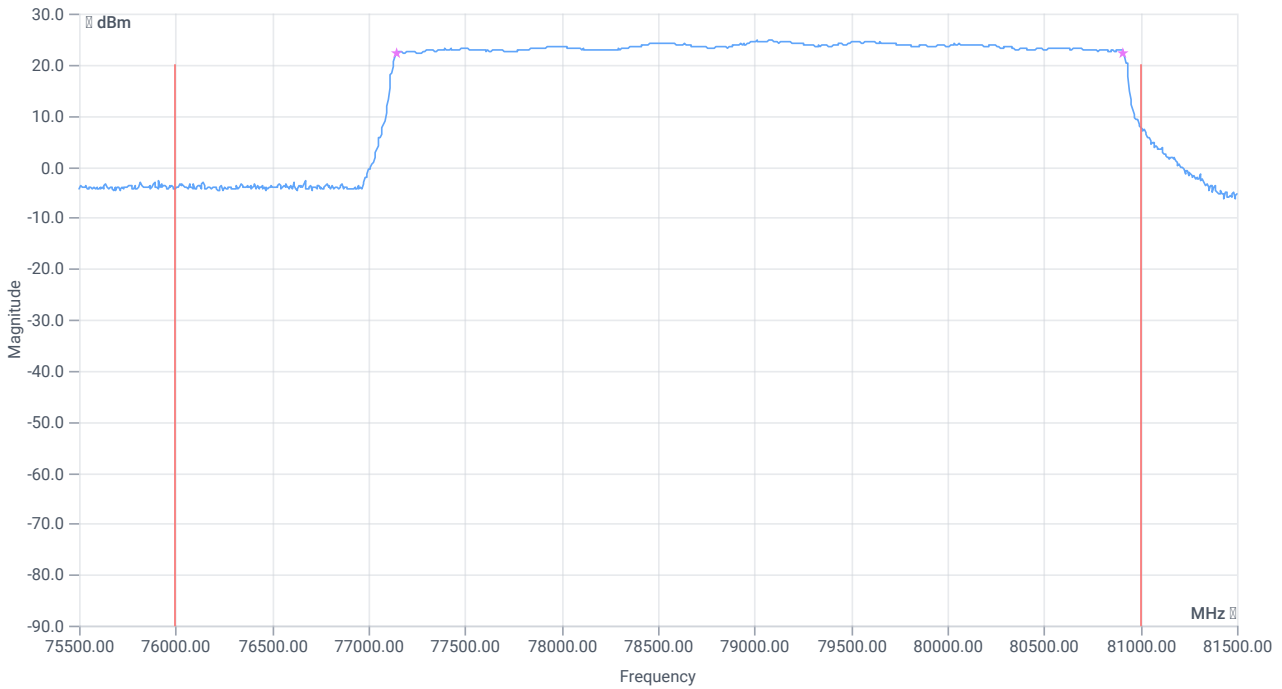

Frequency stability


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3765.738	MHz	INFO
T1 99%	76000	--	77144.9911	MHz	PASS
T2 99%	--	81000	80910.7292	MHz	PASS

Test for Temperature[°C]: 20 | Voltage [V]: 27.6

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

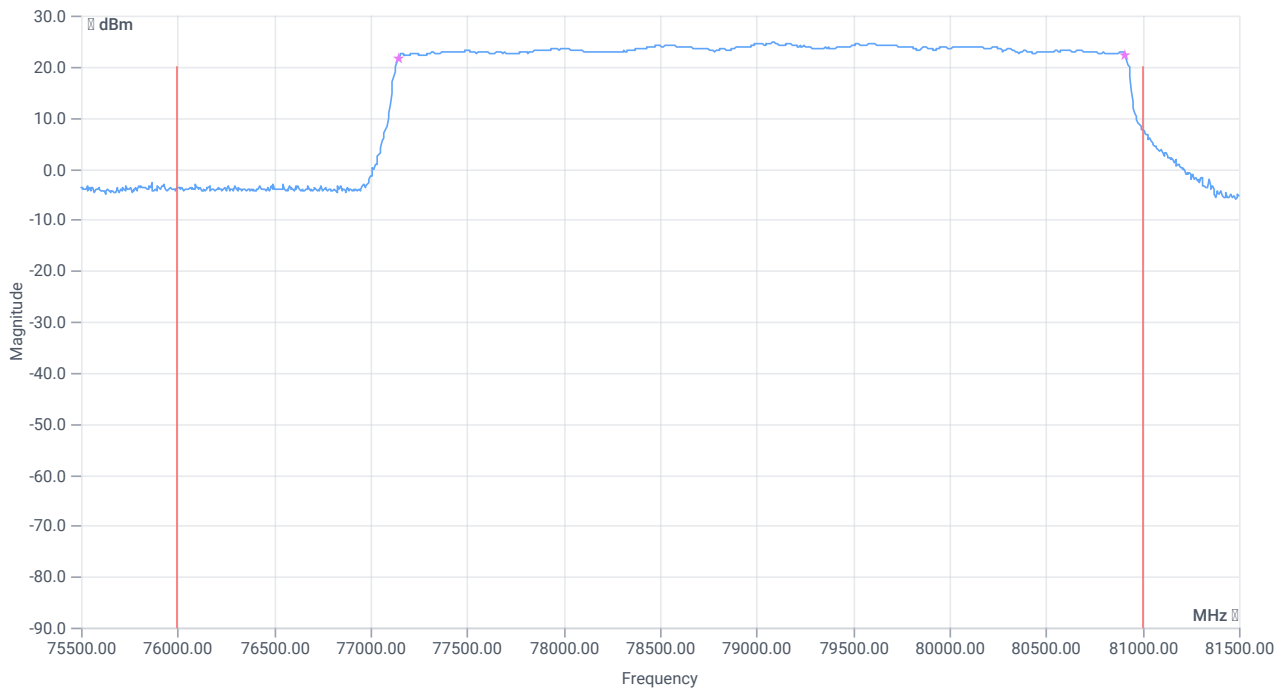

Frequency stability


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3762.627	MHz	INFO
T1 99%	76000	--	77147.9425	MHz	PASS
T2 99%	--	81000	80910.5693	MHz	PASS

Test for Temperature[°C]: -20 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

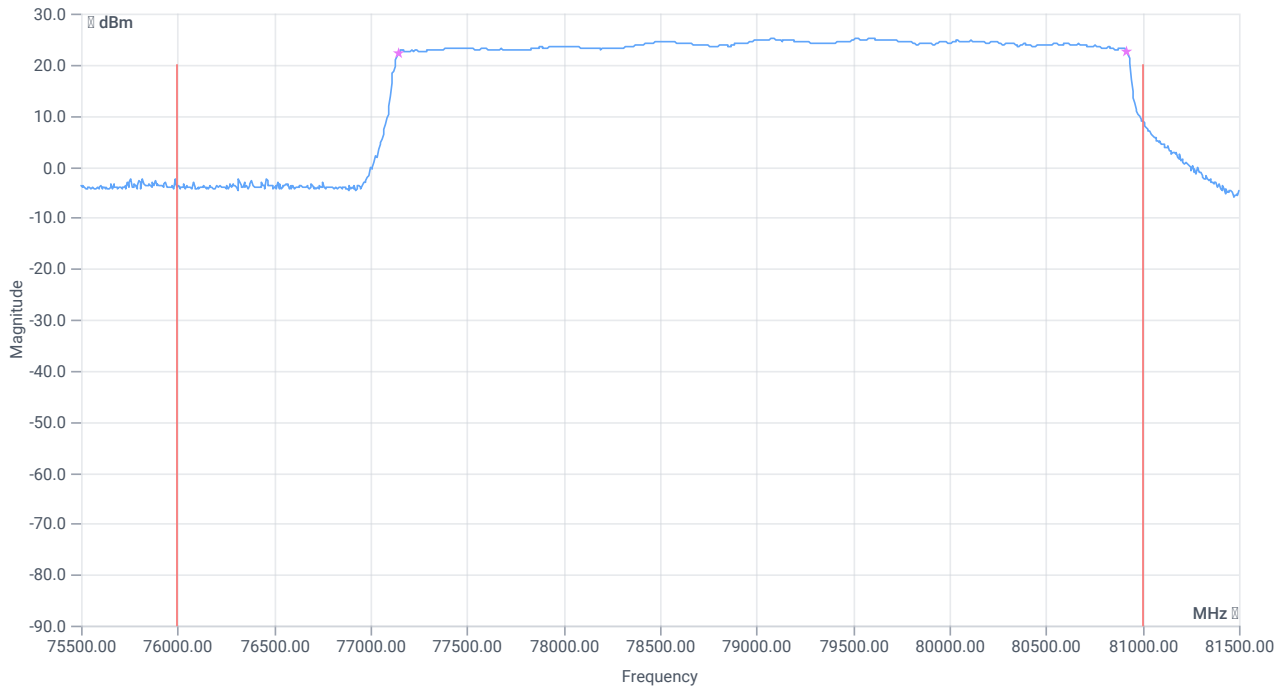

Frequency stability


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3770.320	MHz	INFO
T1 99%	76000	--	77146.0884	MHz	PASS
T2 99%	--	81000	80916.4086	MHz	PASS

Test for Temperature[°C]: -10 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

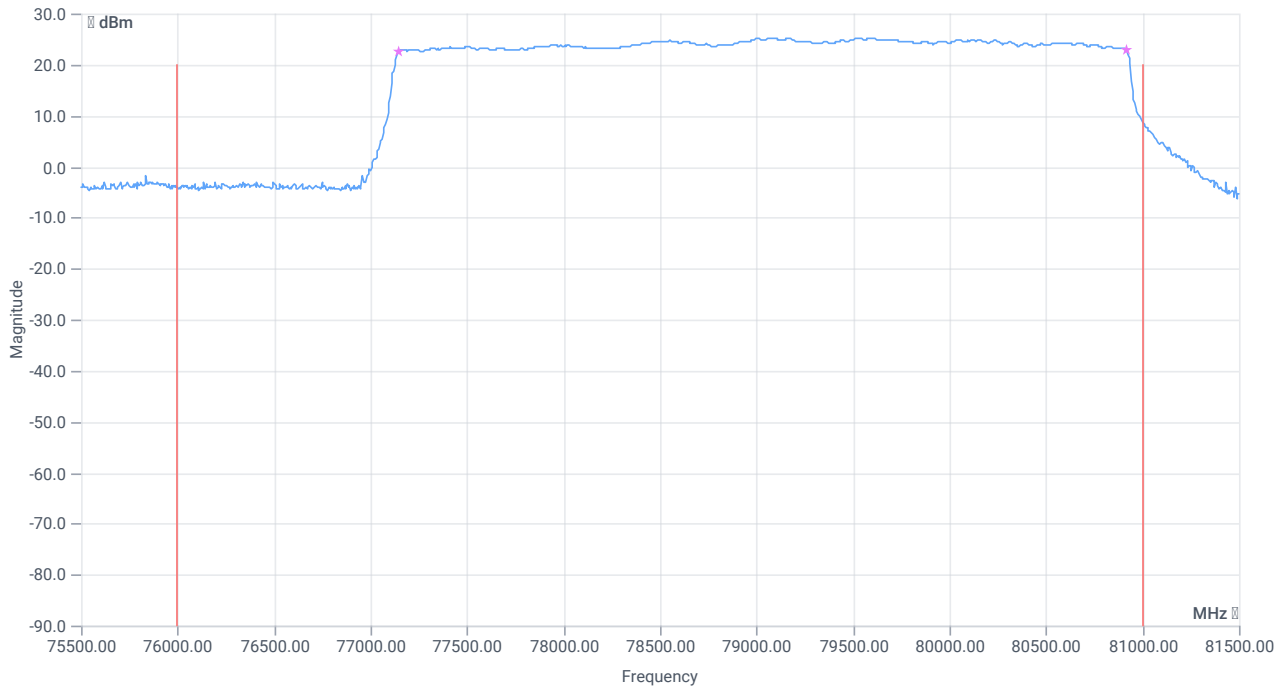

Frequency stability

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3770.002	MHz	INFO
T1 99%	76000	--	77145.8524	MHz	PASS
T2 99%	--	81000	80915.8542	MHz	PASS

Test References

TC Start	16.03.2023 10:05:14
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	4.0.0.0
Test Specification	Systems FCC -
Test Method	
TC Version	0.0.1
My Description	Systems FCC Freq stability over temp/volt
Add. Information	

Test Parameter

Switched Path	none
Temp Variation enabled Voltage Variation enabled	Yes No
Additional Information	

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3

Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E

Test for Temperature[°C]: 0 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

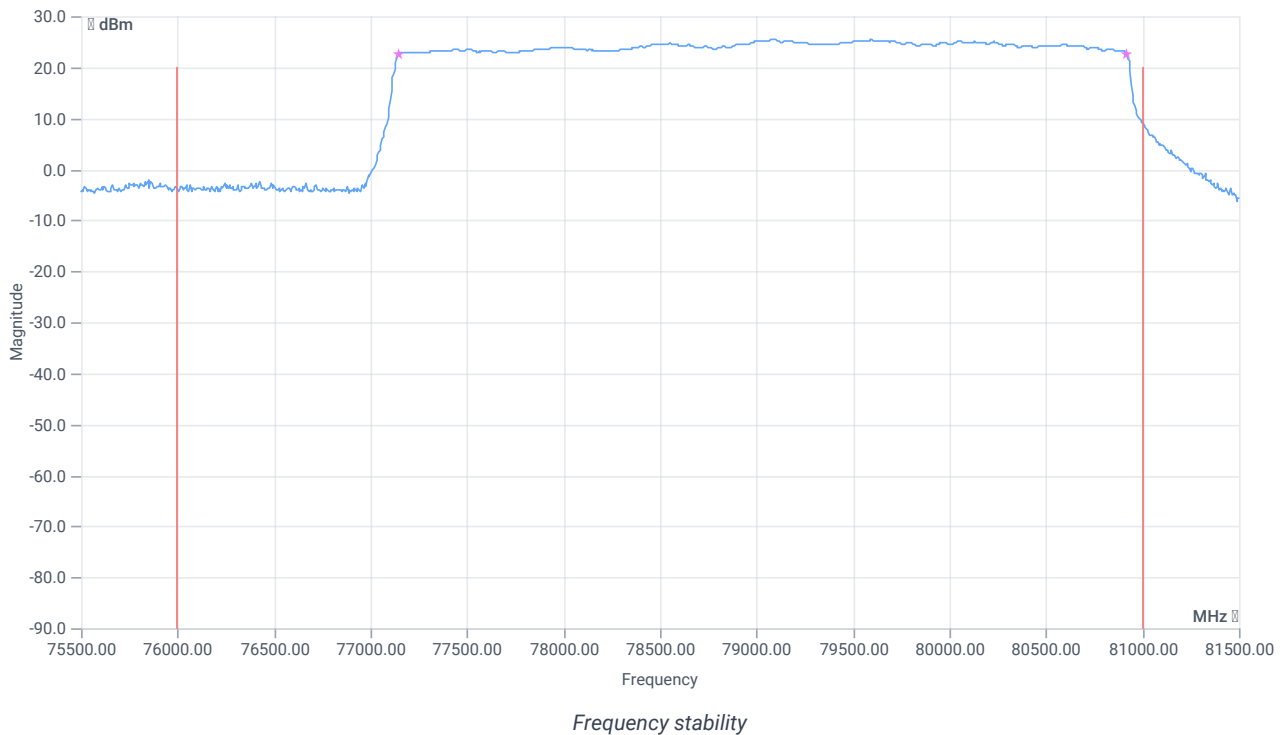

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3766.260	MHz	INFO
T1 99%	76000	---	77147.6229	MHz	PASS
T2 99%	---	81000	80913.8829	MHz	PASS

Verdict

PASS

Test References

TC Start	16.03.2023 10:16:09
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	4.0.0.0
Test Specification	Systems FCC -
Test Method	
TC Version	0.0.1
My Description	Systems FCC Freq stability over temp/volt
Add. Information	

Test Parameter

Switched Path	none
Temp Variation enabled Voltage Variation enabled	Yes No
Additional Information	


Test Equipment

Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

Test for Temperature[°C]: 10 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

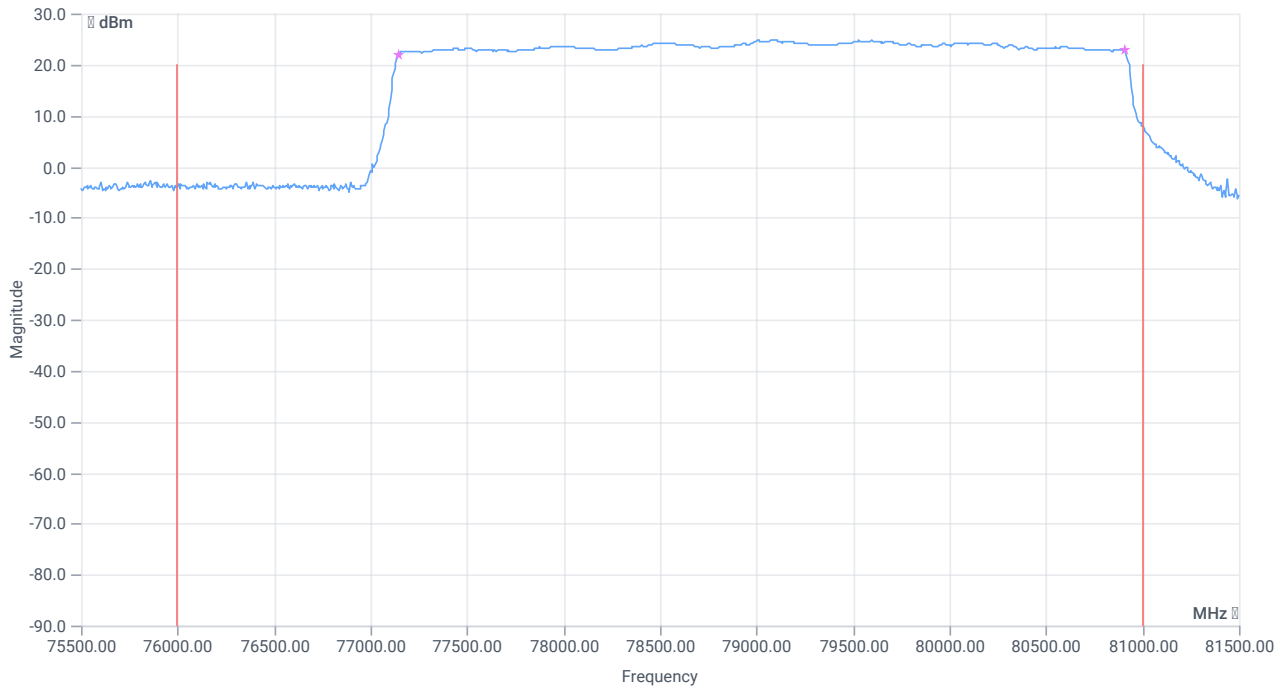

Frequency stability


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3764.565	MHz	INFO
T1 99%	76000	--	77146.8934	MHz	PASS
T2 99%	--	81000	80911.4580	MHz	PASS

Test for Temperature[°C]: 20 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

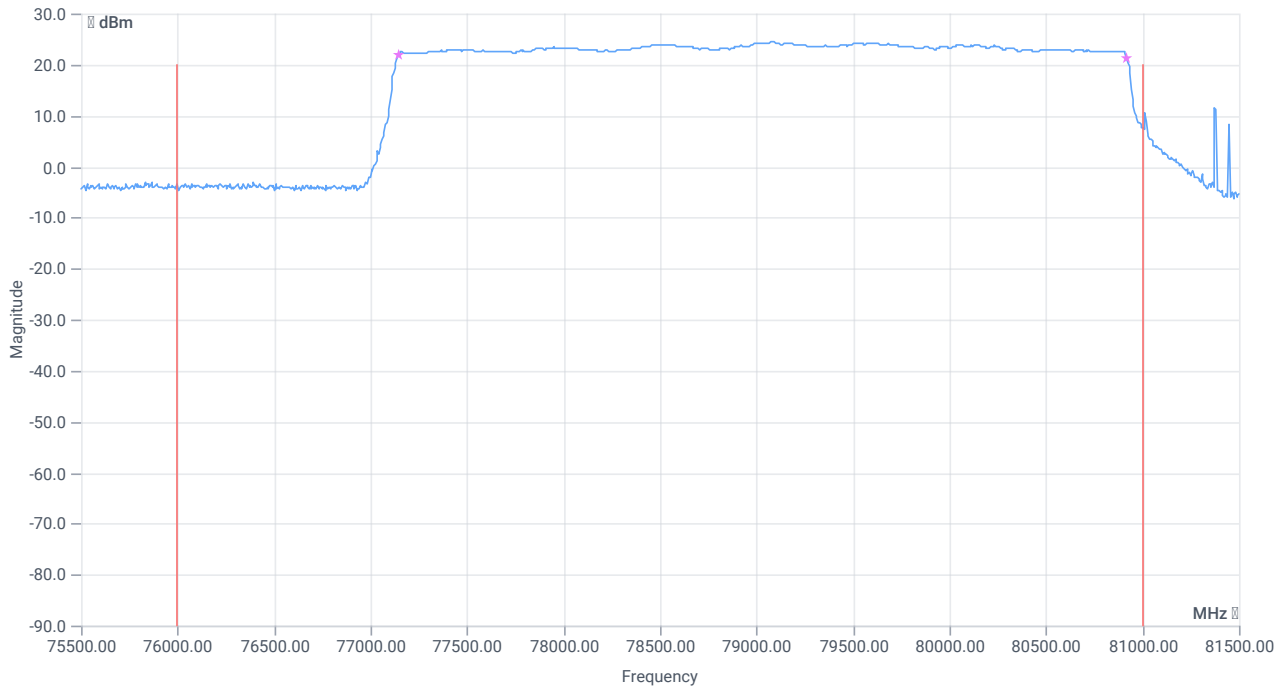

Frequency stability


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3768.158	MHz	INFO
T1 99%	76000	--	77144.7838	MHz	PASS
T2 99%	--	81000	80912.9413	MHz	PASS

Test for Temperature[°C]: 30 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

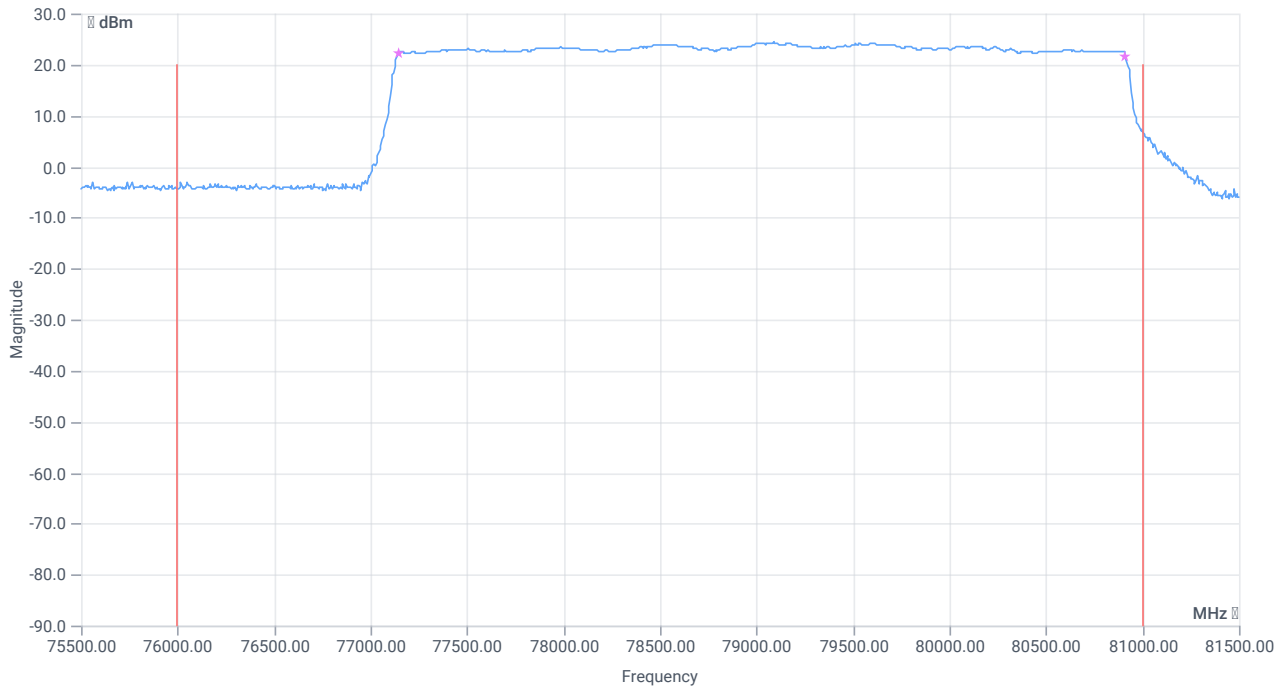

Frequency stability


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3765.581	MHz	INFO
T1 99%	76000	--	77142.6100	MHz	PASS
T2 99%	--	81000	80908.1911	MHz	PASS

Test for Temperature[°C]: 40 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

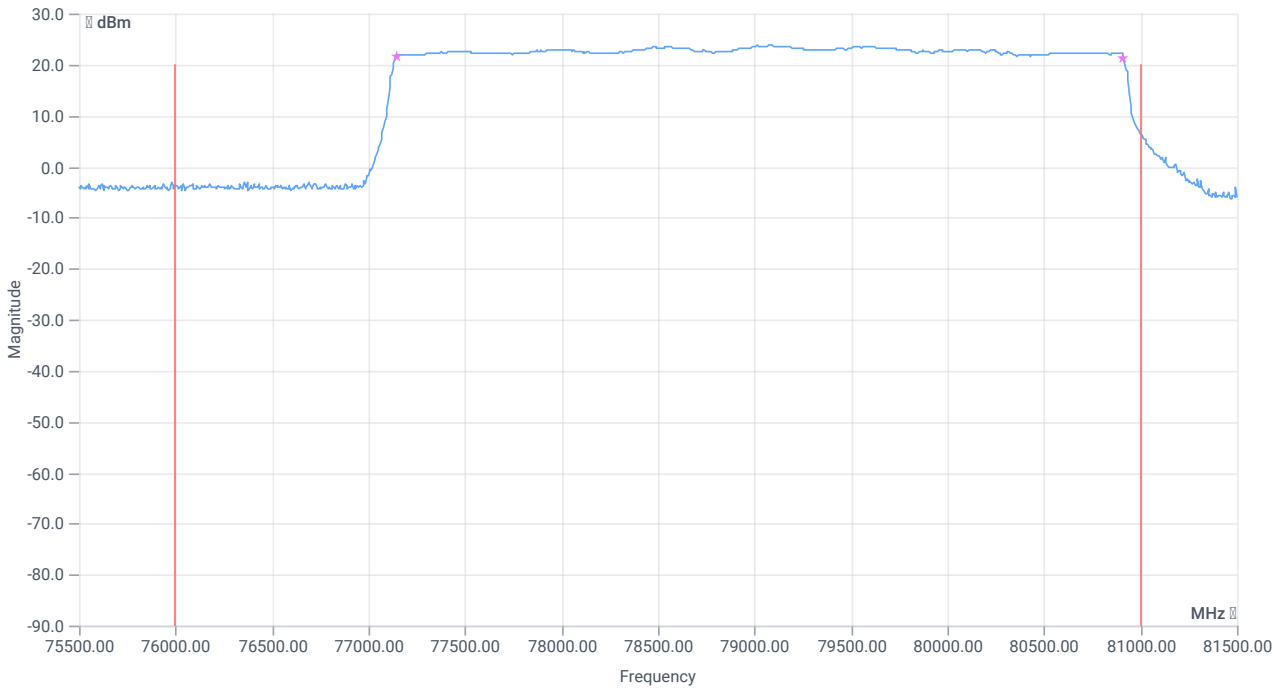

Frequency stability


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3765.589	MHz	INFO
T1 99%	76000	--	77142.5004	MHz	PASS
T2 99%	--	81000	80908.0890	MHz	PASS

Test for Temperature[°C]: 50 | Voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	35.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 81500.000
RBW [MHz] VBW [MHz]	50.000000 80.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	100000 1 1001 SWE

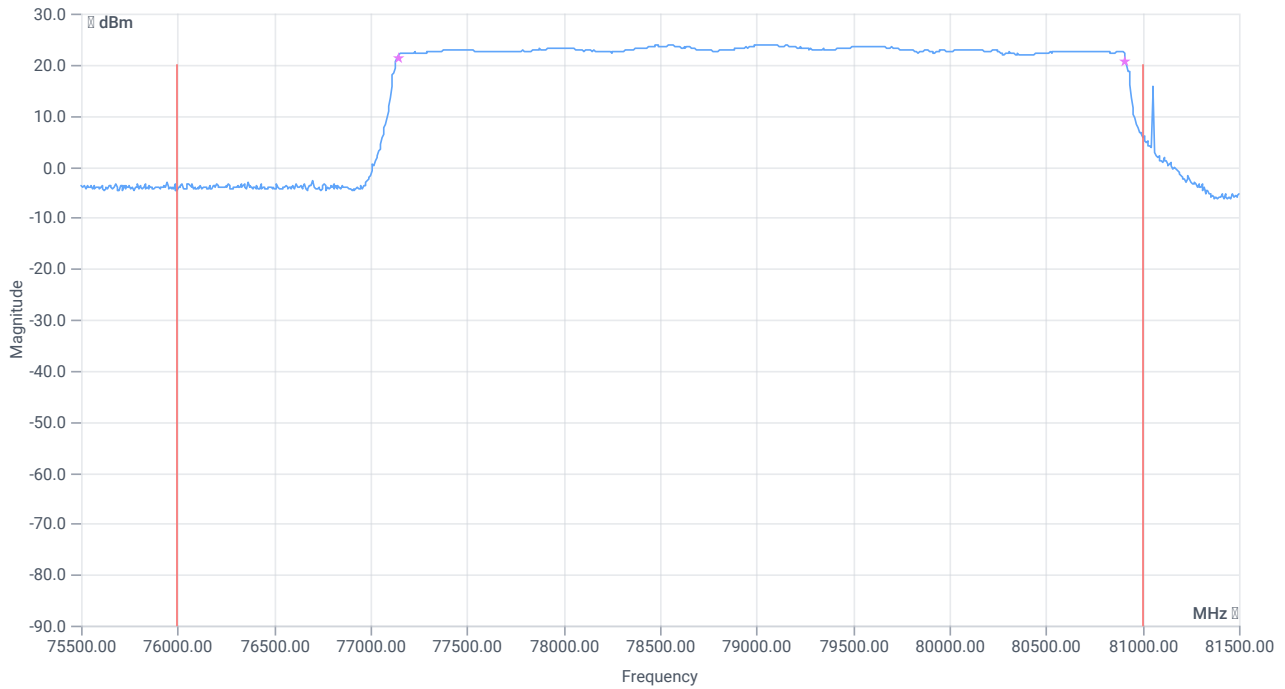

Frequency stability

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	--	--	3765.039	MHz	INFO
T1 99%	76000	--	77141.8745	MHz	PASS
T2 99%	--	81000	80906.9131	MHz	PASS

Verdict

PASS

- END OF DOCUMENT -