



安裝孔配合尺寸

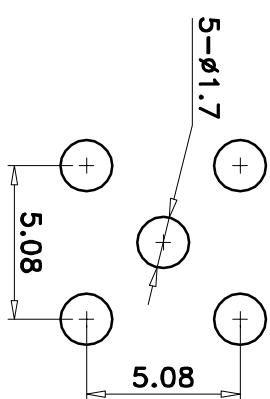

注：



連接器在包裝時，螺牙端用防塵帽套住。四角端用保護蓋套住

(RP)SMA-JACK DIMENSION			
Code	mm	min	max
None			
A	1/4-36UNS-2A		
B	5.28	5.49	
C	4.60	4.67	
D	1.88	2.05	
E	2.92	—	
F	0.00	0.25	
G	0.00	0.25	
H	0.38	1.14	
K	4.32	—	

25<L<=80	±0.50	TITLE	SCALE	3 : 1	DRAWN	李連華	28/11/08
8<L<=25	±0.30	PART NAME	G-(RP)SMA-JHD4	MATERIAL	INSPECTED		
L<=8	±0.20			HANDLING	APPROVED		
線性尺寸L	未注尺寸偏差			DRAWING NO.	G-(RP)SMA-JHD4AO		

第三角畫法

REV.	ISSUE FOR	OLD DRAWING NO.	80<L<=250	± 0.50
①	要求按客戶提供的樣板及PBC網絡測試	G-R9604601B002B-E93	25<L<=80	± 0.40
②	客戶要求連接器SMA-P改為(RP)SMA-K	G-R9604601B002C-E93	8<L<=25	± 0.30
	L<=8		± 0.20	
	線性尺寸L	未注尺寸偏差		

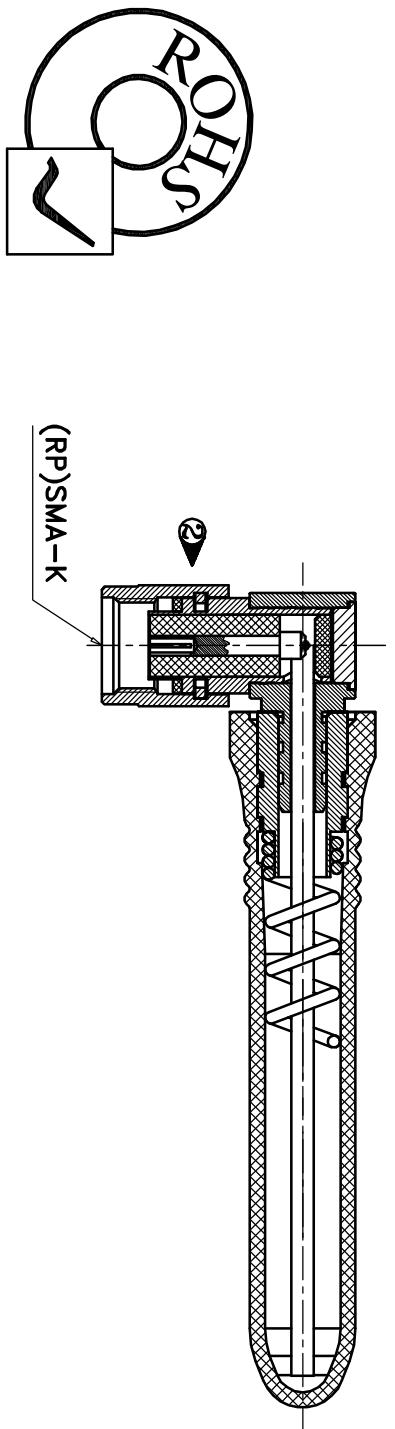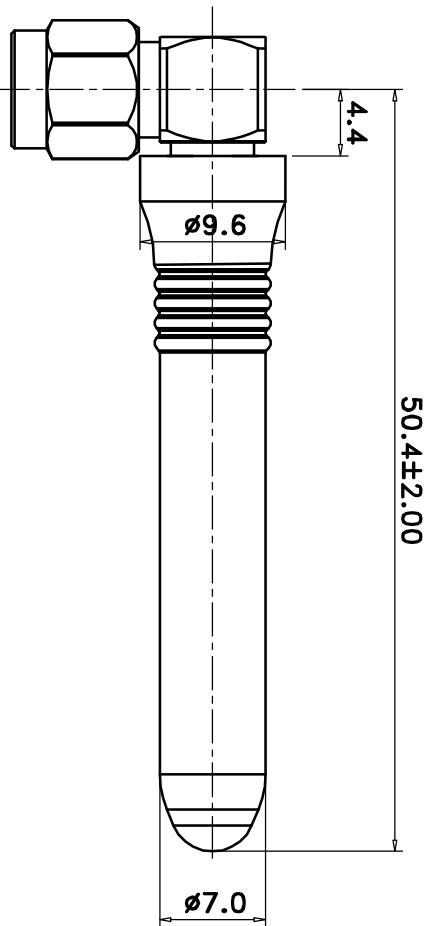

注:

1. 天線工作頻率爲:2.4~2.5GHz
2. 膠管顏色爲黑色。
3. 天線用(RP)SMA-K連接器,表面鍍金。

TITLE	Rubber Antenna	SCALE	2 : 1	DRAWN	溫東明	28/11/06
PART NAME	G-RA-96046(E93-002/F)	MATERIAL		INSPECTED		
BONDAL ELETTRONICS LTD.		HANDLING		APPROVED		
		DRAWING NO.			G-R9604601B002F-E93	

