




SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Trinity Security Systems Inc.
Applicant Address	Alte Building Higashikanda Chiyoda-ku Tokyo, 101-0031 Japan
FCC ID	UOH-AG623T
Manufacturer's company	Z-Com, Inc.
Manufacturer Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan

Product Name	802.11a/g wireless LAN mini PCI adapter
Brand Name	Trinity Security Systems (T-SS)
Model Name	AG-623G
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Oct. 03, 2006
Final Test Date	May 12, 2007
Submission Type	Original Equipment
Operating Mode	Master

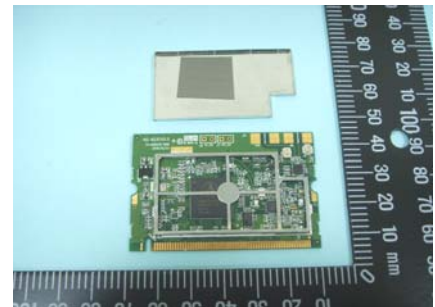

Statement

Test result included is only for the 802.11a (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies	3
3.5. Table for Test Modes	4
3.6. Table for Testing Locations.....	4
3.7. Table for Class II Change	5
3.8. Table for Supporting Units	5
3.9. Table for Parameters of Test Software Setting	5
3.10. Test Configurations	6
4. TEST RESULT	8
4.1. AC Power Line Conducted Emissions Measurement.....	8
4.2. 99% Occupied Bandwidth Measurement	13
4.3. Maximum Conducted Output Power Measurement.....	17
4.4. Power Spectral Density Measurement	21
4.5. Peak Excursion Measurement	25
4.6. Radiated Emissions Measurement	29
4.7. Band Edge Emissions Measurement	43
4.8. Frequency Stability Measurement	48
4.9. Antenna Requirements	50
5. LIST OF MEASURING EQUIPMENTS	51
6. TEST LOCATION.....	53
7. TAF CERTIFICATE OF ACCREDITATION	54
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A5
APPENDIX B. TEST PHOTOS.....	B1 ~ B8
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3



History of This Test Report

Original Issue Date: May 25, 2007

Report No.: FR751609-AA

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11a/g wireless LAN mini PCI adapter
Brand Name : Trinity Security Systems (T-SS)
Model Name : AG-623G
Applicant : Trinity Security Systems Inc.
Test Rule Part(s) : MIC Notice No.88 Appendix No.44

Sporton International as requested by the applicant to evaluate the Radio performance of the product sample received on Oct. 03, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's Radio nature.

A handwritten signature in blue ink, appearing to read 'Wayne Hsu 1/6/07', is written over a horizontal line.

Reviewed By:

Wayne Hsu

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.79 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	4.79dB
4.4	15.407(a)	Power Spectral Density	Complies	9.16 dB
4.5	15.407(a)	Peak Excursion	Complies	7.13 dB
4.6	15.407(b)	Radiated Emissions	Complies	2.60 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.89 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From Host system (Notebook)
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54/108)
Frequency Range	5150 ~ 5250MHz
Channel Number	11a: 5
Channel Band Width (99%)	11a: 17.60 MHz ; 11a Super: 33.33 MHz
Conducted Output Power	Band 1: 12.21 dBm ; 11a Super: 11.41 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna

For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Wha Yu	C356-510153-A	Dipole Antenna	Reversed-SMA	5.0

3.4. Table for Carrier Frequencies

Frequency Allocation for 802.11a

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	Super 42	5210 MHz
	40	5200 MHz		
	44	5220 MHz		
	48	5240 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link	54Mbps	48	1
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Max. Conducted Output Power Power Spectral Density Peak Excursion	Band 1/BPSK	6Mbps	36/40/48	NA
	Band 1 Super/BPSK	12Mbps	42	1
Radiated Emission Below 1GHz	BPSK	6Mbps	48	1
Radiated Emission Above 1GHz Band Edge Emission	Band 1/BPSK	6Mbps	36/40/48	1
	Band 1 Super/BPSK	12Mbps	42	1
Band Edge Emission	Band 1/BPSK	6Mbps	36/48	1
	Band 1 Super/BPSK	12Mbps	42	1
Frequency Stability	Un-modulation	-	48	NA

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR6O0303

Below is the table for the change of the product with respect to the original one.

Modifications	Description
Mode Name change	Original: AG623 New: AG623G
Additional Super mode	Additional test: Maximum Peak Output Power Measurement Power Spectral Density Measurement 6dB Spectrum Bandwidth Measurement Radiated Emissions Measurement Band Edge Emissions Measurement

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D505	E2K24GBRL
Printer	EPSON	LQ-300	DoC
Modem	ACEEX	DM1414	IFAXDM1414

3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11a

Test Software Version	ART		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	12	12	12
Frequency	5210 MHz	-	-
IEEE 802.11a Super	15	-	-

An executive program, EMITEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :


- Turn on the power of all equipment.
- The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.
- The NB sends " H " messages to the printer, then the printer prints them on the paper.
- The NB sends " H " messages to the modem.
- Repeat the steps from b to d.

At the same time, "ART" was executed the test program to control the EUT continuously transmit RF signal.


3.10. Test Configurations

3.10.1. Radiation Emissions Test Configuration


Test Configurations: 9kHz~1GHz

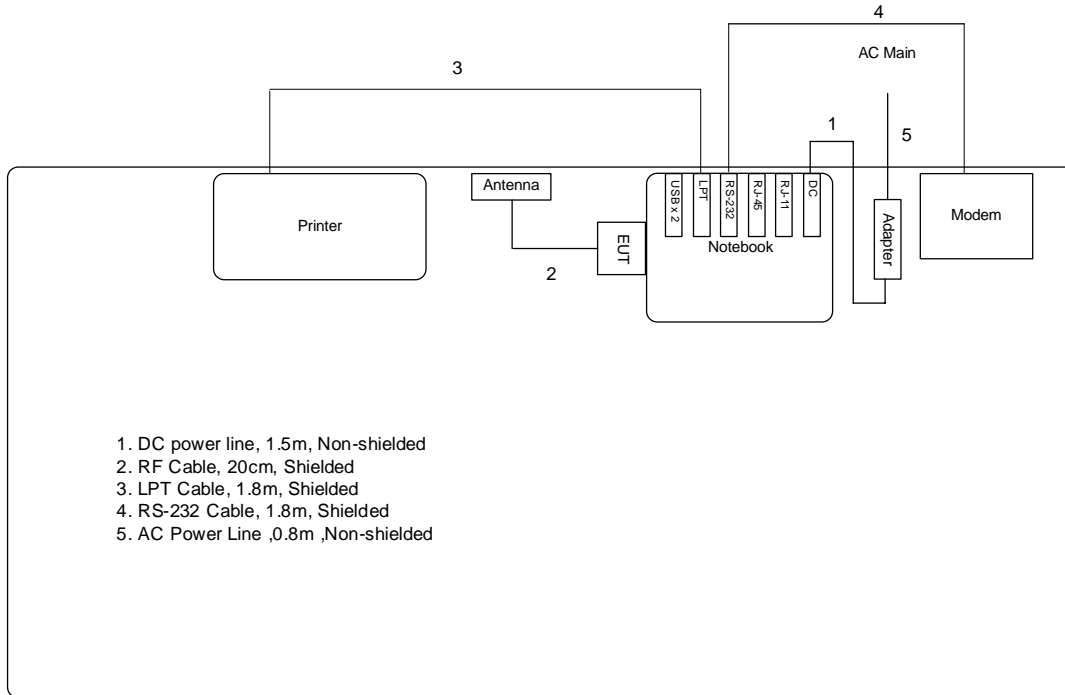

Test Configurations: Above 1GHz

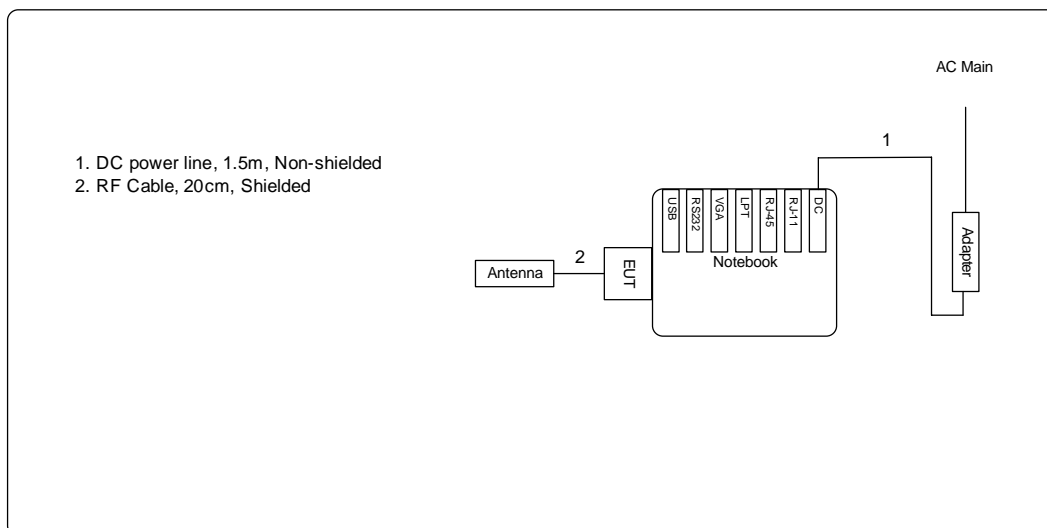

3.10.2. AC Power Line Conduction Emissions Test Configuration

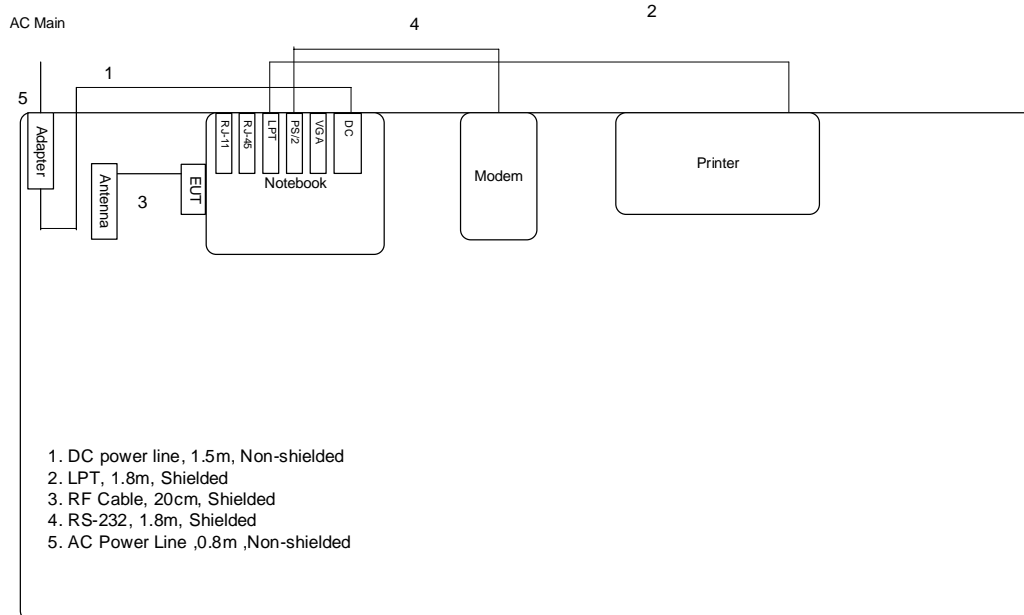

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

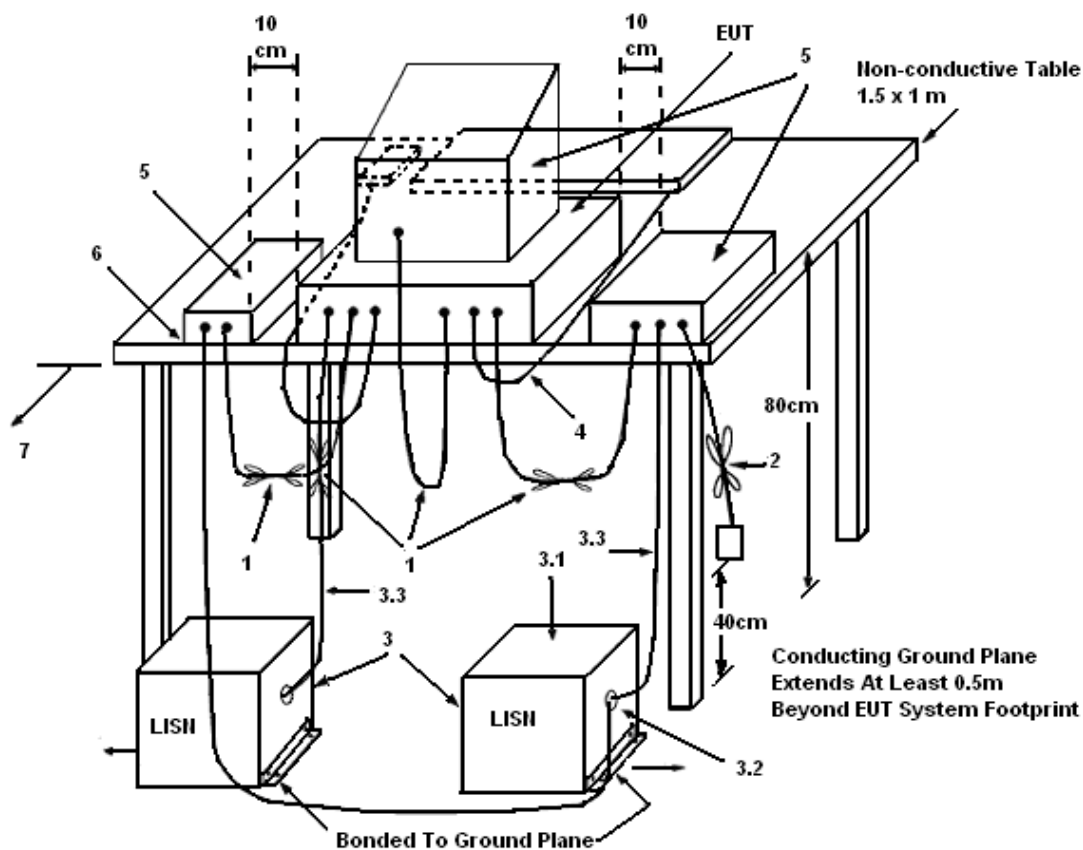

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	27.9°C	Humidity	54%
Test Engineer	Johnson Chang	Phase	Line
Configuration	Normal Link		

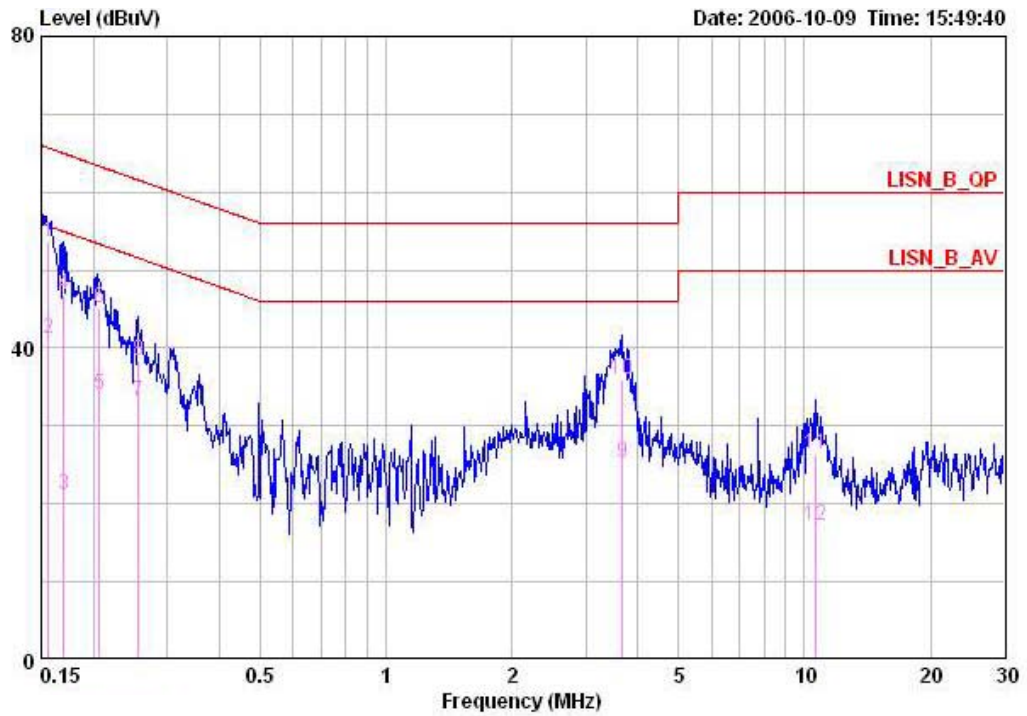

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15617	53.56	-12.10	65.67	52.68	0.68	0.20	QP
2	0.15617	41.29	-14.37	55.67	40.41	0.68	0.20	AVERAGE
3	0.16944	21.19	-33.79	54.99	20.32	0.67	0.20	AVERAGE
4	0.16944	46.97	-18.01	64.99	46.10	0.67	0.20	QP
5	0.20642	33.93	-19.42	53.35	33.08	0.65	0.20	AVERAGE
6	0.20642	45.08	-18.27	63.35	44.23	0.65	0.20	QP
7	0.25615	33.06	-18.50	51.56	32.23	0.63	0.20	AVERAGE
8	0.25615	38.35	-23.21	61.56	37.52	0.63	0.20	QP
9	3.681	25.33	-20.67	46.00	24.70	0.33	0.30	AVERAGE
10	3.681	36.01	-19.99	56.00	35.38	0.33	0.30	QP
11	10.676	26.44	-33.56	60.00	25.83	0.21	0.40	QP
12	10.676	17.28	-32.72	50.00	16.67	0.21	0.40	AVERAGE

Temperature	26°C	Humidity	54%
Test Engineer	Johnson Chang	Phase	Neutral
Configuration	Normal Link		

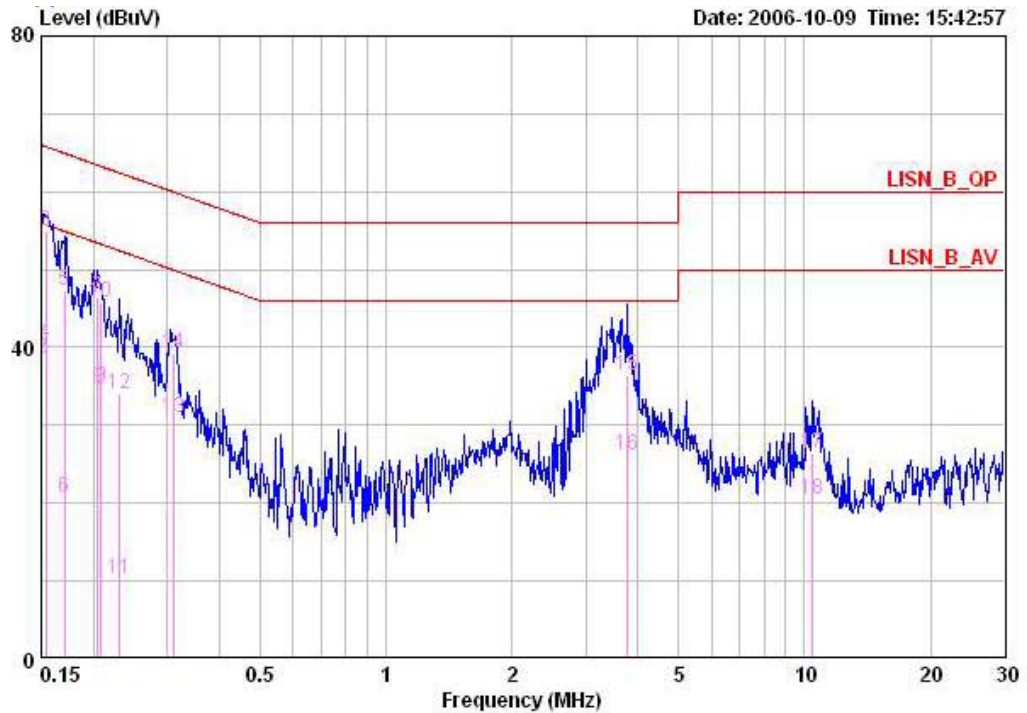

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15000	53.11	-12.89	66.00	52.22	0.69	0.20	QP
2	0.15000	38.69	-17.31	56.00	37.80	0.69	0.20	AVERAGE
3	0.15375	55.01	-10.79	65.79	54.12	0.69	0.20	QP
4	0.15375	40.64	-15.16	55.79	39.75	0.69	0.20	AVERAGE
5	0.17034	47.23	-17.71	64.94	46.36	0.67	0.20	QP
6	0.17034	20.73	-34.21	54.94	19.86	0.67	0.20	AVERAGE
7	0.20505	46.36	-17.04	63.40	45.51	0.65	0.20	QP
8	0.20505	34.73	-18.67	53.40	33.88	0.65	0.20	AVERAGE
9	0.20837	34.78	-18.49	53.27	33.93	0.65	0.20	AVERAGE
10	0.20837	45.69	-17.58	63.27	44.84	0.65	0.20	QP
11	0.23162	10.30	-42.09	52.39	9.46	0.64	0.20	AVERAGE
12	0.23162	34.11	-28.28	62.39	33.27	0.64	0.20	QP
13	0.31134	30.97	-18.97	49.93	30.16	0.61	0.20	AVERAGE
14	0.31134	39.14	-20.80	59.93	38.33	0.61	0.20	QP
15	3.759	36.35	-19.65	56.00	35.72	0.33	0.30	QP
16	3.759	26.05	-19.95	46.00	25.42	0.33	0.30	AVERAGE
17	10.397	26.29	-33.71	60.00	25.69	0.22	0.38	QP
18	10.397	20.54	-29.46	50.00	19.94	0.22	0.38	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

4.2.4. Test Setup Layout

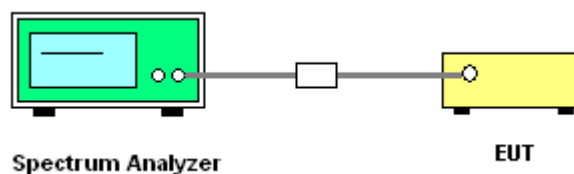

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	24°C	Humidity	56%
Test Engineer	Leo Hung	Configurations	802.11a


Configuration IEEE 802.11a

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	25.60	17.44
40	5200 MHz	25.28	17.60
48	5240 MHz	25.76	17.28

Configuration IEEE 802.11a Super


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	44.55	33.33

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

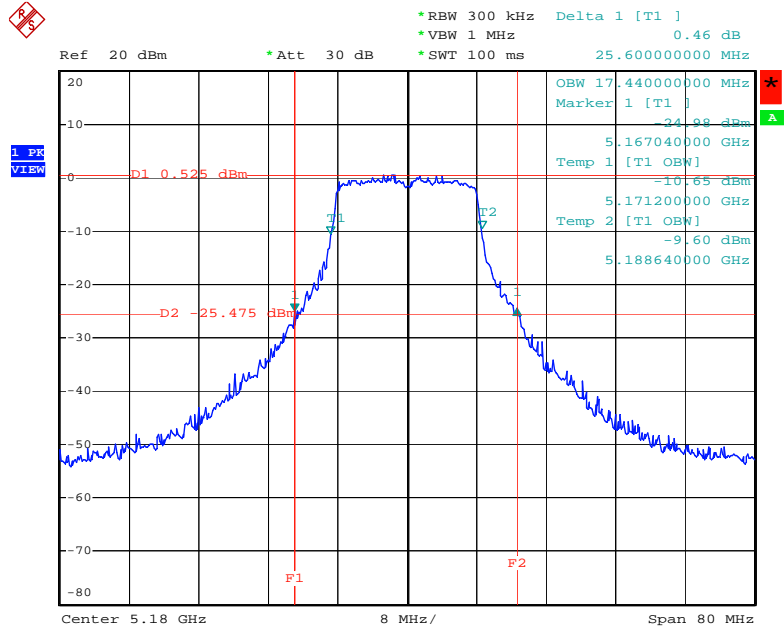


Date: 11.OCT.2006 04:02:04

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

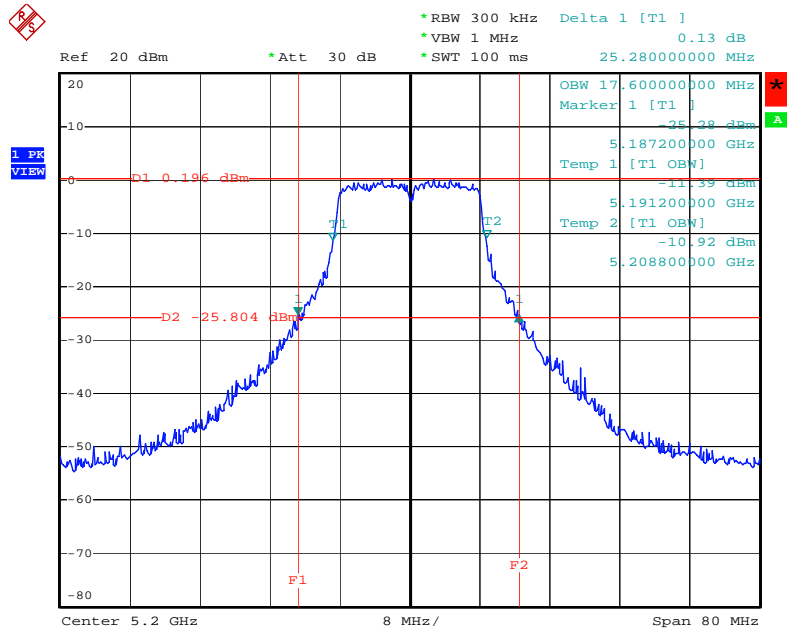


Date: 11.OCT.2006 04:03:33

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

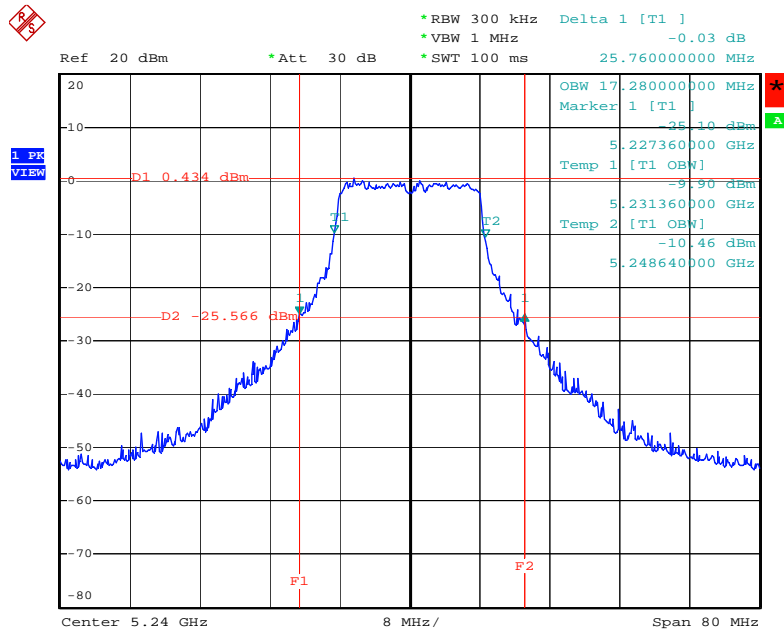

Date: 11.OCT.2006 04:05:50

26 dB Bandwidth Plot on Configuration IEEE 802.11a Super / 5210 MHz

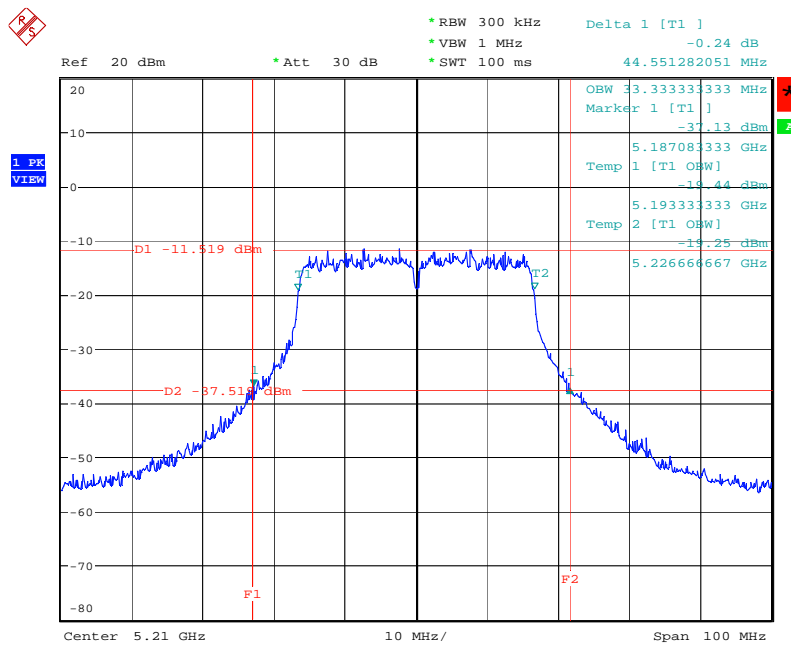

Date: 11.JUN.2007 14:20:53

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the - and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or $17 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	300 kHz
Detector	Sample
Trace	Max Hold
Sweep Time	60s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with method #3 of FCC Public Notice DA-02-2138.

4.3.4. Test Setup Layout

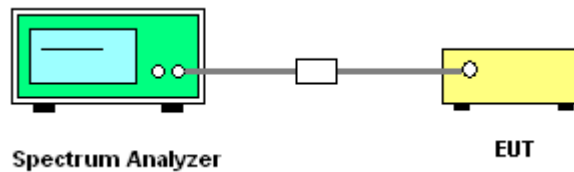

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	56%
Test Engineer	Leo Hung	Configurations	802.11a


Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.21	17.00	Complies
40	5200 MHz	12.07	17.00	Complies
48	5240 MHz	11.67	17.00	Complies

Configuration IEEE 802.11a Super


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
42	5210 MHz	11.41	17.00	Complies

Channel Output Power Plot on Configuration IEEE 802.11 a / 5180 MHz

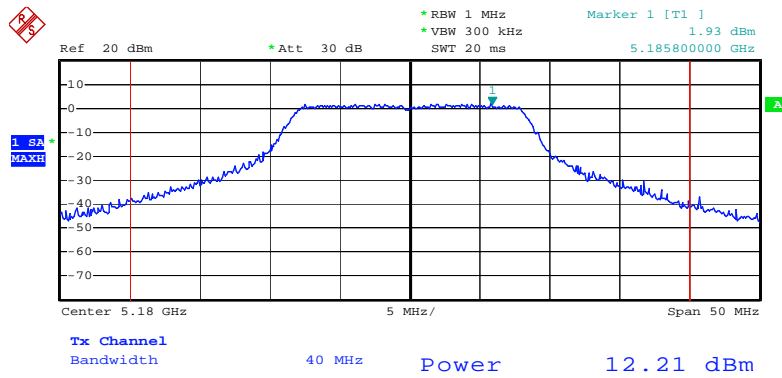


Date: 11.OCT.2006 04:02:45

Channel Output Power Plot on Configuration IEEE 802.11 a / 5200 MHz

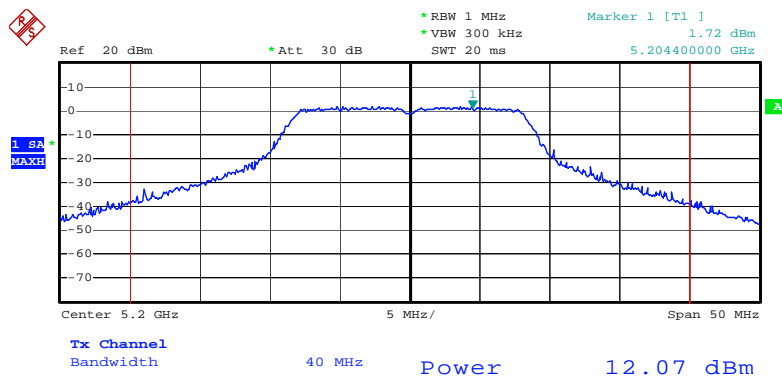


Date: 11.OCT.2006 04:04:14

Channel Output Power Plot on Configuration IEEE 802.11 a / 5240 MHz

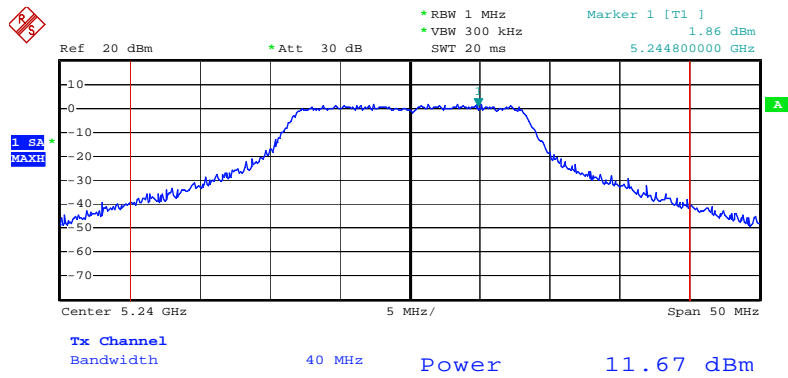

Date: 11.OCT.2006 04:06:31

Channel Output Power Plot on Configuration IEEE 802.11 a Super/ 5210 MHz

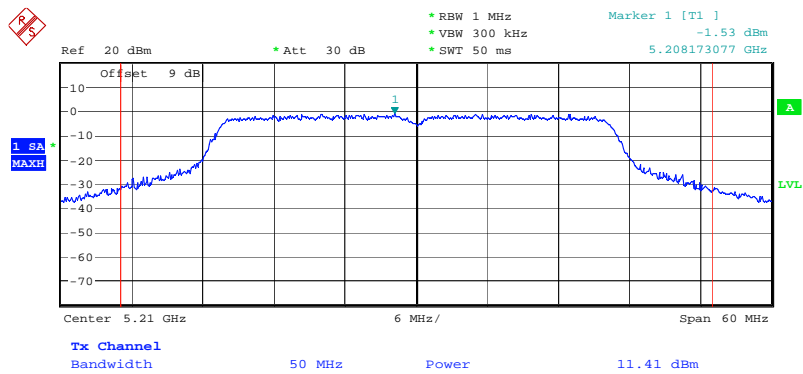

Date: 11.JUN.2007 14:21:35

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.

4.4.4. Test Setup Layout

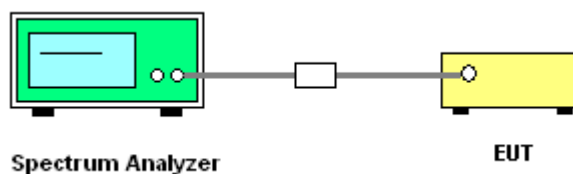

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	56%
Test Engineer	Leo Hung	Configurations	802.11a


Configuration IEEE 802.11a

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	-5.29	4.00	Complies
5200 MHz	-5.41	4.00	Complies
5240 MHz	-5.16	4.00	Complies

Configuration IEEE 802.11a Super


Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5210 MHz	-7.93	4.00	Complies

Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

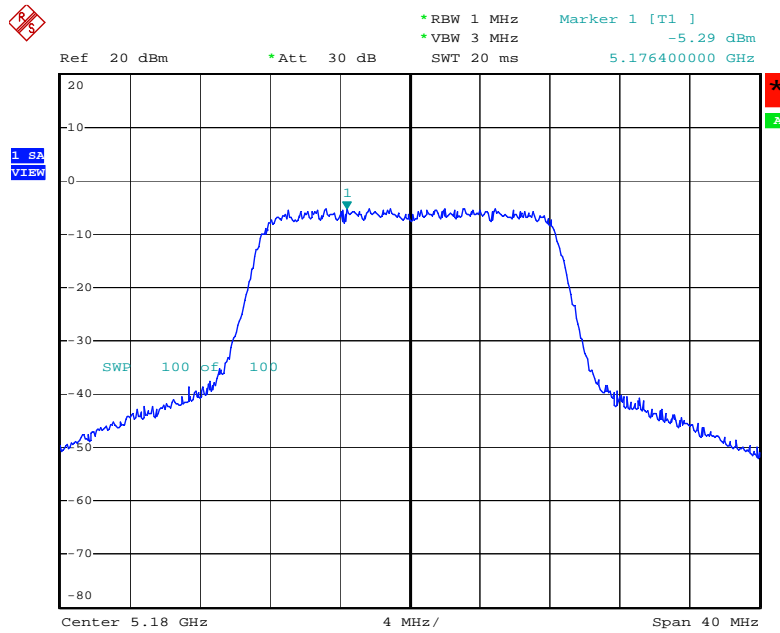


Date: 11.OCT.2006 04:08:39

Power Density Plot on Configuration IEEE 802.11a / 5200 MHz

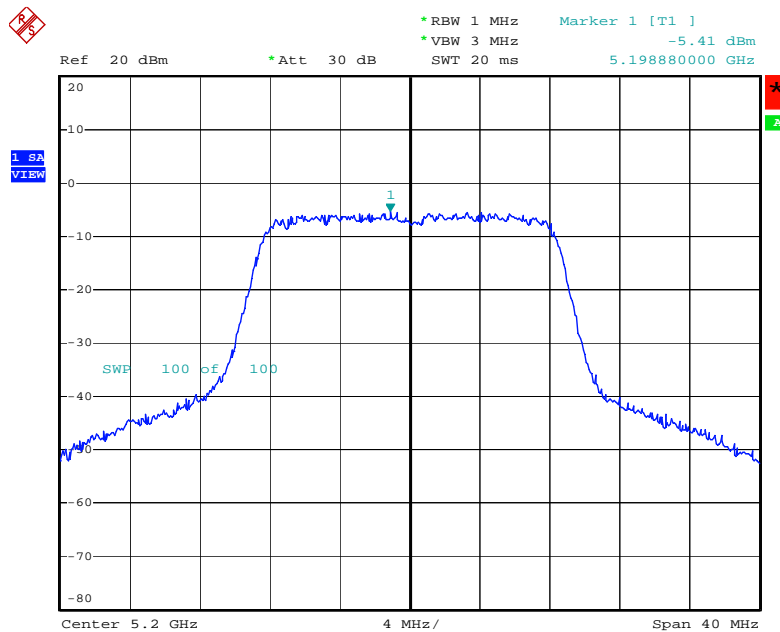


Date: 11.OCT.2006 04:08:21

Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

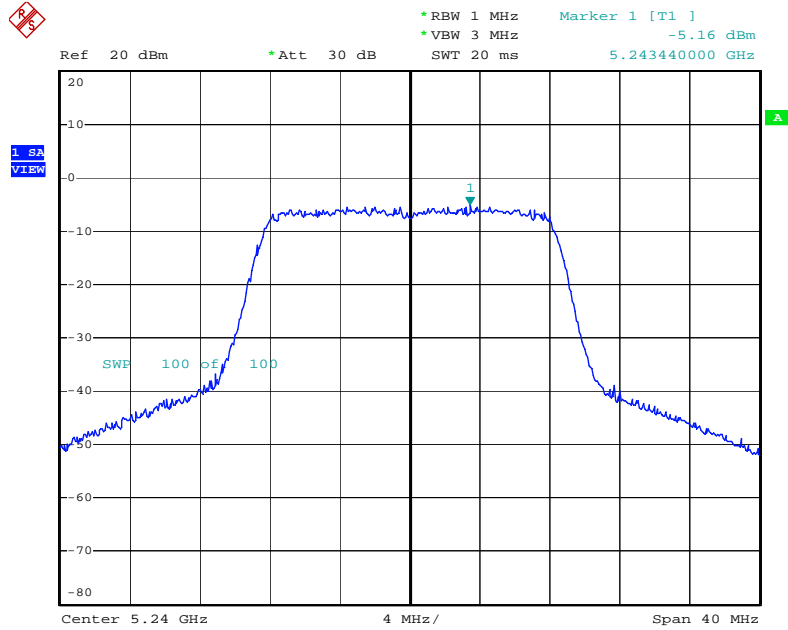

Date: 11.OCT.2006 04:08:00

Power Density Plot on Configuration IEEE 802.11a Super / 5210 MHz

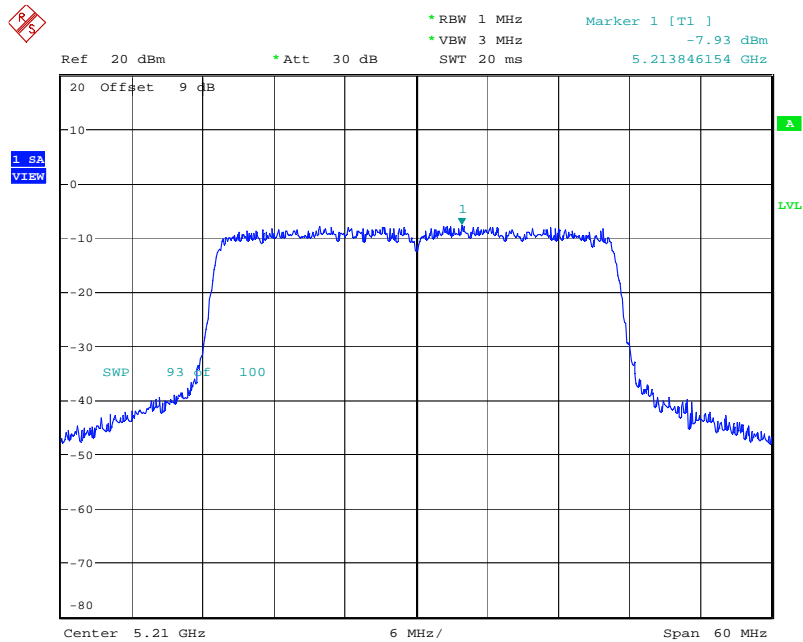

Date: 11.JUN.2007 14:21:00

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW $\geq 1/T$ (IEEE 802.11a VBW = 300kHz $\geq 1/4 \mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.

4.5.4. Test Setup Layout

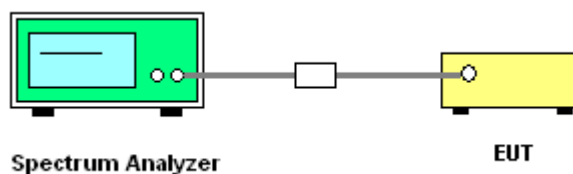

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	24°C	Humidity	56%
Test Engineer	Leo Hung	Configurations	802.11a


Configuration IEEE 802.11a

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	4.58	13	Complies
5200 MHz	4.66	13	Complies
5240 MHz	5.87	13	Complies

Configuration IEEE 802.11a Super


Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5210 MHz	4.20	13	Complies

Peak Excursion Plot on Configuration IEEE 802.11 a / 5180 MHz

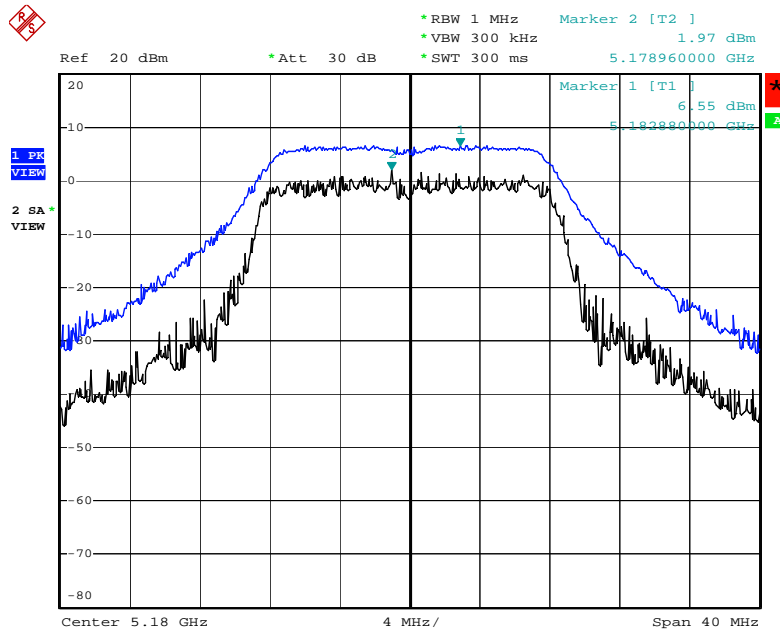


Date: 11.OCT.2006 04:02:57

Peak Excursion Plot on Configuration IEEE 802.11 a / 5200 MHz

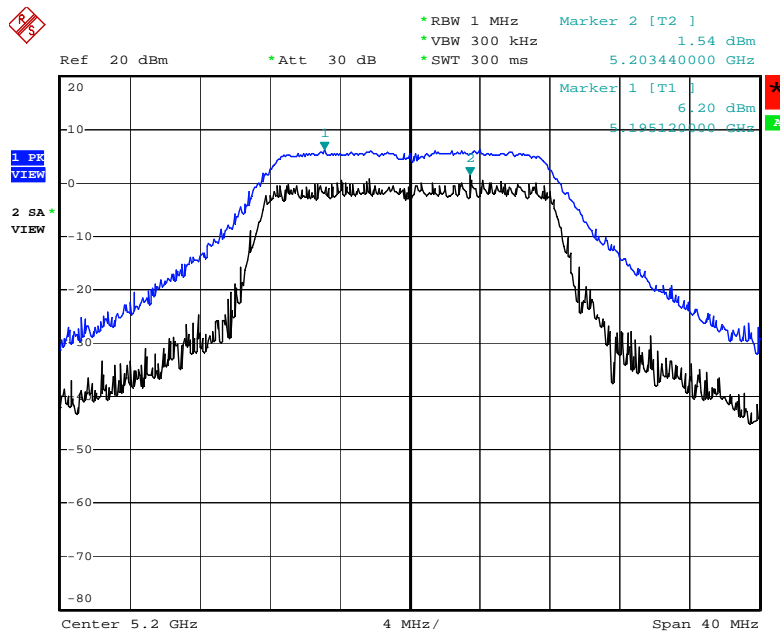


Date: 11.OCT.2006 04:04:26

Peak Excursion Plot on Configuration IEEE 802.11 a / 5240 MHz

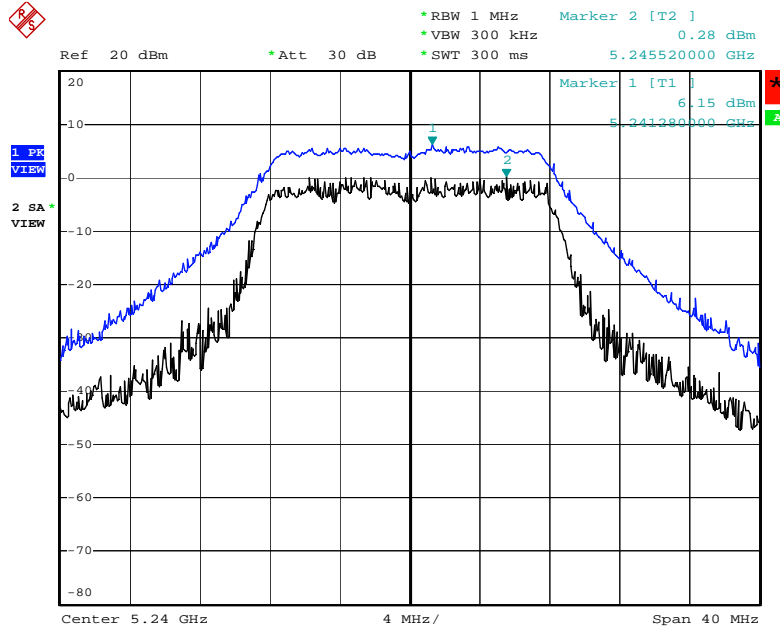

Date: 11.OCT.2006 04:06:43

Peak Excursion Plot on Configuration IEEE 802.11 a Super / 5210 MHz

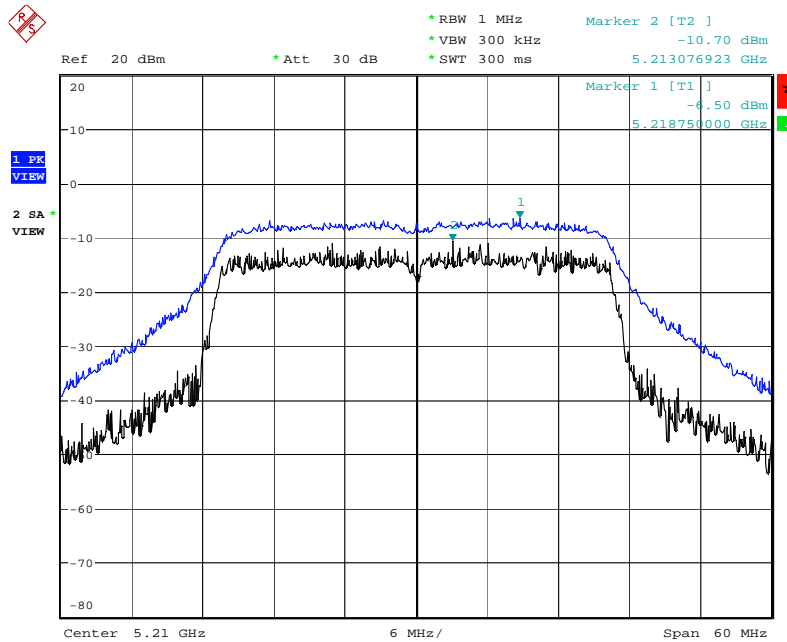

Date: 11.JUN.2007 14:21:47

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

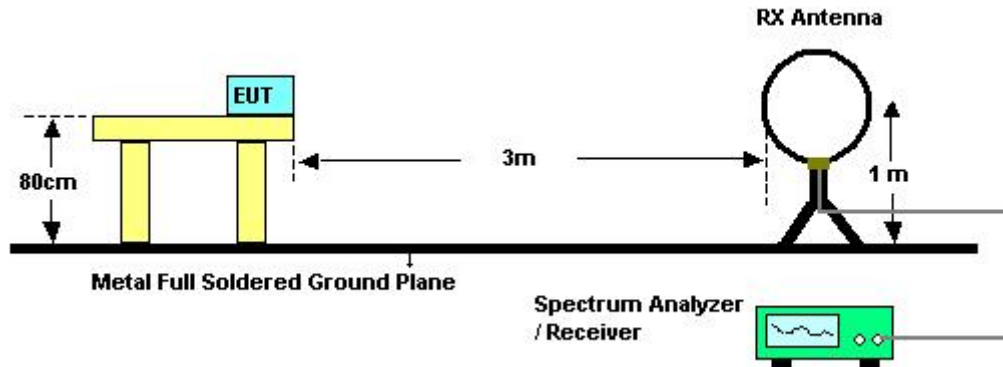

For radiated emissions above 30MHz

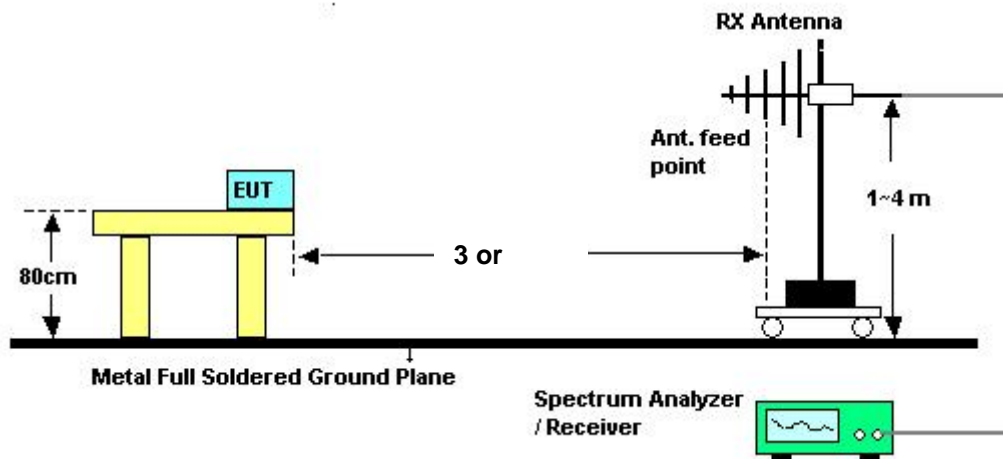

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	54%
Test Engineer	Beck Wu	Configurations	802.11a Ch 48

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	54%
Test Engineer	Beck Wu	Configurations	802.11a Ch 48

Horizontal

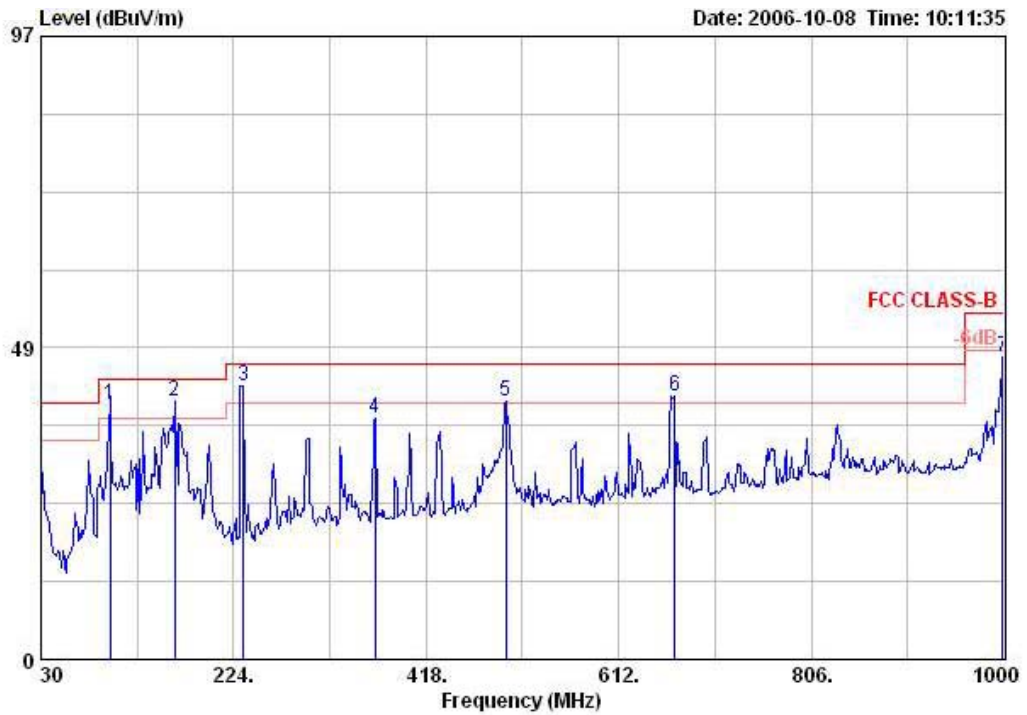

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg
1 !	99.840	39.55	-3.95	43.50	53.98	11.20	0.30	25.93	QP	400	12
2 !	164.830	40.27	-3.23	43.50	54.86	10.35	0.72	25.66	Peak	100	0
3 !	233.700	42.50	-3.50	46.00	55.18	11.66	1.09	25.43	Peak	100	0
4	366.590	37.59	-8.41	46.00	45.76	15.70	1.31	25.17	Peak	100	0
5 !	498.510	40.17	-5.83	46.00	46.93	17.78	1.80	26.33	Peak	100	0
6 !	668.260	41.02	-4.98	46.00	45.34	19.64	2.14	26.10	Peak	100	0
7	999.030	46.92	-7.08	54.00	46.74	22.29	3.11	25.23	Peak	100	0

Vertical

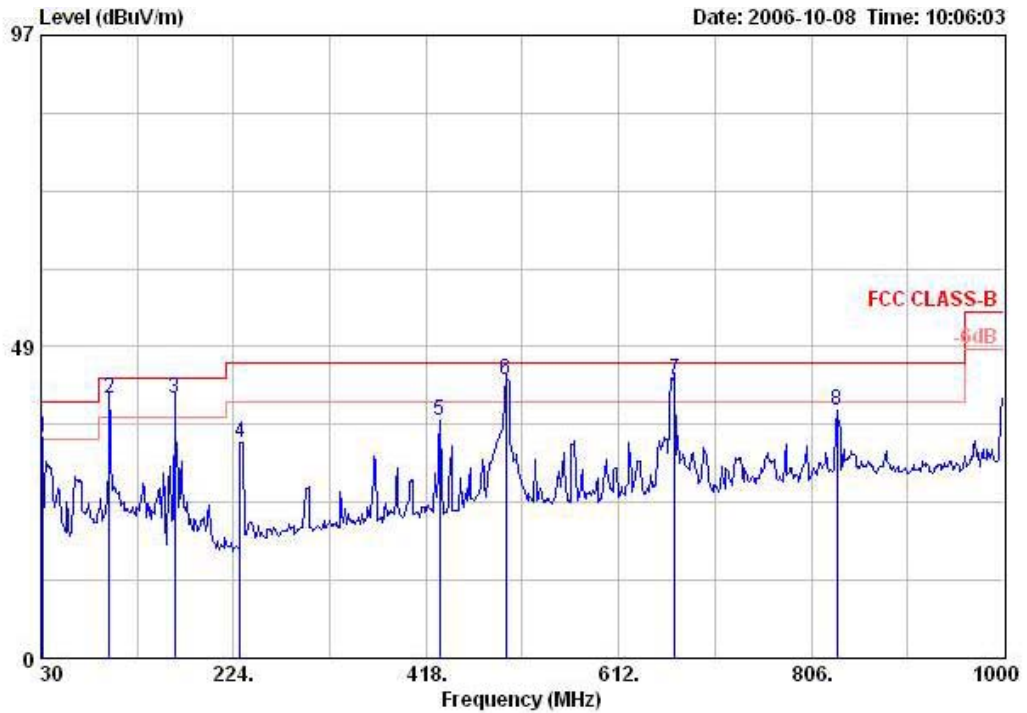

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 !	31.940	34.49	-5.51	40.00	41.70	18.96	0.32	26.49	Peak	400	0
2 !	98.870	40.38	-3.12	43.50	54.97	11.01	0.36	25.96	QP	100	20
3 @	164.830	40.52	-2.98	43.50	55.11	10.35	0.72	25.66	QP	100	0
4	230.790	33.57	-12.43	46.00	46.54	11.39	1.08	25.44	Peak	400	0
5	431.580	36.88	-9.12	46.00	44.24	16.94	1.49	25.79	Peak	400	0
6 @	498.510	43.40	-2.60	46.00	50.16	17.78	1.80	26.33	QP	100	160
7 @	668.260	43.30	-2.70	46.00	47.62	19.64	2.14	26.10	QP	100	120
8	832.190	38.50	-7.50	46.00	39.77	21.15	2.52	24.94	Peak	400	0

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)


Temperature	23°C	Humidity	54%
Test Engineer	Beck Wu	Configurations	802.11a Ch 36

Horizontal

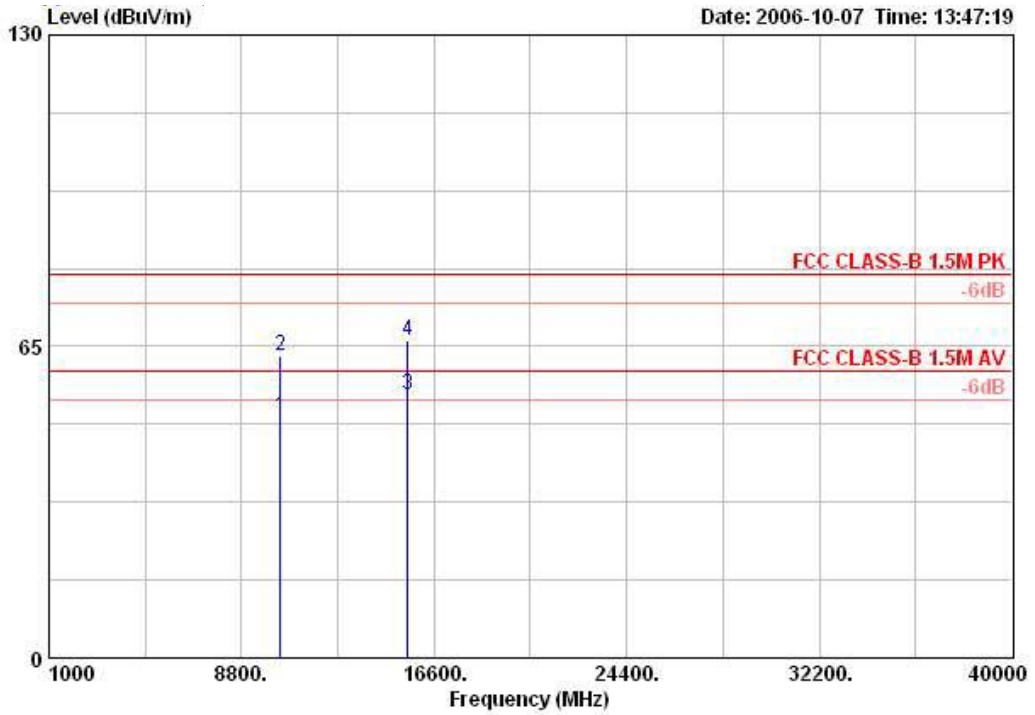

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10358.900	50.33	-9.67	60.00	33.87	39.34	10.54	33.42	AVERAGE	122	307
2	10358.900	63.17	-16.83	80.00	46.71	39.34	10.54	33.42	PEAK	122	307
3 !	15539.480	55.01	-4.99	60.00	36.42	38.15	13.45	33.01	AVERAGE	122	328
4	15539.480	66.15	-13.85	80.00	47.56	38.15	13.45	33.01	PEAK	122	328


Vertical

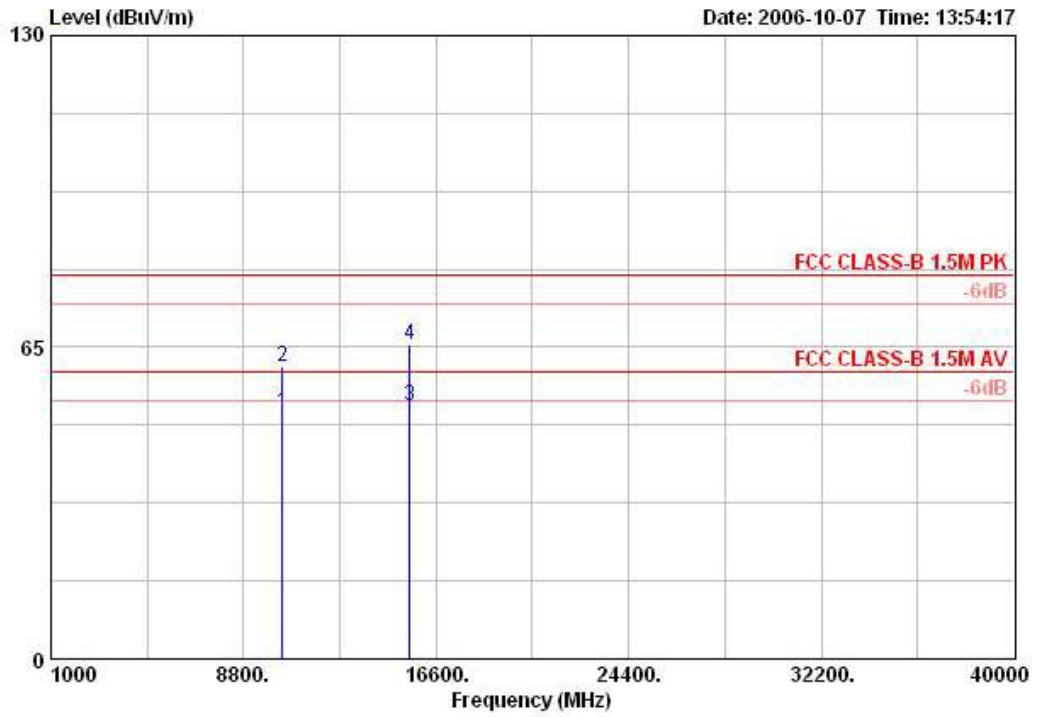

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10360.460	51.48	-8.52	60.00	35.02	39.34	10.54	33.42	AVERAGE	110	209
2	10361.160	60.83	-19.17	80.00	44.37	39.34	10.54	33.42	PEAK	110	209
3	15540.520	52.87	-7.13	60.00	34.28	38.15	13.45	33.01	AVERAGE	112	287
4	15540.520	65.43	-14.57	80.00	46.84	38.15	13.45	33.01	PEAK	112	287


Temperature	23°C	Humidity	54%
Test Engineer	Beck Wu	Configurations	802.11a Ch 40

Horizontal

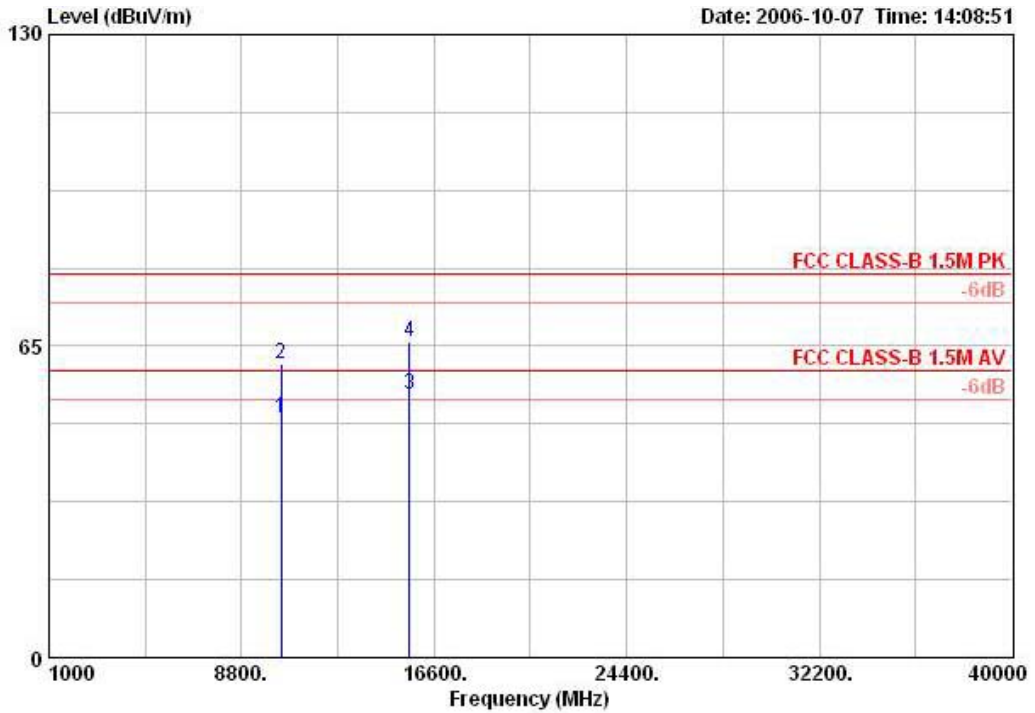


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10400.780	49.86	-10.14	60.00	33.29	39.38	10.57	33.38	AVERAGE	114	306
2	10400.780	61.35	-18.65	80.00	44.78	39.38	10.57	33.38	PEAK	114	306
3 !	15601.840	55.07	-4.93	60.00	36.56	38.06	13.50	33.04	AVERAGE	112	328
4	15601.840	65.74	-14.26	80.00	47.23	38.06	13.50	33.04	PEAK	112	328

Vertical

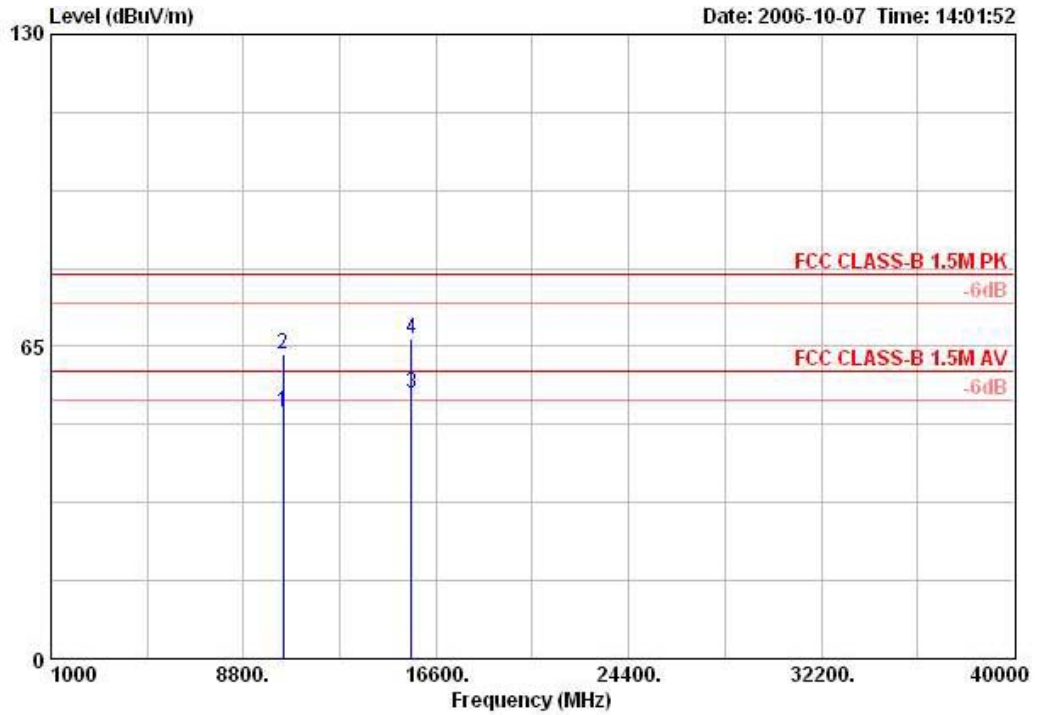


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10399.240	51.32	-8.68	60.00	34.75	39.38	10.57	33.38	AVERAGE	112	208
2	10399.240	63.39	-16.61	80.00	46.82	39.38	10.57	33.38	PEAK	112	208
3 !	15601.620	55.10	-4.90	60.00	36.59	38.06	13.50	33.04	AVERAGE	120	322
4	15601.620	66.48	-13.52	80.00	47.97	38.06	13.50	33.04	PEAK	120	322

Temperature	23°C	Humidity	54%
Test Engineer	Beck Wu	Configurations	802.11a Channel 48

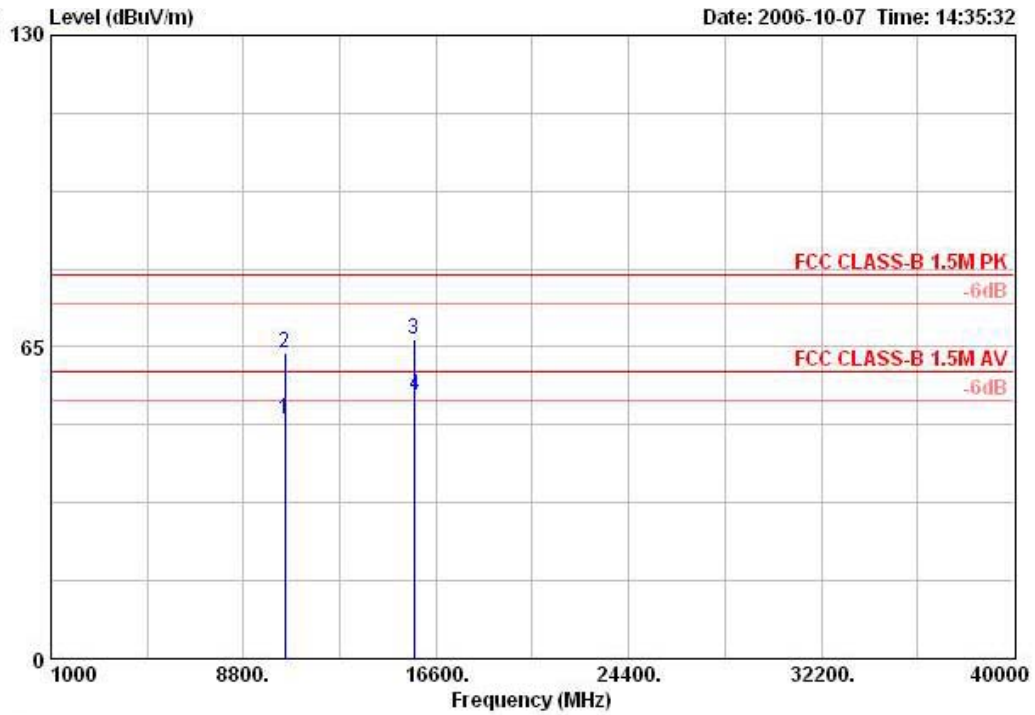Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10479.240	50.11	-9.89	60.00	33.32	39.48	10.63	33.32	AVERAGE	108	297
2	10479.240	63.84	-16.16	80.00	47.05	39.48	10.63	33.32	PEAK	108	297
3	15715.320	66.61	-13.39	80.00	48.17	37.89	13.64	33.08	PEAK	117	328
4 !	15720.520	54.80	-5.20	60.00	36.36	37.89	13.64	33.08	AVERAGE	117	328


Vertical

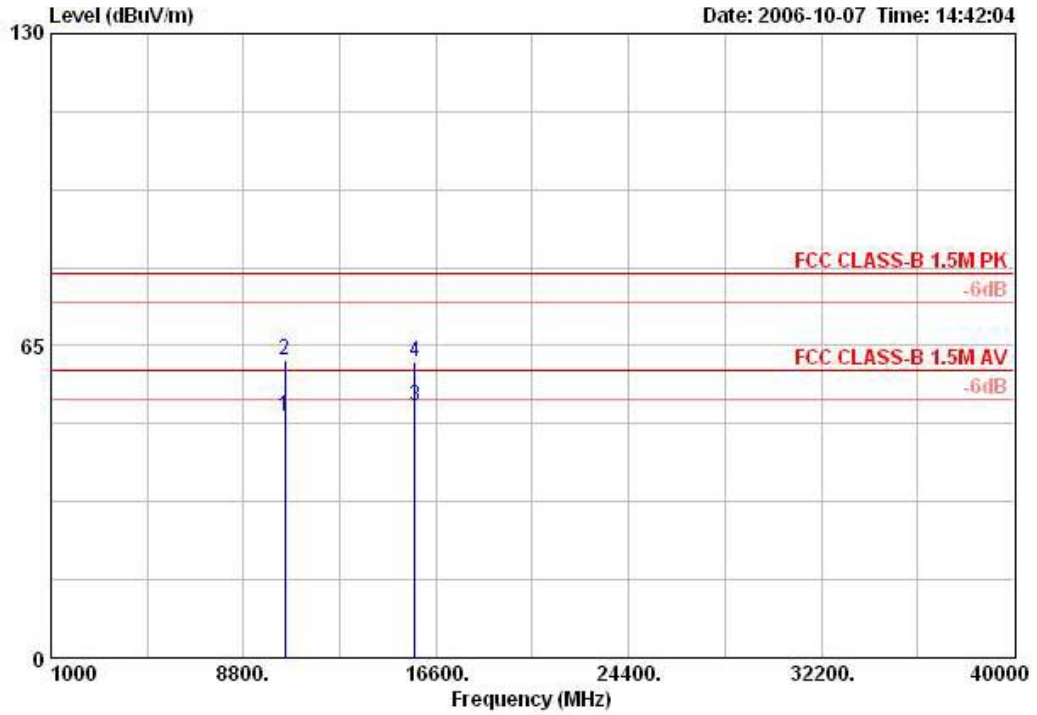

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10480.620	50.45	-9.55	60.00	33.66	39.48	10.63	33.32	AVERAGE	111	202
2	10480.620	62.01	-17.99	80.00	45.22	39.48	10.63	33.32	PEAK	111	202
3	15720.500	52.39	-7.61	60.00	33.95	37.89	13.64	33.08	AVERAGE	111	290
4	15720.500	61.77	-18.23	80.00	43.33	37.89	13.64	33.08	PEAK	111	290


Temperature	26°C	Humidity	56%
Test Engineer	Beck Wu	Configurations	802.11a Super Channel 42

Horizontal

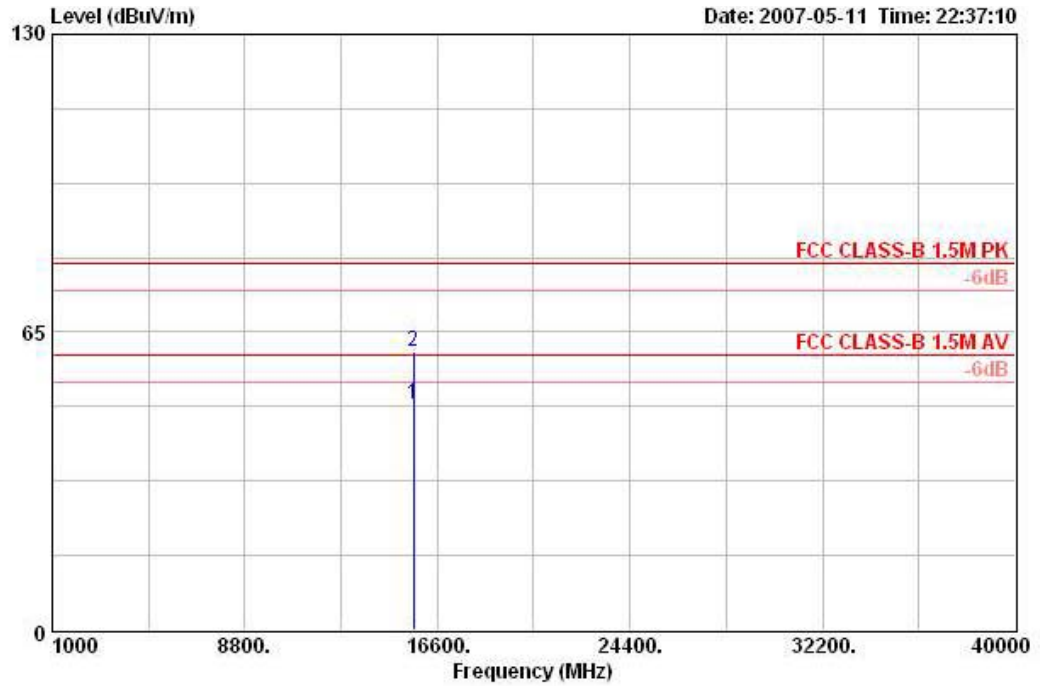

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	15625.960	49.41	-10.59	60.00	33.46	38.97	11.77	34.79	AVERAGE	119	0
2	15625.960	60.59	-19.41	80.00	44.64	38.97	11.77	34.79	PERK	119	0

Vertical

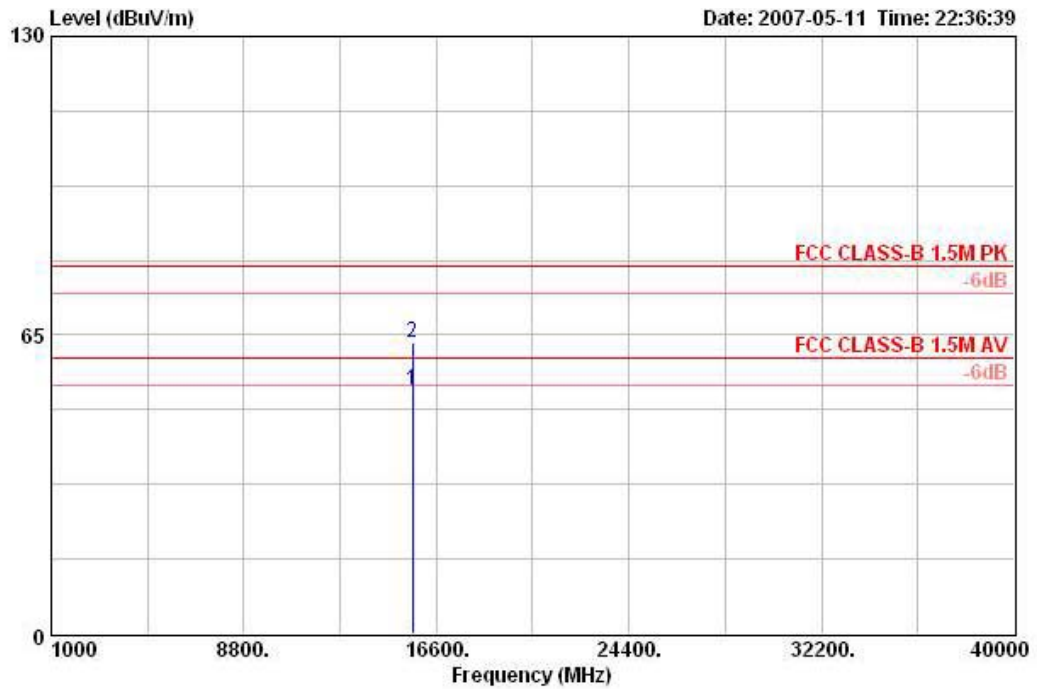

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	15625.960	52.86	-7.14	60.00	36.91	38.97	11.77	34.79	AVERAGE	119	0
2	15625.960	63.41	-16.59	80.00	47.46	38.97	11.77	34.79	PEAK	119	0

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor [6 dB].

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 1 MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.


4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	54%
Test Engineer	Beck Wu	Configurations	802.11a Channel 36, 48


Channel 36

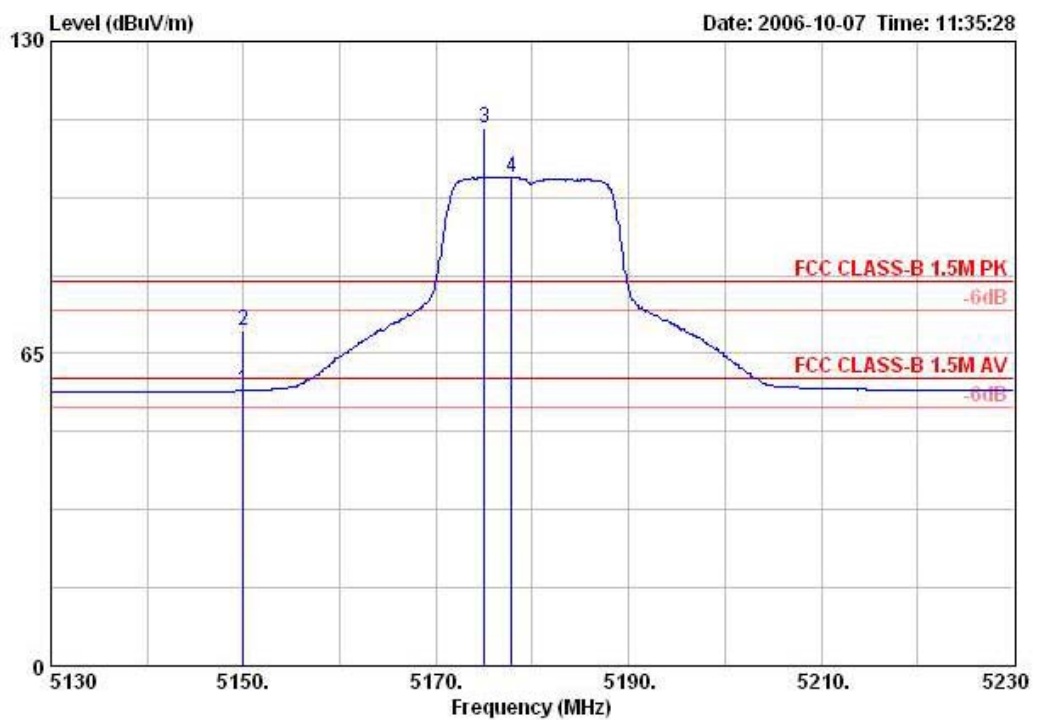

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	5150.000	57.27	-2.73	60.00	16.11	33.84	7.32	0.00	AVERAGE	128	139
2	5150.000	69.67	-10.33	80.00	28.52	33.84	7.32	0.00	PEAK	128	139
3 @	5175.000	111.83			70.60	33.89	7.33	0.00	PEAK	128	139
4 @	5177.800	101.78			60.55	33.89	7.33	0.00	AVERAGE	128	139

Channel 36 is fundamental frequency at 5180 MHz.

Channel 64

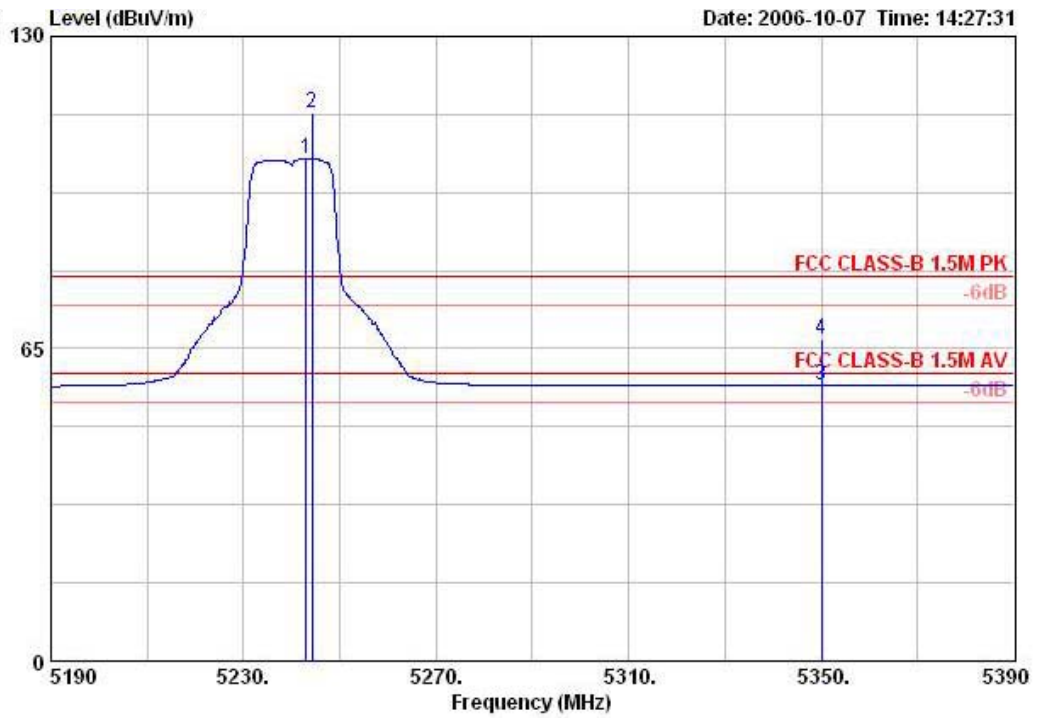


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	5243.000	104.65			63.28	34.00	7.37	0.00	AVERAGE	103	195
2 @	5244.200	114.11			72.74	34.00	7.37	0.00	Peak	103	195
3 !	5350.090	57.36	-2.64	60.00	15.80	34.16	7.40	0.00	AVERAGE	103	195
4	5350.120	67.03	-12.97	80.00	25.47	34.16	7.40	0.00	Peak	103	195

Channel 48 is fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	56%
Test Engineer	Ted Chiu	Configurations	802.11a Super Channel 42

Super Channel 42

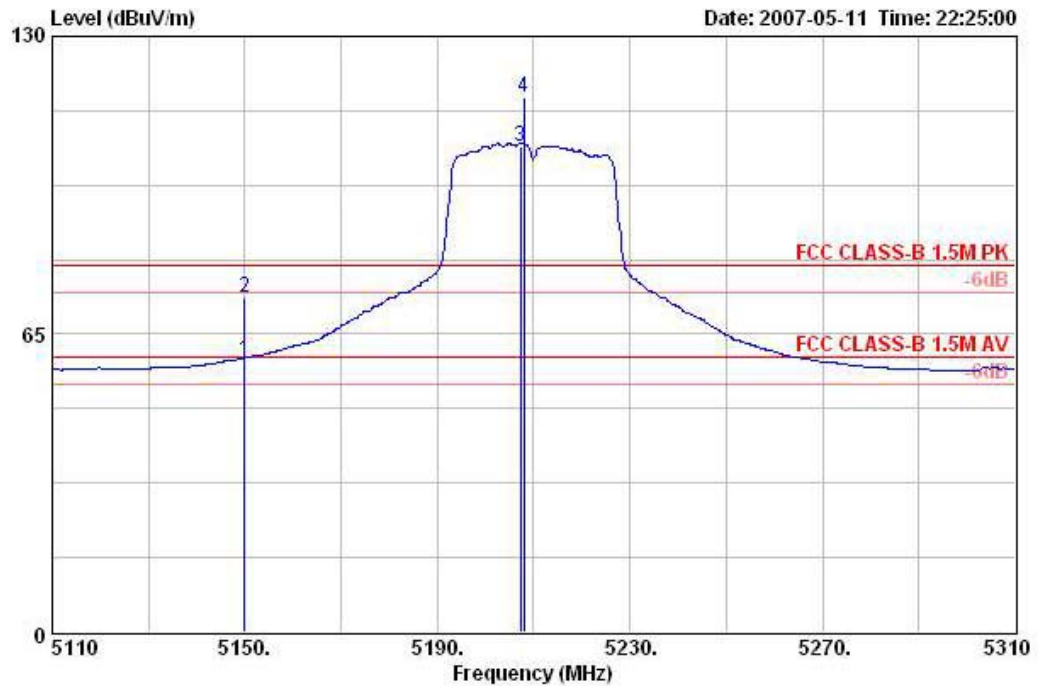

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5150.000	59.11	-0.89	60.00	20.59	34.07	4.44	0.00	AVERAGE	100	41
2	5150.000	72.98	-7.02	80.00	34.46	34.07	4.44	0.00	PEAK	100	41
3	5207.200	105.86			67.23	34.20	4.43	0.00	AVERAGE	100	41
4	5208.000	116.53			77.90	34.20	4.43	0.00	PEAK	100	41

Item 1 and 2 are Band Edge.

Note:

Emission level (dBUV/m) = 20 log Emission level (uV/m)


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

EIRP Emission in Band on Configuration IEEE 802.11a / 5180 MHz

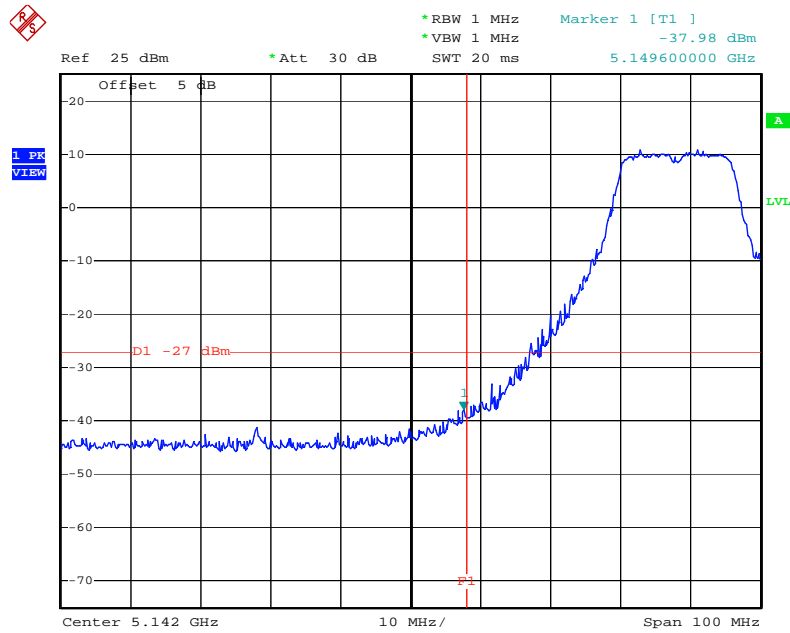

Date: 11.OCT.2006 04:10:14

EIRP Emission in Band on Configuration IEEE 802.11a / 5240 MHz

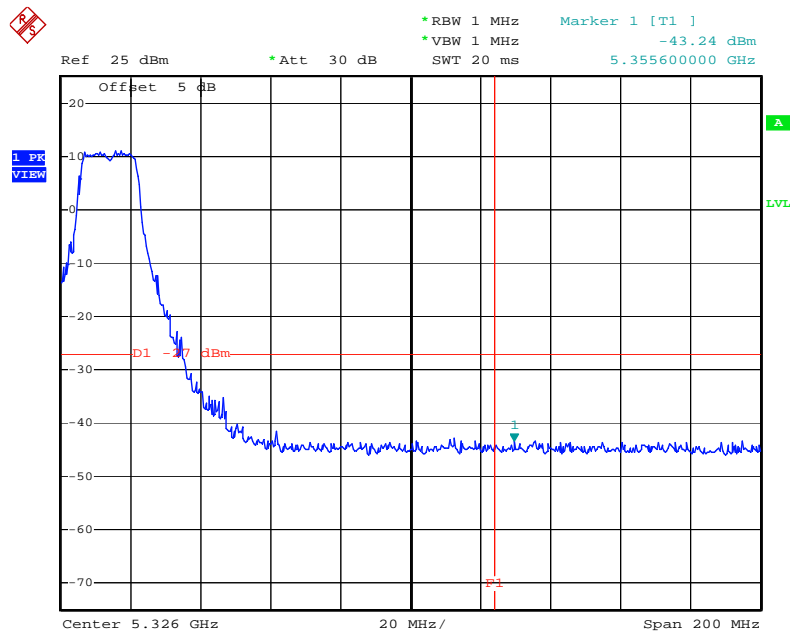

Date: 11.OCT.2006 11:54:14

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11a specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11a specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

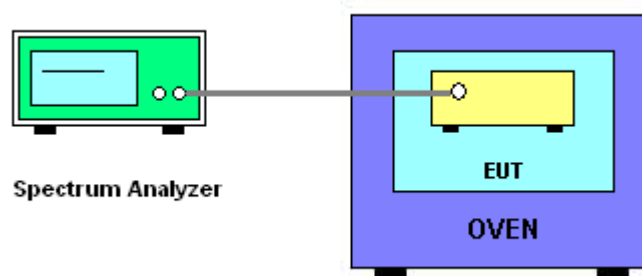

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
126.50	5240.0166
110.00	5240.0168
93.50	5240.0142
Max. Deviation (MHz)	0.0168
Max. Deviation (ppm)	3.2061

Note: The reference frequency is 5240Mz.

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
-30	5240.0468
-20	5240.0432
-10	5240.0426
0	5240.0390
10	5240.0228
20	5240.0168
30	5240.0054
40	5239.9964
50	5239.9958
Max. Deviation (MHz)	0.0468
Max. Deviation (ppm)	8.9313

Note: The reference frequency is 5240Mz.

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100359	9kHz – 2.75GHz	Mar. 01, 2007	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2007	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2007	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz –30MHz	Mar. 27, 2007	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	1886	9 kHz - 2 GHz	Jan. 22, 2007	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 21, 2006	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	MAY. 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
10m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-10M	10CH01-HY	30MHz~1GHz 10m, 3m	Jun. 13, 2006	Radiation (10CH01-HY)
Spectrum Analyzer	R&S	FSP7	838858/013	9kHz – 7GHz	Feb. 13, 2007	Radiation (10CH01- HY)
Receiver	R&S	ESI7	838496/009	9kHz-7GHz	Jan. 29, 2007	Radiation (10CH01-HY)
Amplifier	Aglient	8447D	2944A10825	100kHz – 1.3GHz	May. 24, 2006	Radiation (10CH01-HY)
Amplifier	Aglient	8447D	2944A10826	100kHz – 1.3GHz	May. 29, 2006	Radiation (10CH01-HY)
Biconical Antenna	Schwarzbeck	VHBB 9124	286	30MHz –200MHz	Aug. 14, 2006	Radiation (10CH01-HY)
Log Antenna	Schwarzbeck	VUSLP 9111	206	200MHz -1GHz	Aug. 14, 2006	Radiation (10CH01-HY)
Turn Table	HD	DT 60 RPS	1513/004/00	0 ~ 360 degree	N/A	Radiation (10CH01-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Antenna Mast	HD	MA240	240/556/00	1 m - 4 m	N/A	Radiation (10CH01-HY)
Antenna Mast	HD	MA240	240/559/00	1 m - 4 m	N/A	Radiation (10CH01-HY)
RF Cable-R10m	BELDEN	RG8/U	CB023-INSIDE	30MHz~1GHz	Nov. 29, 2006	Radiation (10CH01-HY)
RF Cable-R10m	Suhner Switzerland + Rosenberger	RG223/U + UAA220A-0	CB022-DOOR	30MHz~1GHz	Nov. 29, 2006	Radiation (10CH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection : Accreditation Program for Telecommunication Equipment Testing Laboratory


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.