

---

# FCC Test Report

---

Report No.: AGC06P130101F2A

**FCC ID** : UOSAM217  
**PRODUCT DESIGNATION** : mobile phone  
**BRAND NAME** : AMGOO  
**MODEL NAME** : AM301  
**CLIENT** : Amgoo Telecom Co., Ltd.  
**DATE OF ISSUE** : Mar.05, 2013  
**STANDARD(S)** : FCC Part 22H & 24E Rules  
**REPORT VERSION** : V1.1

**Attestation of Global Compliance (Shenzhen) Co., Ltd.**

**CAUTION:** This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

This is a variant report which is only valid together with the original test report. The product was received on nov. 01, 2012 and completely tested on nov. 08, 2012. we, Attestation of Global Compliance (Shenzhen) Co., Ltd., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ansi / tia / eia-603-c-2004 and shown compliance with the applicable technical standards.

#### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
AGC06P130101F2A	V1.1	In this report, only change the GSM antenna and button board and Speaker and appearance and GPRS class and Through the software to adjust conducted power, Test results information AM217 in AGC06P121101F2A report. All the test cases were performed on original report which can be referred to Report Number AGC06P121101F2A. Based on the original test report, only the Conducted Power, ERP/EIRP, Conducted Spurious Emission and the worst cases of Radiated Spurious Emission were verified for the differences.	Mar.05,2013

## VERIFICATION OF COMPLIANCE

<b>Applicant:</b>	Amgoo Telecom Co., Ltd. 6/F, Block 3, Tongjian Building, NO.2013, Middle Shennan Rd., Futian District, Shenzhen, China
<b>Manufacturer:</b>	Topology Communication Technology(Shenzhen) CO., LTD. KaiXinDa Technology Park, No.49 Zhou Shi Road, Shiyan County, Bao'an District, Shenzhen, China
<b>Product Designation:</b>	mobile phone
<b>Brand name:</b>	AMGOO
<b>Test Model:</b>	AM301
<b>FCC ID:</b>	UOSAM217
<b>Date of Test:</b>	Feb.27, 2013 to Mar.04, 2013

### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By :



Bart Xie Mar.05, 2013

Reviewed By :



Forrest Lei Mar.05, 2013

Approved By:



Solger Zhang Mar.05, 2013

## TABLE OF CONTENTS

REVISION HISTORY .....	2
1. GENERAL INFORMATION .....	6
1. GENERAL INFORMATION .....	6
1.1 PRODUCT DESCRIPTION .....	6
1.2 RELATED SUBMITTAL(S) / GRANT (S) .....	6
1.3 TEST METHODOLOGY .....	7
1.4 TEST FACILITY .....	7
1.5 MEASUREMENT INSTRUMENTS .....	7
1.6 SPECIAL ACCESSORIES .....	7
1.7 EQUIPMENT MODIFICATIONS .....	7
2. SYSTEM TEST CONFIGURATION .....	8
2.1 EUT CONFIGURATION .....	8
2.2 EUT EXERCISE .....	8
2.3 GENERAL TECHNICAL REQUIREMENTS .....	8
2.4 CONFIGURATION OF EUT SYSTEM .....	8
3. SUMMARY OF TEST RESULTS .....	9
4. DESCRIPTION OF TEST MODES .....	9
5. OUTPUT POWER .....	10
5.1 CONDUCTED OUTPUT POWER .....	10
5.2 RADIATED OUTPUT POWER .....	13
6. PEAK-TO-AVERAGE RATIO .....	15
6.1 MEASUREMENT METHOD .....	15
6.2 PROVISIONS APPLICABLE .....	15
6.3 MEASUREMENT RESULT .....	15
7. SPURIOUS EMISSION .....	16

<b>7.1 CONDUCTED SPURIOUS EMISSION .....</b>	<b>16</b>
<b>7.2 RADIATED SPURIOUS EMISSION.....</b>	<b>18</b>
<b>APPENDIX I.....</b>	<b>22</b>
<b>TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION.....</b>	<b>22</b>
<b>APPENDIX IV .....</b>	<b>30</b>
<b>PHOTOGRAPHS OF TEST SETUP .....</b>	<b>30</b>
<b>APPENDIX V .....</b>	<b>32</b>
<b>PHOTOGRAPHS OF EUT .....</b>	<b>32</b>

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	mobile phone
Hardware Version:	5612-MB-V0.2
Software Version:	---
FCC ID:	UOSAM217
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800 (Non-U.S. Bands)
Antenna:	Integrated Antenna
Antenna gain:	2.15dBi
Battery parameter:	DC 3.7V/700mAh
Adapter Input:	AC 100-240V
Adapter Output:	DC 5.0V, 600mA
Output Power:	30.53dBm Maximum ERP measured for GSM 850 30.07 dBm Maximum Average Burst Power for GSM 850 28.14 dBm Maximum EIRP measured for GSM 1900 27.21 dBm Maximum Average Burst Power for GSM 1900
Dual SIM Card:	The result for SIM1 is the worst case which was only recorded.
GPRS Class:	10
Extreme Vol. Limits:	DC 3.4 V to DC4.2 V (Nominal DC 3.7 V)
Extreme Temp. Tolerance:	-10°C to +50°C
<p>** Note: The High Voltage DC 4.2V and Low Voltage DC 3.4V were declared by manufacturer, The EUT could not operate normally with higher or lower voltage. Other functions have been performed according to verification procedure except for MS function. SIM1 can't transmit with SIM2 simultaneously. Customers through the software to adjust the motherboard conducted power.</p>	

### 1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: UOSAM217** filing to comply with the FCC Part 22H and 24E requirements.

### 1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

### 1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

### 1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	Jul.18, 2012	Jul.17, 2013
TEST RECEIVER	R&S	ESCI	A0304218	Jul.18, 2012	Jul.17, 2013
COMMUNICATION TESTER	AGILENT	8960	3104A03367	Feb.28, 2013	Feb.27, 2014
COMMUNICATION TESTER	R&S	CMU200	A0304247	Feb.28, 2013	Feb.27, 2014
TEST RECEIVER	ROHDE&SCHWARZ	ESCI	A0304230	Jul.18, 2012	Jul.17, 2013
LISN	R&S	ESH3-Z5	A0304233	Jul.18, 2012	Jul.17, 2013
CLIMATE CHAMBER	ALBATROSS	--	--	Jul.18, 2012	Jul.17, 2013
Loop Antenna	A.H.	SAS-562B	SEL0097	Jul.18, 2012	Jul.17, 2013
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	Jun.08, 2012	Jun.07, 2013
Horn Antenna	EM	EM-AH-10180	N/A	Apr.21, 2012	Apr.20, 2013

### 1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

### 1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted	22.913(a) / 24.232 (b)
		Radiated	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238
		Radiated Spurious Emission	

### 2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	GSM Mobile Phone	AM301	FCC ID: UOSAM217	EUT
2	Adapter	CH4	DC 5.0V / 600mA	Accessory
3	Battery	AM-5C	DC 3.7V/ 700mAh	Accessory
4	Earphone	AM301	N/A	Accessory
5	USB Cable	AM301	N/A	Accessory

**Note:** All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.



### 3. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917/ 24.238	Pass
		Radiated Spurious Emission		
4	Mains Conducted Emission		15.107 / 15.207	Pass
5	Frequency Stability		2.1055 /24.235	Pass
6	Occupied Bandwidth		2.1049 (h)(i)	Pass
7	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
8	Band Edge		22.917(b) / 24.238 (b)	Pass

### 4. DESCRIPTION OF TEST MODES

During the testing, the EUT (Quad-band GSM / GPRS mobile phone) was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

**Note:** GSM and GPRS modes have been tested during the test. The worst condition (GSM) be recorded in the test report if no other modes test data.

## 5. OUTPUT POWER

### 5.1 CONDUCTED OUTPUT POWER

#### 5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM, GPRS,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

#### 5.1.2 PROVISIONS APPLICABLE

Conducted Output Power Limits for GSM 850 MHz			
Mode	Power Step	Nominal Peak Power	Tolerance(dB)
GSM	5	33 dBm (2W)	-2
GPRS	3	33 dBm (2W)	-2

Conducted Output Power Limits for PCS 1900 MHz			
Mode	Power Step	Nominal Peak Power	Tolerance(dB)
GSM	0	30 dBm (1W)	-2
GPRS	3	30 dBm (1W)	-2

#### 5.1.3 MEASUREMENT RESULT

##### Test Result of Conducted Output Power for GSM 850 MHZ (SIM1)

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM(SIM1)	824.2	33	31.31	-1.69	<b>30.07</b>	-9	21.07
	836.6	33	31.24	-1.76	30.02	-9	21.02
	848.8	33	31.21	-1.79	30.01	-9	21.01
GPRS850 (1 Slot)	824.2	33	31.18	-1.82	29.99	-9	20.99
	836.6	33	31.24	-1.76	29.91	-9	20.91
	848.8	33	31.18	-1.82	28.88	-9	19.88
GPRS850 (2 Slot)	824.2	30	28.36	-1.64	27.26	-6	21.26
	836.6	30	28.38	-1.62	27.3	-6	21.3
	848.8	30	28.29	-1.71	27.23	-6	21.23

**Test Result of Conducted Output Power for PCS 1900 MHZ (SIM1)**

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM(SIM1)	1850.2	30	28.29	-1.71	27.19	-9	18.19
	1880	30	28.3	-1.7	<b>27.21</b>	-9	18.21
	1909.8	30	28.18	-1.82	27.08	-9	18.08
GPRS1900 (1 Slot)	1850.2	30	28.4	-1.6	27.09	-9	18.09
	1880	30	28.27	-1.73	26.98	-9	17.98
	1909.8	30	28.3	-1.7	27.01	-9	18.01
GPRS1900 (2 Slot)	1850.2	27	25.18	-1.82	24.19	-6	18.19
	1880	27	25.22	-1.78	24.18	-6	18.18
	1909.8	27	25.09	-1.91	24.21	-6	18.21

**Test Result of Conducted Output Power for GSM 850 MHZ and PCS 1900 MHZ(SIM 2)**

Mode	Maximum Conducted Power(dBm)	Average Burst Power(dBm)	Duty cycle Factor (dB)	Frame Power (dBm)
GSM(SIM2) for GSM 850 MHZ	31.2	29.98	-9	20.98
GSM(SIM2) for GSM 1900 MHZ	28.22	27.04	-9	18.04

**Test Result of Conducted Output Power for original Model:AM217**

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM(SIM1)	824.2	33	<b>32.46</b>	-0.57	<b>31.22</b>	-9	22.22
	836.6	33	32.39	-0.61	31.15	-9	22.15
	848.8	33	32.36	-0.64	31.16	-9	22.16
GPRS850 (1 Slot)	824.2	33	32.33	-0.67	31.14	-9	22.14
	836.6	33	32.39	-0.61	31.06	-9	22.06
	848.8	33	32.33	-0.67	30.03	-9	21.03
GPRS850 (2 Slot)	824.2	30	29.51	-0.49	28.41	-6	22.41
	836.6	30	29.53	-0.47	28.45	-6	22.45
	848.8	30	29.44	-0.56	28.38	-6	22.38

GSM(SIM1)	1850.2	30	29.44	-0.56	28.34	-9	19.34
	1880	30	<b>29.45</b>	-0.55	<b>28.36</b>	-9	19.36
	1909.8	30	29.33	-0.67	28.23	-9	19.23
GPRS1900 (1 Slot)	1850.2	30	29.55	-0.45	28.24	-9	19.24
	1880	30	29.42	-0.58	28.13	-9	19.13
	1909.8	30	29.45	-0.55	28.16	-9	19.16
GPRS1900 (2 Slot)	1850.2	27	26.33	-0.67	25.34	-6	19.34
	1880	27	26.37	-0.63	25.33	-6	19.33
	1909.8	27	26.24	-0.76	25.36	-6	19.36

**Test Result of Conducted Output Power for GSM 850 MHZ and PCS 1900 MHZ(SIM 2)**

Mode	Maximum Conducted Power(dBm)	Average Burst Power(dBm)	Duty cycle Factor (dB)	Frame Power (dBm)
GSM(SIM2) for GSM 850 MHZ	32.35	31.13	-9	22.13
GSM(SIM2) for GSM 1900 MHZ	29.37	28.19	-9	19.19

Notes: Original Model:AM217 Antenna gain: 1.0dBi

As Class II Permissive Change in this device:

The GPRS Class was from 12 to 10 through software control

There is a higher gain antenna (2.15dBi) used for this device.

Therefore the conducted output power was decreased by 1.15dB since the antenna gain is higher than the original. So that the ERP/EIRP power could be equal to the original filing

## 5.2 RADIATED OUTPUT POWER

### 5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = P_{in} - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{dBi}$ .

### 5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Radiated Power Limits for GSM 850 MHZ (ERP)		
Mode	Power Step	Nominal Peak Power
GSM	5	$\leq 38.45 \text{ dBm (7W)}$
GPRS	3	$\leq 38.45 \text{ dBm (7W)}$

Radiated Power Limits for PCS 1900 MHZ (E.I.R.P.)		
Mode	Power Step	Nominal Peak Power
GSM	0	$\leq 33 \text{ dBm (2W)}$
GPRS	3	$\leq 33 \text{ dBm (2W)}$

**5.2.3 MEASUREMENT RESULT**

<b>Radiated Power (ERP) for GSM 850 MHZ</b>					
<b>Mode</b>	<b>Frequency</b>	<b>Power Step</b>	<b>Result</b>		<b>Conclusion</b>
			<b>Max. Peak ERP (dBm)</b>	<b>Polarization Of Max. ERP</b>	
GSM	824.2	5	<b>30.53</b>	Horizontal	Pass
	836.6	5	30.48	Horizontal	Pass
	848.8	5	30.46	Horizontal	Pass
GPRS 1 slot	824.2	3	30.47	Horizontal	Pass
	836.6	3	30.44	Horizontal	Pass
	848.8	3	30.38	Horizontal	Pass
GPRS 2 slots	824.2	3	Less than 27 dBm	Horizontal	Pass
	836.6	3		Horizontal	Pass
	848.8	3		Horizontal	Pass
<b>Radiated Power (E.I.R.P) for PCS 1900 MHZ</b>					
<b>Mode</b>	<b>Frequency</b>	<b>Power Step</b>	<b>Result</b>		<b>Conclusion</b>
			<b>Max. Peak E.I.R.P.(dBm)</b>	<b>Polarization Of Max. E.I.R.P.</b>	
GSM	1850.2	0	<b>28.14</b>	Horizontal	Pass
	1880.0	0	28.11	Horizontal	Pass
	1909.8	0	28.07	Horizontal	Pass
GPRS 1slot	1850.2	3	28.11	Horizontal	Pass
	1880.0	3	28.09	Horizontal	Pass
	1909.8	3	28.04	Horizontal	Pass
GPRS 2 slots	1850.2	3	Less than 27 dBm	Horizontal	Pass
	1880.0	3		Horizontal	Pass
	1909.8	3		Horizontal	Pass

## 6. PEAK-TO-AVERAGE RATIO

### 6.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the Peak-to-Average Ratio from the EUT.

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. For GSM/EGPRS operating modes:
  - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
  - b. Set EUT in maximum power output, and triggered the burst signal.
  - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
3. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

### 6.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 6.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)	1.24	1.22	1.20

Modes	PCS 1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)	1.1	1.09	1.1

## 7. SPURIOUS EMISSION

### 7.1 CONDUCTED SPURIOUS EMISSION

#### 7.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

#### 7.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.



**7.1.3 MEASUREMENT RESULT**

<b>Conducted Spurious Emission for GSM 850 MHz</b>						
Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)
2	1648.4	B.I.N.F	1673.2	B.I.N.F	1697.6	B.I.N.F
3	2472.6	B.I.N.F	2509.8	B.I.N.F	2546.4	B.I.N.F
4	3296.8	B.I.N.F	3346.4	B.I.N.F	3395.2	B.I.N.F
5	4121	B.I.N.F	4183	B.I.N.F	4244	B.I.N.F
6	4945.2	B.I.N.F	5019.6	B.I.N.F	5092.8	B.I.N.F
7	5769.4	B.I.N.F	5856.2	B.I.N.F	5941.6	B.I.N.F
8	6593.6	B.I.N.F	6692.8	B.I.N.F	6790.4	B.I.N.F
9	7417.8	B.I.N.F	7529.4	B.I.N.F	7639.2	B.I.N.F
10	8242	B.I.N.F	8366	B.I.N.F	8488	B.I.N.F
● <b>B.I.N.F: Below Instruments Noise floor</b>						

<b>Conducted Spurious Emission for PCS 1900 MHz</b>						
Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	B.I.N.F	3760	B.I.N.F	3819.6	B.I.N.F
3	5550.6	B.I.N.F	5640	B.I.N.F	5729.4	B.I.N.F
4	7400.8	B.I.N.F	7520	B.I.N.F	7639.2	B.I.N.F
5	9251.0	B.I.N.F	9400	B.I.N.F	9549.0	B.I.N.F
6	11101.2	B.I.N.F	11280	B.I.N.F	11458.8	B.I.N.F
7	12951.4	B.I.N.F	13160	B.I.N.F	13368.6	B.I.N.F
8	14801.6	B.I.N.F	15040	B.I.N.F	15278.4	B.I.N.F
9	16651.8	B.I.N.F	16920	B.I.N.F	17188.2	B.I.N.F
10	18502.0	B.I.N.F	18800	B.I.N.F	19098.0	B.I.N.F
● <b>B.I.N.F: Below Instruments Noise floor</b>						

**Note:** Below 30MHZ no Spurious found and The GSM modes is the worst condition.


## 7.2 RADIATED SPURIOUS EMISSION

### 7.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM, GPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$  The SA is calibrated using following setup.

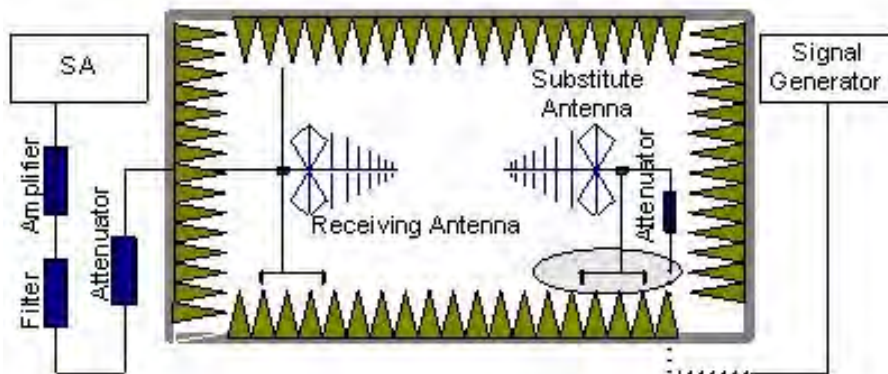

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

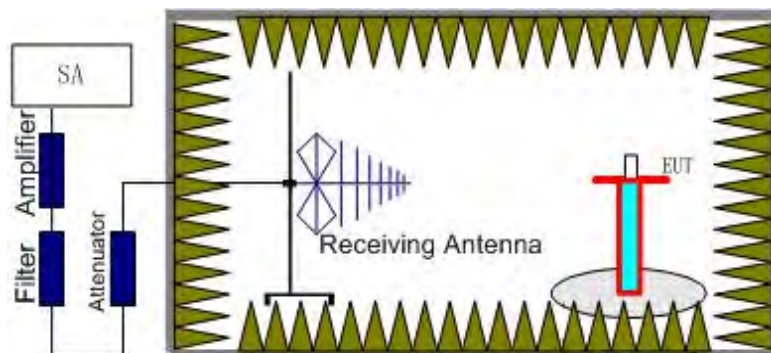

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + A_{Rpl}$

### 7.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a IMOBOnsee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**7.2.3 MEASUREMENT RESULT**

<b>The Worst Test Results for Channel 128 / 824.2 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1648.00	-37.17	-5.01	-42.18	-13.00	Horizontal
1752.00	-37.45	-2.18	-39.63	-13.00	Vertical
2472.00	-37.59	3.46	-34.13	-13.00	Horizontal
9086.00	-37.63	2.79	-34.84	-13.00	Horizontal

<b>The Worst Test Results for Channel 190/836.6 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1673.00	-43.16	-3.22	-46.38	-13.00	Horizontal
1903.00	-39.72	-0.24	-39.96	-13.00	Vertical
9089.00	-37.89	3.98	-33.91	-13.00	Vertical

<b>The Worst Test Results for Channel 251/848.8 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1698.00	-38.61	-2.26	-40.87	-13.00	Horizontal
1888.50	-37.88	-3.12	-41.00	-13.00	Vertical
2131.00	-41.72	-1.74	-43.46	-13.00	Vertical
9089.00	-37.54	8.46	-29.08	-13.00	Horizontal

<b>The Worst Test Results for Channel 512/1850.2 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1999.00	-40.81	9.5	-31.31	-13.00	Horizontal
3700.00	-37.87	8.74	-29.13	-13.00	Horizontal
12950.40	-36.56	11.56	-25.00	-13.00	Vertical
17919.60	-40.42	17.89	-22.53	-13.00	Vertical


<b>The Worst Test Results for Channel 661/1880.0 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.50	-48.34	9.7	-38.64	-13.00	Vertical
9399.00	-40.63	11.6	-29.03	-13.00	Vertical
13160.40	-39.25	14.89	-24.36	-13.00	Horizontal
15039.60	-38.67	13.87	-24.80	-13.00	Vertical
17941.20	-38.59	19.76	-18.83	-13.00	Horizontal
<b>The Worst Test Results for Channel 810/1909.8 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.00	-38.53	10.02	-28.51	-13.00	Vertical
9548.50	-38.71	11.3	-27.41	-13.00	Horizontal
13367.40	-37.92	12.4	-25.52	-13.00	Horizontal
15277.80	-37.73	18.03	-19.70	-13.00	Vertical
17931.60	-39.58	19	-20.58	-13.00	Horizontal

**Note:** Below 30MHZ no Spurious found and The GSM modes is the worst condition.


## **APPENDIX I**

### **TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION**


CONDUCTED EMISSION IN GSM BAND  
Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

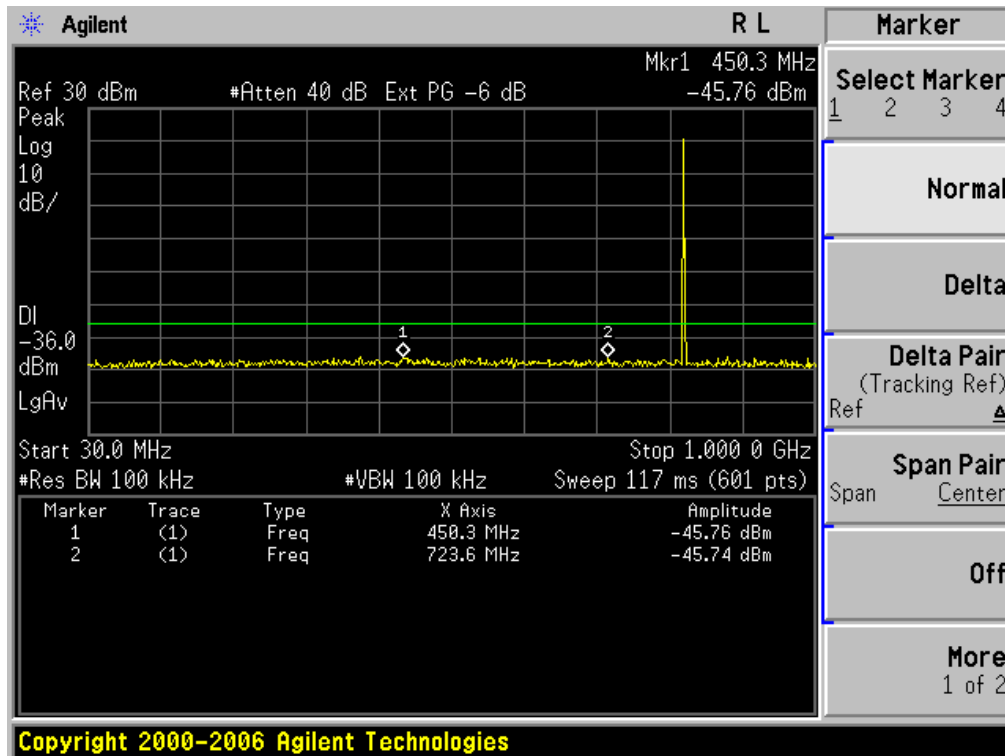


Conducted Emission Transmitting Mode CH 128 1GHz – 9GHz

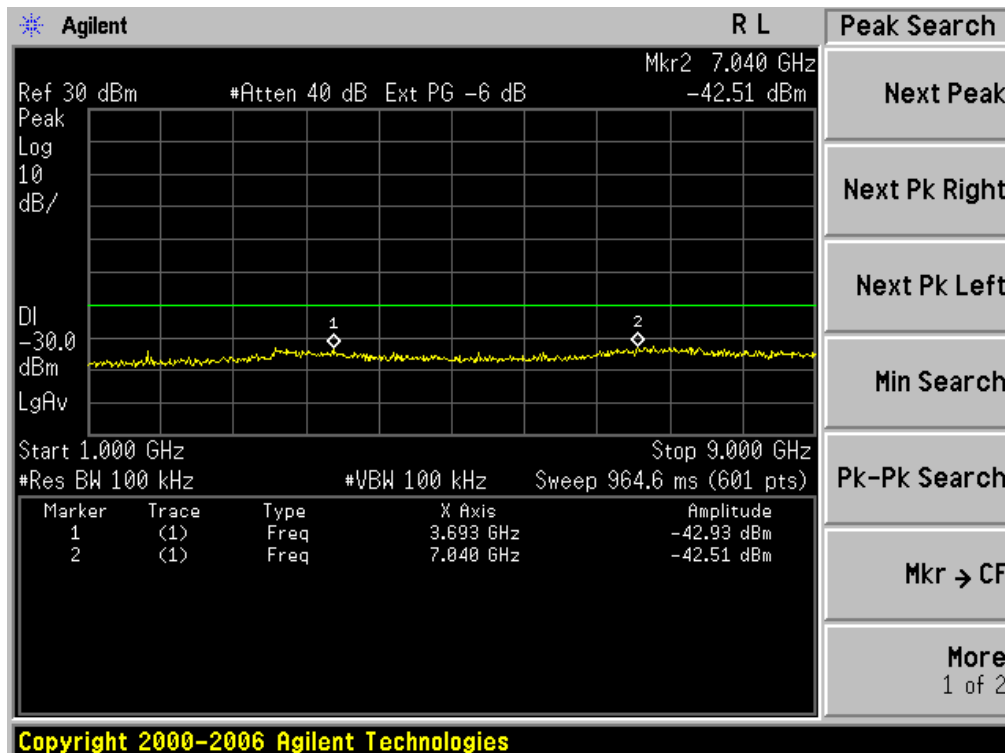

Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

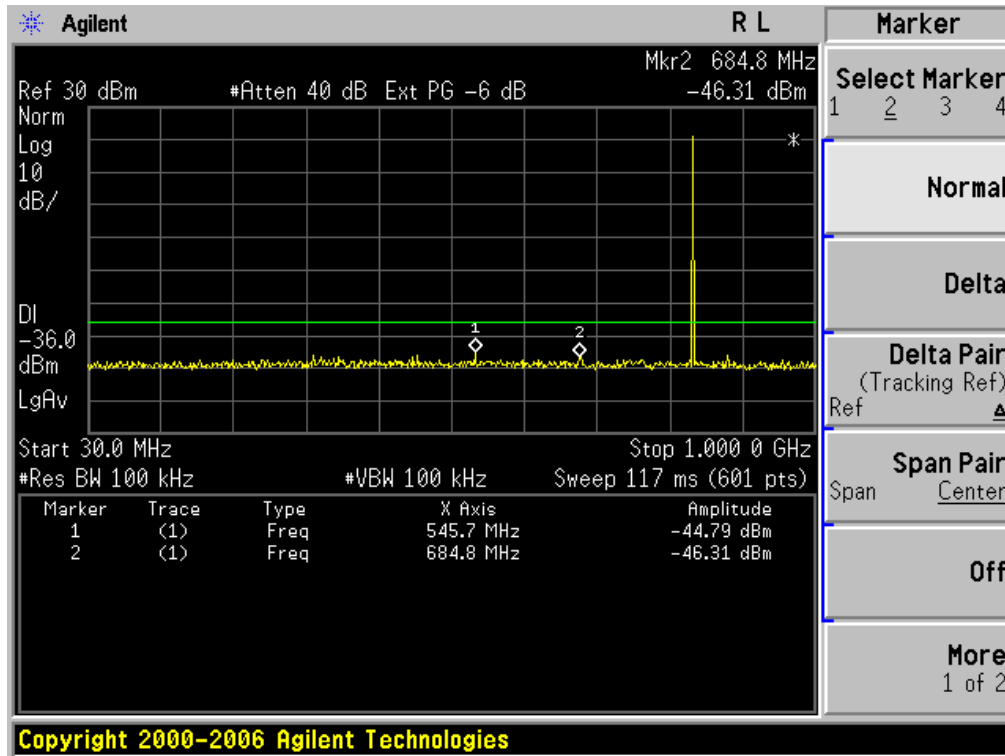


Conducted Emission Transmitting Mode CH 190 1GHz – 9GHz

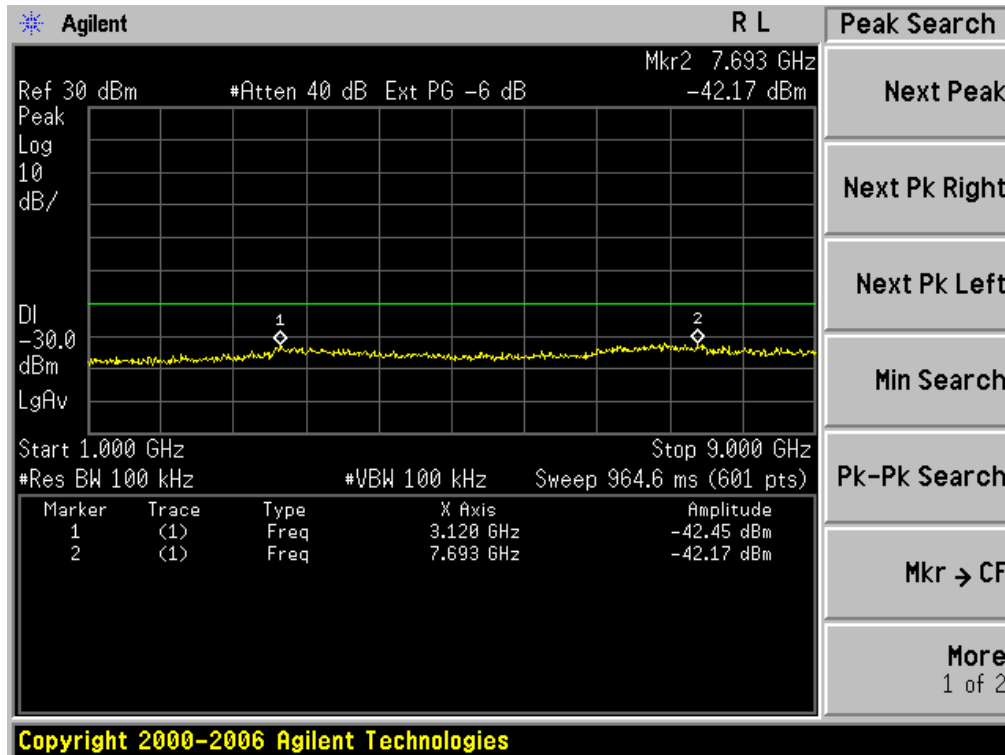





Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

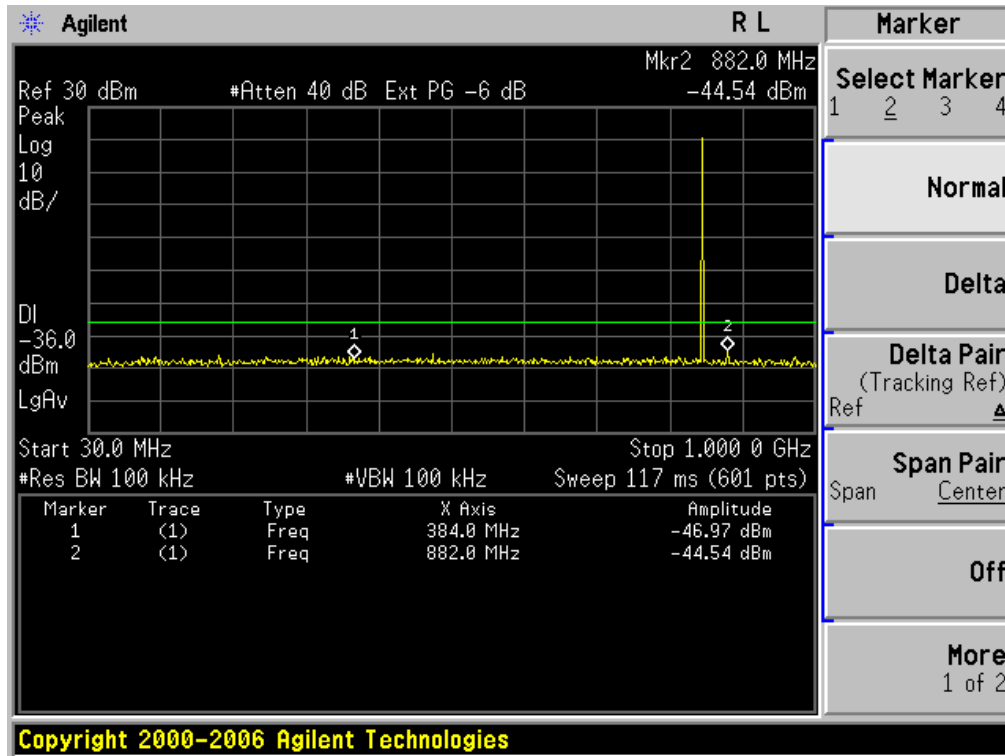


Conducted Emission Transmitting Mode CH 251 1GHz – 9GHz

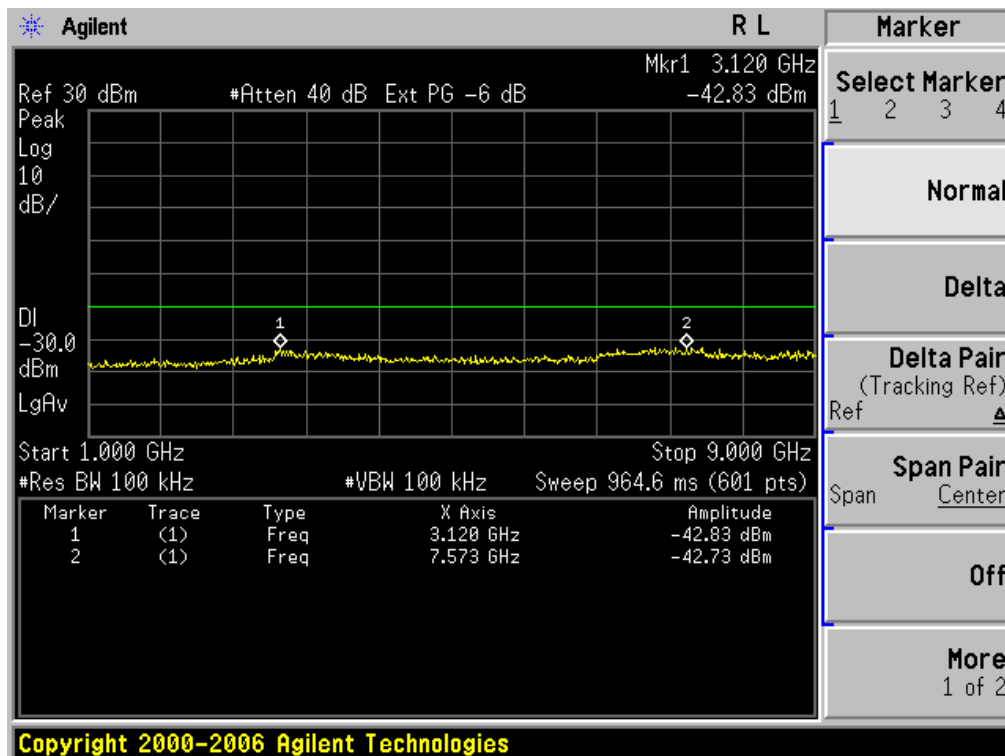


Conducted Emission Idle Mode 30MHz – 1GHz

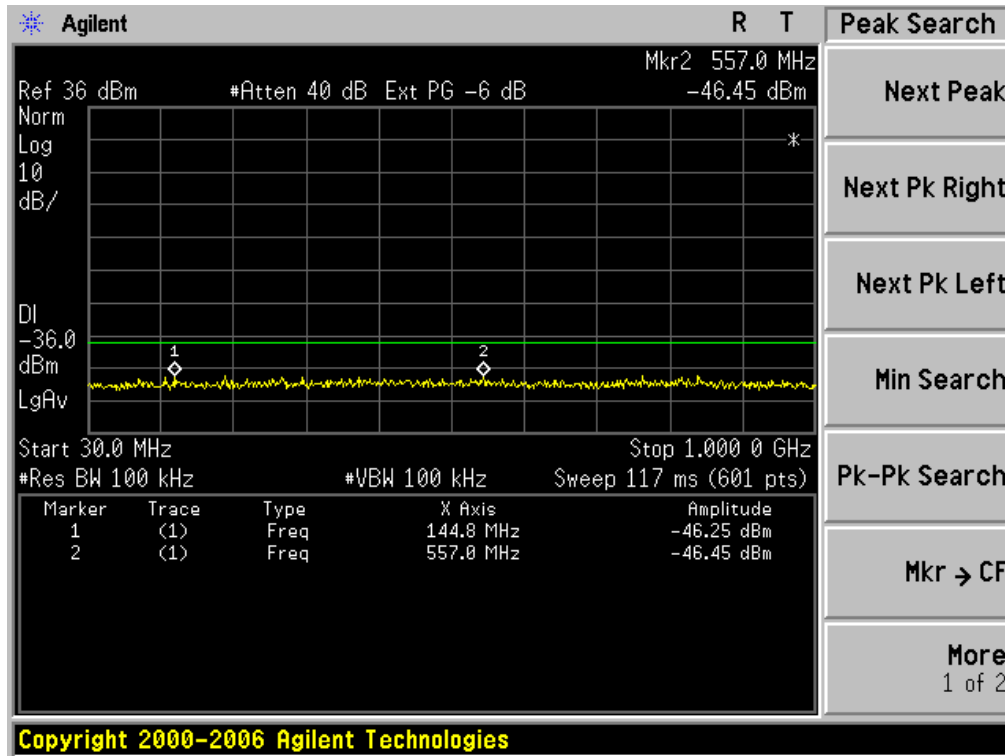


Conducted Emission Idle Mode 1GHz – 9GHz

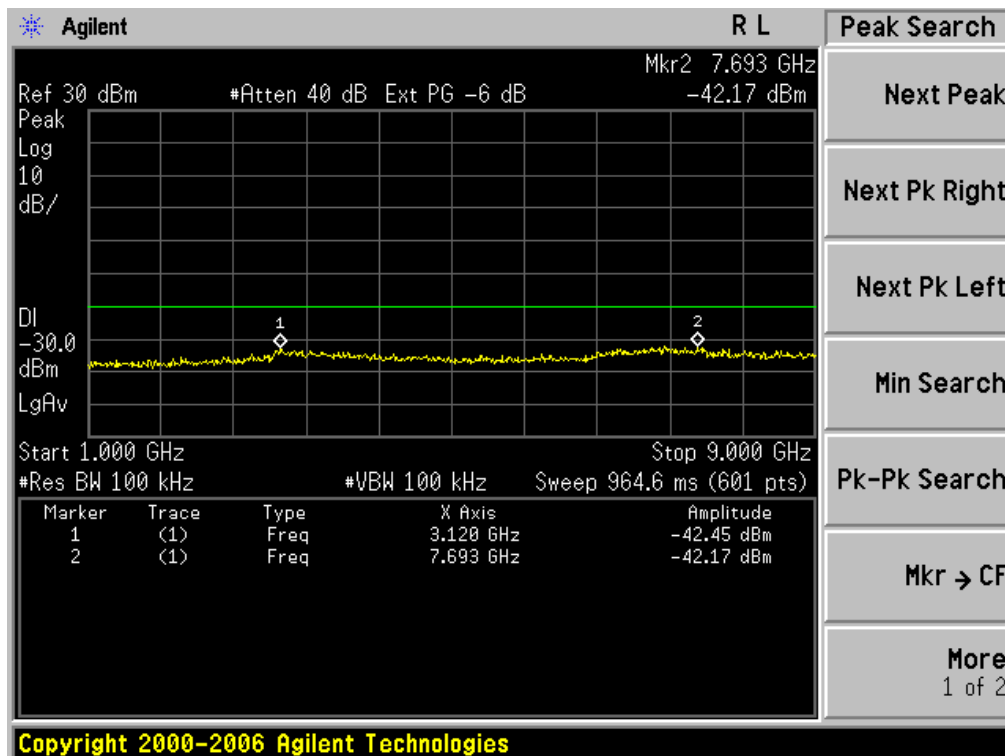


CONDUCTED EMISSION IN PCS BAND  
Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

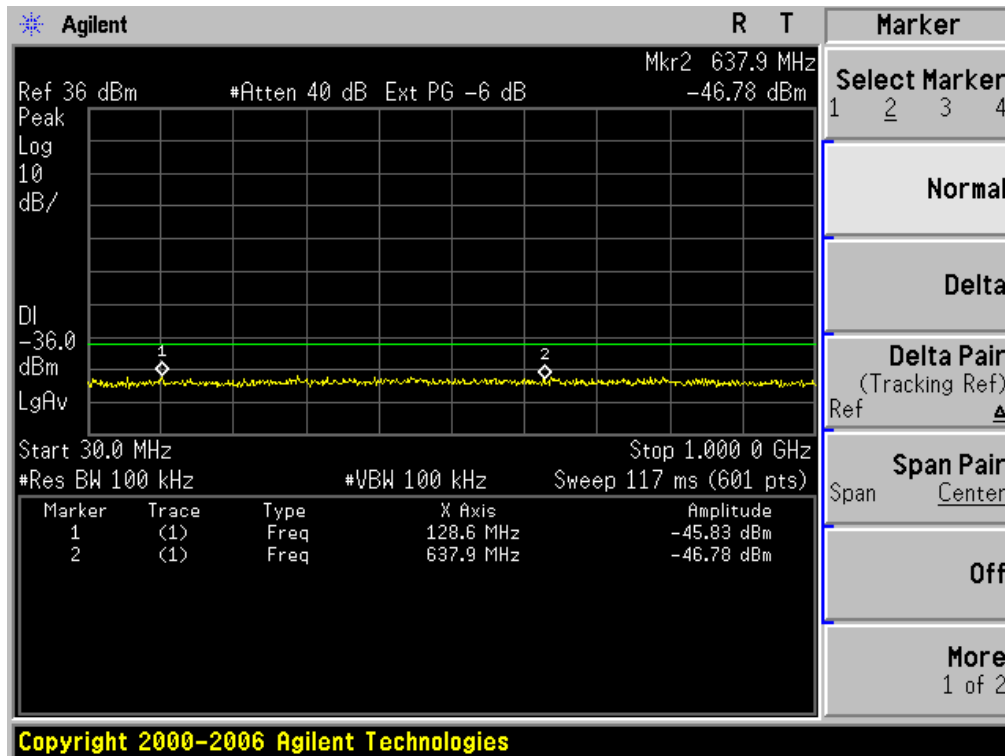


Conducted Emission Transmitting Mode CH 512 1GHz – 20GHz

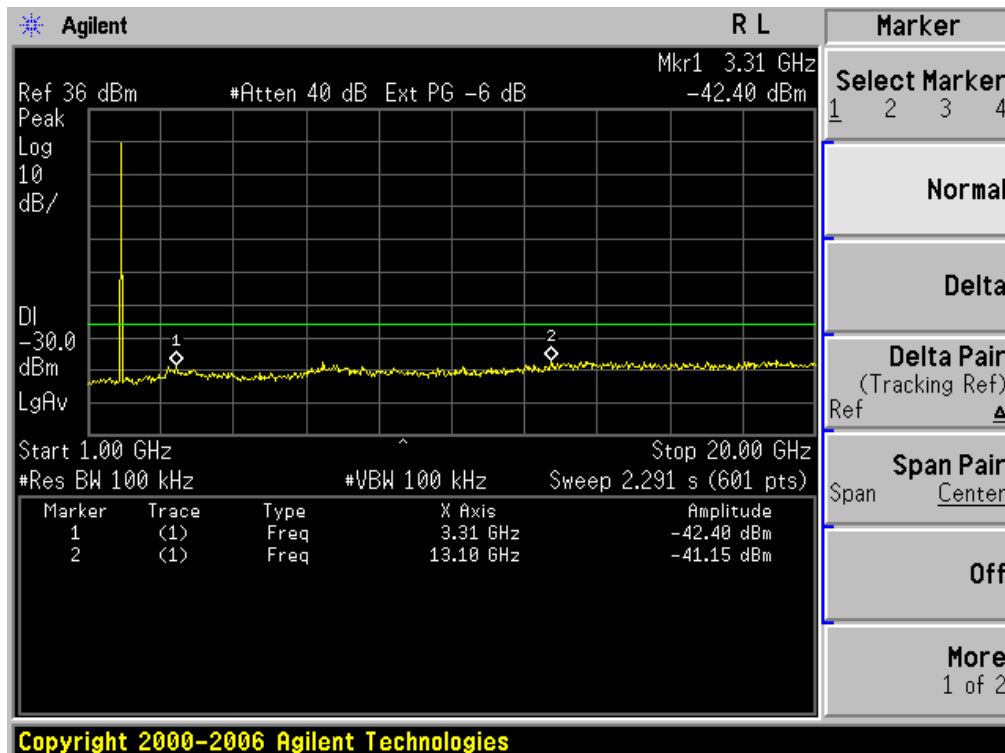


Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

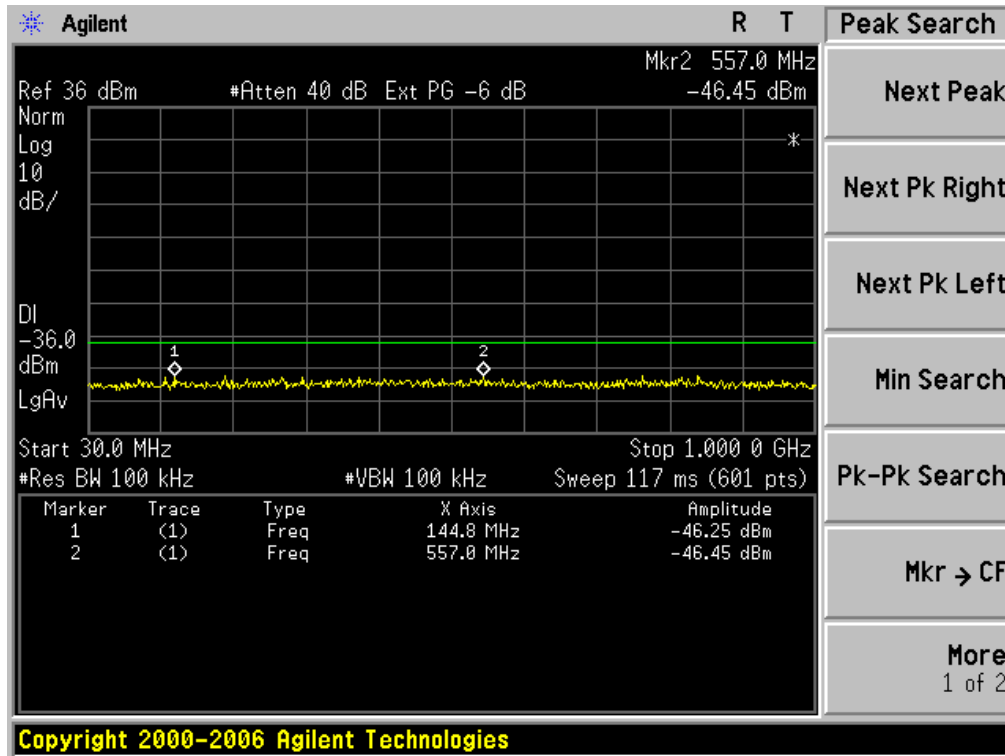


Conducted Emission Transmitting Mode CH 661 1GHz – 20GHz

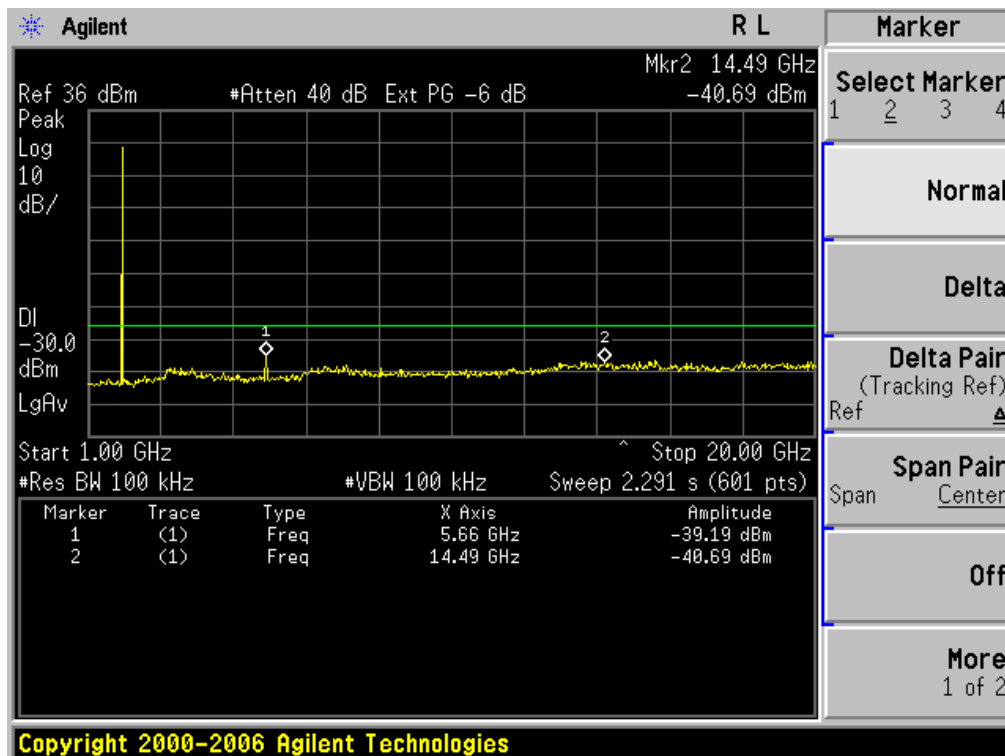

Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

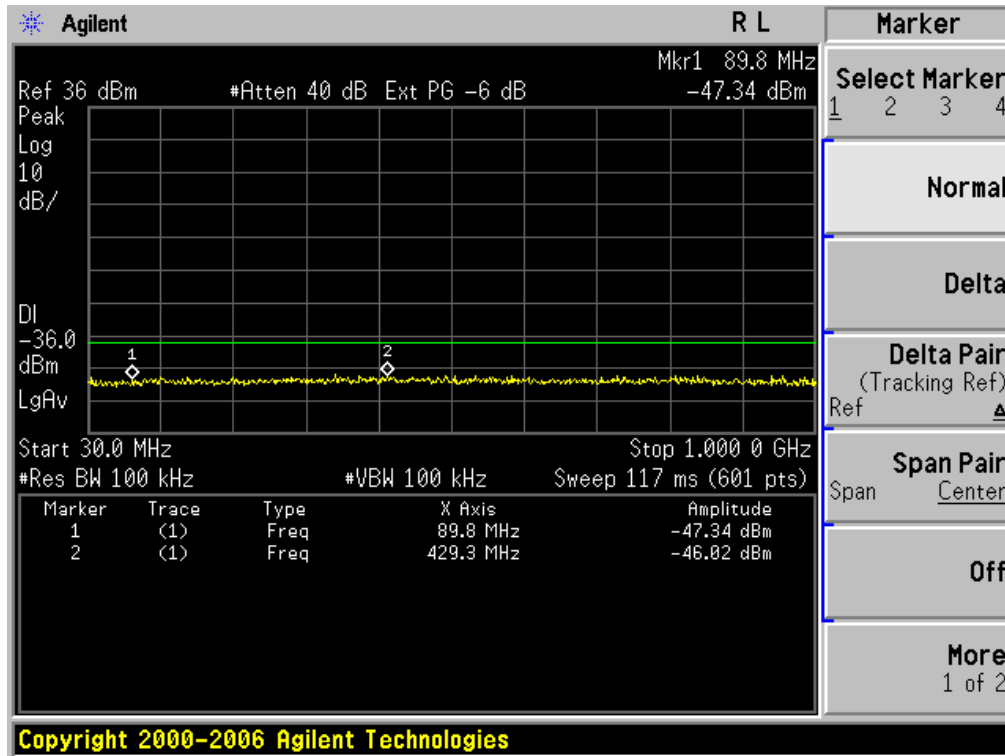


Conducted Emission Transmitting Mode CH 810 1GHz – 20GHz

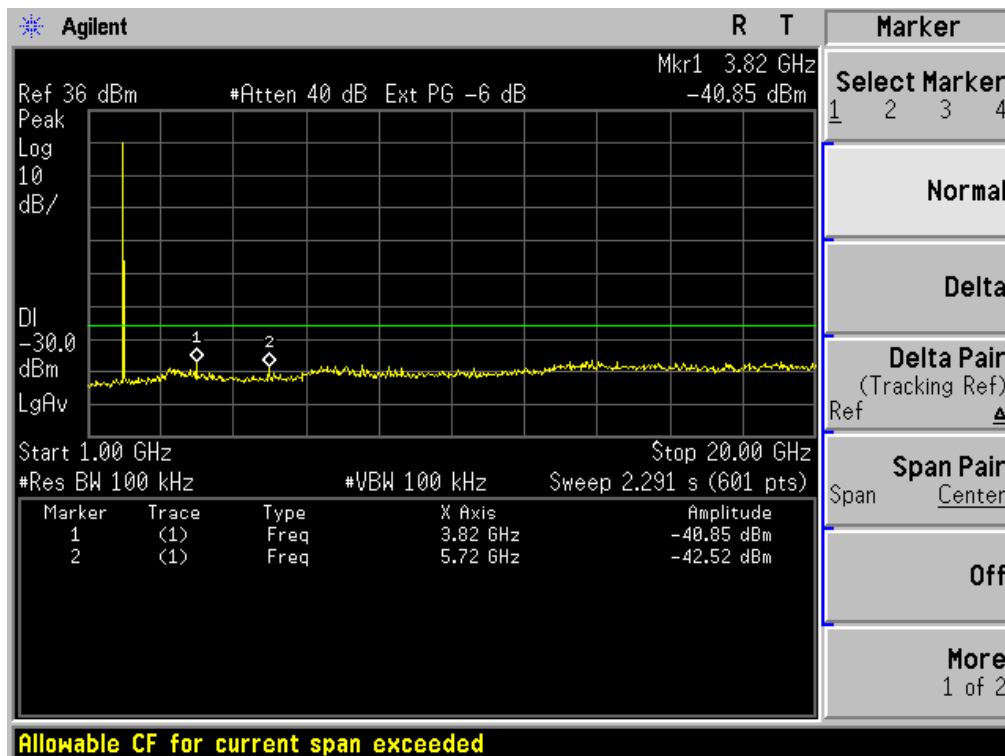

## **APPENDIX IV**

### **PHOTOGRAPHS OF TEST SETUP**

### RADIATED SPURIOUS EMISSION

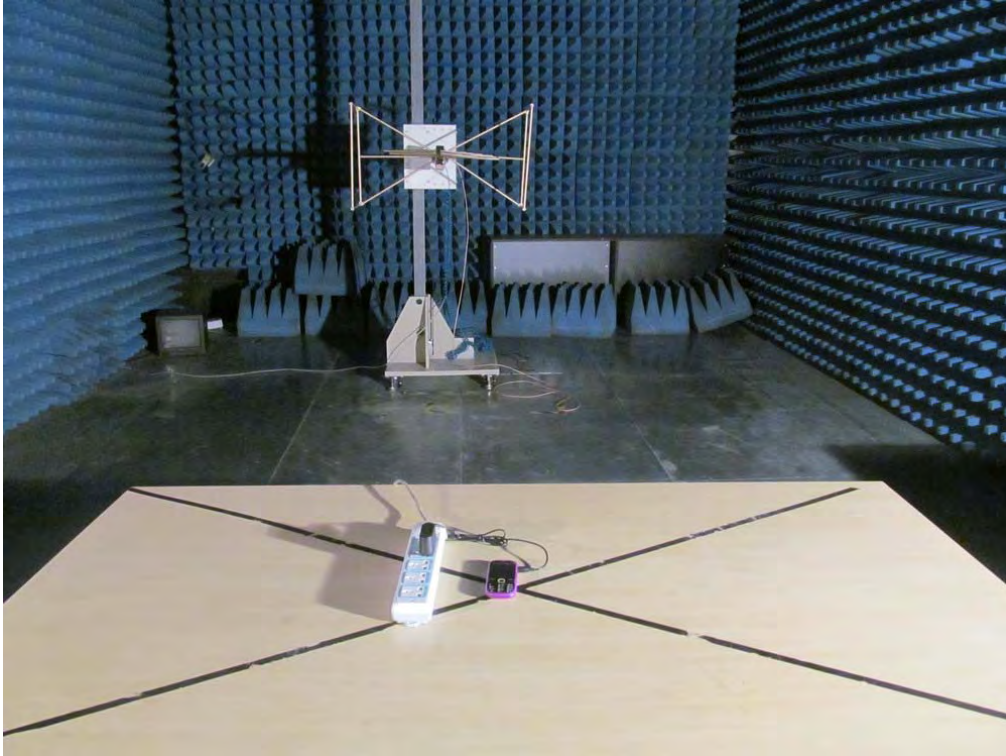

## **APPENDIX V**

### **PHOTOGRAPHS OF EUT**



TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT





BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1







OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3

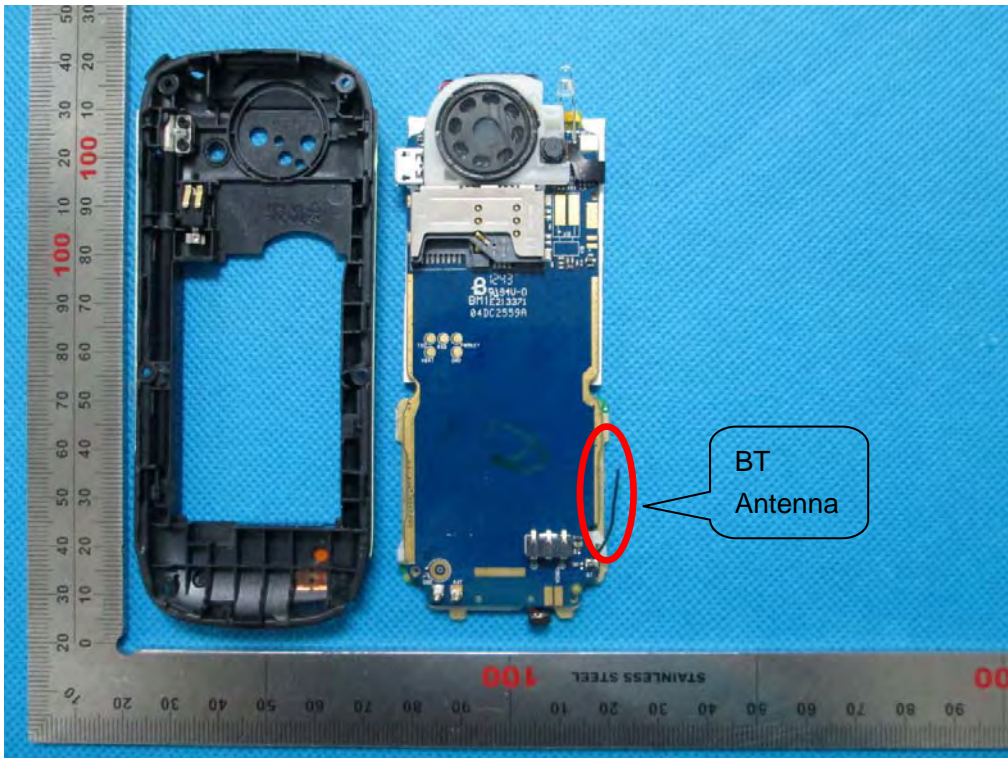

INTERNAL VIEW OF EUT-1

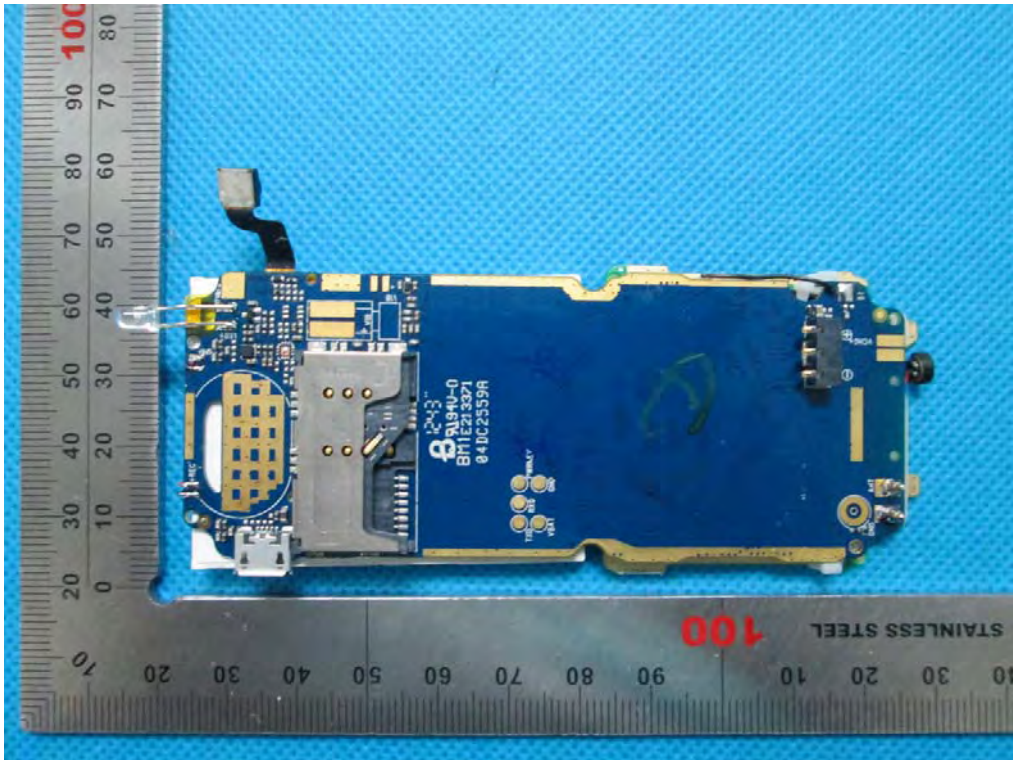


INTERNAL VIEW OF EUT-2

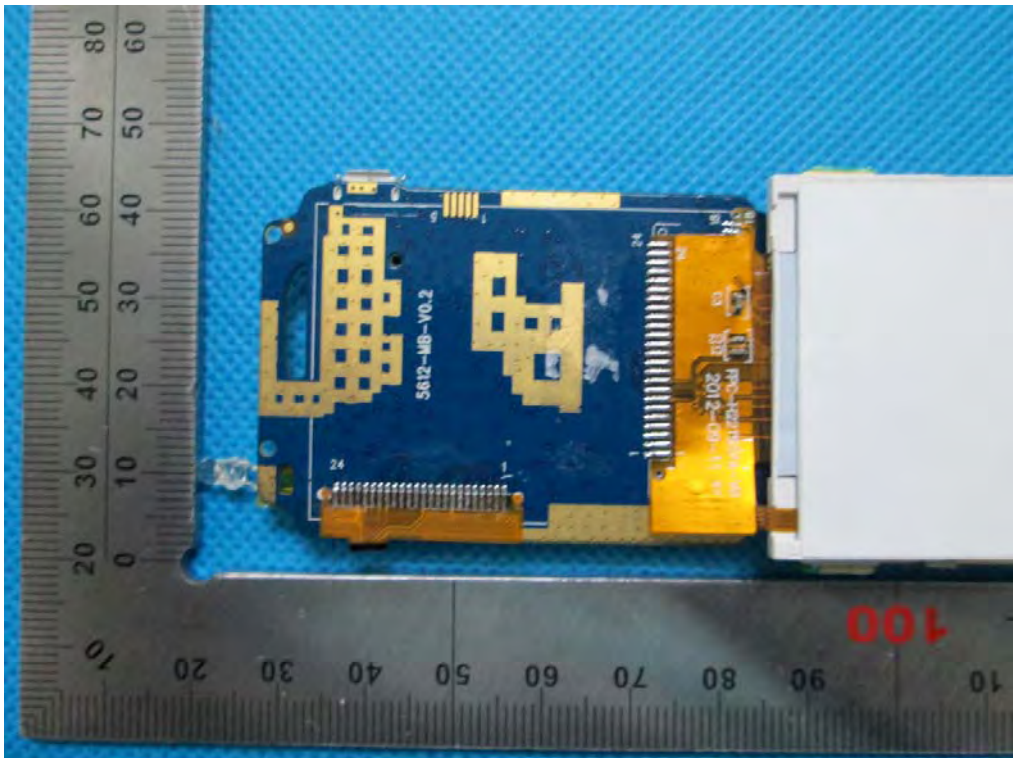



INTERNAL VIEW OF EUT-3

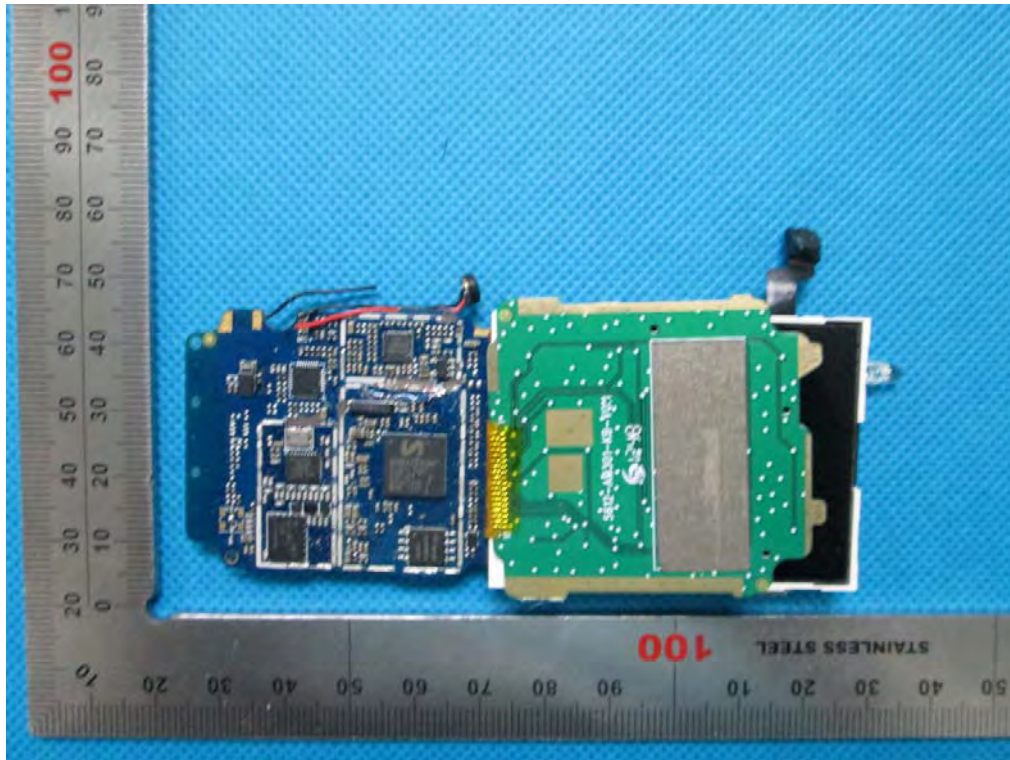

-----END OF REPORT-----