



FCC TEST REPORT

according to

FCC Rules and Regulations Part 15 Subpart C

Applicant : ATBS Technology Corporation
Address : 3F-4, No.200 Kang-Chien Rd., Taipei, Taiwan
Equipment : TPMS for iPod,iPhone,iPad
Model No. : BT6XXXX (X= 0-9, A-Z, a-z or blank)
FCC ID : UP5-SC-BT6000I
Trade Name : ATBS

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



Contents

1. Report of Measurements and Examinations	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test	7
2.1 Feature of Equipment under Test	7
2.2 Carrier Frequency of Channels	8
2.3 Test Mode & Test Software	9
2.4 Description of Test System	9
2.5 General Information of Test	10
2.6 Measurement Uncertainty	10
3. Antenna Requirements	11
3.1 Standard Applicable	11
3.2 Antenna Construction and Directional Gain	11
4. Test of Conducted Emission	12
4.1 Test Limit	12
4.2 Test Procedures	12
4.3 Typical Test Setup	13
4.4 Measurement equipment	13
4.5 Test Result and Data	14
4.6 Test Photographs	20
5. Test of Radiated Emission	21
5.1 Test Limit	21
5.2 Test Procedures	21
5.3 Typical Test Setup	22
5.4 Measurement equipment	22
5.5 Test Result and Data	23
5.6 Test Photographs (30MHz~1000MHz)	53
5.7 Test Photographs (1000MHz~25000MHz)	54
6. 20dB Bandwidth Measurement Data	55
6.1 Test Limit	55
6.2 Test Procedures	55
6.3 Test Setup Layout	55
6.4 Measurement equipment	55
6.5 Test Result and Data	56
7. Frequencies Separation	62
7.1 Test Limit	62
7.2 Test Procedures	62
7.3 Test Setup Layout	62
7.4 Measurement equipment	62
7.5 Test Result and Data	62
8. Dwell Time on each channel	69
8.1 Test Limit	69
8.2 Test Procedures	69
8.3 Test Setup Layout	69



8.4 Measurement equipment 69

8.5 Test Result and Data 69

9. Number of Hopping Channels 80

9.1 Test Limit 80

9.2 Test Procedures 80

9.3 Test Setup Layout 80

9.4 Measurement equipment 80

9.5 Test Result and Data 80

10. Maximum Peak Output Power 84

10.1 Test Limit 84

10.2 Test Procedures 84

10.3 Test Setup Layout 84

10.4 Measurement equipment 84

10.5 Test Result and Data 84

11. Band Edges Measurement 91

11.1 Test Limit 91

11.2 Test Procedure 91

11.3 Test Setup Layout 91

11.4 List of Measuring Equipment Used 91

11.5 Test Result and Data 91

11.6 Restrict band emission Measurement Data 99

12. Restricted Bands of Operation 102

12.1 Labeling Requirement 102

Appendix A. Photographs of EUT.....A1 ~ A4



CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations Part 15 Subpart C


Applicant : ATBS Technology Corporation
Address : 3F-4, No.200 Kang-Chien Rd., Taipei, Taiwan
Equipment : TPMS for iPod,iPhone,iPad
Model No. : BT6XXXX (X= 0-9, A-Z, a-z or blank)
FCC ID : UP5-SC-BT6000i

I **HEREBY** CERTIFY THAT :


The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2010)**.

The test was carried out on Jul. 11, 2012 at **CerpPASS Technology Corp.**

Approval by :


Hill Chen
EMC/RF B.U. Assistant Manager

Test Engineer:


Ben Lu
Engineer



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	. 20dB Bandwidth Measurement	Pass
15.247(a)(1)	. Dwell Time	Pass
15.247(b)	. Number of Hopping Channels	Pass
15.247(b)	. Peak Output Power Measurement Data	Pass
15.247(d)	. Band Edges Measurement Data	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Receiver:

Operation	USB 5V
Operation Current	50 mA
Operation Temperature	-10 ~ 70
TPMS Frequency	433.92 MHz
BT Frequency	2.4 GHz
Operating Current	4mA
Operating Temperature	-25 ~85
Transmit Power	0.11 dBm



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---



2.3 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- b. The complete test system included Notebook, Mouse and EUT for EMI test.
- c. The EUT was executed to keep transmitting and receiving data via Bluetooth.
- d. The following test mode was performed for conduction and radiation test:
 - GFSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - $\pi/4$ -DQPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - 8DPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.

2.4 Description of Test System


Device	Manufacturer	Model No.	Description
Mouse	DELL	M-UV83	Data Cable, USB Shielding 1.85m
Notebook	ASUS	A8J	Power Cable, Adapter Unshielding 1.8m

Use Cable

Cable	Quantity	Description
RS232 To USB	1	Shielding, 1.8m



2.5 General Information of Test

Test Site :	Cerpass Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS2-SD) :	No.68-1, Shihbachongsi, Shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number :	TW1049, TW1061, 390316, 488071
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number :	T-1173 for Telecommunication Test C-4139 for Conducted emission test R-3428 for Radiated emission test G-97 for Radiated emission test above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24800MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.
Laboratory Accreditation :	

2.6 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	3.25 dB
Radiated Emission	30 MHz ~ 1,000 MHz	Vertical / Horizontal	3.93 dB
	1,000 MHz ~ 18,000 MHz	Vertical / Horizontal	5.18dB
6 dB Bandwidth	---	---	7500 Hz
Maximum Peak Output Power	---	---	1.4 dB
100kHz Bandwidth of Frequency Band Edges	---	---	2.2 dB
Power Spectral Density	---	---	2.2 dB



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna type: PCB Antenna

Antenna Gain: 0 dBi



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



4.3 Typical Test Setup

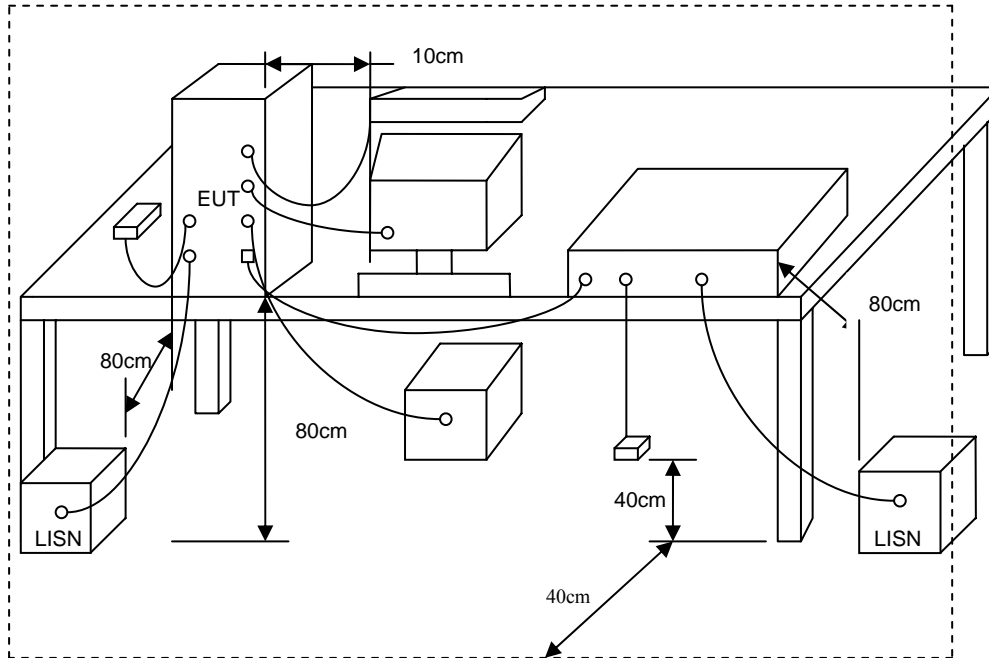


4.4 Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Receiver	R&S	ESCI	100443	2012/01/12	2013/01/11
LISN	Schwarzbeck	NSLK 8127	8127-516	2012/03/08	2013/03/07
LISN	Schwarzbeck	NSLK 8127	8127-568	2011/08/24	2012/08/23



4.5 Test Result and Data

Power	: From System	Pol/Phase	: LINE
Test Mode	: GFSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

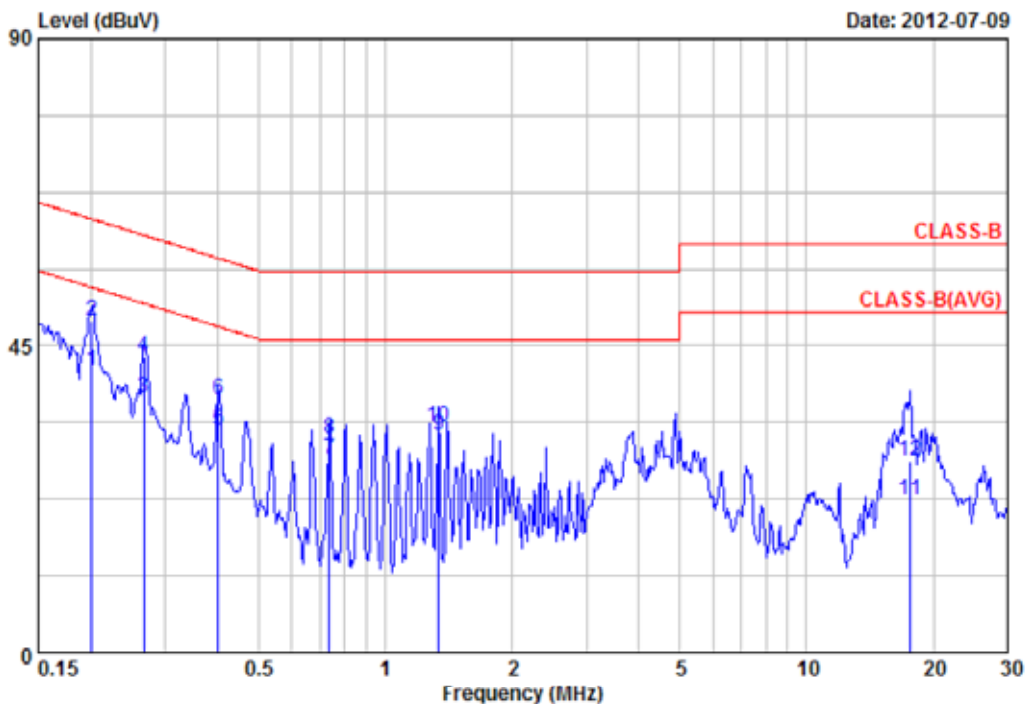


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.201	41.12	0.12	41.24	53.58	-12.34	Average
2	0.201	48.61	0.12	48.73	63.58	-14.85	QP
3	0.267	37.15	0.12	37.27	51.20	-13.93	Average
4	0.267	43.30	0.12	43.42	61.20	-17.78	QP
5	0.402	32.56	0.13	32.69	47.81	-15.12	Average
6	0.402	37.07	0.13	37.20	57.81	-20.61	QP
7	0.736	28.11	0.17	28.28	46.00	-17.72	Average
8	0.736	31.21	0.17	31.38	56.00	-24.62	QP
9	1.339	31.74	0.22	31.96	46.00	-14.04	Average
10	1.339	32.87	0.22	33.09	56.00	-22.91	QP
11	17.661	21.51	0.90	22.41	50.00	-27.59	Average
12	17.661	27.15	0.90	28.05	60.00	-31.95	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: From System	Pol/Phase	: NEUTRAL
Test Mode	: GFSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

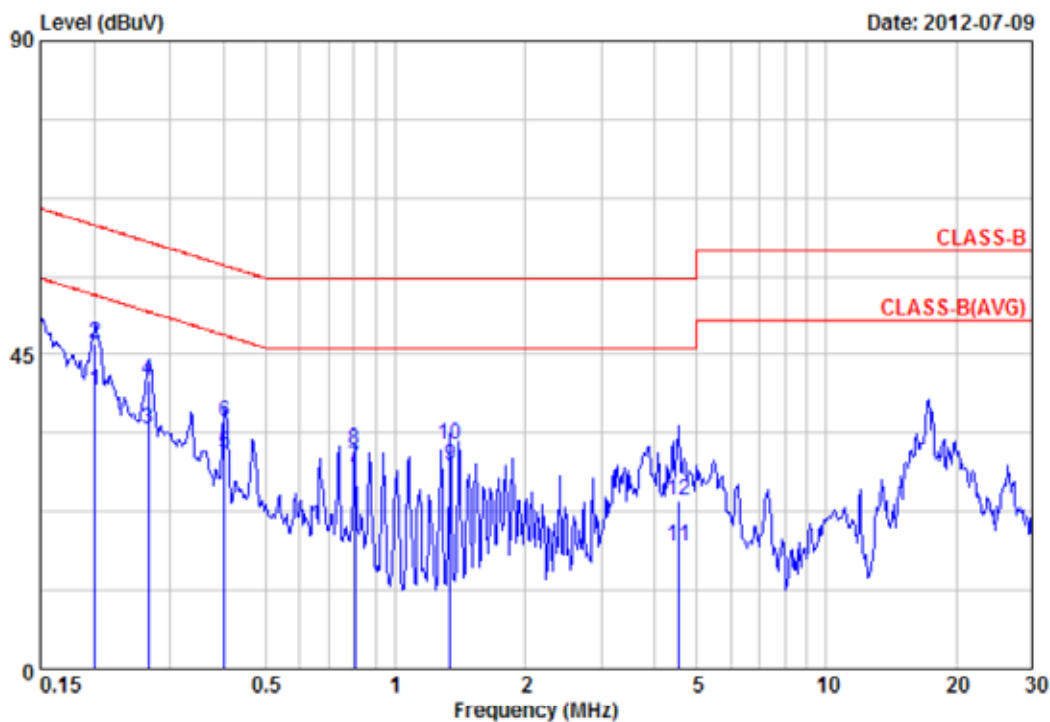


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.201	39.74	0.10	39.84	53.58	-13.74	Average
2	0.201	46.48	0.10	46.58	63.58	-17.00	QP
3	0.267	34.20	0.10	34.30	51.20	-16.90	Average
4	0.267	41.36	0.10	41.46	61.20	-19.74	QP
5	0.402	30.70	0.12	30.82	47.81	-16.99	Average
6	0.402	35.29	0.12	35.41	57.81	-22.40	QP
7	0.804	28.68	0.16	28.84	46.00	-17.16	Average
8	0.804	31.14	0.16	31.30	56.00	-24.70	QP
9	1.338	28.91	0.20	29.11	46.00	-16.89	Average
10	1.338	31.86	0.20	32.06	56.00	-23.94	QP
11	4.525	17.32	0.34	17.66	46.00	-28.34	Average
12	4.525	23.74	0.34	24.08	56.00	-31.92	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: From System	Pol/Phase	: LINE
Test Mode	: $\pi/4$ -DQPSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

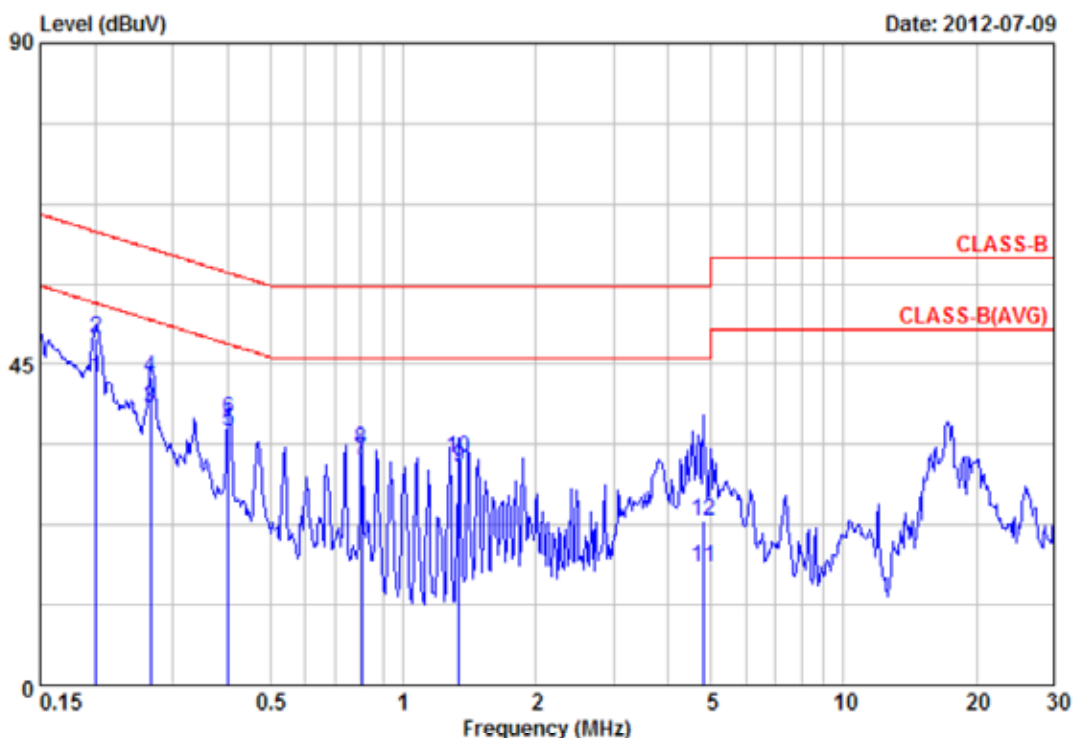


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.201	42.97	0.12	43.09	53.58	-10.49	Average
2	0.201	48.43	0.12	48.55	63.58	-15.03	QP
3	0.267	38.86	0.12	38.98	51.20	-12.22	Average
4	0.267	43.12	0.12	43.24	61.20	-17.96	QP
5	0.402	35.58	0.13	35.71	47.81	-12.10	Average
6	0.402	37.25	0.13	37.38	57.81	-20.43	QP
7	0.804	31.42	0.18	31.60	46.00	-14.40	Average
8	0.804	32.96	0.18	33.14	56.00	-22.86	QP
9	1.338	30.46	0.22	30.68	46.00	-15.32	Average
10	1.338	31.72	0.22	31.94	56.00	-24.06	QP
11	4.802	16.26	0.38	16.64	46.00	-29.36	Average
12	4.802	22.59	0.38	22.97	56.00	-33.03	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: From System	Pol/Phase	: NEUTRAL
Test Mode	: $\pi/4$ -DQPSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

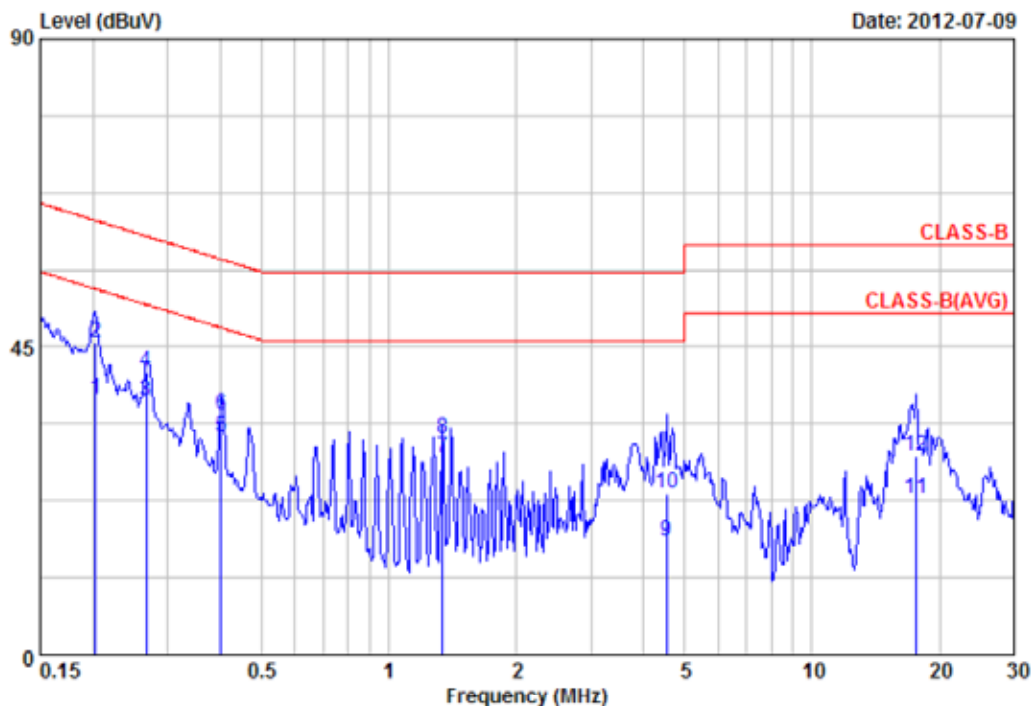


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.203	37.13	0.10	37.23	53.49	-16.26	Average
2	0.203	45.58	0.10	45.68	63.49	-17.81	QP
3	0.267	37.11	0.10	37.21	51.20	-13.99	Average
4	0.267	41.33	0.10	41.43	61.20	-19.77	QP
5	0.402	31.82	0.12	31.94	47.81	-15.87	Average
6	0.402	34.96	0.12	35.08	57.81	-22.73	QP
7	1.338	28.62	0.20	28.82	46.00	-17.18	Average
8	1.338	31.50	0.20	31.70	56.00	-24.30	QP
9	4.525	16.20	0.34	16.54	46.00	-29.46	Average
10	4.525	23.25	0.34	23.59	56.00	-32.41	QP
11	17.590	22.24	0.69	22.93	50.00	-27.07	Average
12	17.590	28.45	0.69	29.14	60.00	-30.86	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: From System	Pol/Phase	: LINE
Test Mode	: 8DPSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

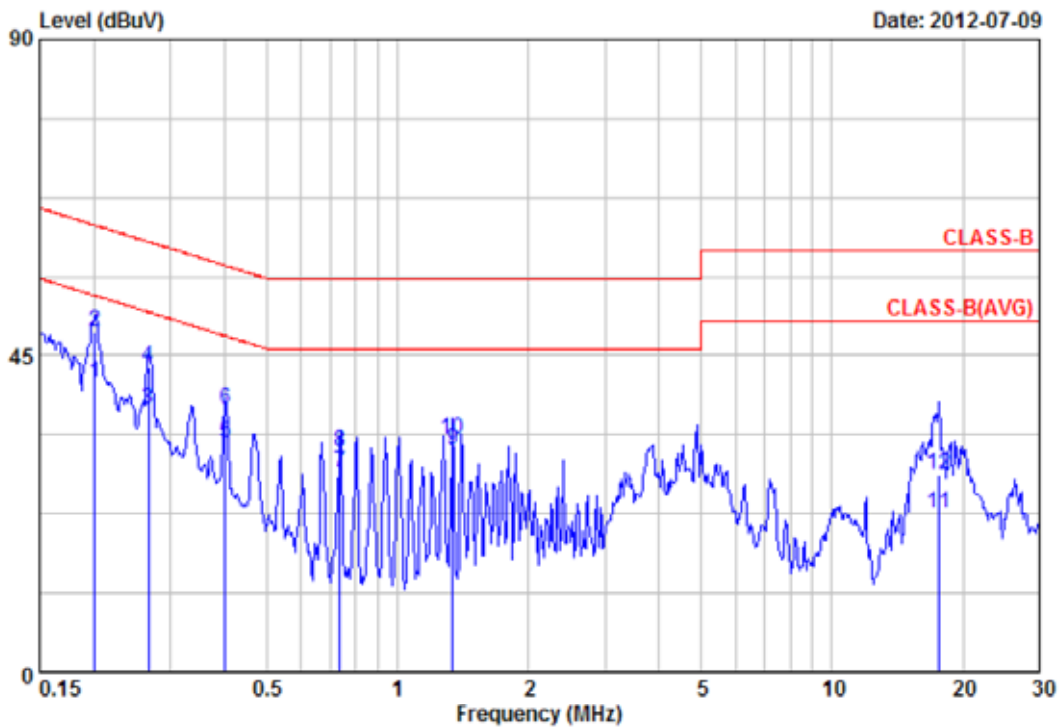


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.201	41.07	0.12	41.19	53.58	-12.39	Average
2	0.201	48.34	0.12	48.46	63.58	-15.12	QP
3	0.267	37.13	0.12	37.25	51.20	-13.95	Average
4	0.267	43.16	0.12	43.28	61.20	-17.92	QP
5	0.402	32.57	0.13	32.70	47.81	-15.11	Average
6	0.402	37.13	0.13	37.26	57.81	-20.55	QP
7	0.736	28.05	0.17	28.22	46.00	-17.78	Average
8	0.736	31.18	0.17	31.35	56.00	-24.65	QP
9	1.339	31.42	0.22	31.64	46.00	-14.36	Average
10	1.339	32.88	0.22	33.10	56.00	-22.90	QP
11	17.661	21.54	0.90	22.44	50.00	-27.56	Average
12	17.661	27.15	0.90	28.05	60.00	-31.95	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



Power	: From System	Pol/Phase	: NEUTRAL
Test Mode	: 8DPSK CH0	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

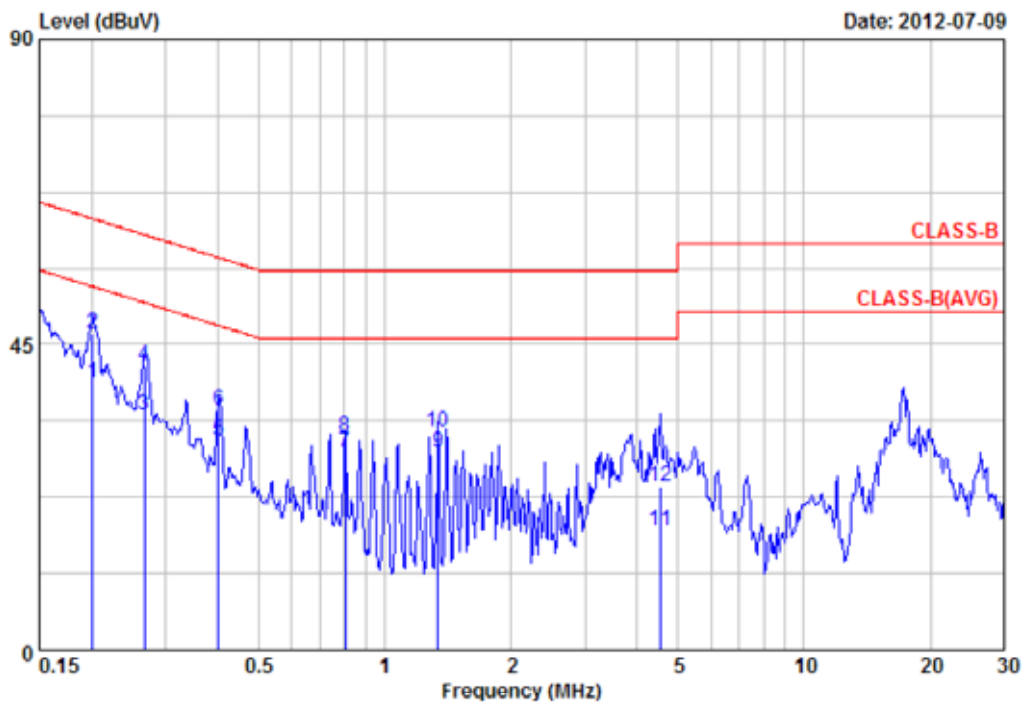

Item	Freq MHz	Read		Factor	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
		Value dBuV						
1	0.201	39.32	0.10	39.42	53.58	-14.16	Average	
2	0.201	46.54	0.10	46.64	63.58	-16.94	QP	
3	0.267	34.57	0.10	34.67	51.20	-16.53	Average	
4	0.267	41.84	0.10	41.94	61.20	-19.26	QP	
5	0.402	30.69	0.12	30.81	47.81	-17.00	Average	
6	0.402	35.33	0.12	35.45	57.81	-22.36	QP	
7	0.804	28.92	0.16	29.08	46.00	-16.92	Average	
8	0.804	31.19	0.16	31.35	56.00	-24.65	QP	
9	1.338	28.88	0.20	29.08	46.00	-16.92	Average	
10	1.338	31.83	0.20	32.03	56.00	-23.97	QP	
11	4.525	17.19	0.34	17.53	46.00	-28.47	Average	
12	4.525	23.72	0.34	24.06	56.00	-31.94	QP	

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
4. The data is worst case.



5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated ($\mu V / M$)	Radiated (dB $\mu V / M$)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB $\mu V / M$)
30-230	10	30
230-1000	10	37


5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




5.3 Typical Test Setup

Below 1GHz Test Setup

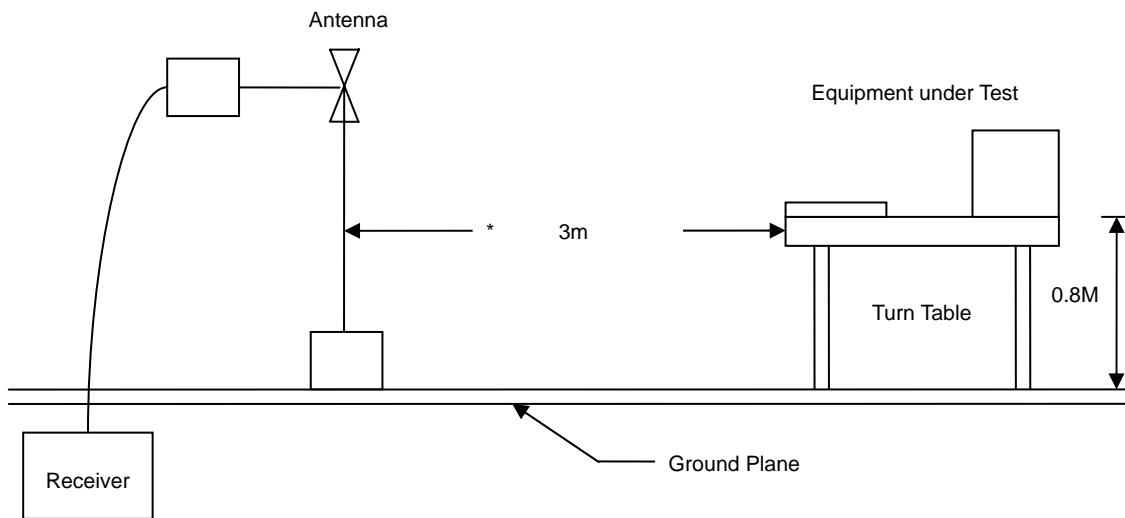

Above 1GHz Test Setup

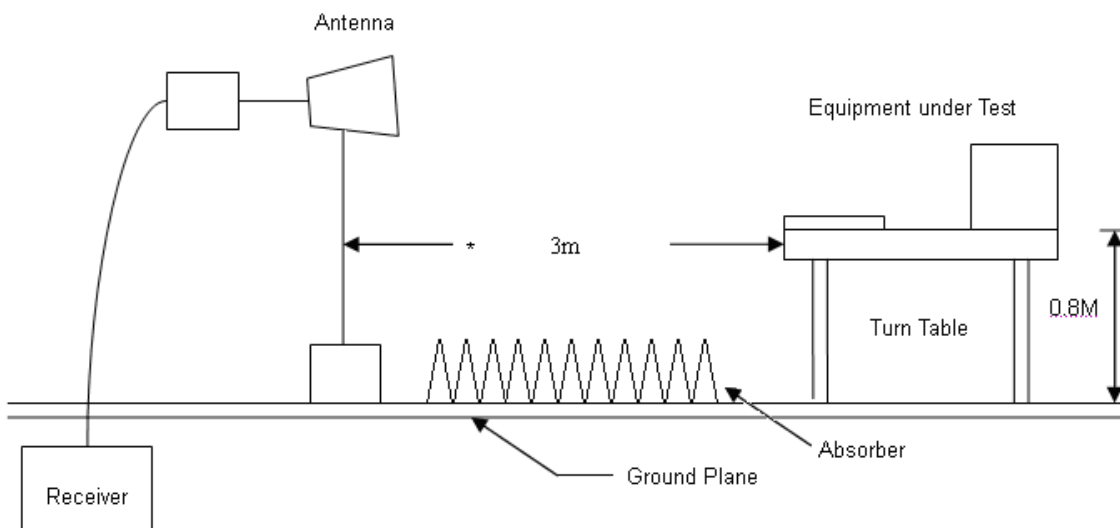

5.4 Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Amplifier	Agilent	8447D	2944A10531	2012/01/13	2013/01/12
Bilog Antenna	Schaffner	CBL6112D	22242	2012/01/12	2013/01/11
EMI Receiver	R&S	ESCI	101200	2011/07/26	2012/07/25
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28
Horn Antenna	EMCO	3115	31589	2012/03/01	2013/02/28
Preamplifier	Agilent	8449B	3008A01954	2012/02/29	2013/02/28
Loop Antenna	EMCO	6507	40855	N/A	N/A




5.5 Test Result and Data

The 9kHz-30MHz spurious emission is under limit 20dB more.

5.5.1 Test Result and Data of Transmitter

Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

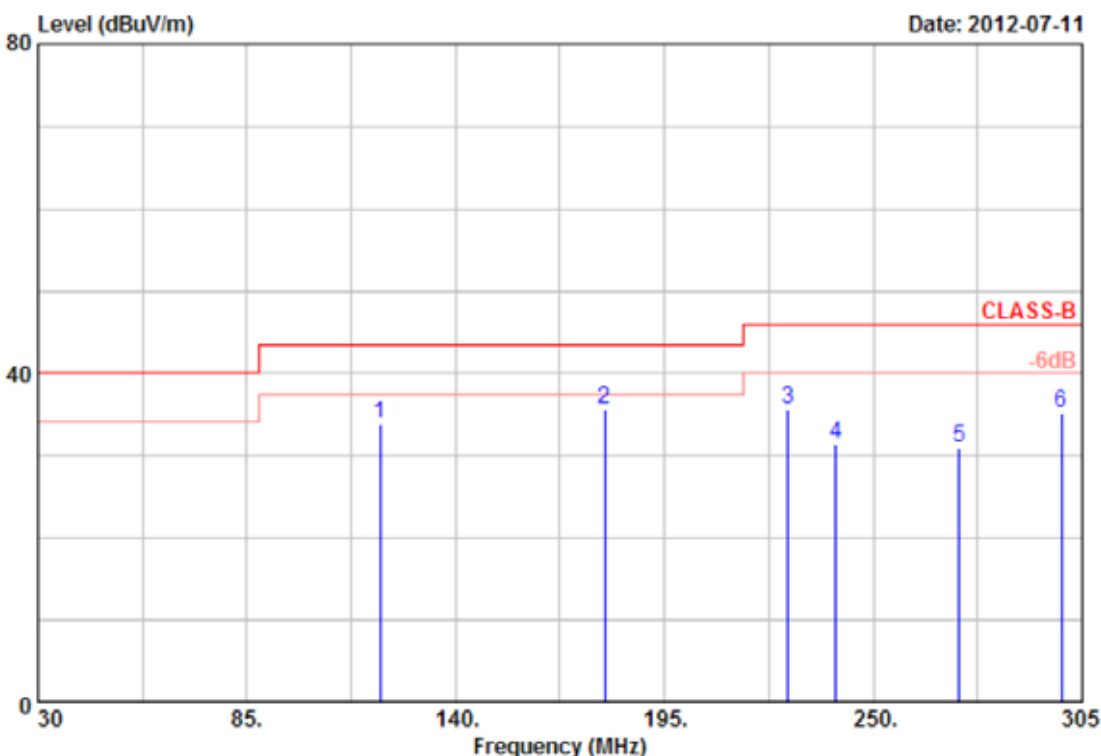


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	120.20	38.46	-4.66	33.80	43.50	-9.70	Peak	100	0
2	179.32	41.46	-5.90	35.56	43.50	-7.94	Peak	100	0
3	227.50	42.96	-7.32	35.64	46.00	-10.36	Peak	100	0
4	240.10	40.92	-9.41	31.51	46.00	-14.49	Peak	100	0
5	272.55	39.52	-8.51	31.01	46.00	-14.99	Peak	100	0
6	299.50	43.87	-8.59	35.28	46.00	-10.72	Peak	100	0

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

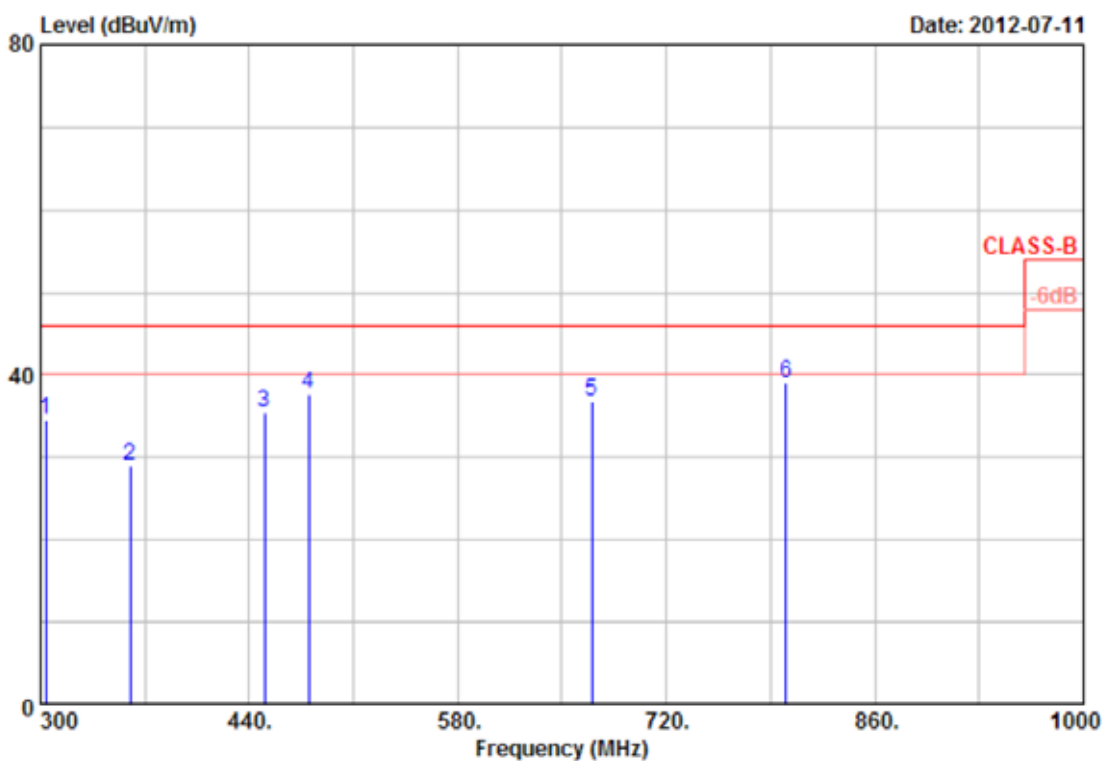


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	303.50	42.64	-8.15	34.49	46.00	-11.51	Peak	100	360
2	360.20	36.56	-7.54	29.02	46.00	-16.98	Peak	100	360
3	450.50	42.98	-7.61	35.37	46.00	-10.63	Peak	100	360
4	479.90	44.18	-6.49	37.69	46.00	-8.31	Peak	100	360
5	669.80	38.60	-1.79	36.81	46.00	-9.19	Peak	100	360
6	800.50	33.42	5.56	38.98	46.00	-7.02	Peak	100	360

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

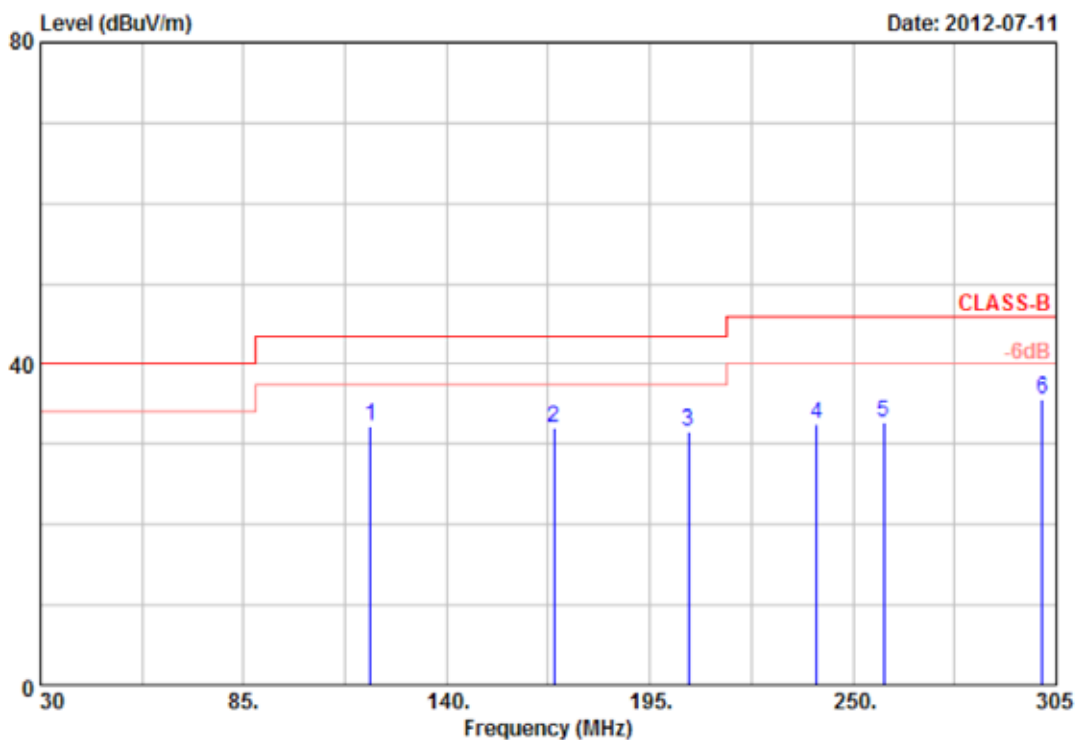


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	119.37	50.56	-18.34	32.22	43.50	-11.28	Peak	100	0
2	169.15	43.85	-11.87	31.98	43.50	-11.52	Peak	100	0
3	205.45	50.16	-18.43	31.73	43.50	-11.77	Peak	100	0
4	240.10	46.50	-14.04	32.46	46.00	-13.54	Peak	100	0
5	258.30	46.19	-13.34	32.85	46.00	-13.15	Peak	100	0
6	301.15	47.78	-12.10	35.68	46.00	-10.32	Peak	100	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

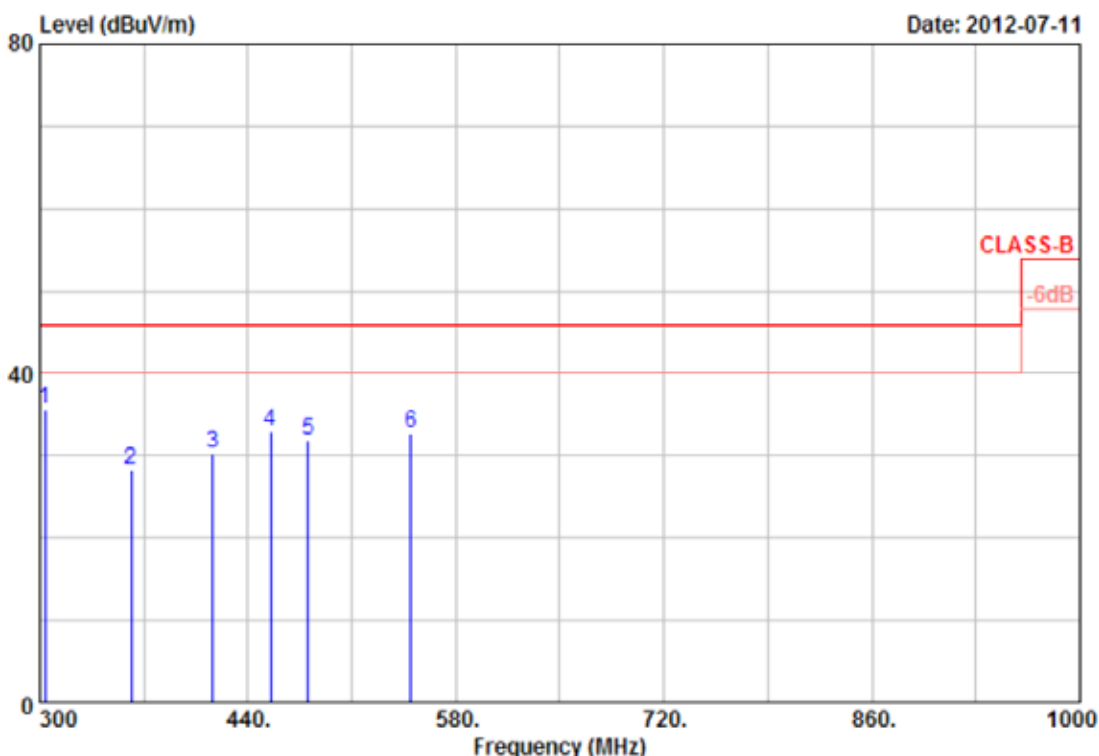


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	303.50	47.89	-12.14	35.75	46.00	-10.25	Peak	100	360
2	361.60	39.48	-11.08	28.40	46.00	-17.60	Peak	100	360
3	416.20	38.92	-8.68	30.24	46.00	-15.76	Peak	100	360
4	455.40	37.71	-4.72	32.99	46.00	-13.01	Peak	100	360
5	480.60	36.12	-4.23	31.89	46.00	-14.11	Peak	100	360
6	549.88	30.19	2.56	32.75	46.00	-13.25	Peak	100	360

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

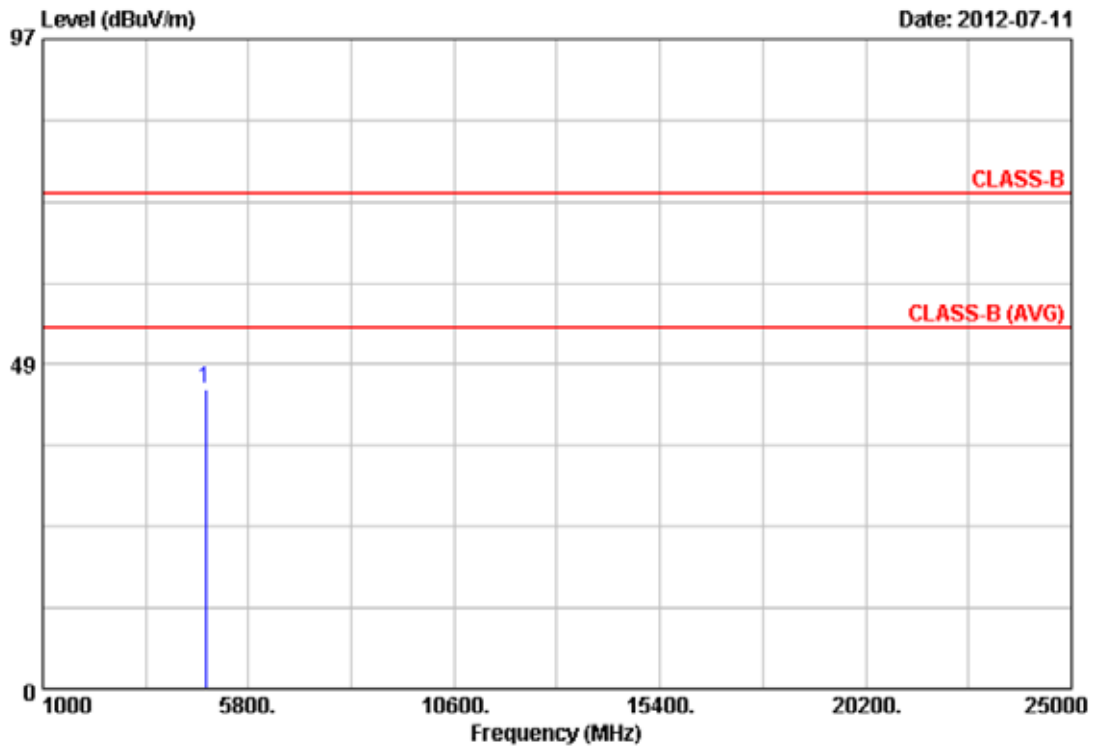


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	39.53	5.21	44.74	74.00	-29.26	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

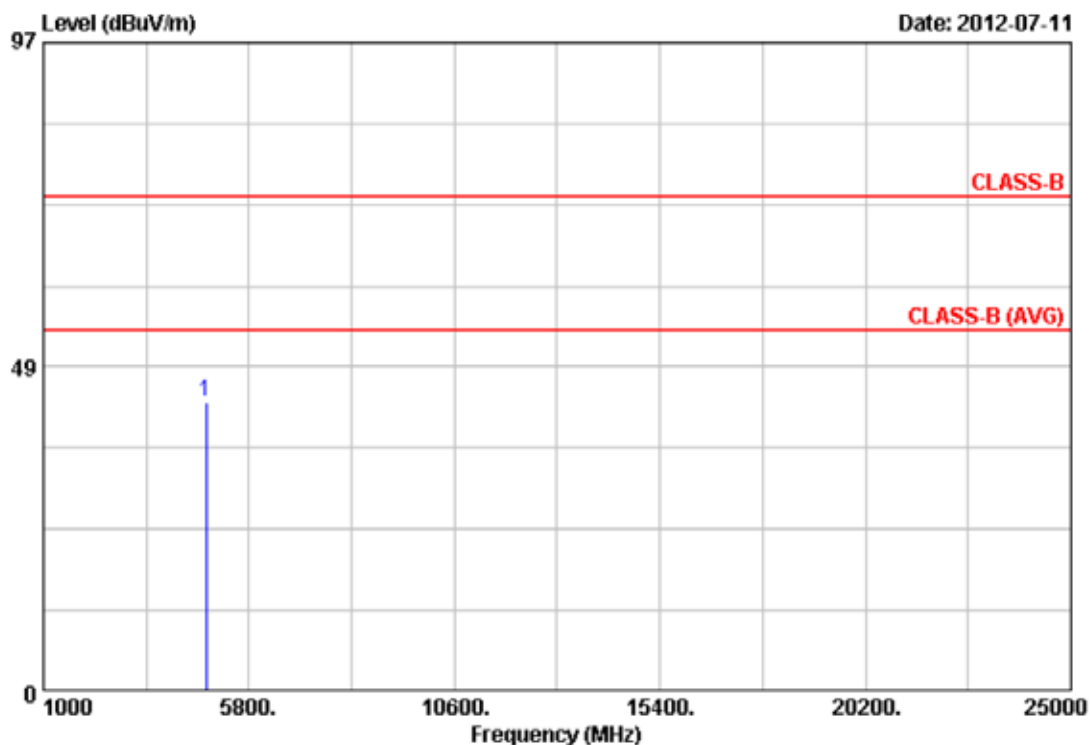


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	39.47	3.63	43.10	74.00	-30.90	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 39	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

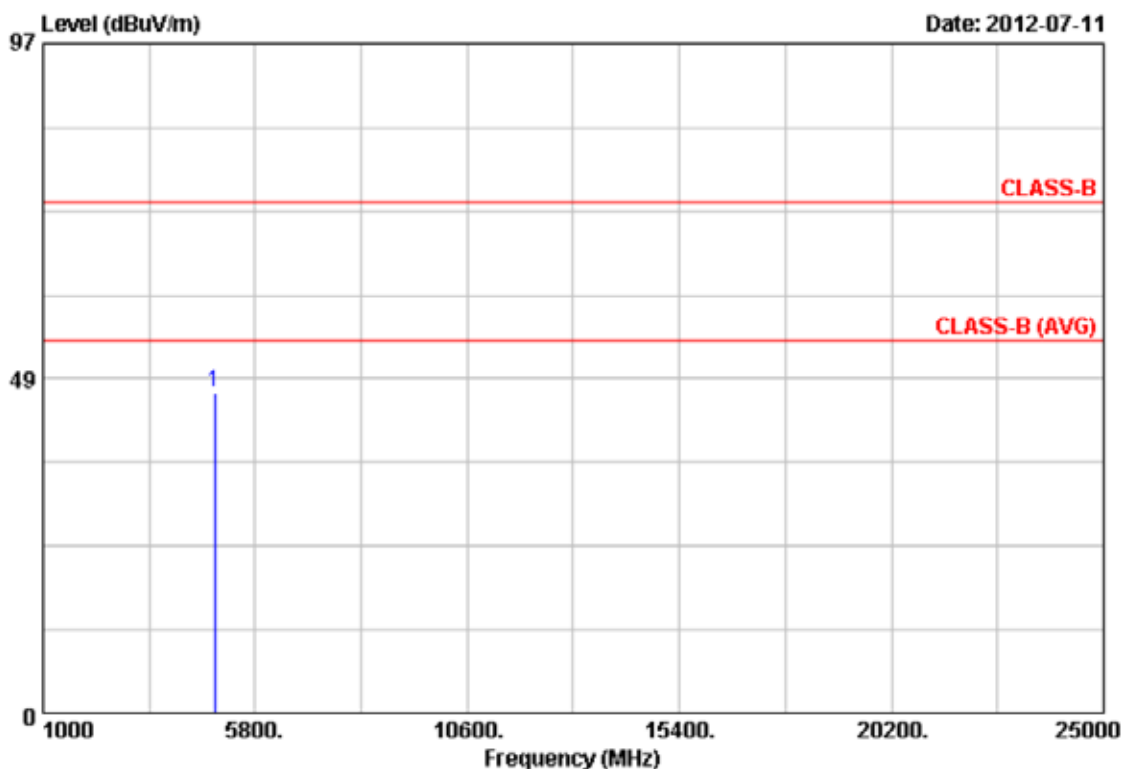


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.00	39.68	6.75	46.43	74.00	-27.57	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 39	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

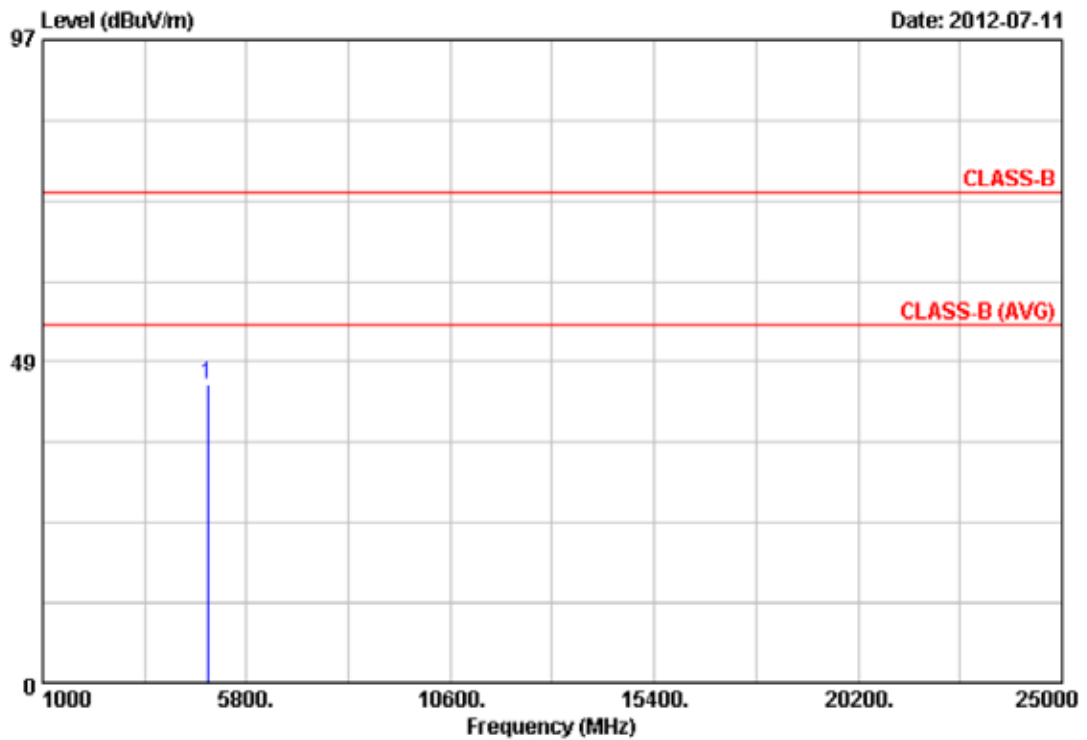


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.00	40.23	4.86	45.09	74.00	-28.91	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 78	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

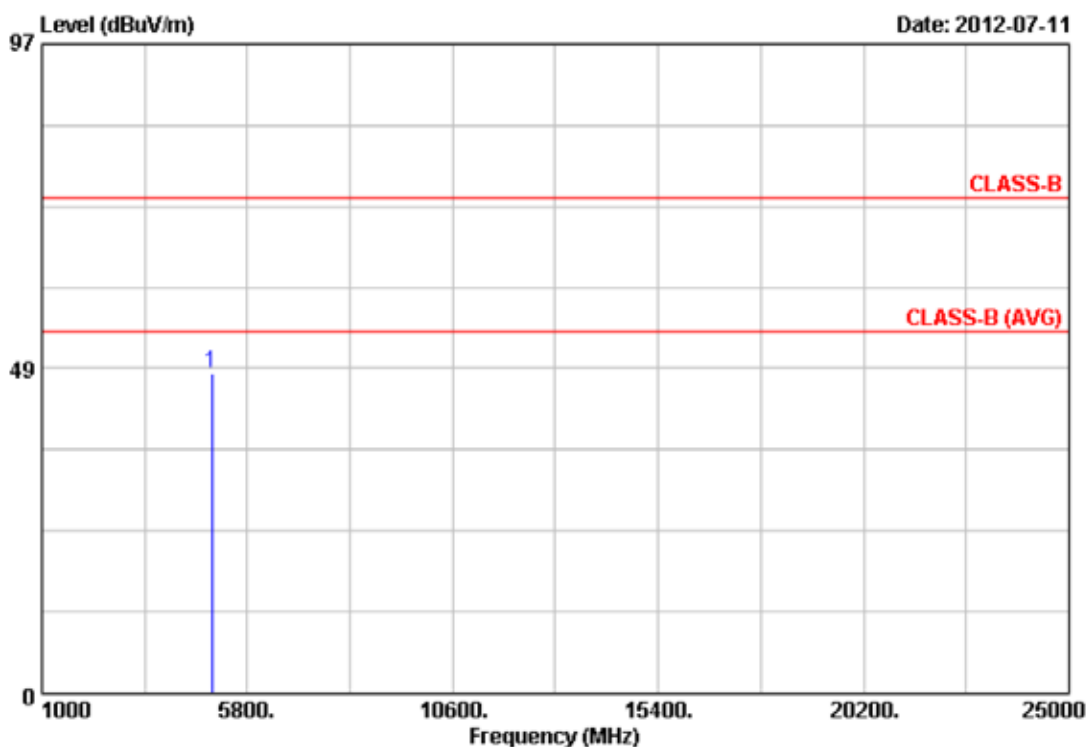


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.00	40.47	7.26	47.73	74.00	-26.27	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 78	Humidity	: 63 %
Modulation Type	: GFSK	Atmospheric Pressure	: 1014 hPa
Rate	: 1 Mbps		

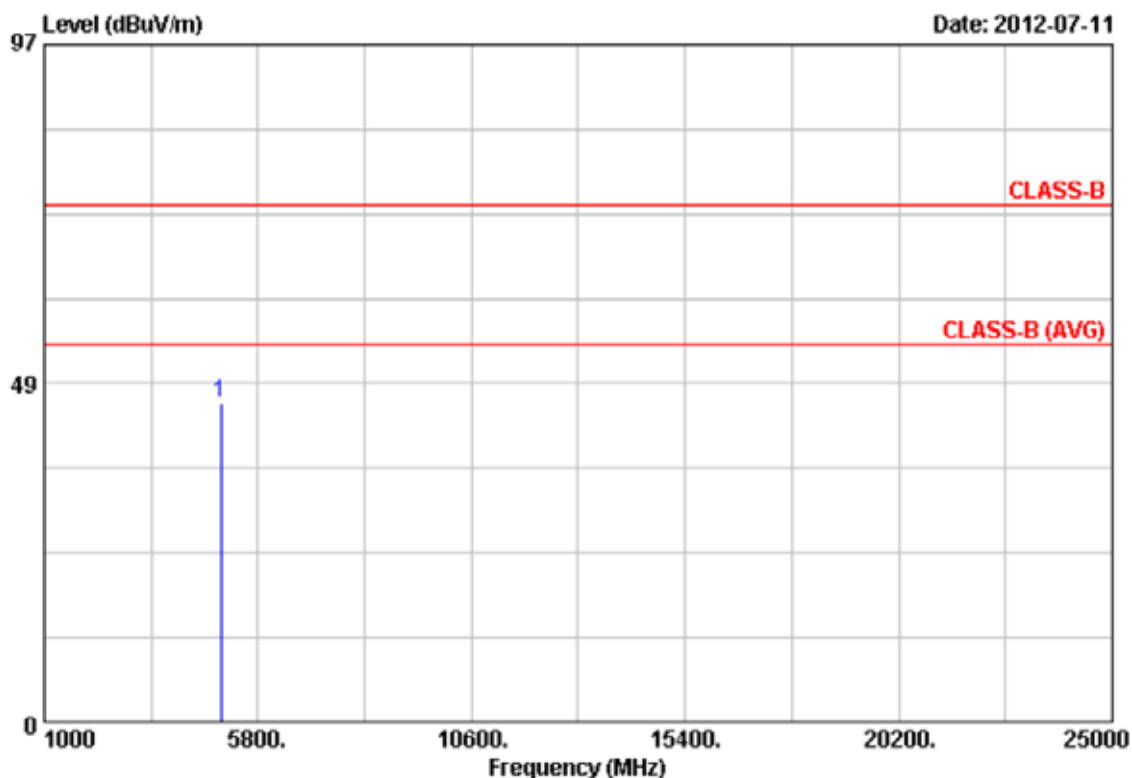


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.00	40.56	5.16	45.72	74.00	-28.28	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

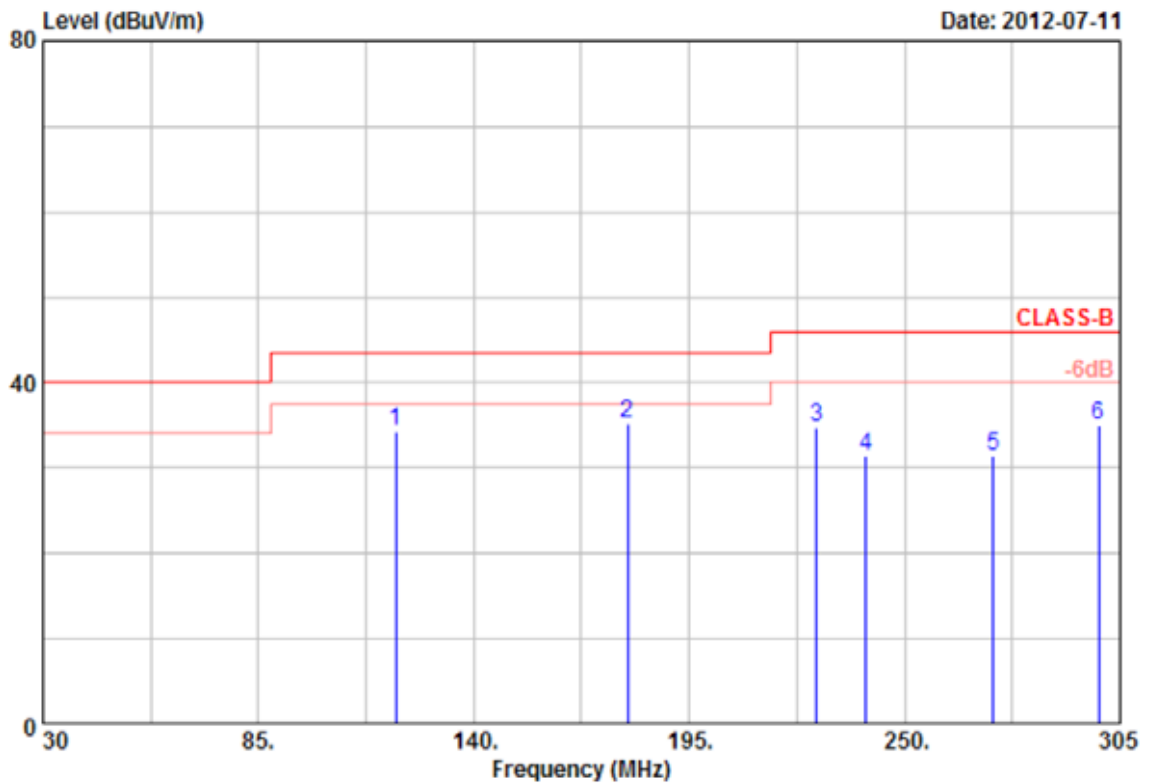


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	120.20	38.89	-4.66	34.23	43.50	-9.27	Peak	100	0
2	179.32	41.16	-5.90	35.26	43.50	-8.24	Peak	100	0
3	227.50	42.16	-7.32	34.84	46.00	-11.16	Peak	100	0
4	240.10	40.87	-9.41	31.46	46.00	-14.54	Peak	100	0
5	272.55	39.98	-8.51	31.47	46.00	-14.53	Peak	100	0
6	299.50	43.47	-8.59	34.88	46.00	-11.12	Peak	100	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

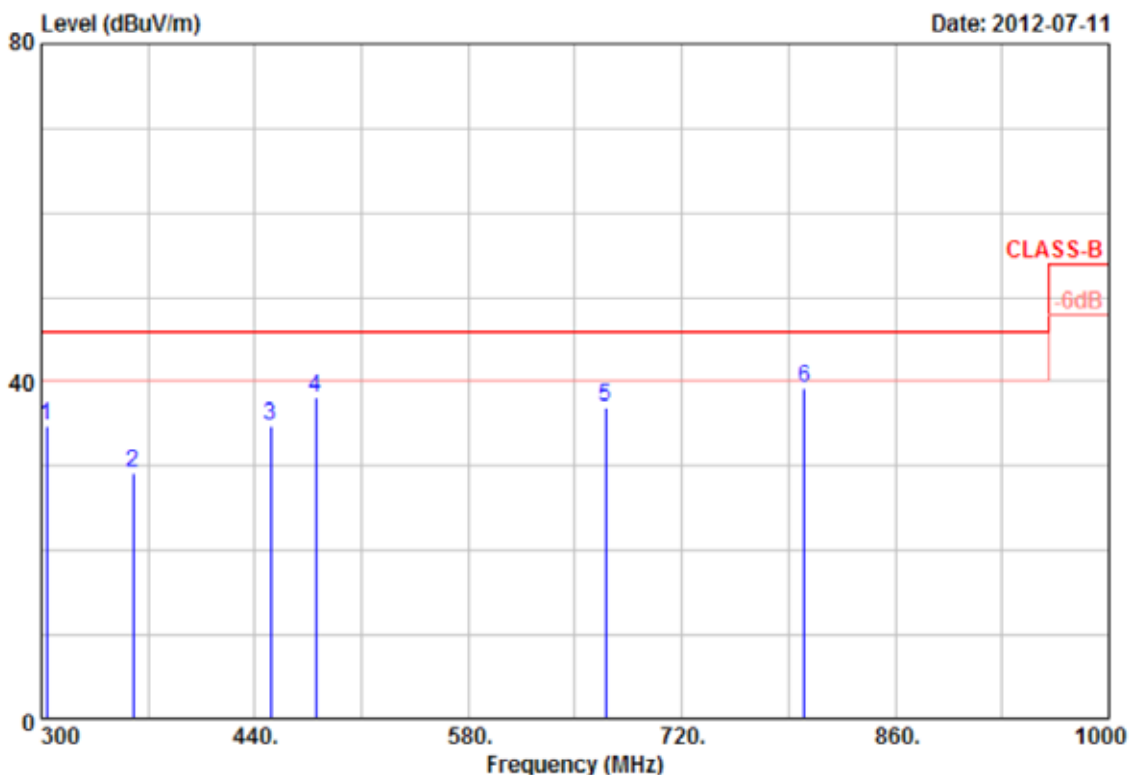


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	303.50	42.89	-8.15	34.74	46.00	-11.26	Peak	100	360
2	360.20	36.67	-7.54	29.13	46.00	-16.87	Peak	100	360
3	450.50	42.48	-7.61	34.87	46.00	-11.13	Peak	100	360
4	479.90	44.65	-6.49	38.16	46.00	-7.84	Peak	100	360
5	669.80	38.75	-1.79	36.96	46.00	-9.04	Peak	100	360
6	800.50	33.66	5.56	39.22	46.00	-6.78	Peak	100	360

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

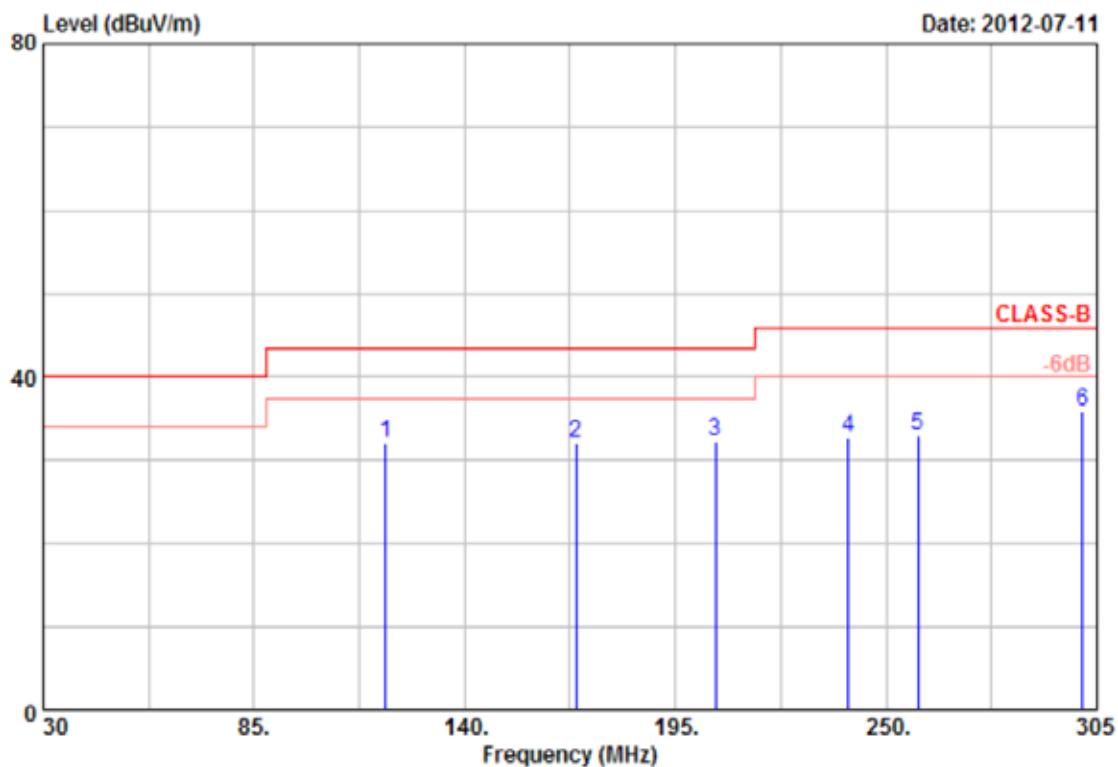


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	119.37	50.48	-18.34	32.14	43.50	-11.36	Peak	100	0
2	169.15	43.97	-11.87	32.10	43.50	-11.40	Peak	100	0
3	205.45	50.79	-18.43	32.36	43.50	-11.14	Peak	100	0
4	240.10	46.79	-14.04	32.75	46.00	-13.25	Peak	100	0
5	258.30	46.25	-13.34	32.91	46.00	-13.09	Peak	100	0
6	301.15	47.98	-12.10	35.88	46.00	-10.12	Peak	100	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

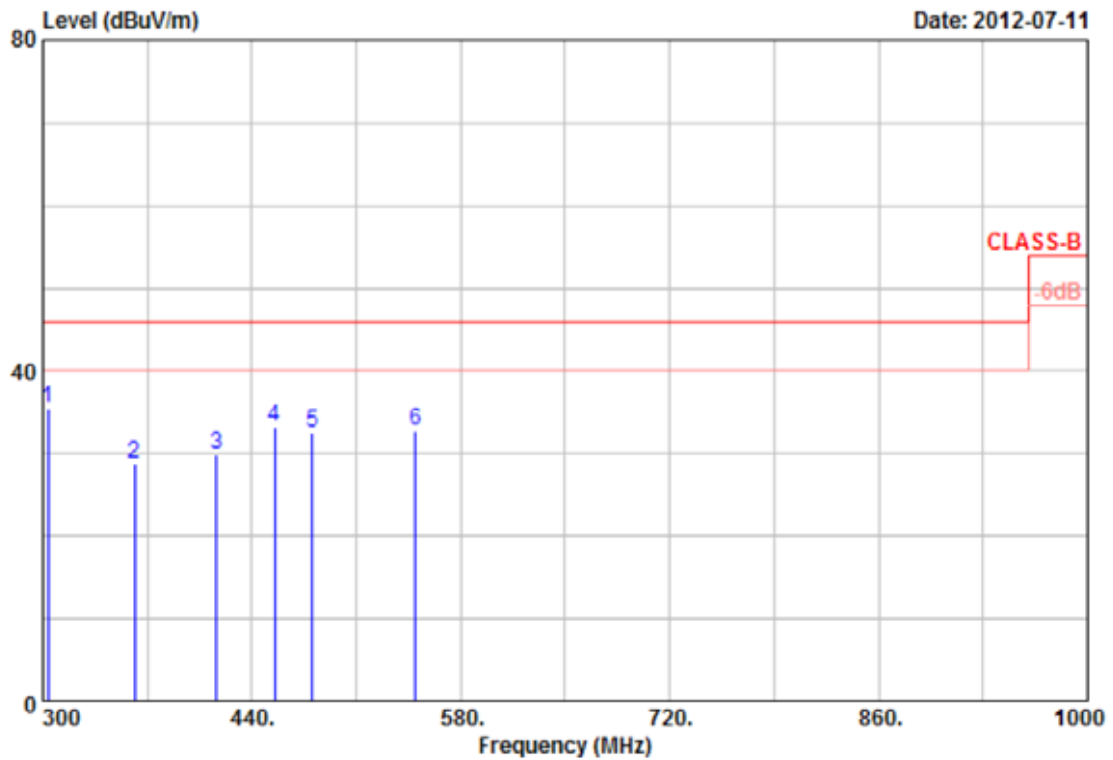


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	303.50	47.47	-12.14	35.33	46.00	-10.67	Peak	100	360
2	361.60	39.89	-11.08	28.81	46.00	-17.19	Peak	100	360
3	416.20	38.62	-8.68	29.94	46.00	-16.06	Peak	100	360
4	455.40	37.94	-4.72	33.22	46.00	-12.78	Peak	100	360
5	480.60	36.66	-4.23	32.43	46.00	-13.57	Peak	100	360
6	549.88	30.10	2.56	32.66	46.00	-13.34	Peak	100	360

- Remarks:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0, 39, 78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

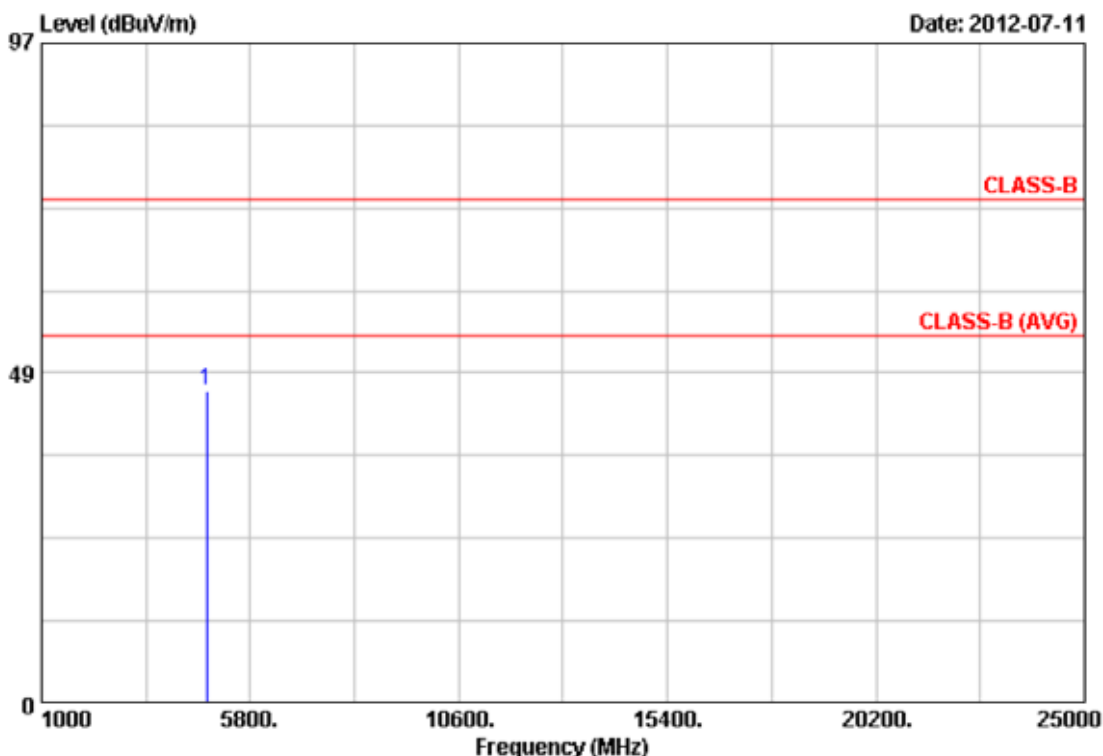


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	40.80	5.21	46.01	74.00	-27.99	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

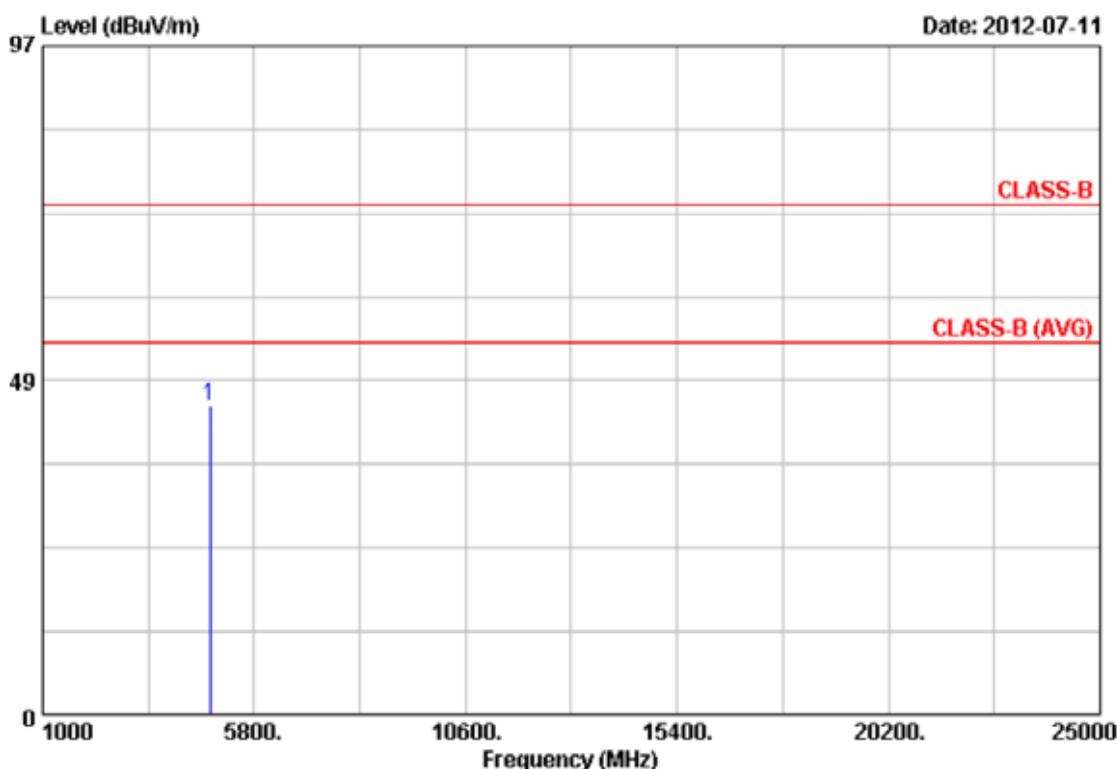


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	41.26	3.63	44.89	74.00	-29.11	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 39	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

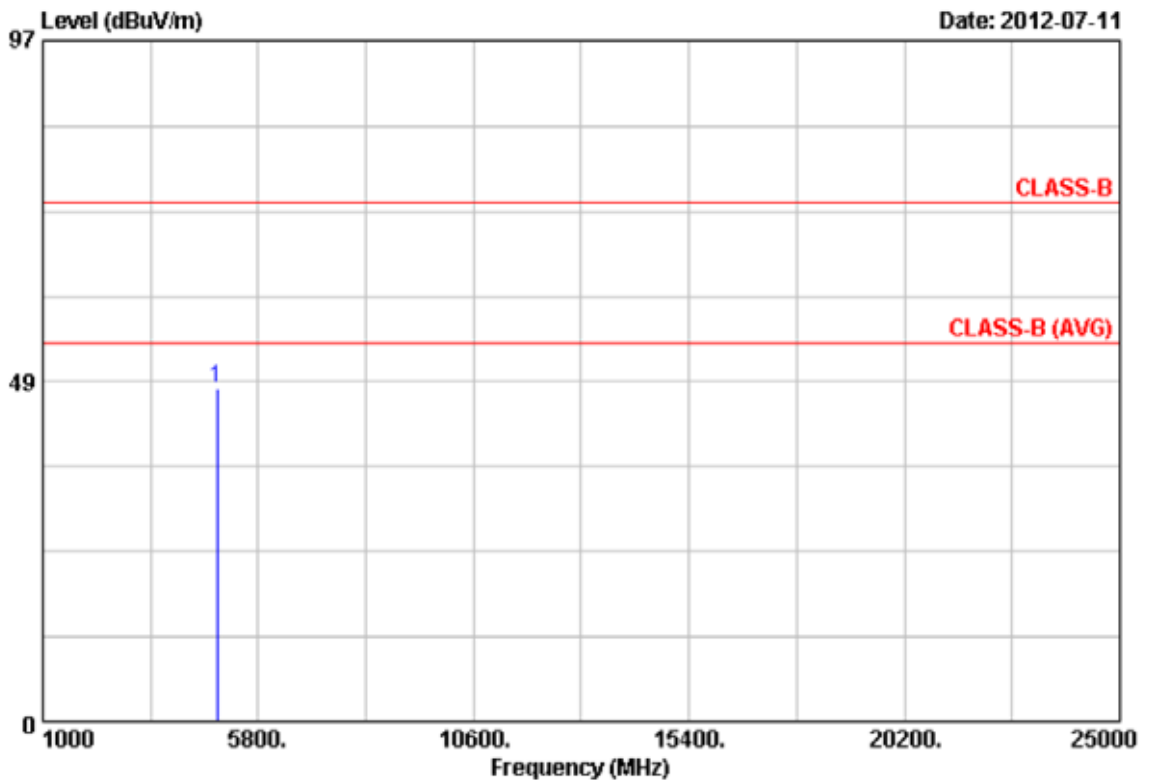


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.00	40.78	6.75	47.53	74.00	-26.47	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 39	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

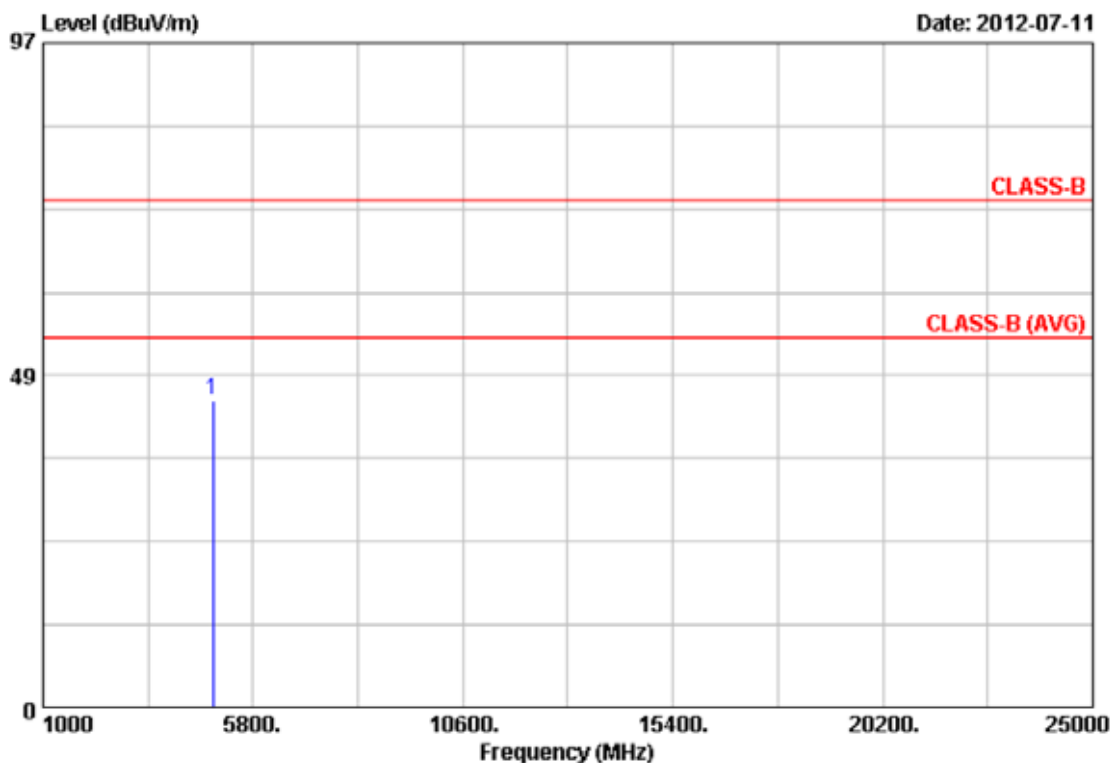


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.00	40.13	4.86	44.99	74.00	-29.01	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 78	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

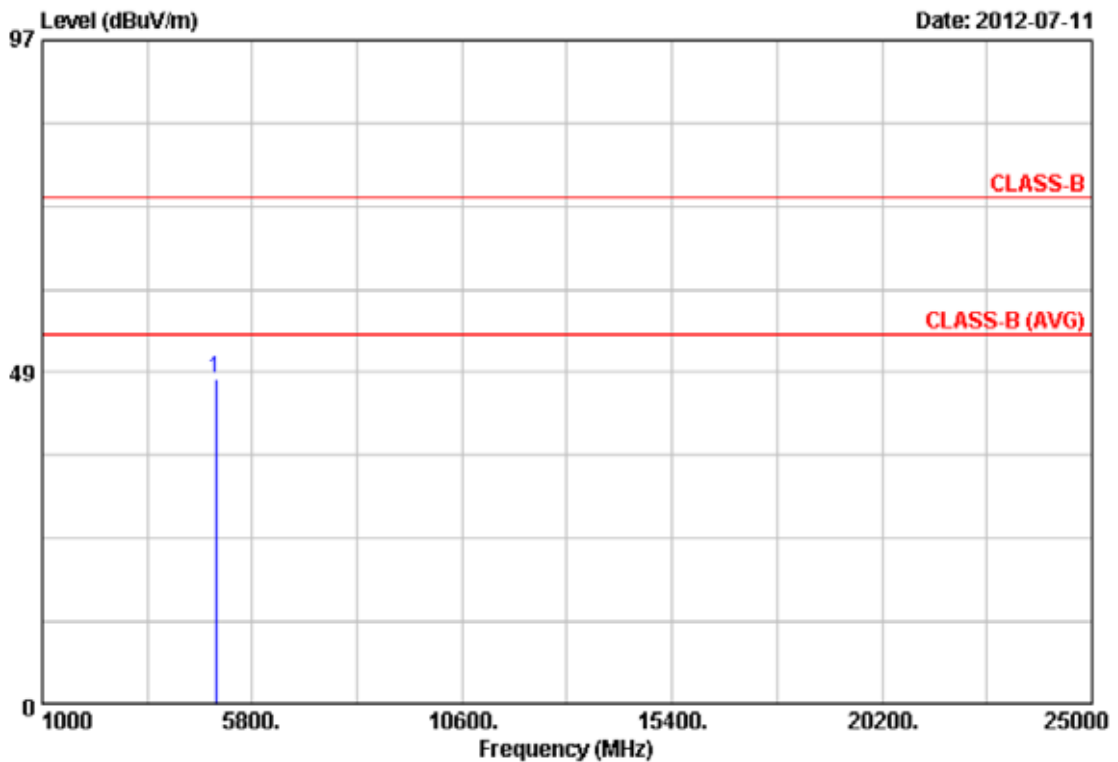


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.00	40.16	7.26	47.42	74.00	-26.58	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 78	Humidity	: 63 %
Modulation Type	: $\pi/4$ -DQPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 2 Mbps		

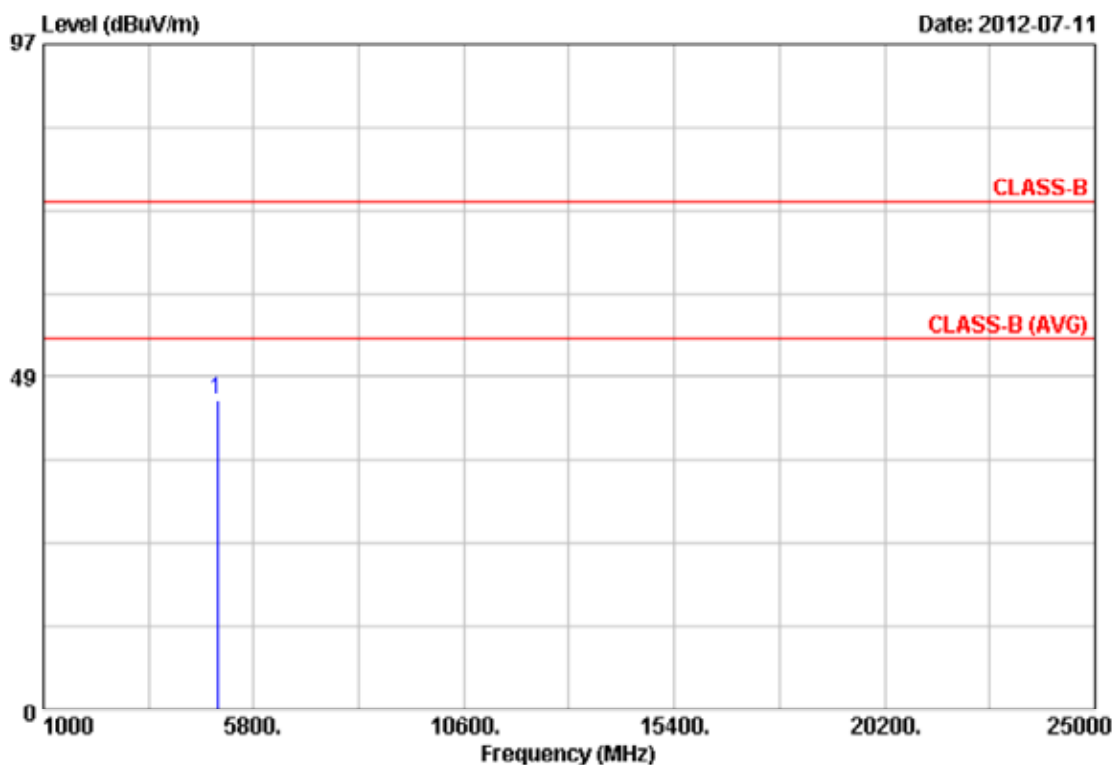


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.00	39.92	5.16	45.08	74.00	-28.92	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

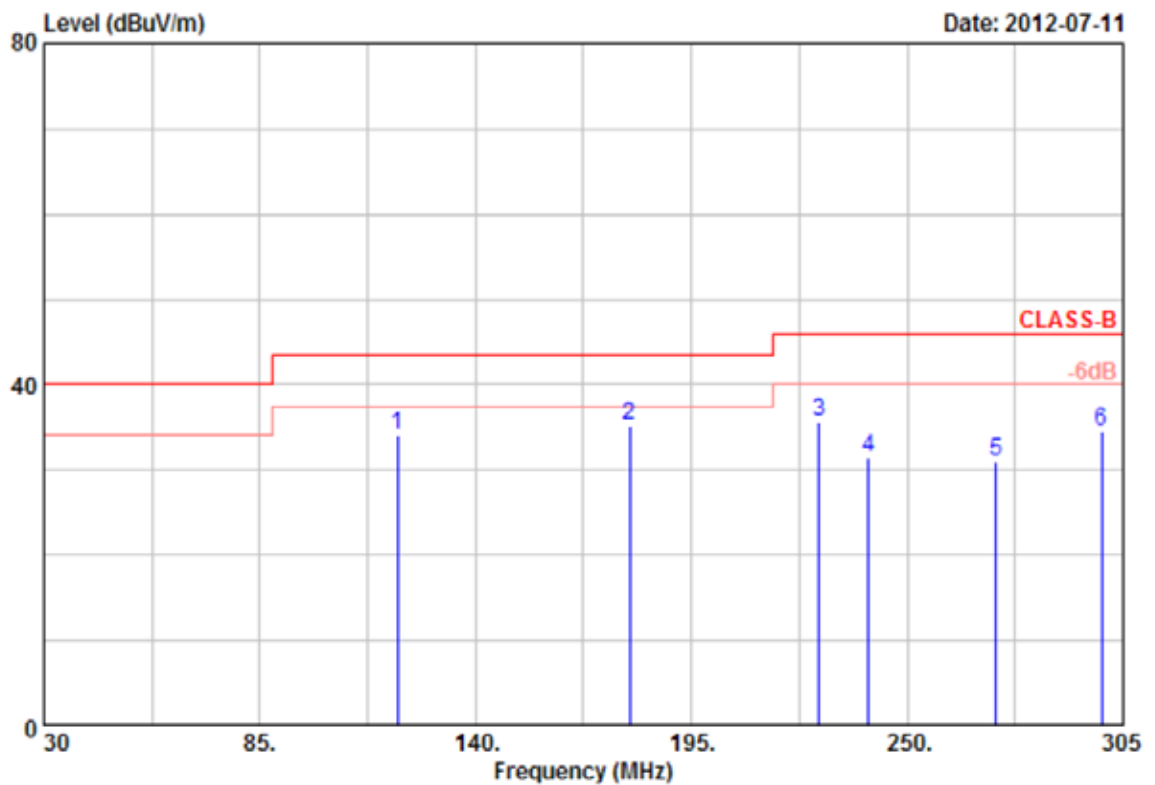


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	120.20	38.68	-4.66	34.02	43.50	-9.48	Peak	100	0
2	179.32	41.16	-5.90	35.26	43.50	-8.24	Peak	100	0
3	227.50	42.97	-7.32	35.65	46.00	-10.35	Peak	100	0
4	240.10	40.74	-9.41	31.33	46.00	-14.67	Peak	100	0
5	272.55	39.46	-8.51	30.95	46.00	-15.05	Peak	100	0
6	299.50	43.16	-8.59	34.57	46.00	-11.43	Peak	100	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

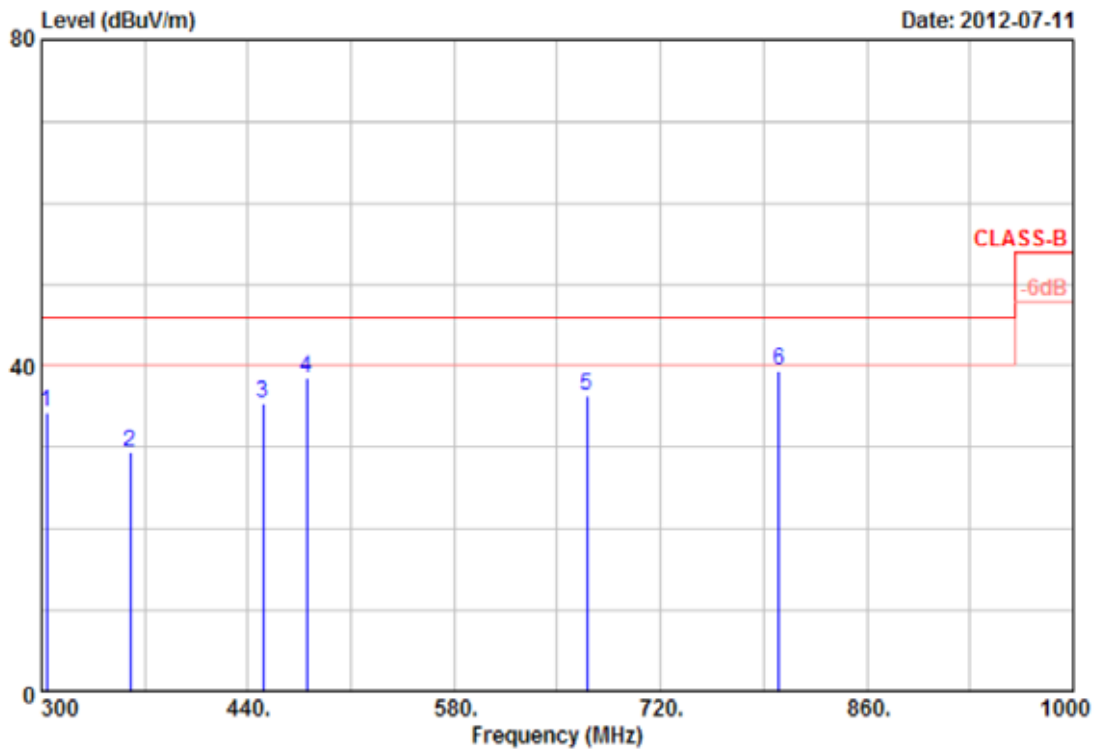


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	303.50	42.41	-8.15	34.26	46.00	-11.74	Peak	100	360
2	360.20	36.89	-7.54	29.35	46.00	-16.65	Peak	100	360
3	450.50	42.94	-7.61	35.33	46.00	-10.67	Peak	100	360
4	479.90	44.97	-6.49	38.48	46.00	-7.52	Peak	100	360
5	669.80	38.20	-1.79	36.41	46.00	-9.59	Peak	100	360
6	800.50	33.79	5.56	39.35	46.00	-6.65	Peak	100	360

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

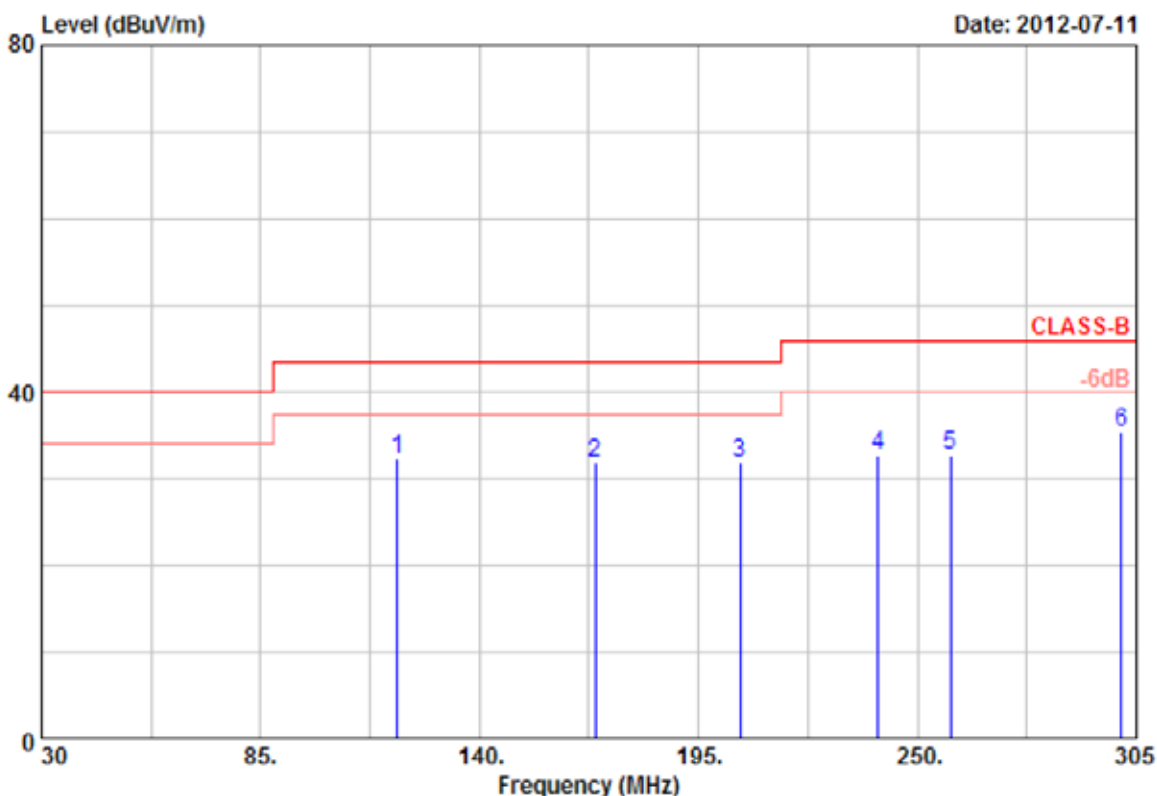


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	119.37	50.64	-18.34	32.30	43.50	-11.20	Peak	100	0
2	169.15	43.65	-11.87	31.78	43.50	-11.72	Peak	100	0
3	205.45	50.40	-18.43	31.97	43.50	-11.53	Peak	100	0
4	240.10	46.80	-14.04	32.76	46.00	-13.24	Peak	100	0
5	258.30	46.12	-13.34	32.78	46.00	-13.22	Peak	100	0
6	301.15	47.49	-12.10	35.39	46.00	-10.61	Peak	100	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

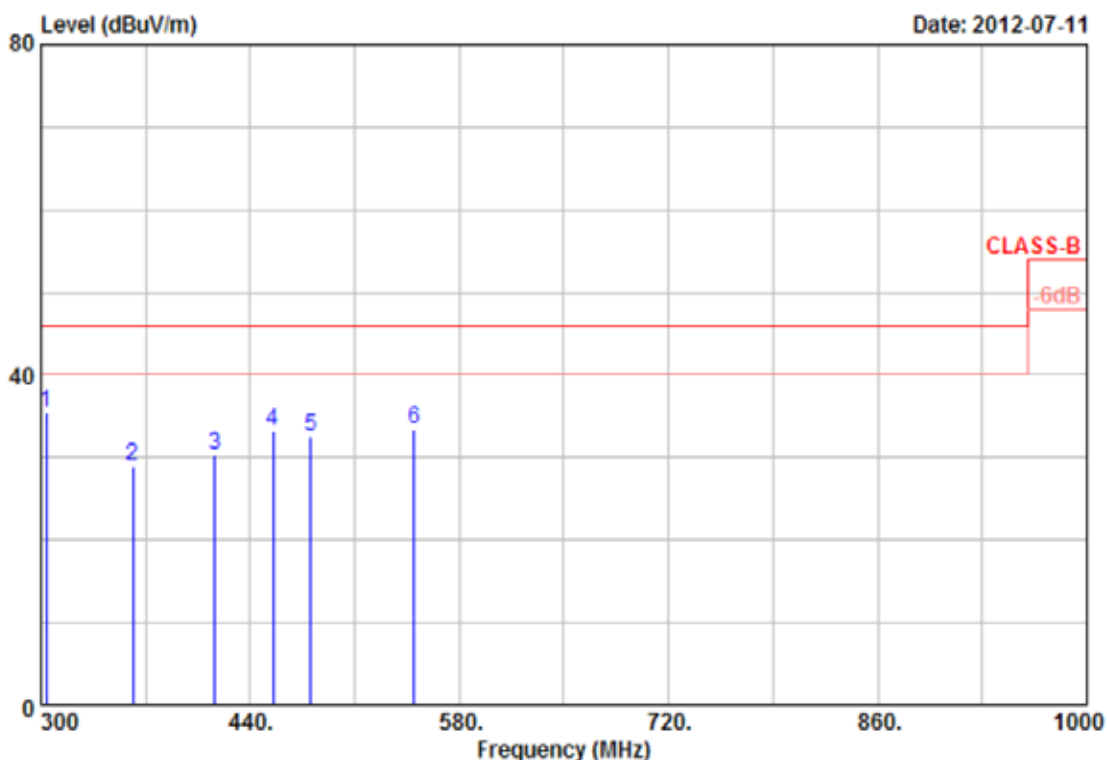


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	303.50	47.67	-12.14	35.53	46.00	-10.47	Peak	100	360
2	361.60	39.98	-11.08	28.90	46.00	-17.10	Peak	100	360
3	416.20	38.98	-8.68	30.30	46.00	-15.70	Peak	100	360
4	455.40	37.98	-4.72	33.26	46.00	-12.74	Peak	100	360
5	480.60	36.80	-4.23	32.57	46.00	-13.43	Peak	100	360
6	549.88	30.90	2.56	33.46	46.00	-12.54	Peak	100	360

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. According to technical experiences, all spurious emission of BT mode at channel 0,39,78 are almost the same below 1GHz, so that the channel 0 was chosen as representative in final test.
 4. The data is worst case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

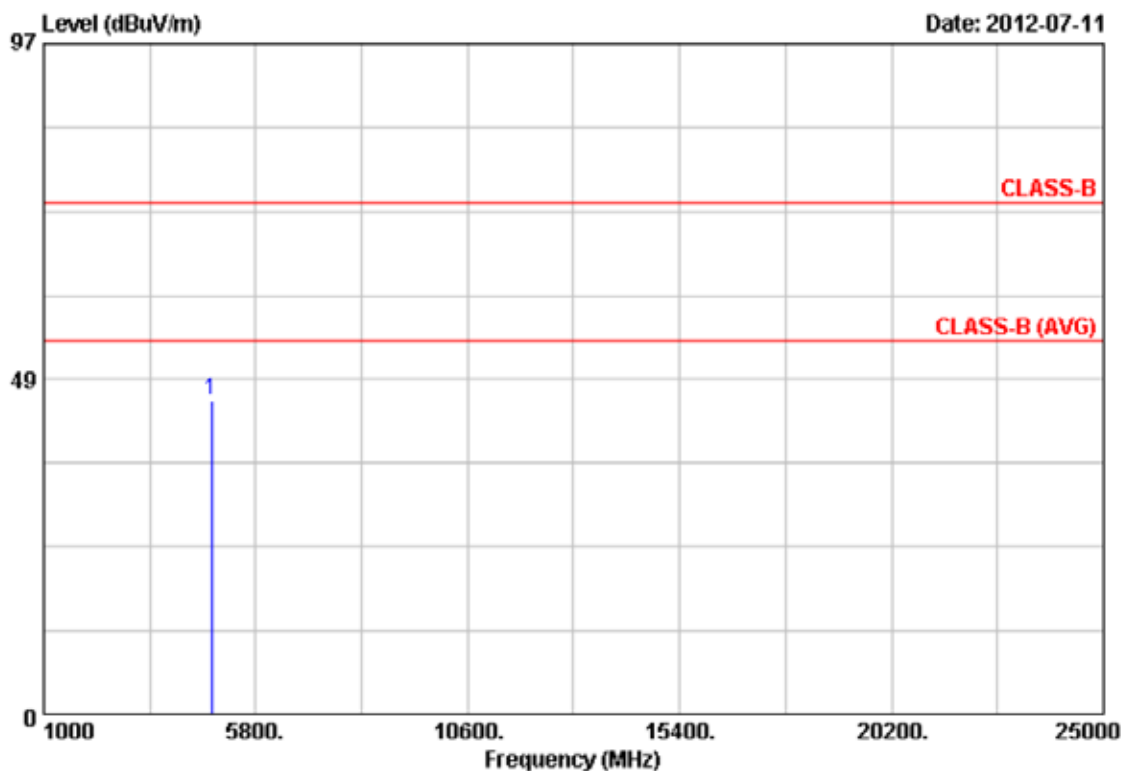


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	40.05	5.21	45.26	74.00	-28.74	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 0	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

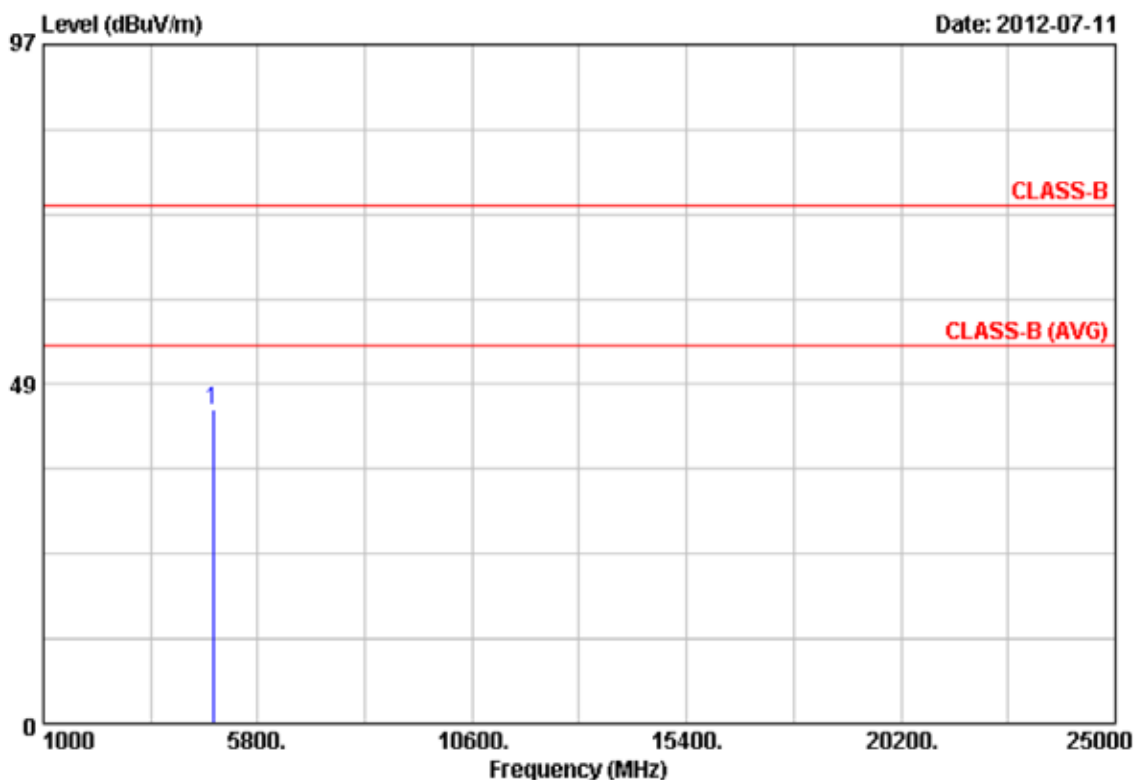


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	41.31	3.63	44.94	74.00	-29.06	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 39	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

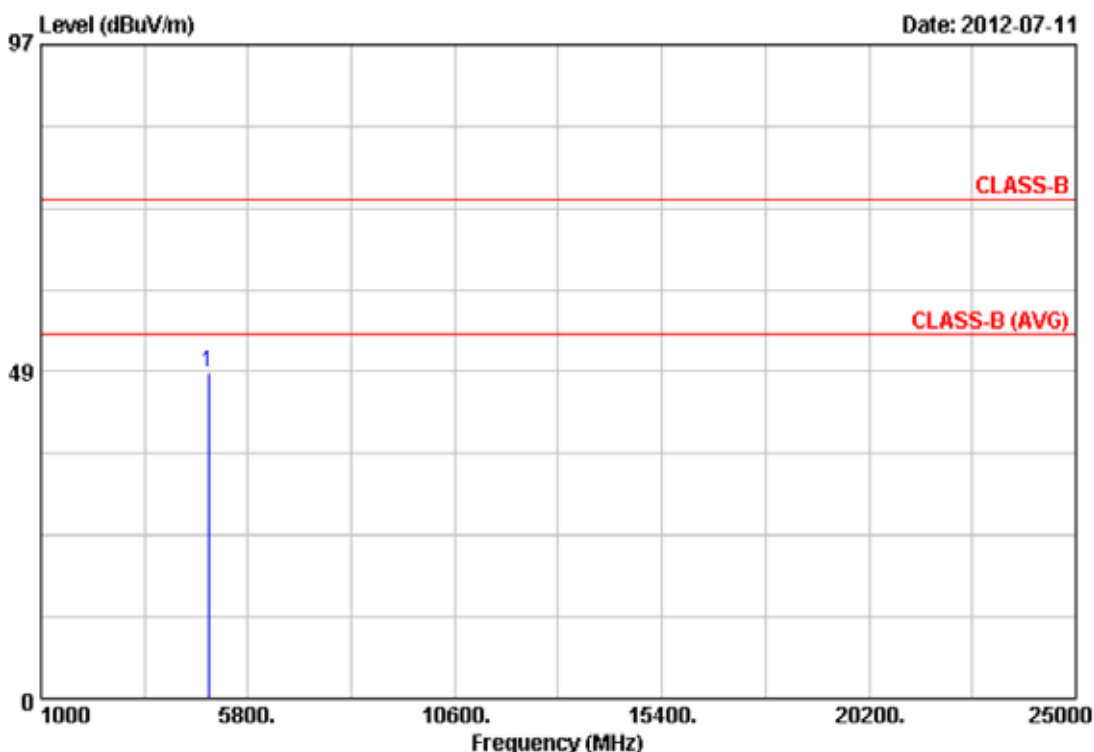


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.00	41.59	6.75	48.34	74.00	-25.66	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 39	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

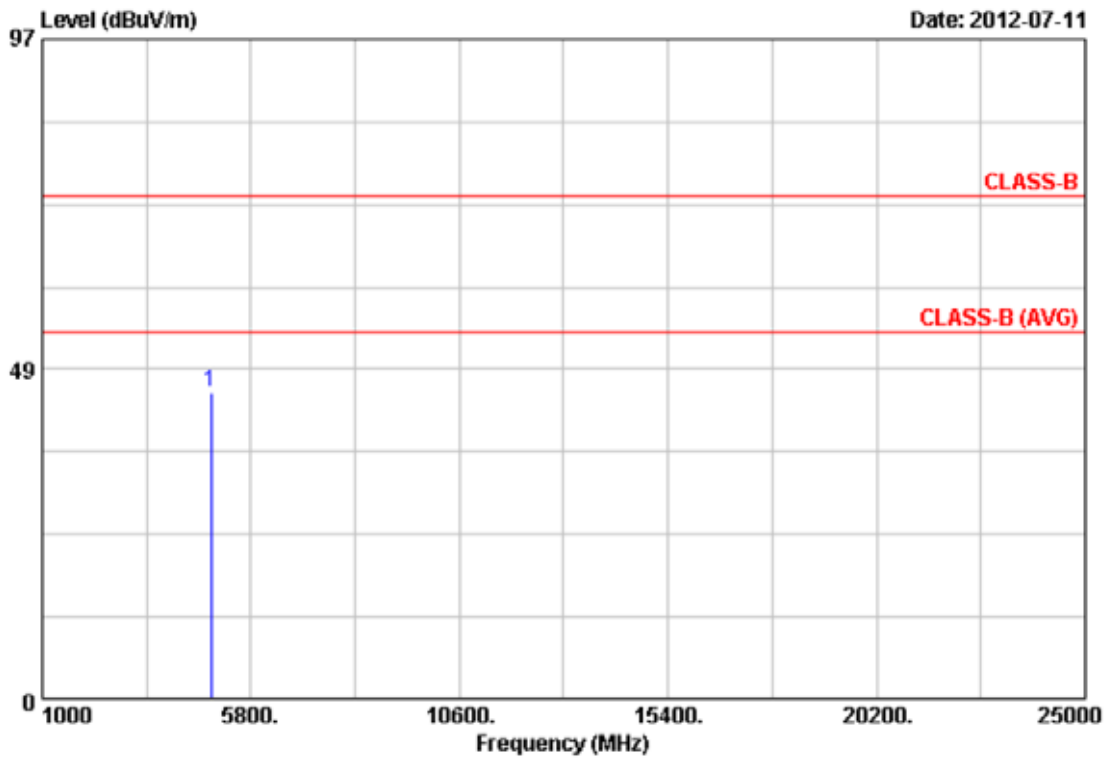


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4882.00	40.19	4.86	45.05	74.00	-28.95	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 78	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

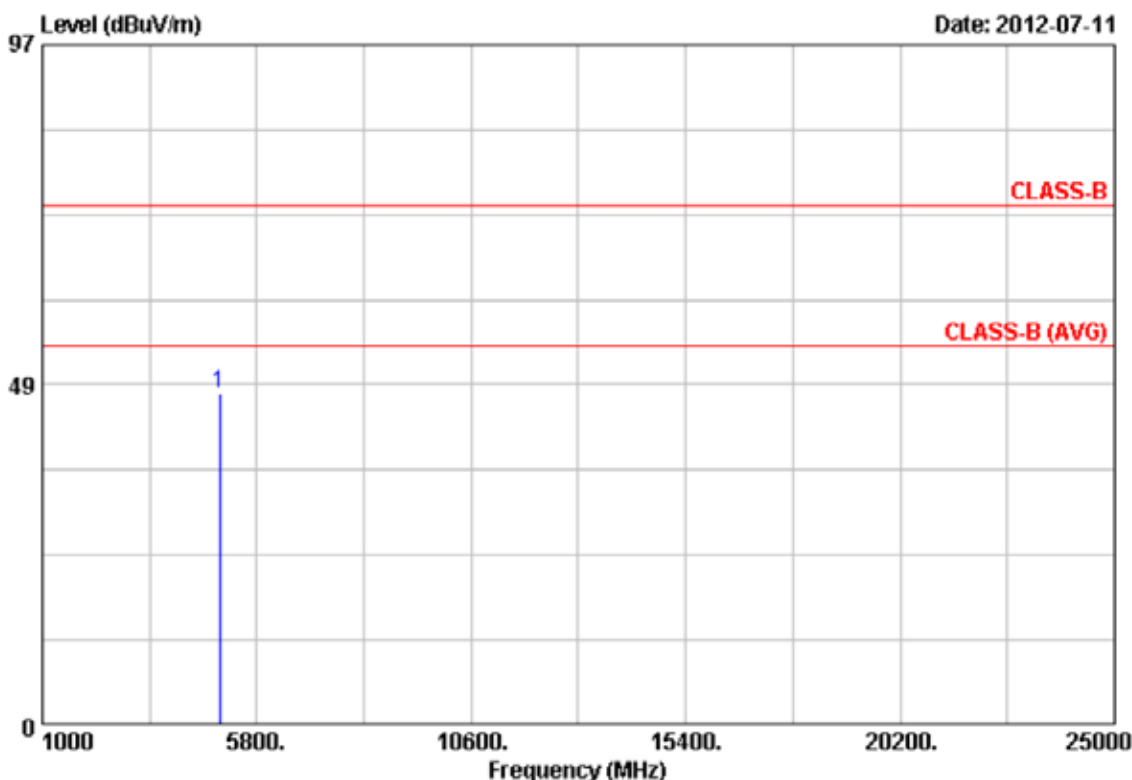


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.00	40.06	7.26	47.32	74.00	-26.68	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: From System	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 78	Humidity	: 63 %
Modulation Type	: 8 DPSK	Atmospheric Pressure	: 1014 hPa
Rate	: 3 Mbps		

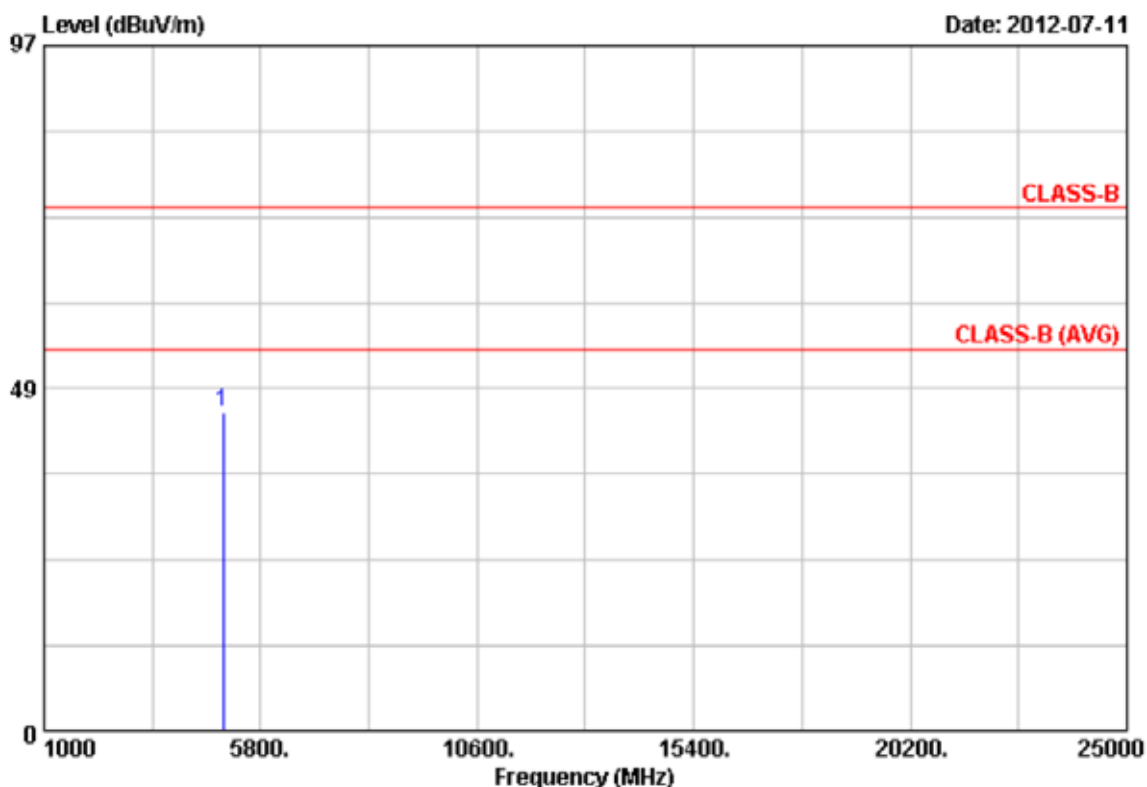

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4960.00	39.96	5.16	45.12	74.00	-28.88	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



6. 20dB Bandwidth Measurement Data


6.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- c. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

6.3 Test Setup Layout



6.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28



6.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Channel	Frequency (MHz)	20dB Bandwidth (KHz)
00	2402	692.00
39	2441	728.00
78	2480	700.00

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Channel	Frequency (MHz)	20dB Bandwidth (KHz)
00	2402	1248.00
39	2441	1240.00
78	2480	1240.00

Modulation Standard: 8DPSK (3Mbps)

Test Date: Jul. 05, 2012

Temperature: 25


Atmospheric pressure: 1020 hPa

Humidity: 65 %


Channel	Frequency (MHz)	20dB Bandwidth (KHz)
00	2402	1216.00
39	2441	1236.00
78	2480	1216.00



Modulation Standard: GFSK (1Mbps)
Channel: 00

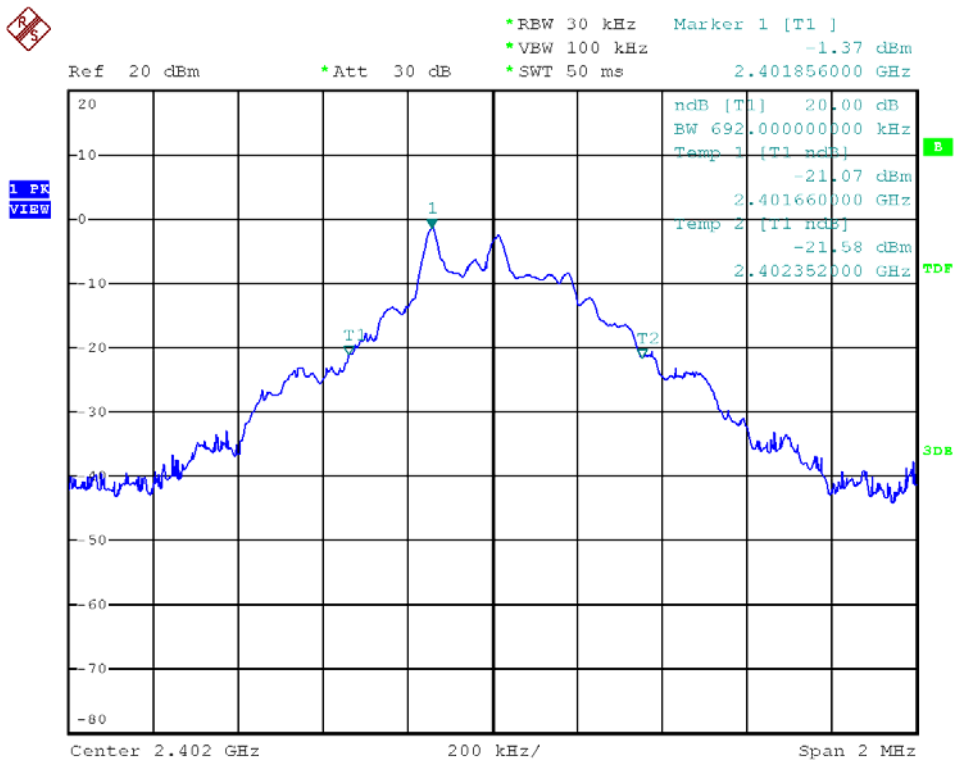


Modulation Standard: GFSK (1Mbps)
Channel: 39

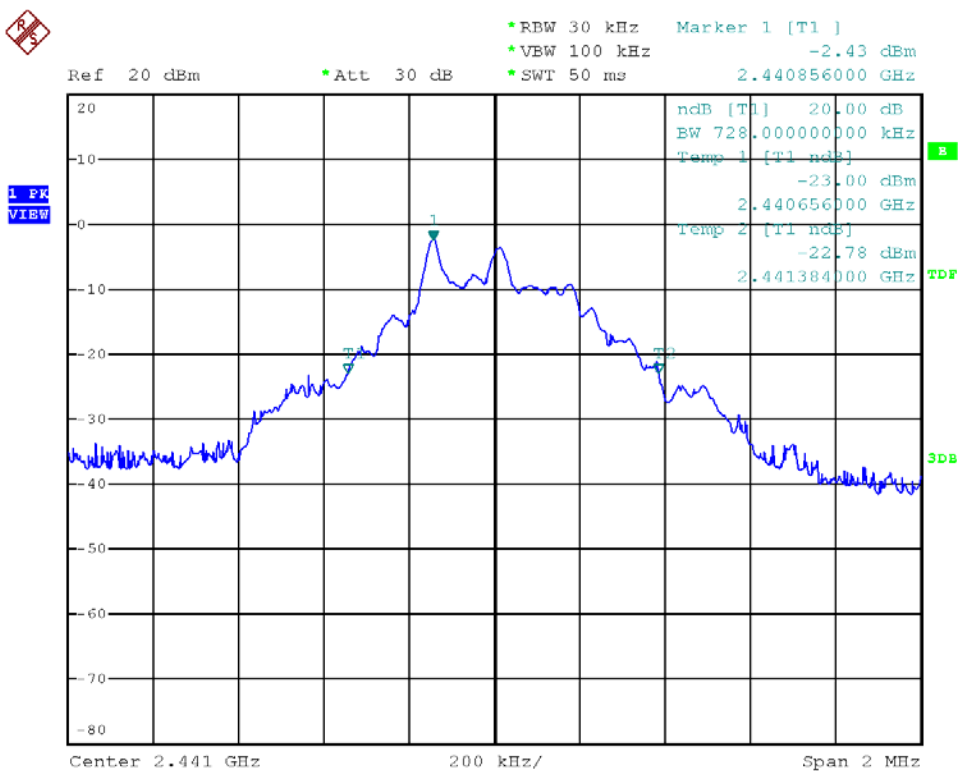




Modulation Standard: GFSK (1Mbps)
Channel: 78

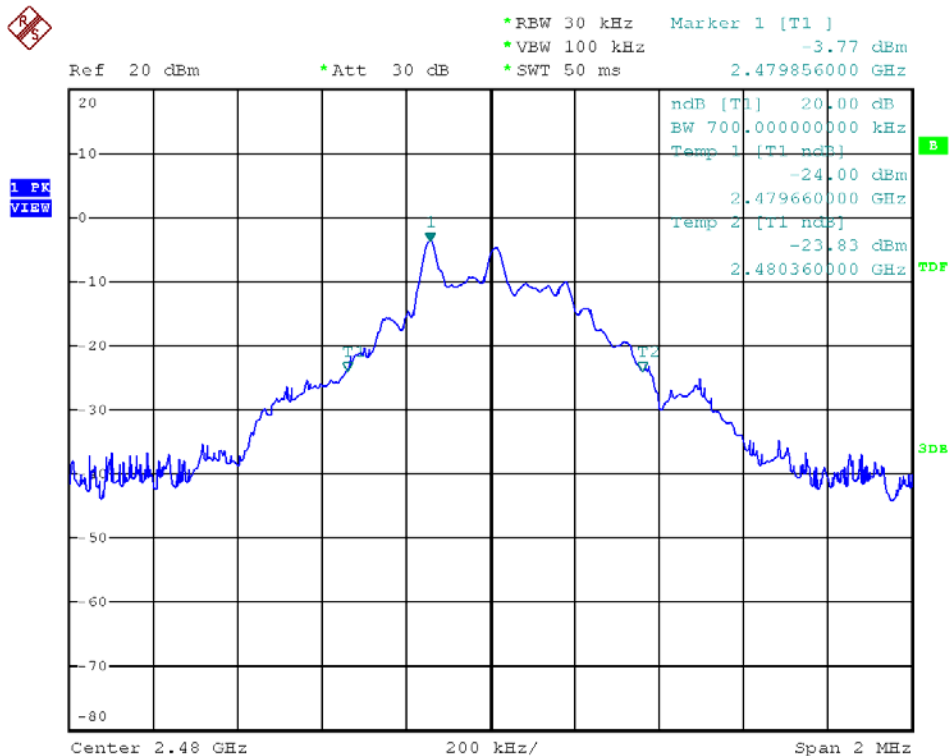


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

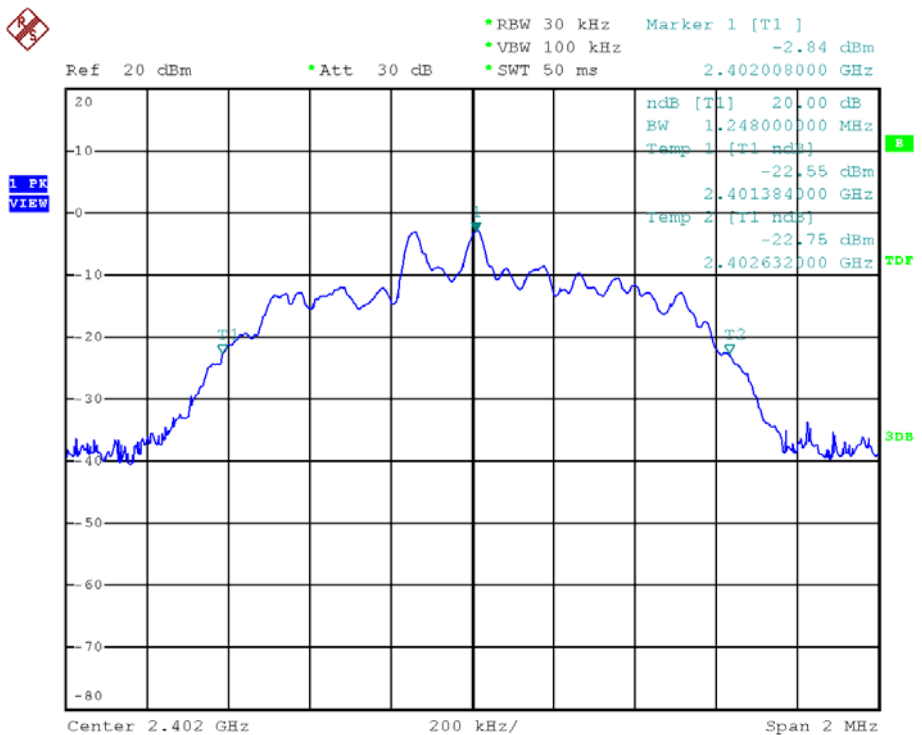




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

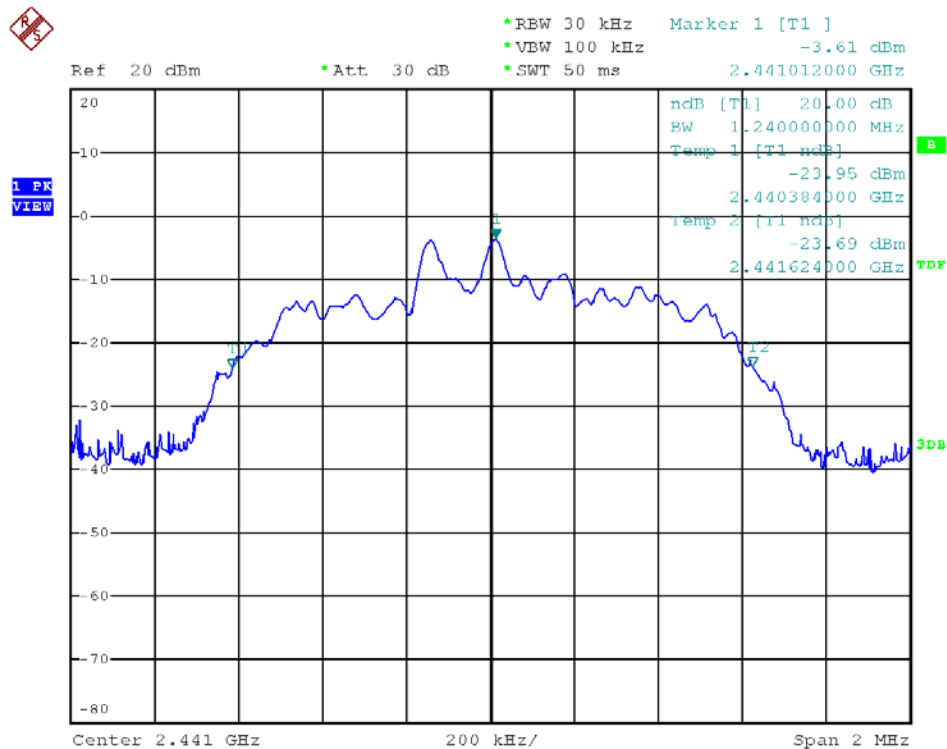


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

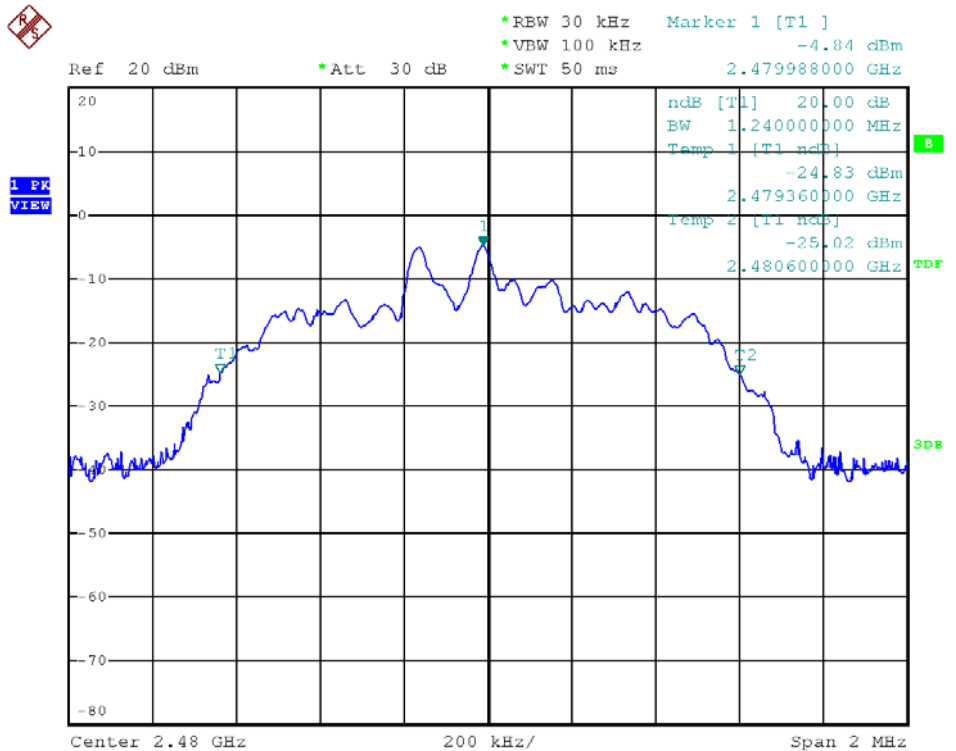




Modulation Standard: 8DPSK (3Mbps)
Channel: 00

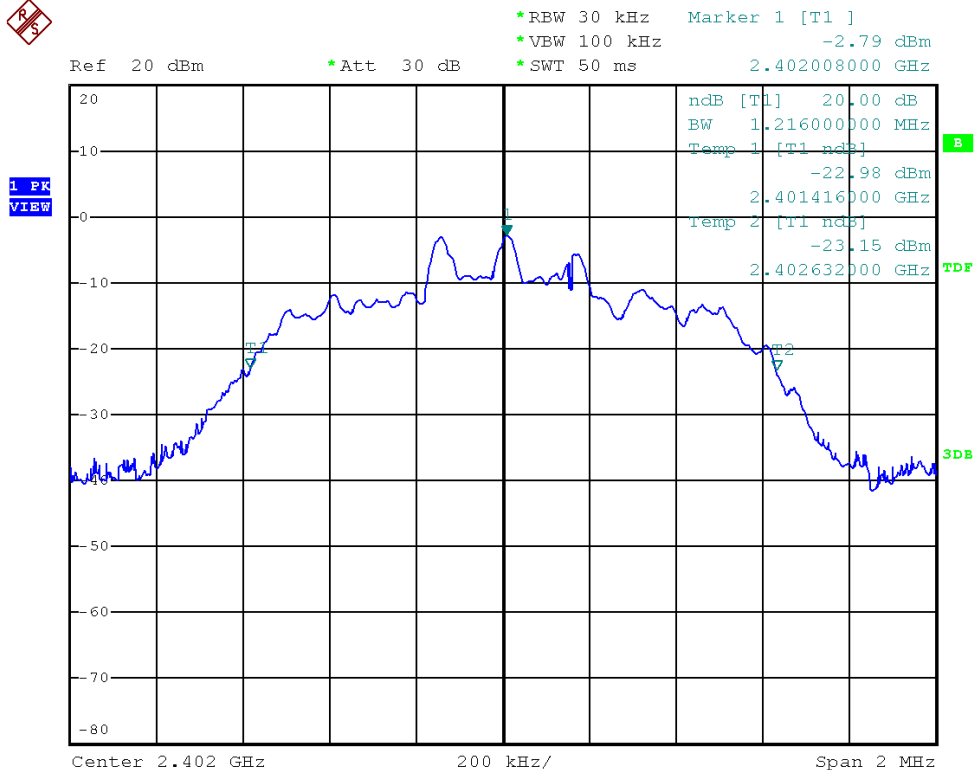


Modulation Standard: 8DPSK (3Mbps)
Channel: 39

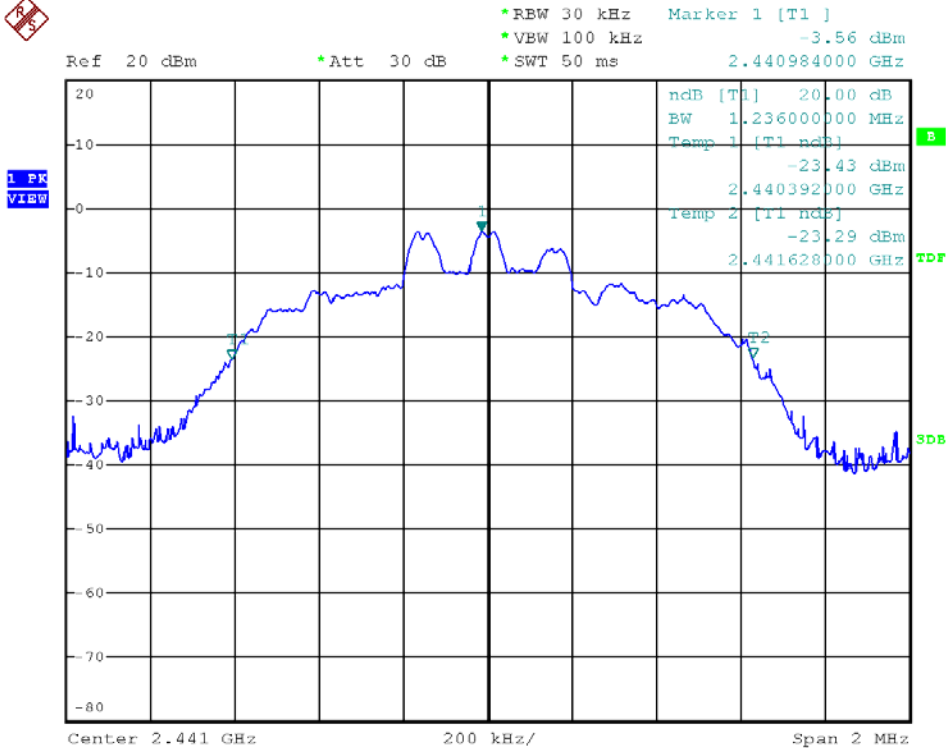



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

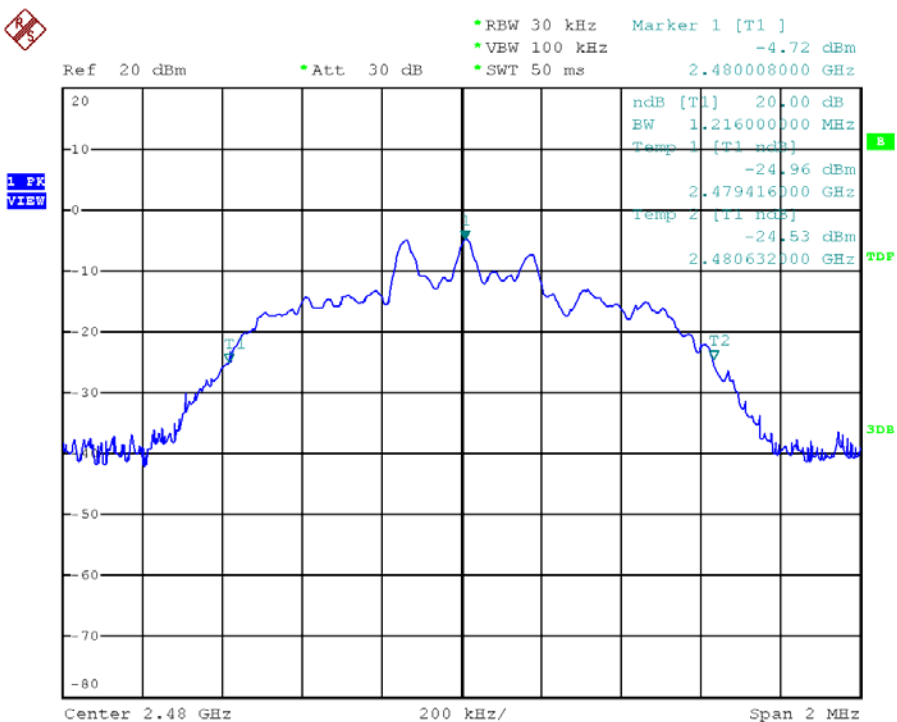



7. Frequencies Separation


7.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

7.3 Test Setup Layout



7.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28

7.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Channel	Frequency (MHz)	Channel Separation (MHz)
00	2402	0.980
39	2441	1.020
78	2480	0.980



Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Channel	Frequency (MHz)	Channel Separation (MHz)
00	2402	1.004
39	2441	1.028
78	2480	0.976

Modulation Standard: 8DPSK (3Mbps)

Test Date: Jul. 05, 2012

Temperature: 25


Atmospheric pressure: 1020 hPa

Humidity: 65 %


Channel	Frequency (MHz)	Channel Separation (MHz)
00	2402	1.000
39	2441	1.004
78	2480	0.980



Modulation Standard: GFSK (1Mbps)
Channel: 00

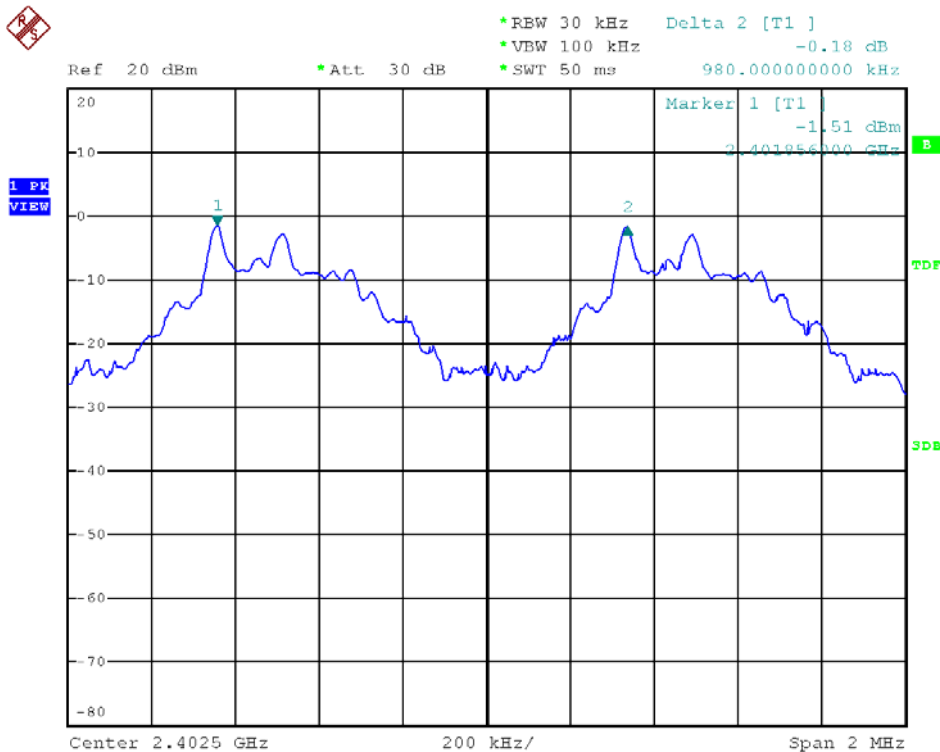


Modulation Standard: GFSK (1Mbps)
Channel: 39

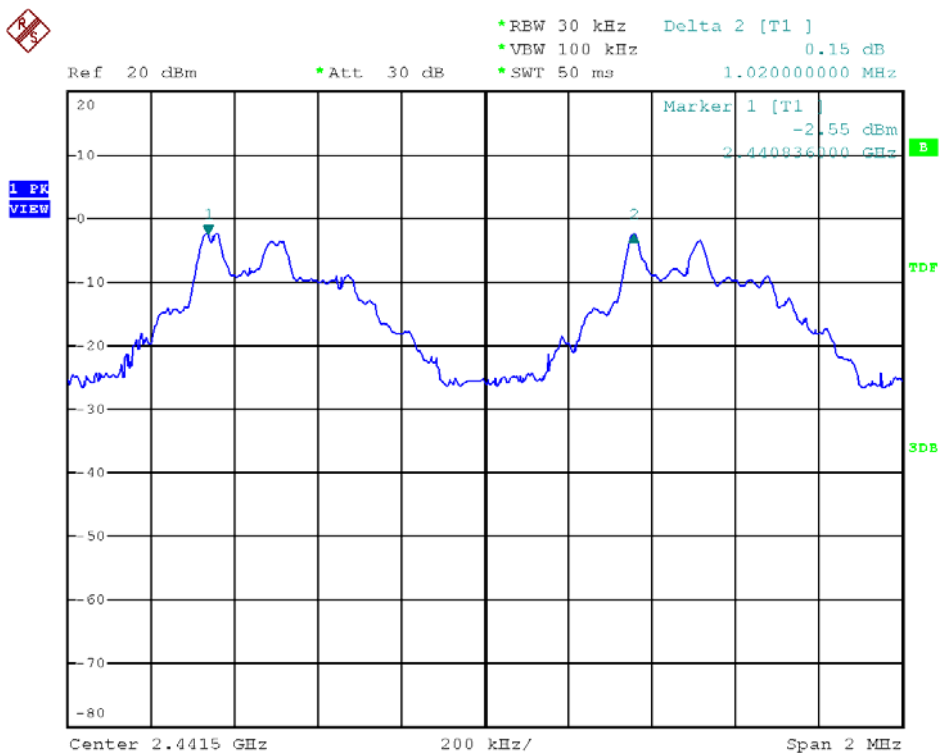




Modulation Standard: GFSK (1Mbps)
Channel: 78

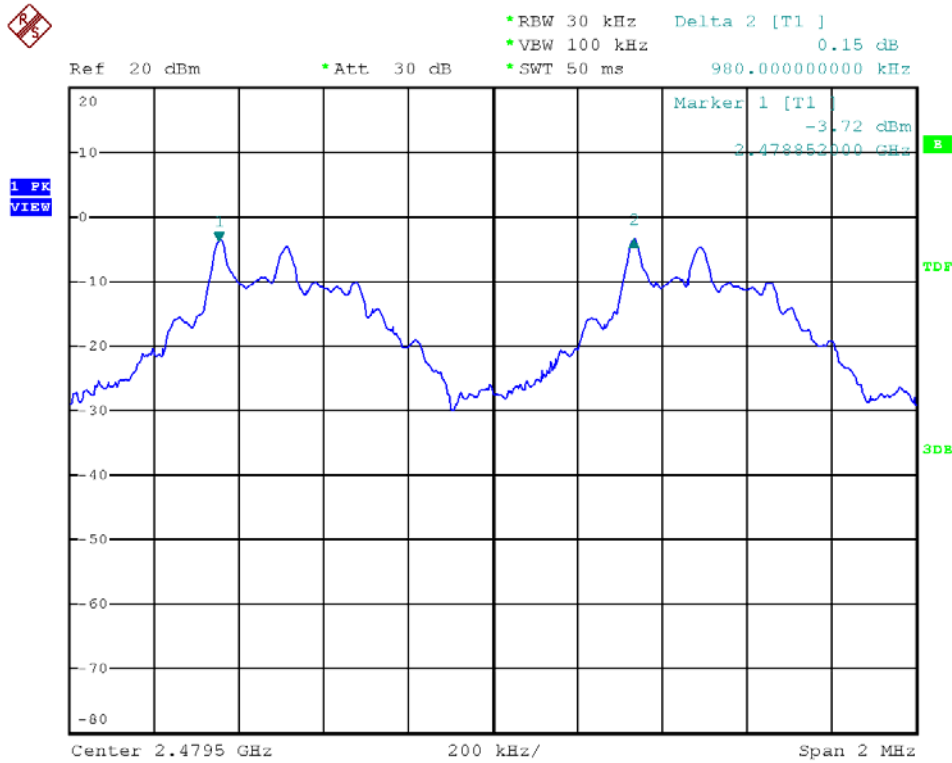


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

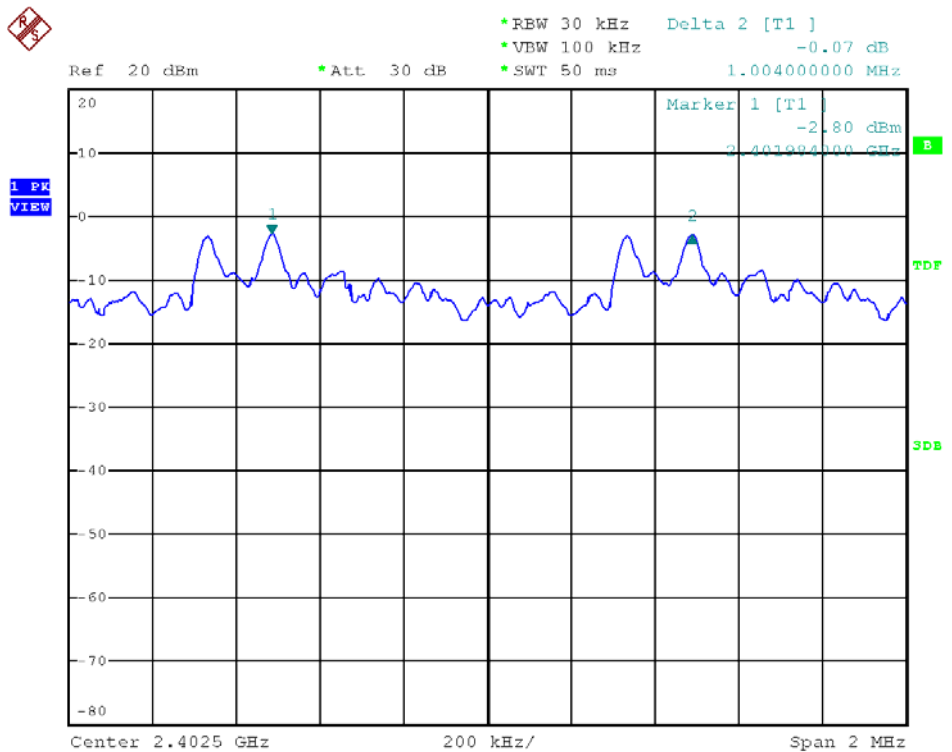




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

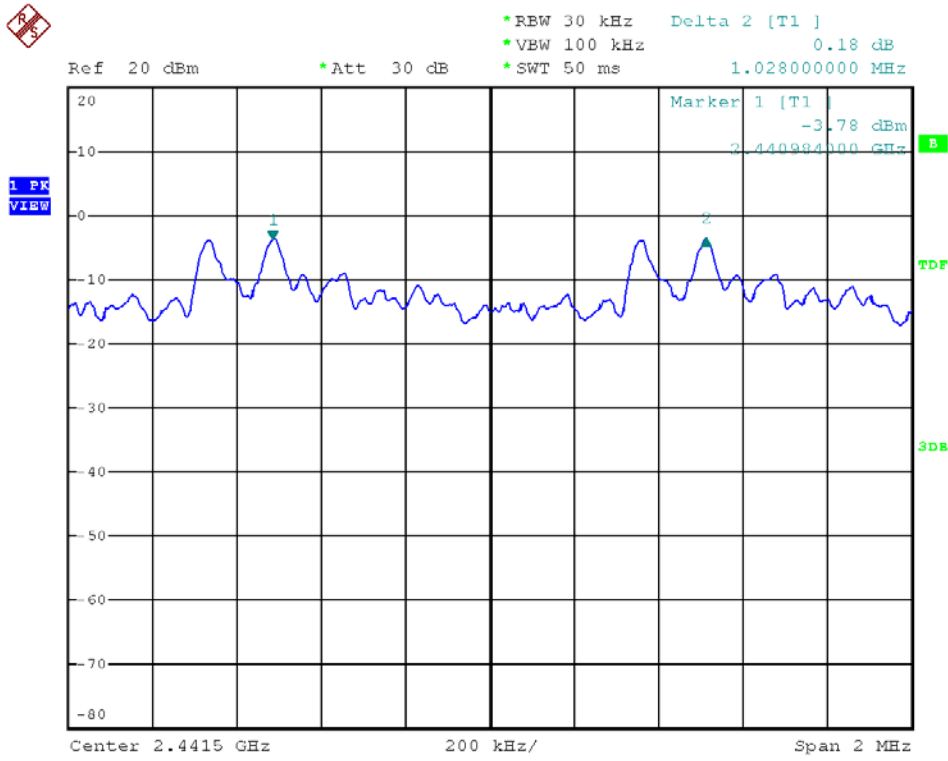


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

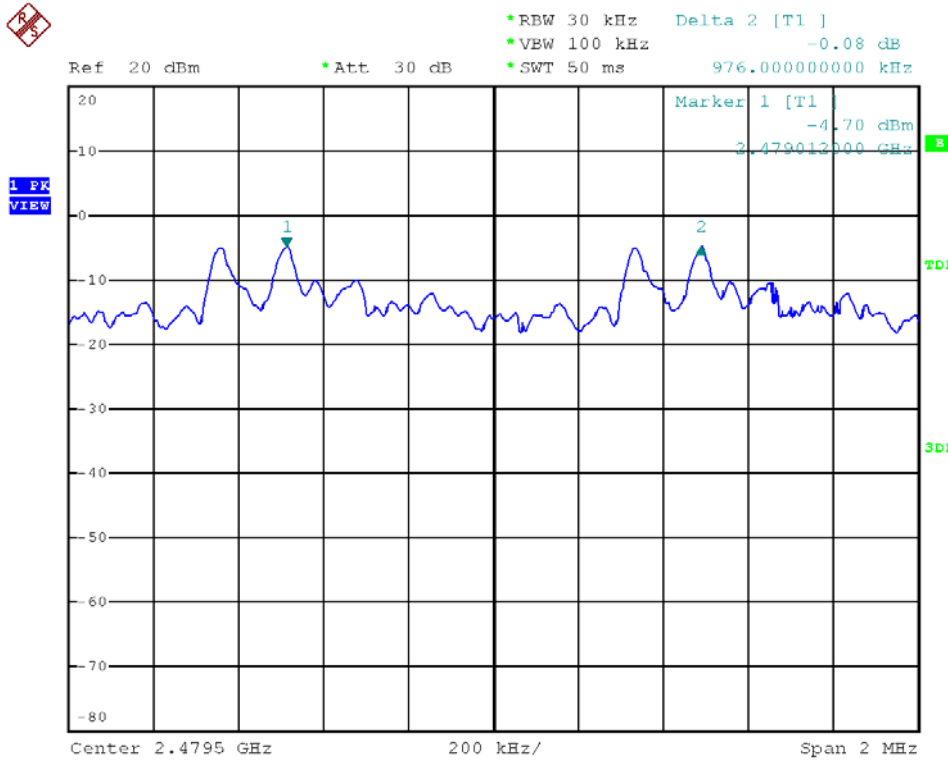




Modulation Standard: 8DPSK (3Mbps)
Channel: 00

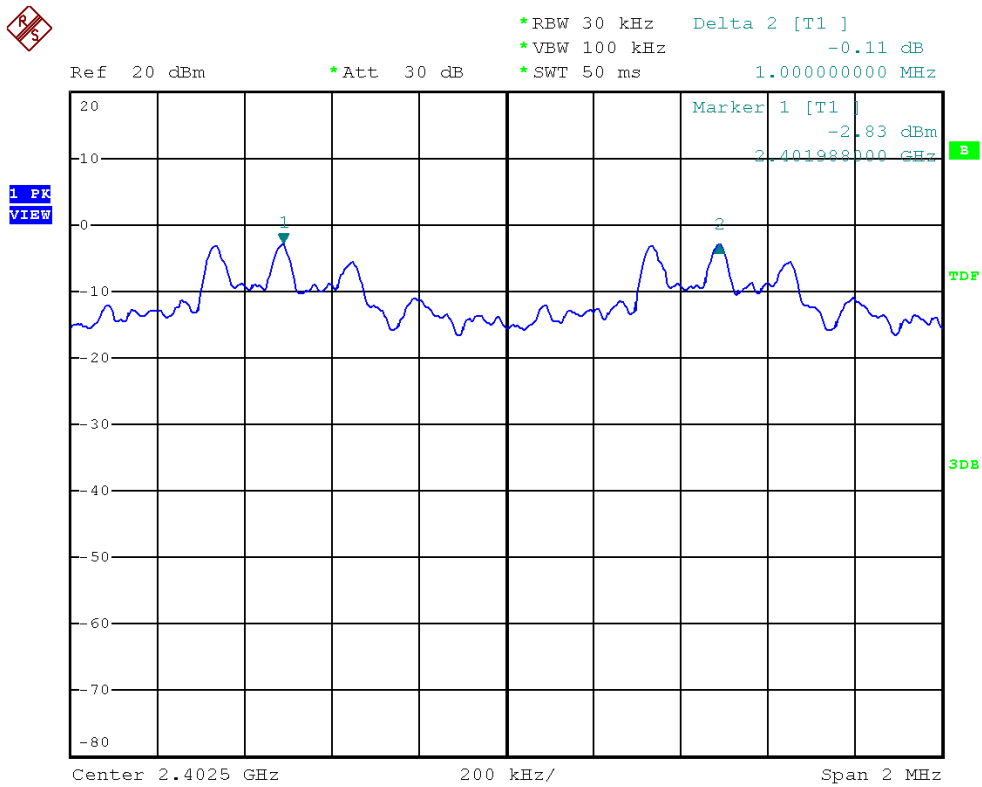


Modulation Standard: 8DPSK (3Mbps)
Channel: 39

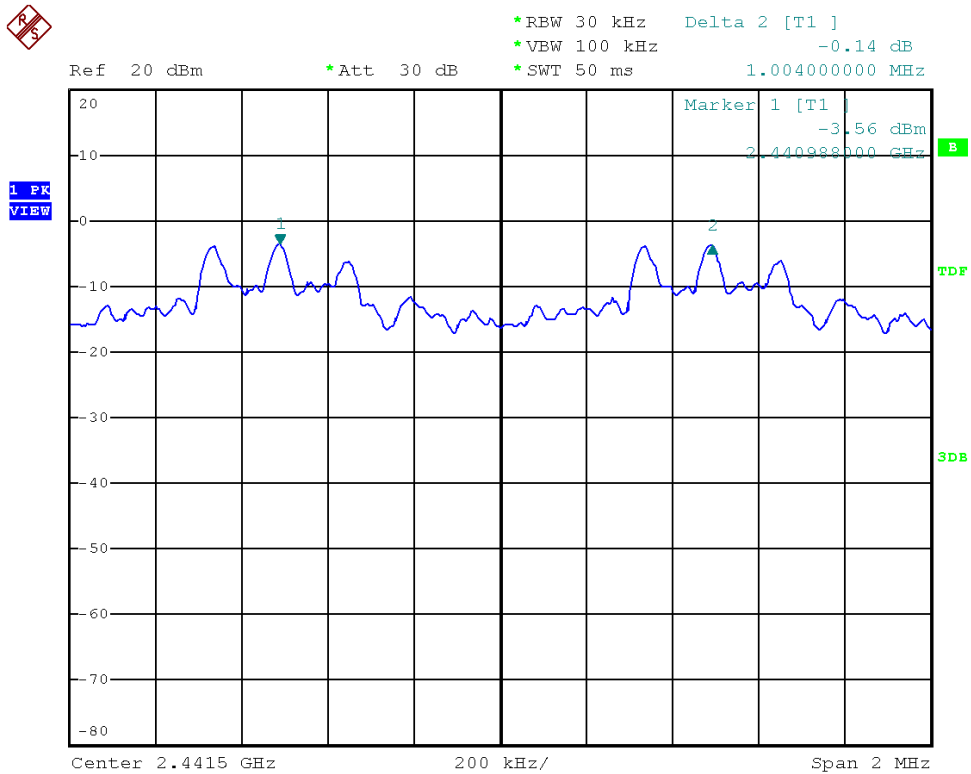



Modulation Standard: 8DPSK (3Mbps)

Channel: 78

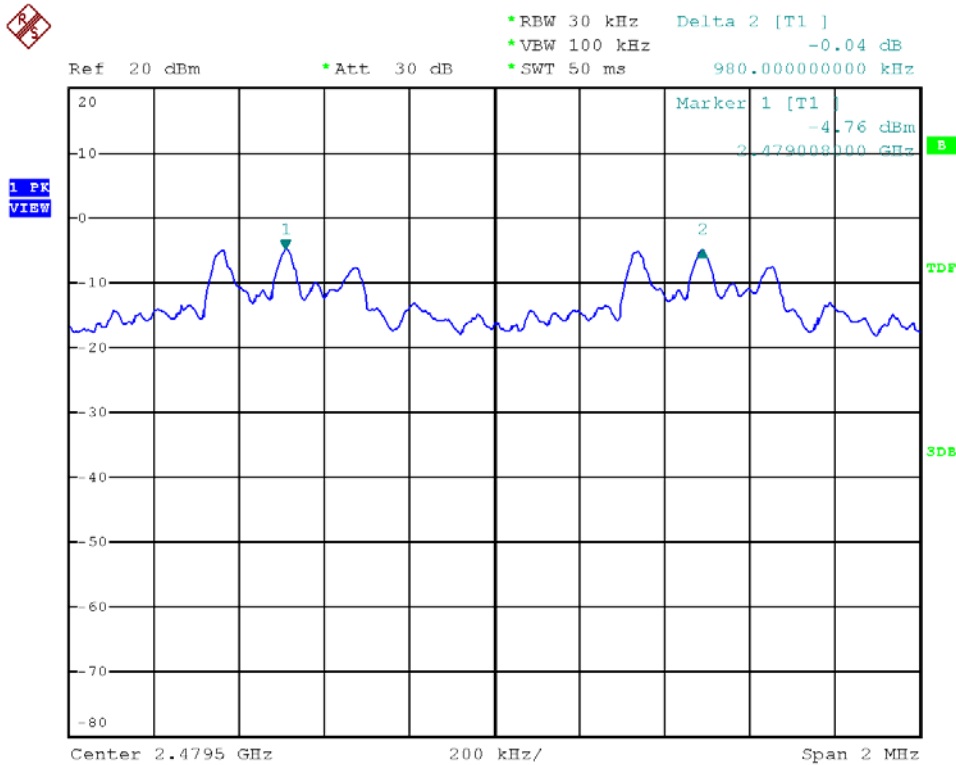



8. Dwell Time on each channel


8.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

8.3 Test Setup Layout



8.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28

8.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

a) 2402 MHz Dwell Time is	=	378.30 ms
b) 2441 MHz Dwell Time is	=	378.30 ms
c) 2480 MHz Dwell Time is	=	349.20 ms



Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

d) 2402 MHz Dwell Time is	=	379.60 ms
e) 2441 MHz Dwell Time is	=	378.30 ms
f) 2480 MHz Dwell Time is	=	350.40 ms

Modulation Standard: 8DPSK (3Mbps)

Test Date: Jul. 05, 2012

Temperature: 25



Atmospheric pressure: 1020 hPa

Humidity: 65 %

g) 2402 MHz Dwell Time is	=	379.60 ms
h) 2441 MHz Dwell Time is	=	379.60 ms
i) 2480 MHz Dwell Time is	=	350.40 ms



Modulation Standard: GFSK (1Mbps)
Channel: 00

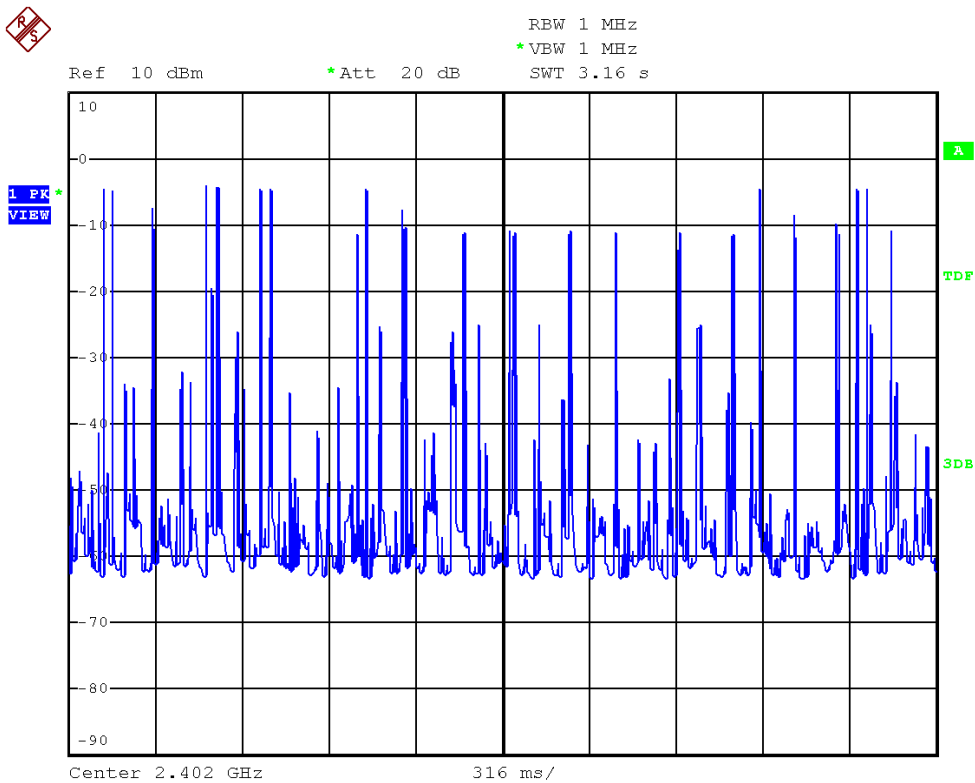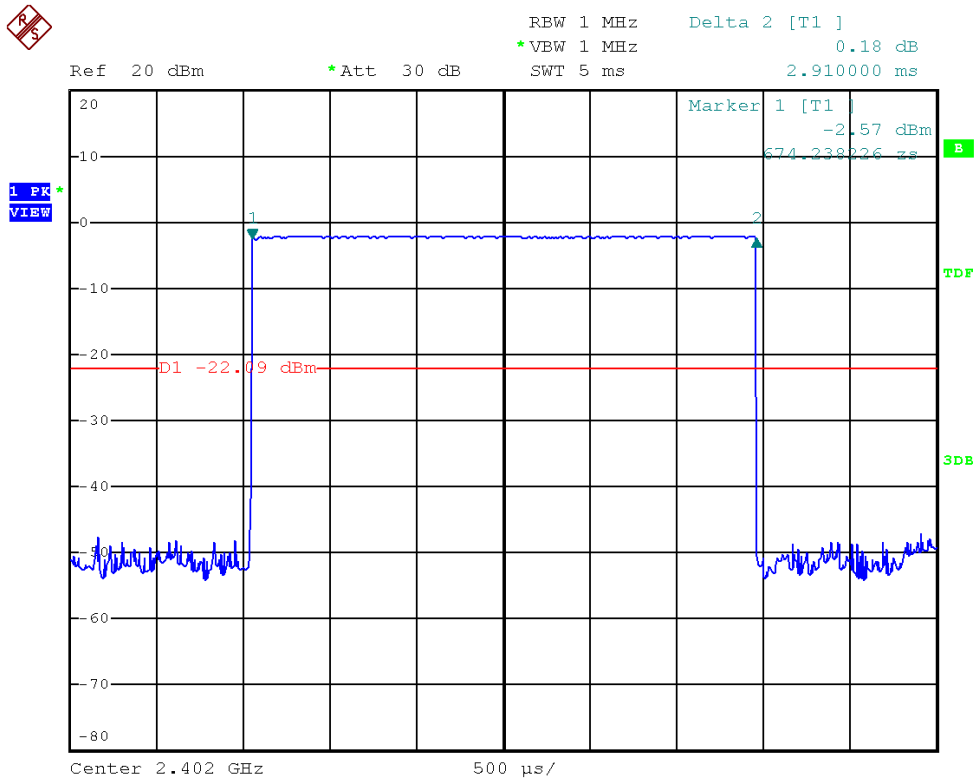





Modulation Standard: GFSK (1Mbps)
Channel: 39



Ref 20 dBm *Att 30 dB RBW 1 MHz Delta 2 [T1]
*VBW 1 MHz 0.23 dB
SWT 5 ms 2.910000 ms


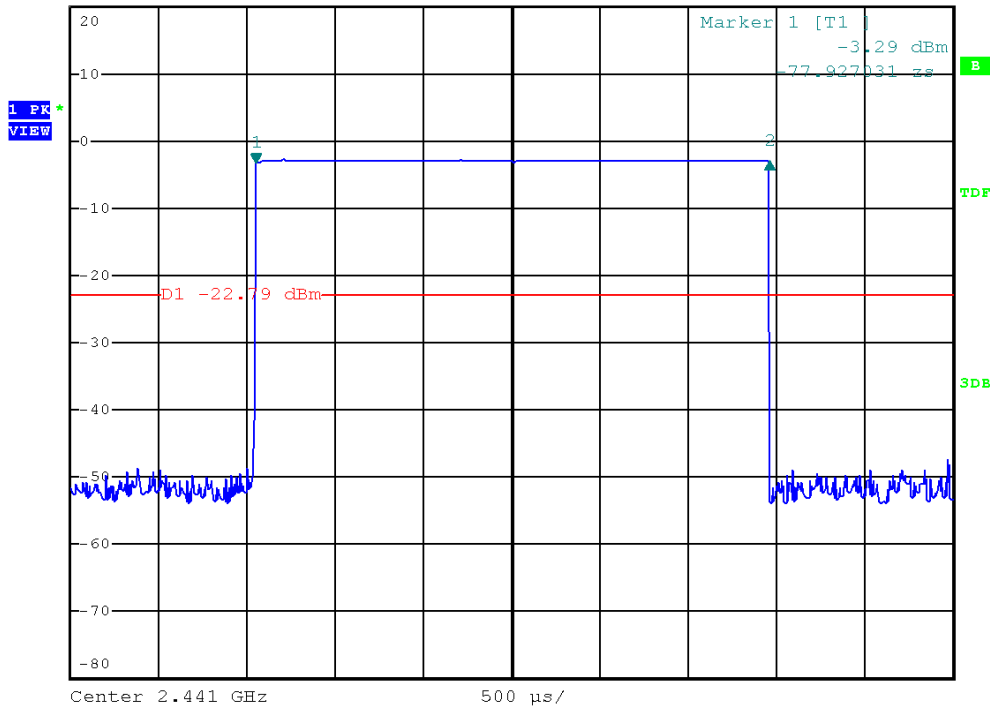


Ref 10 dBm *Att 20 dB RBW 1 MHz
*VBW 1 MHz
SWT 3.16 s

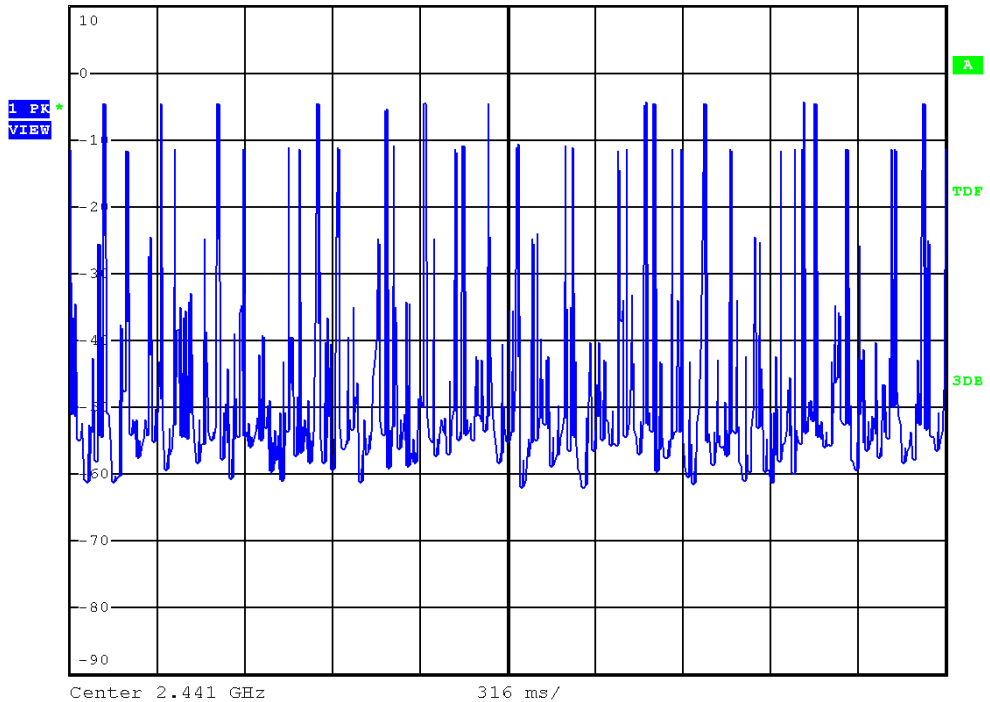





Modulation Standard: GFSK (1Mbps)
Channel: 78

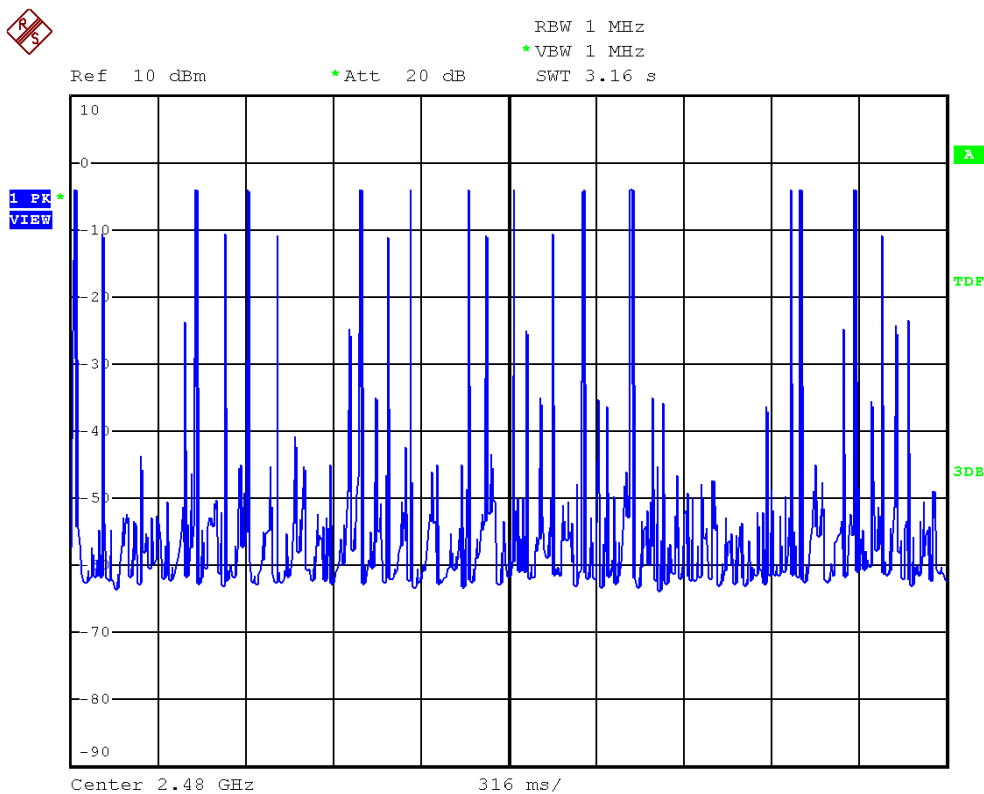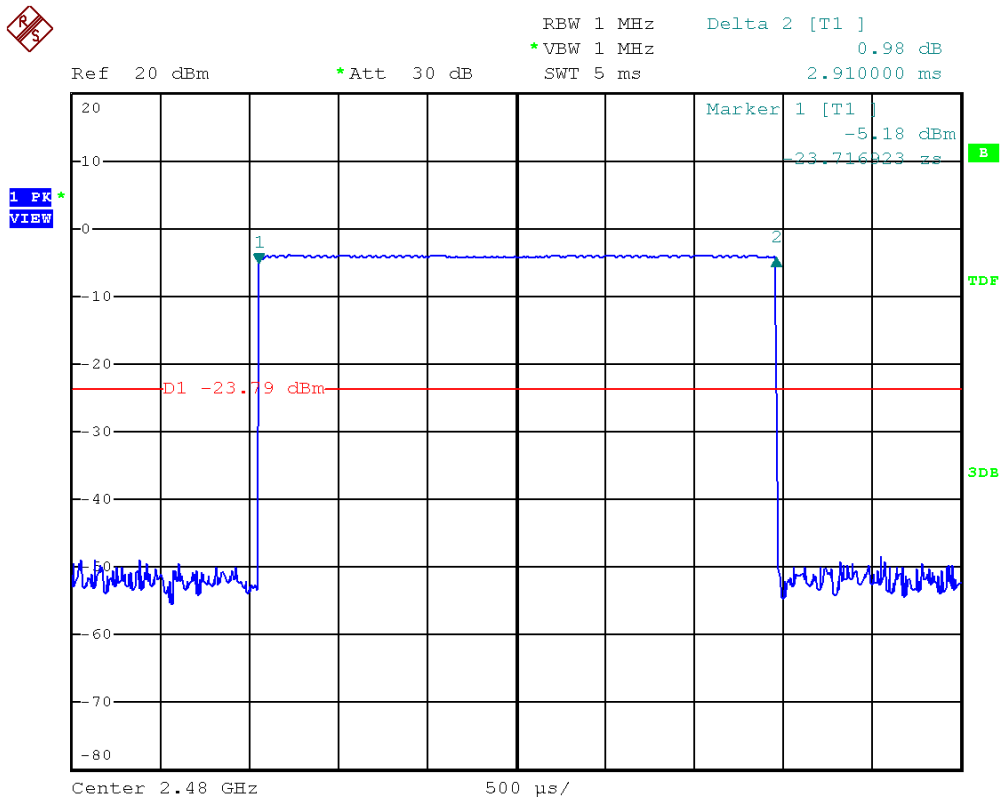



Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

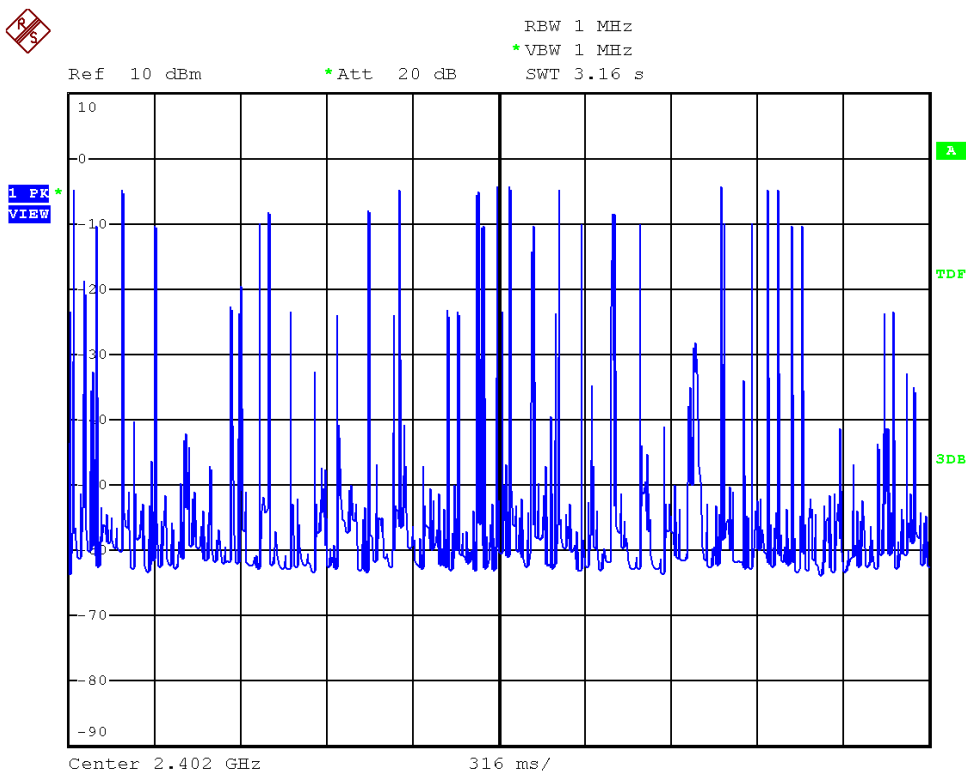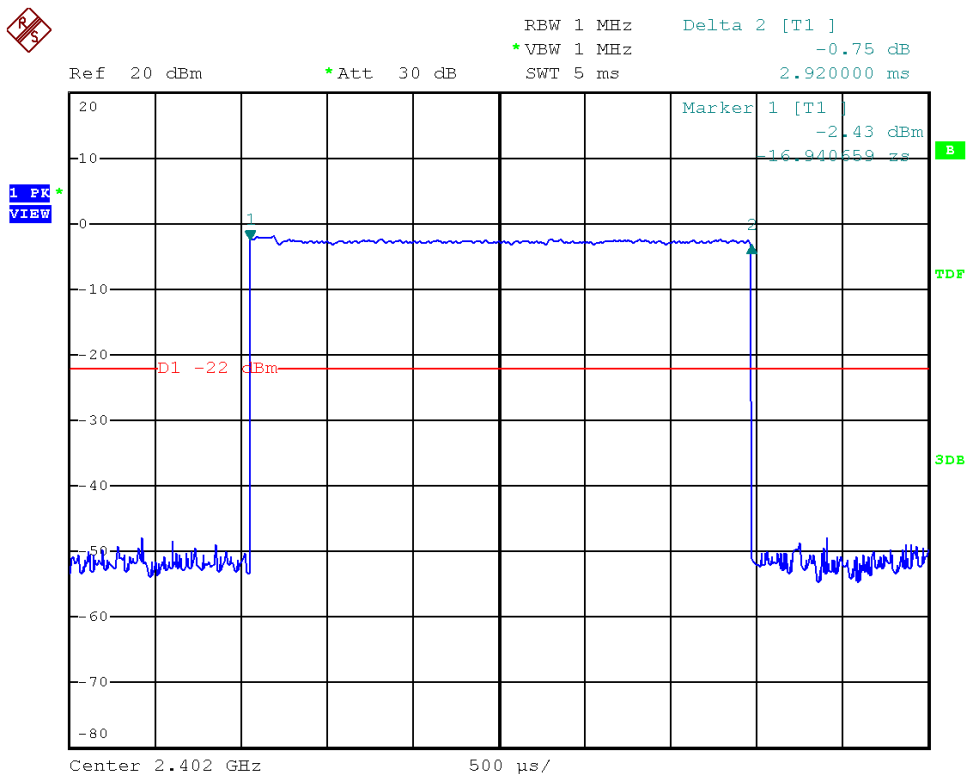





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39



Ref 20 dBm *Att 30 dB RBW 1 MHz Delta 2 [T1]
*VBW 1 MHz -0.60 dB
SWT 5 ms 2.910000 ms


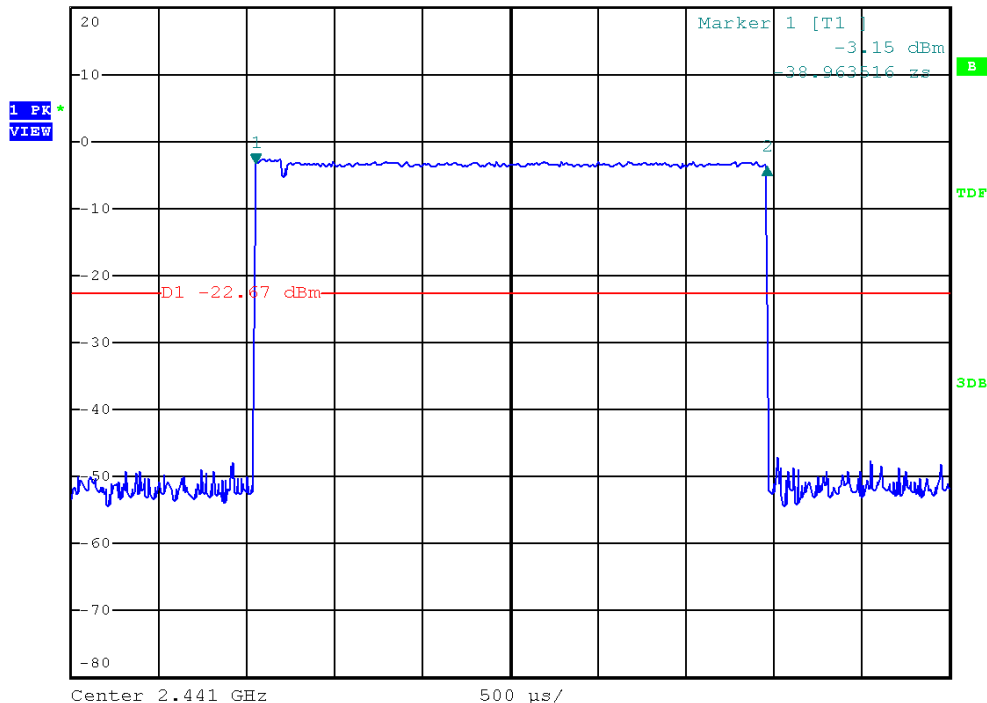


Ref 10 dBm *Att 20 dB RBW 1 MHz
*VBW 1 MHz
SWT 3.16 s

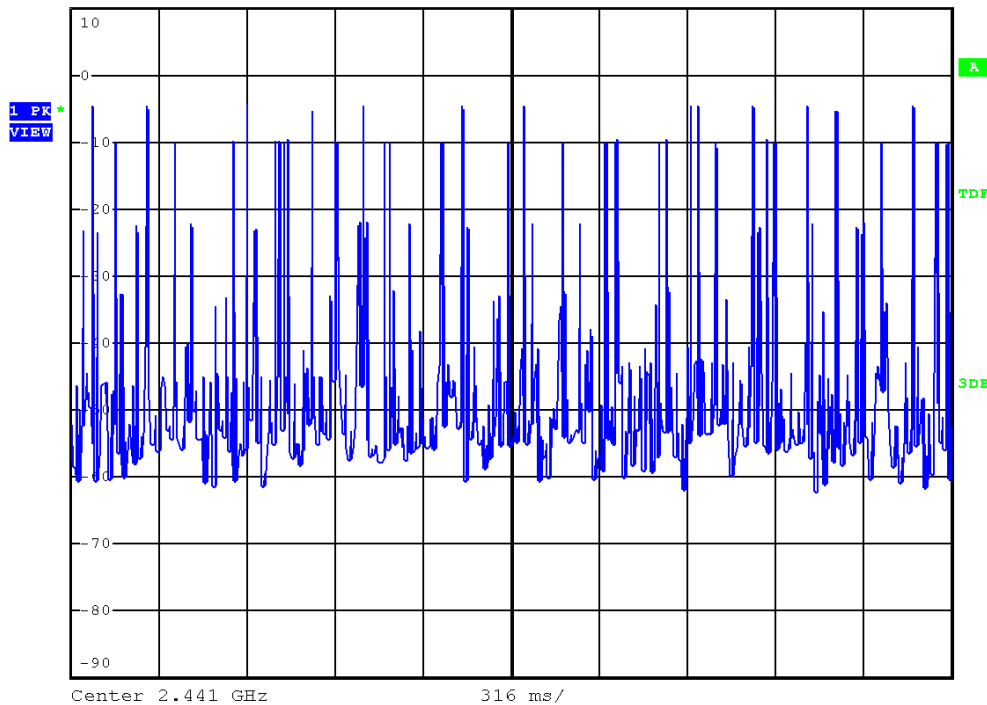





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

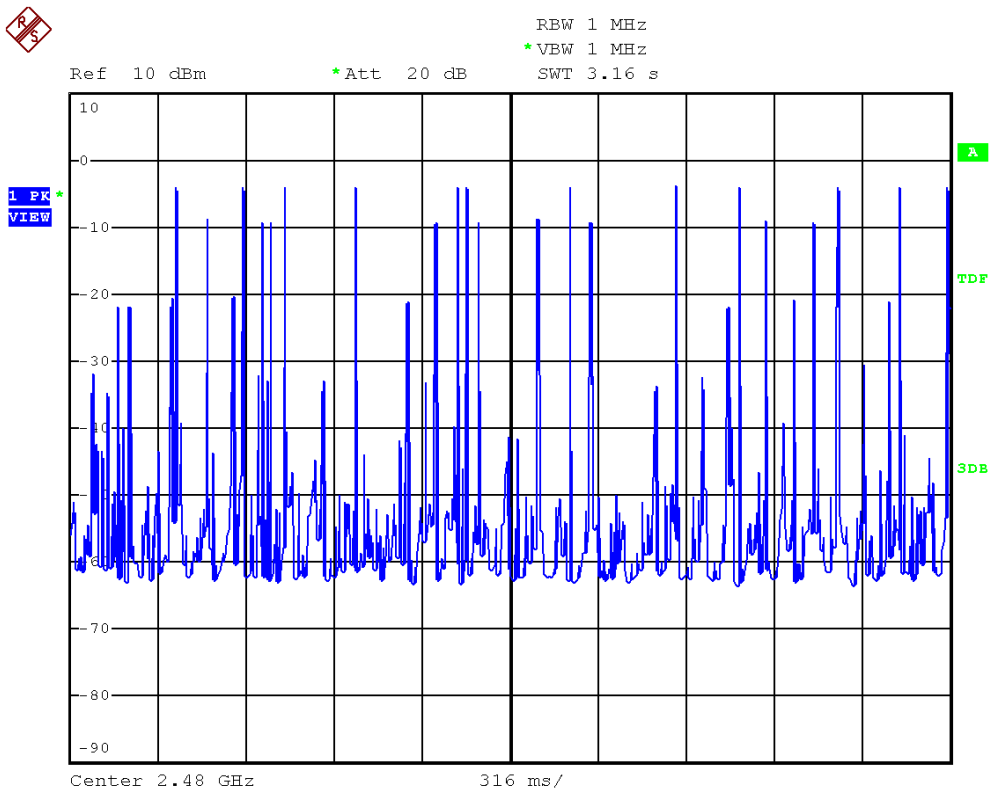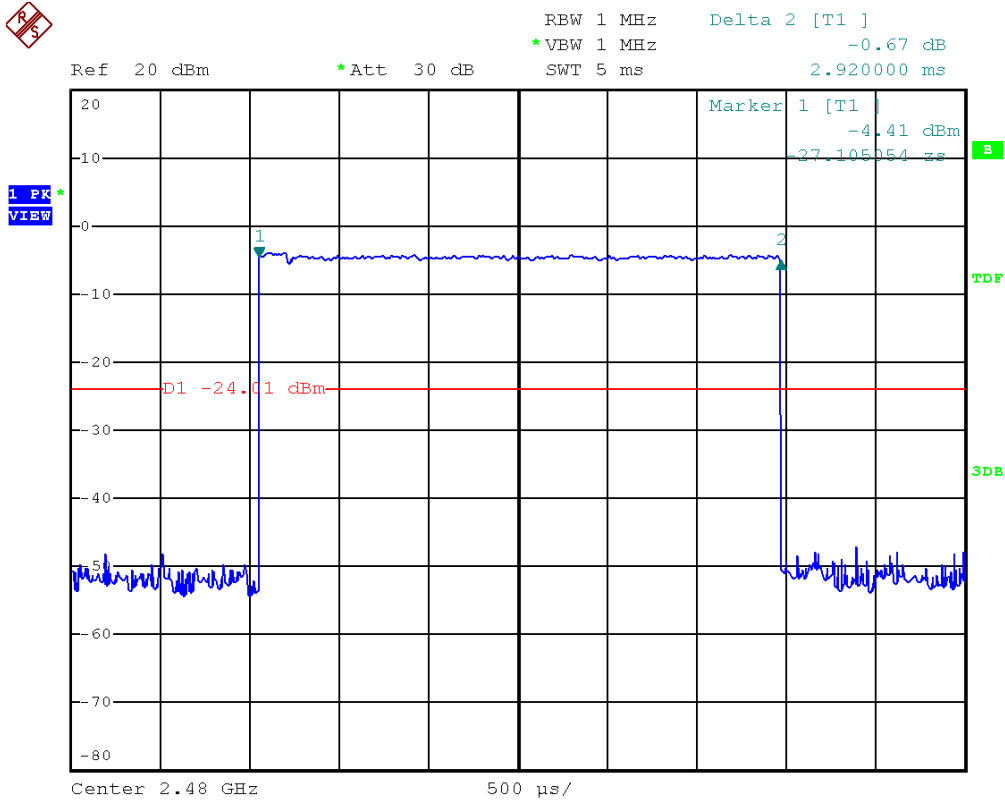





Modulation Standard: 8DPSK (3Mbps)
Channel: 00

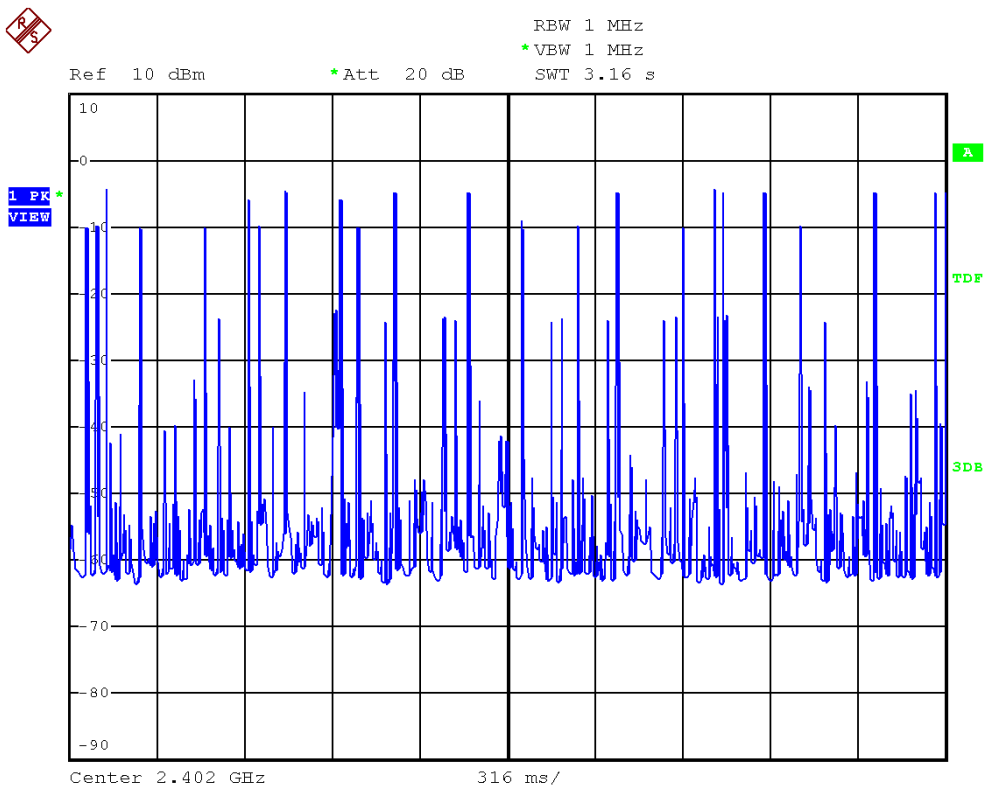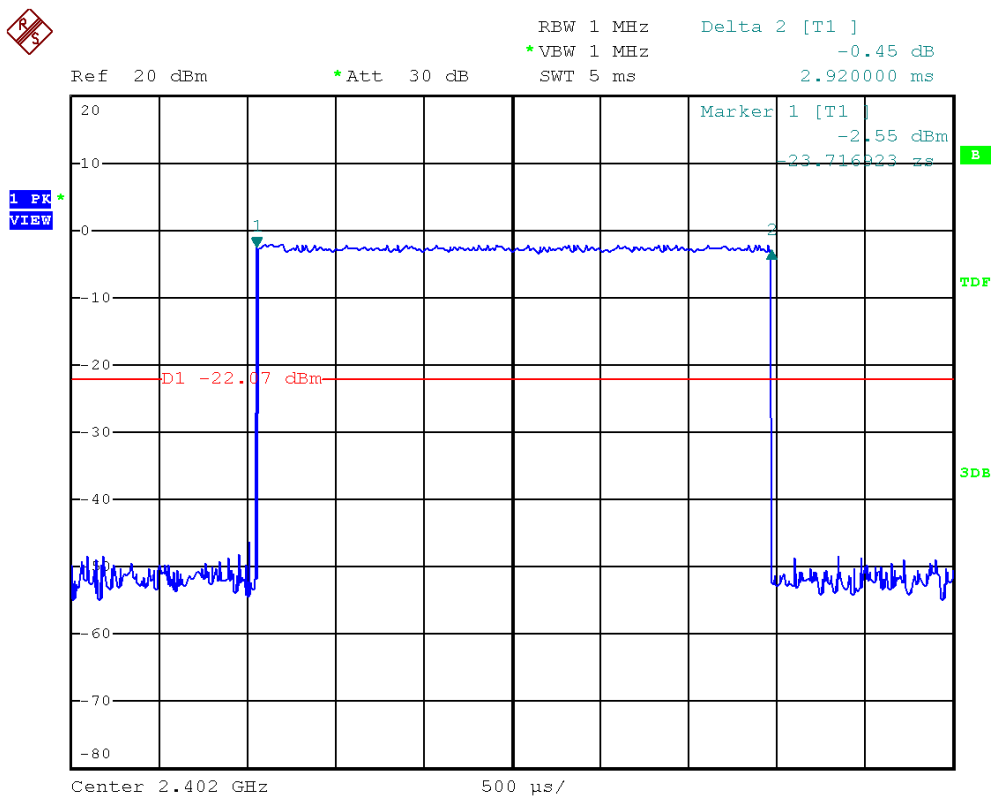



Modulation Standard: 8DPSK (3Mbps)
Channel: 39

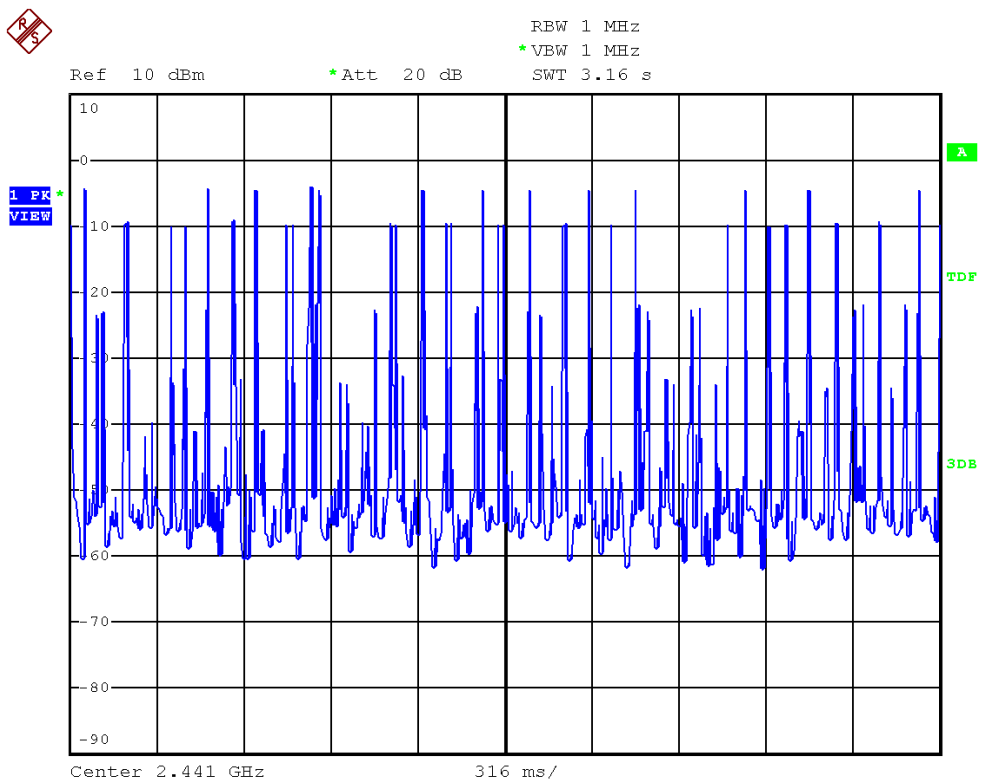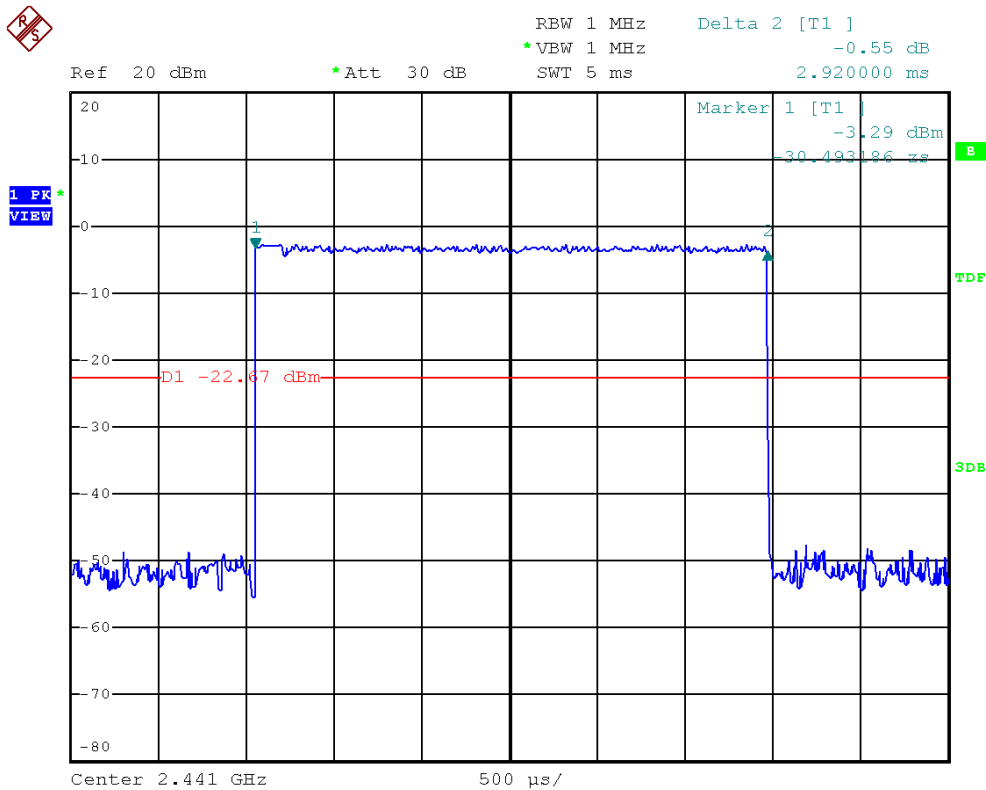





Modulation Standard: 8DPSK (3Mbps)
Channel: 78



Ref 20 dBm *Att 30 dB RBW 1 MHz Delta 2 [T1]
*VBW 1 MHz -0.71 dB
SWT 5 ms 2.920000 ms

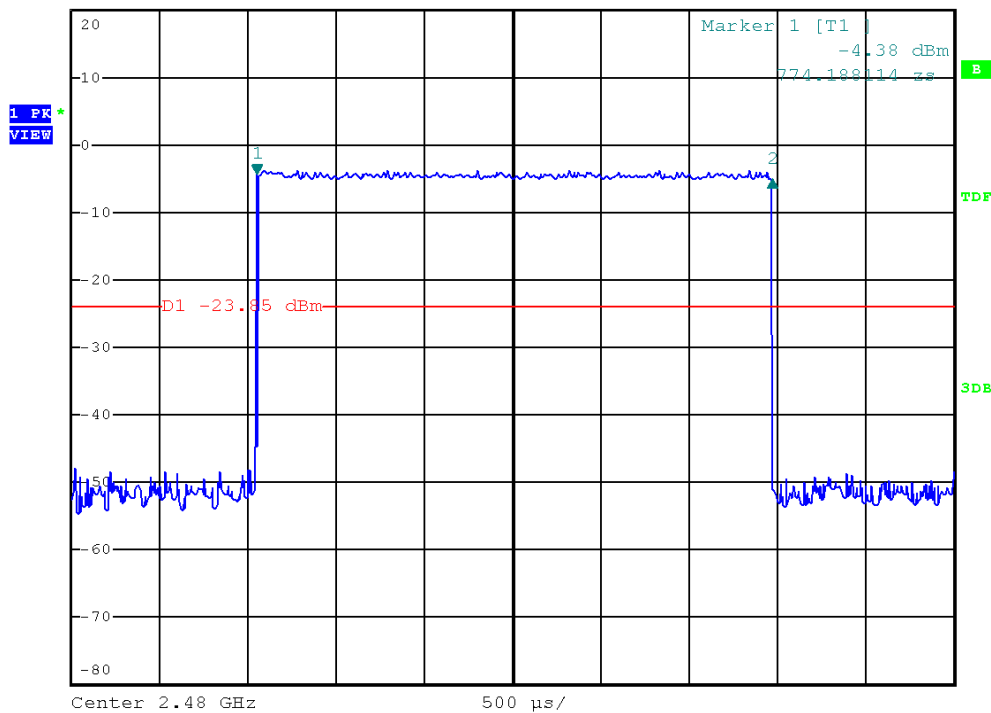

Ref 10 dBm *Att 20 dB RBW 1 MHz
*VBW 1 MHz
SWT 3.16 s

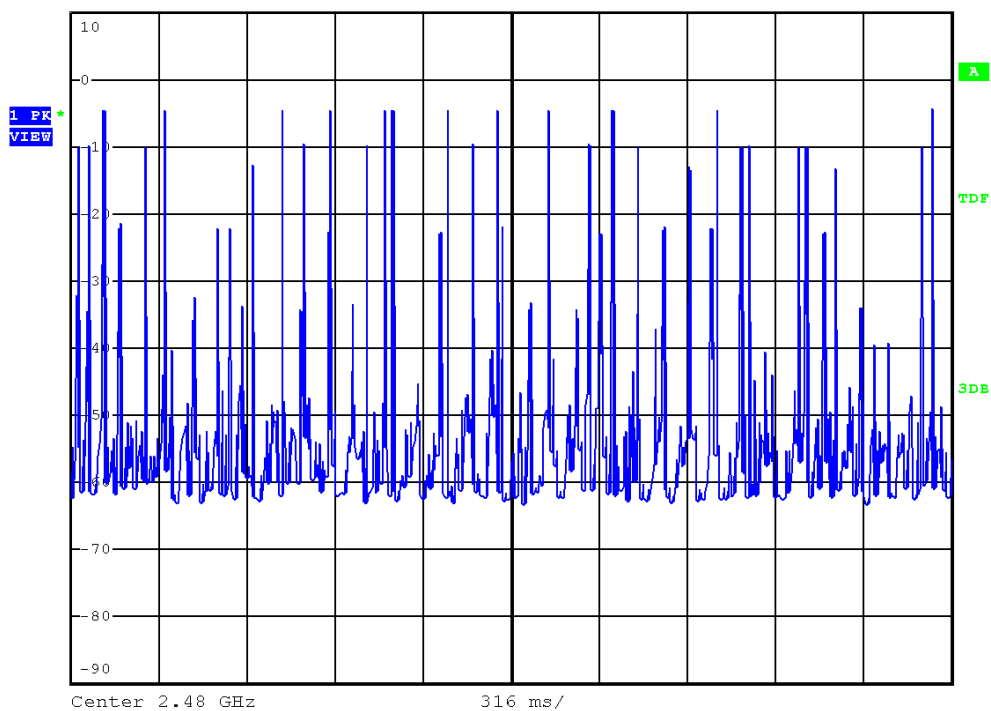



9. Number of Hopping Channels


9.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. 2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. 3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

9.3 Test Setup Layout

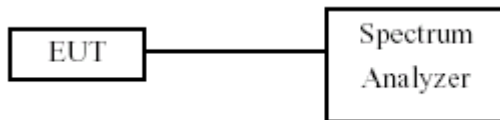

9.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28

9.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Number of hopping channels:	79	Channels
-----------------------------	----	----------



Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Number of hopping channels:	79	Channels
-----------------------------	----	----------

Modulation Standard: 8DPSK (3Mbps)

Test Date: Jul. 05, 2012

Temperature: 25


Atmospheric pressure: 1020 hPa

Humidity: 65 %


Number of hopping channels:	79	Channels
-----------------------------	----	----------



Modulation Standard: GFSK (1Mbps)

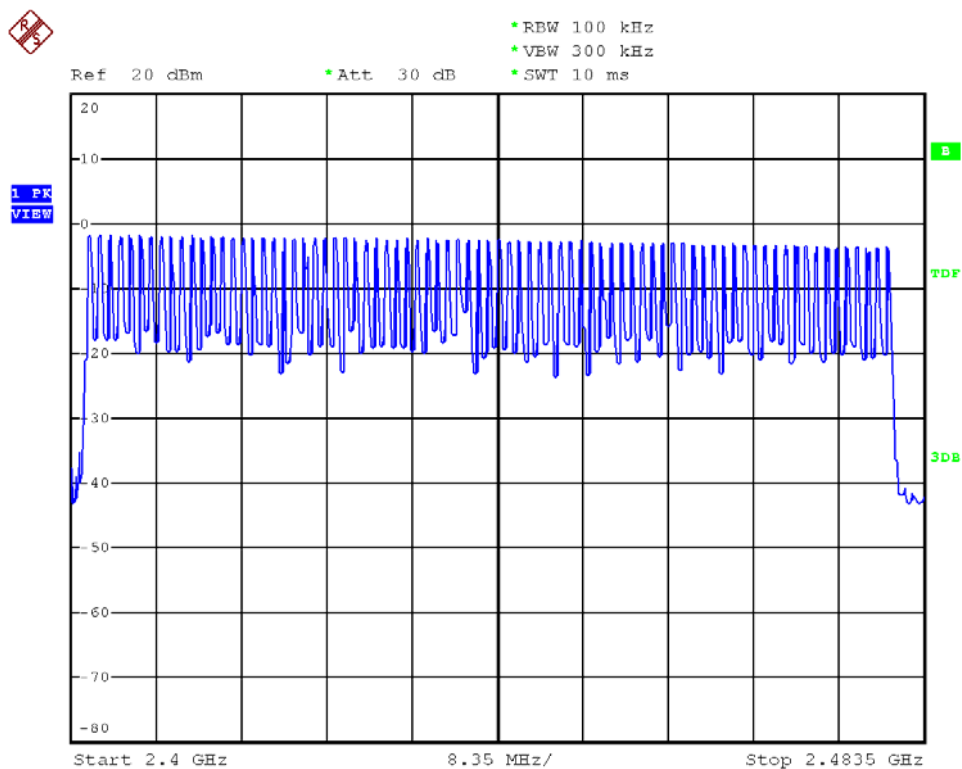


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

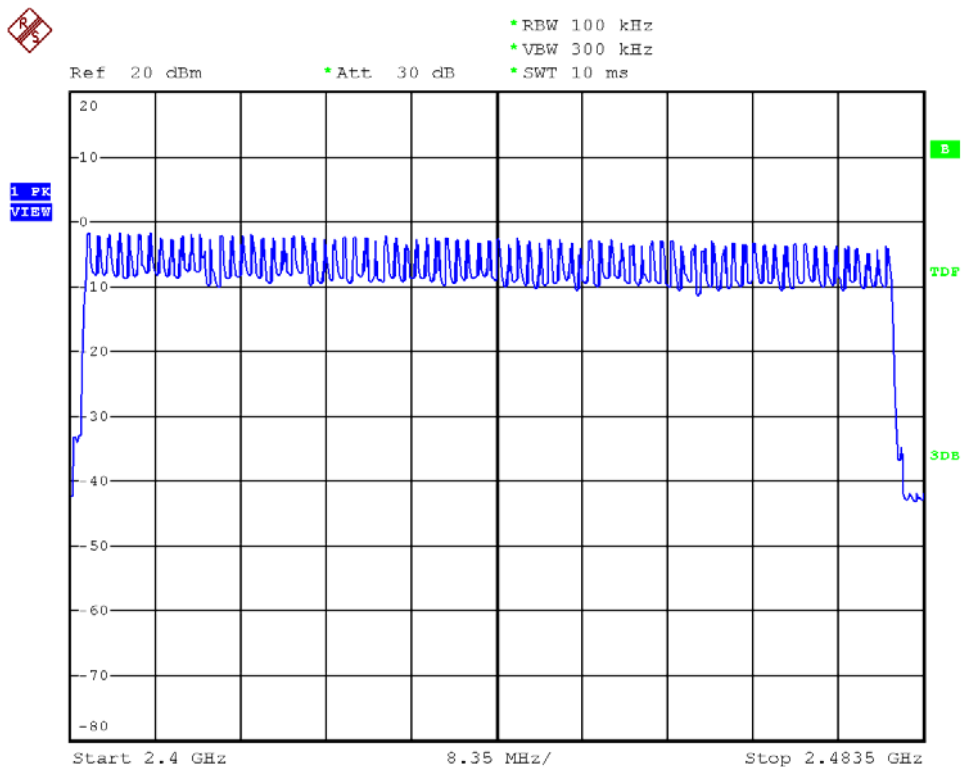



Modulation Standard: 8DPSK (3Mbps)

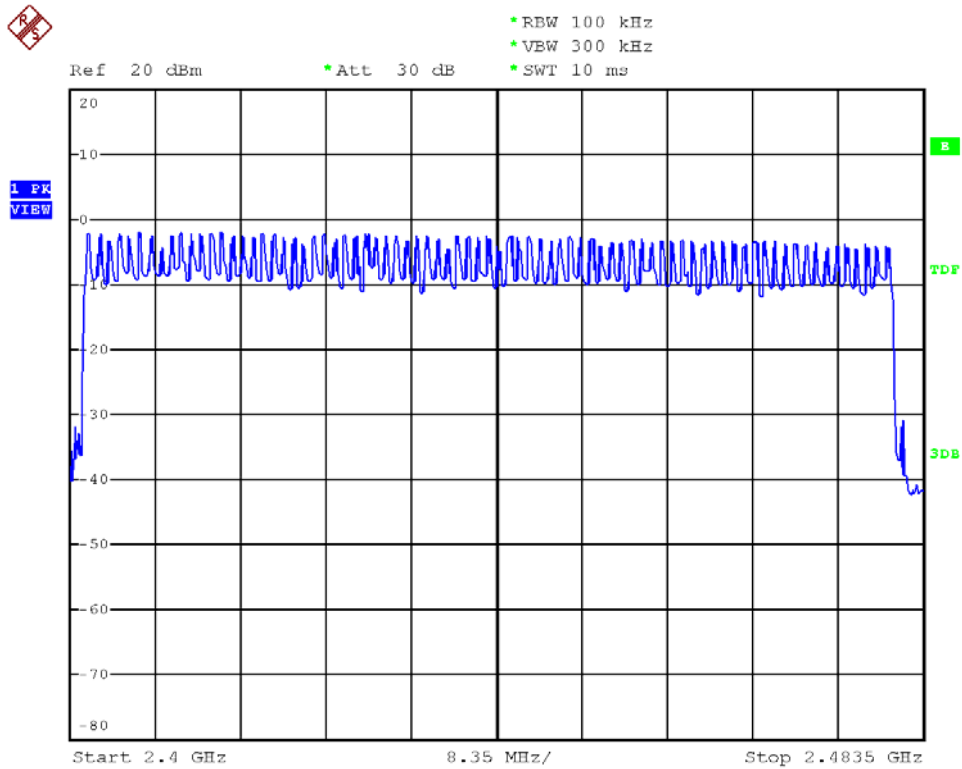



10. Maximum Peak Output Power


10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

10.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



10.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28

10.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	-0.30	0.9
39	2441	-1.26	0.7
78	2480	-3.08	0.5



Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	-1.07	0.8
39	2441	-1.44	0.7
78	2480	-3.10	0.5

Modulation Standard: 8DPSK (3Mbps)

Test Date: Jul. 05, 2012

Temperature: 25


Atmospheric pressure: 1020 hPa

Humidity: 65 %


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
00	2402	-1.04	0.8
39	2441	-1.64	0.7
78	2480	-3.04	0.5



Modulation Standard: GFSK (1Mbps)
Channel: 00

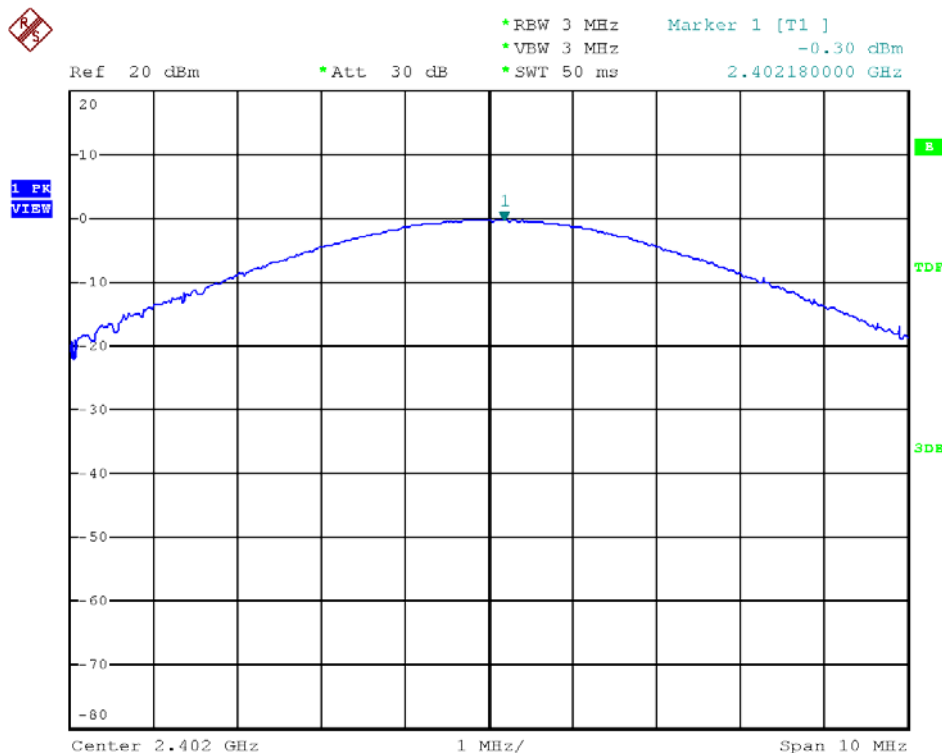

Modulation Standard: GFSK (1Mbps)
Channel: 39

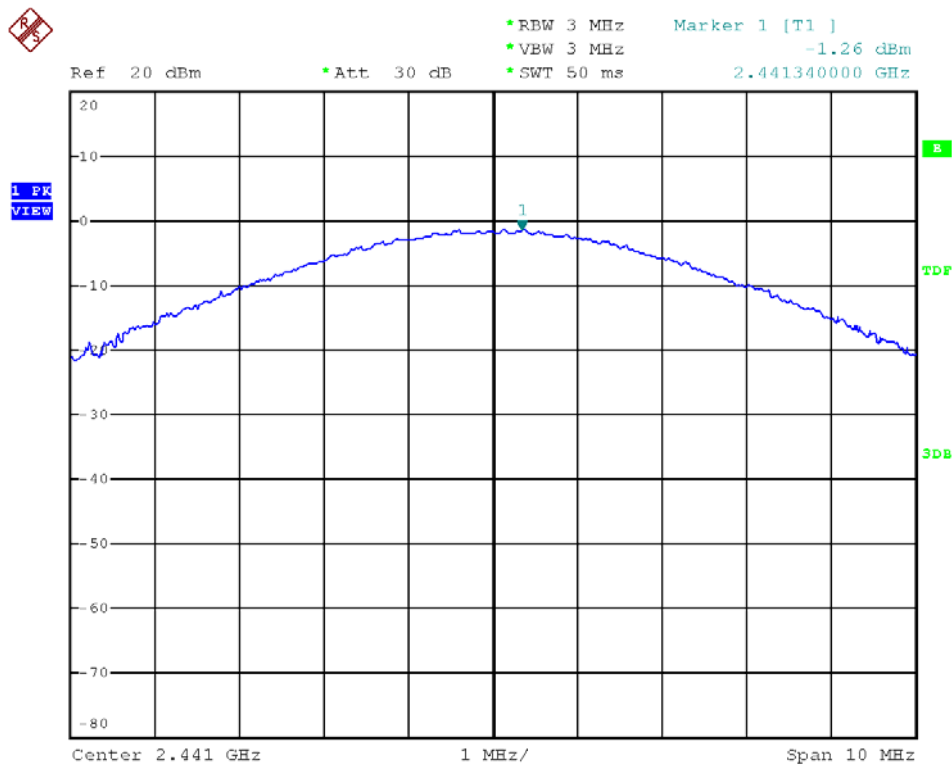




Modulation Standard: GFSK (1Mbps)
Channel: 78




Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] -3.08 dBm
*VBW 3 MHz
*SWT 50 ms 2.479920000 GHz

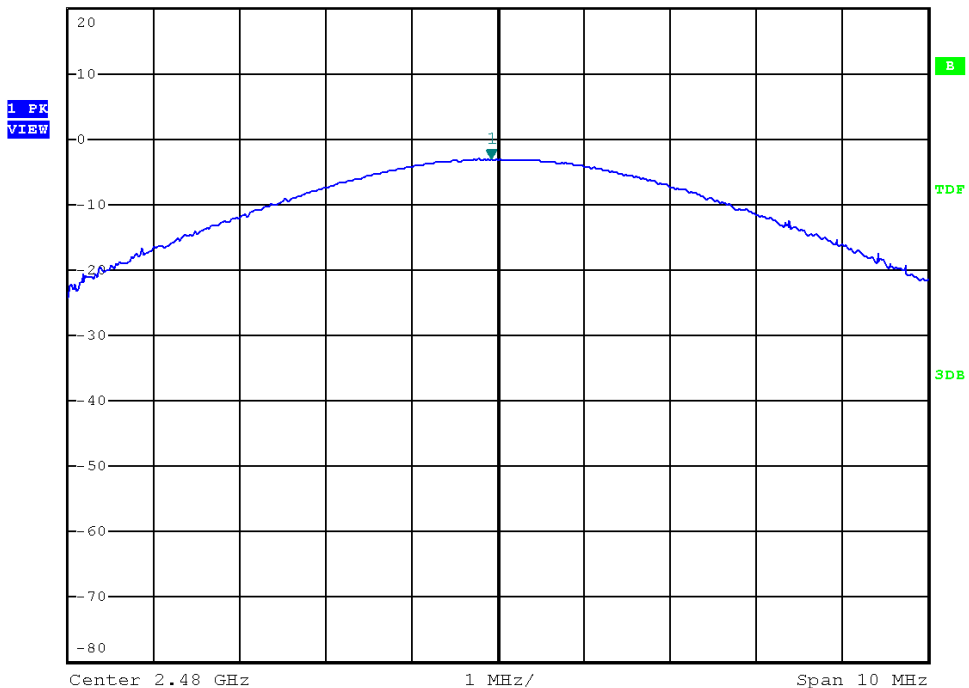

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00



Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] -1.07 dBm
*VBW 3 MHz
*SWT 50 ms 2.401800000 GHz

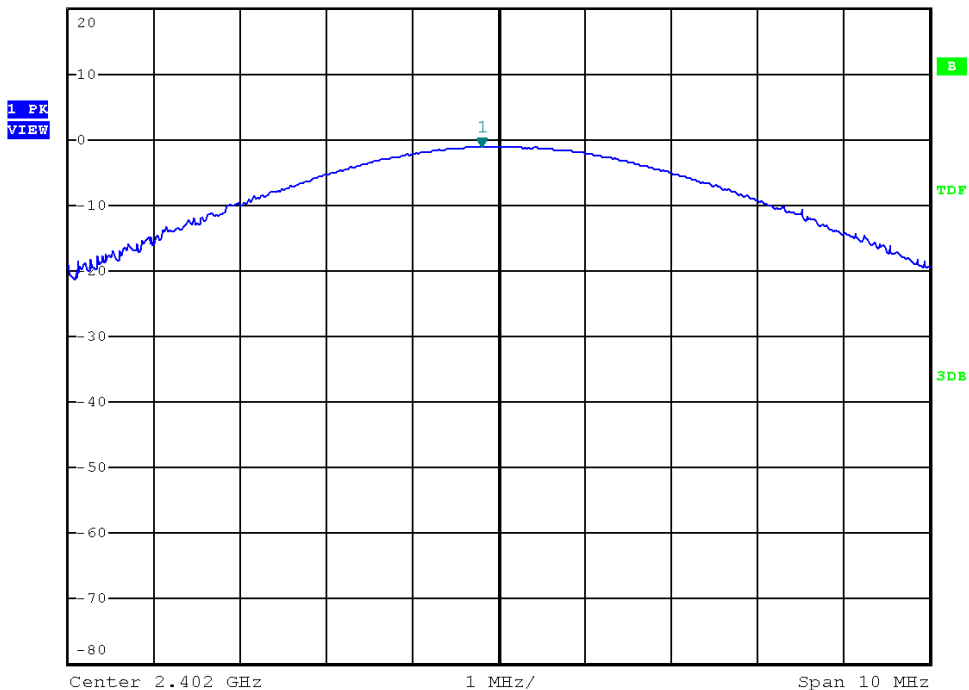




Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39




Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] -1.44 dBm
*VBW 3 MHz *SWT 50 ms 2.440840000 GHz

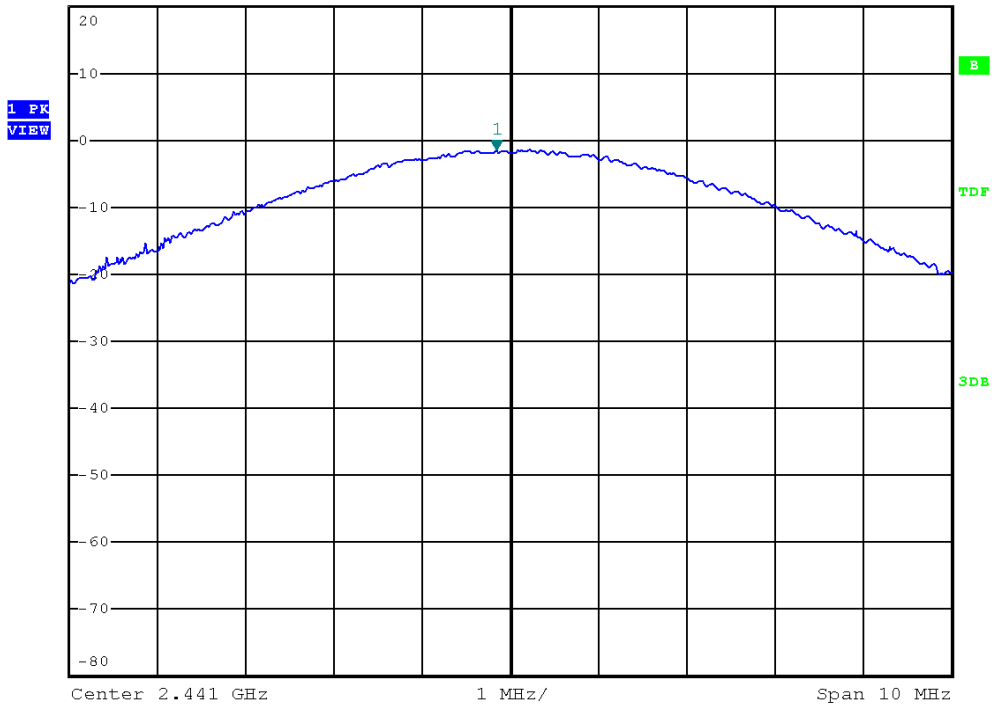

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78



Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] -3.10 dBm
*VBW 3 MHz *SWT 50 ms 2.479860000 GHz

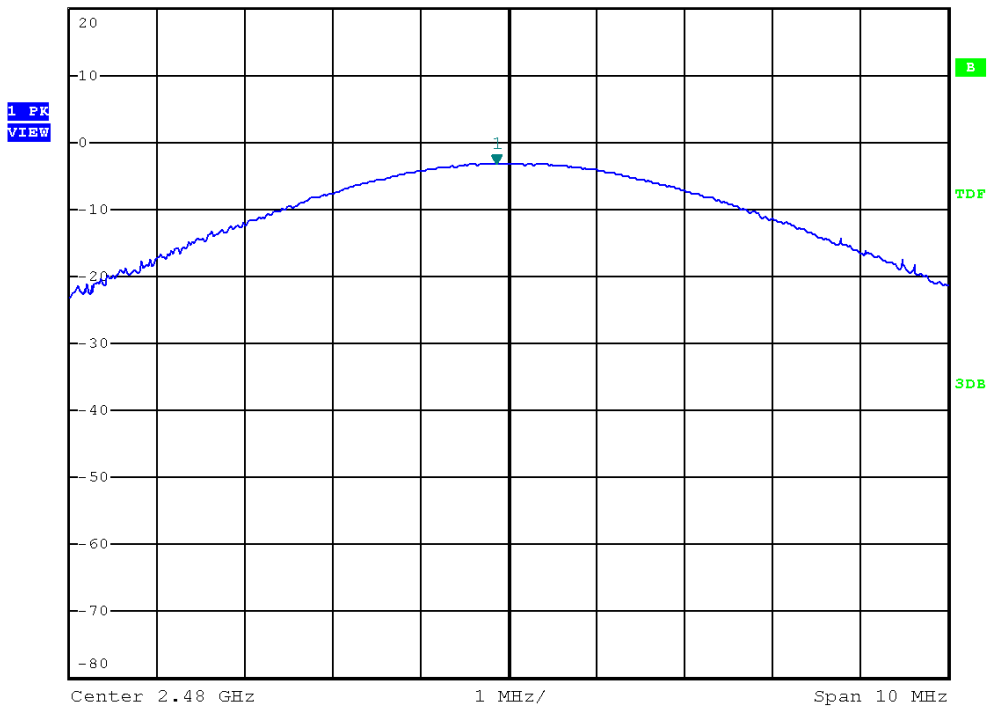




Modulation Standard: 8DPSK (3Mbps)
Channel: 00




Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1]
*VBW 3 MHz -1.04 dBm
*SWT 50 ms 2.402140000 GHz

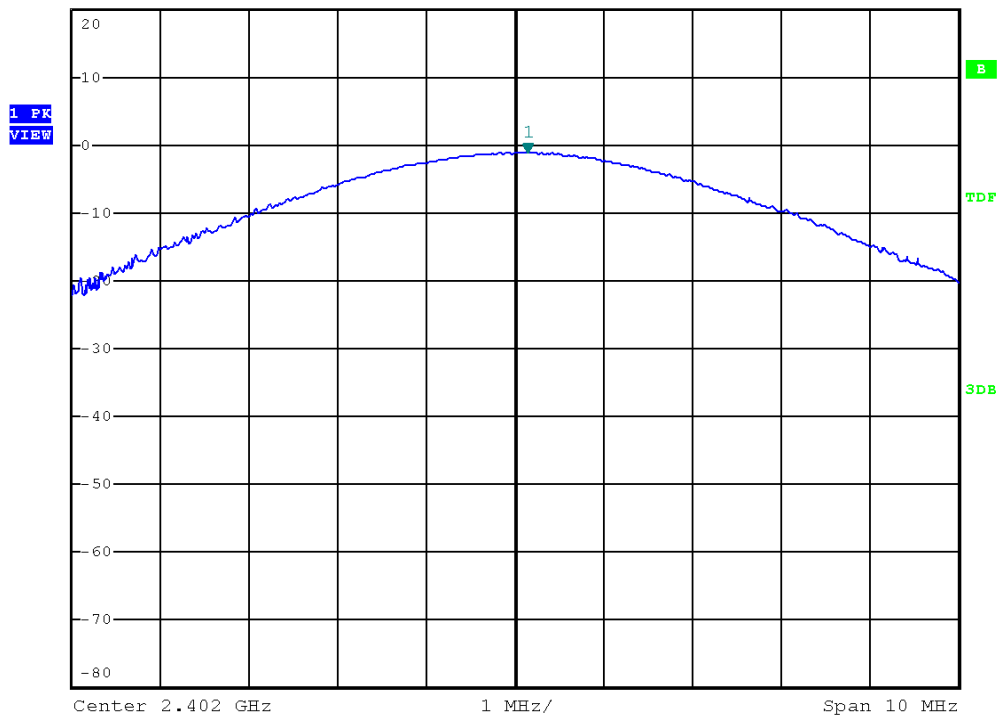

Modulation Standard: 8DPSK (3Mbps)
Channel: 39



Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1]
*VBW 3 MHz -1.64 dBm
*SWT 50 ms 2.441140000 GHz

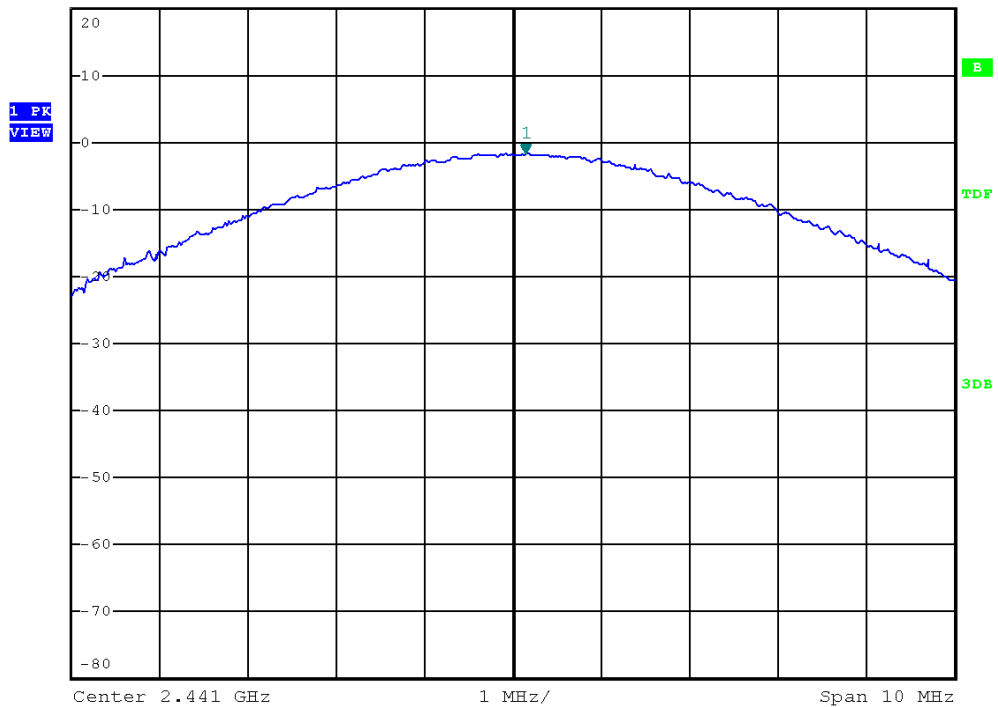




Modulation Standard: 8DPSK (3Mbps)
Channel: 78



*RBW 3 MHz Marker 1 [T1]
*VBW 3 MHz -3.04 dBm
*SWT 50 ms 2.479880000 GHz

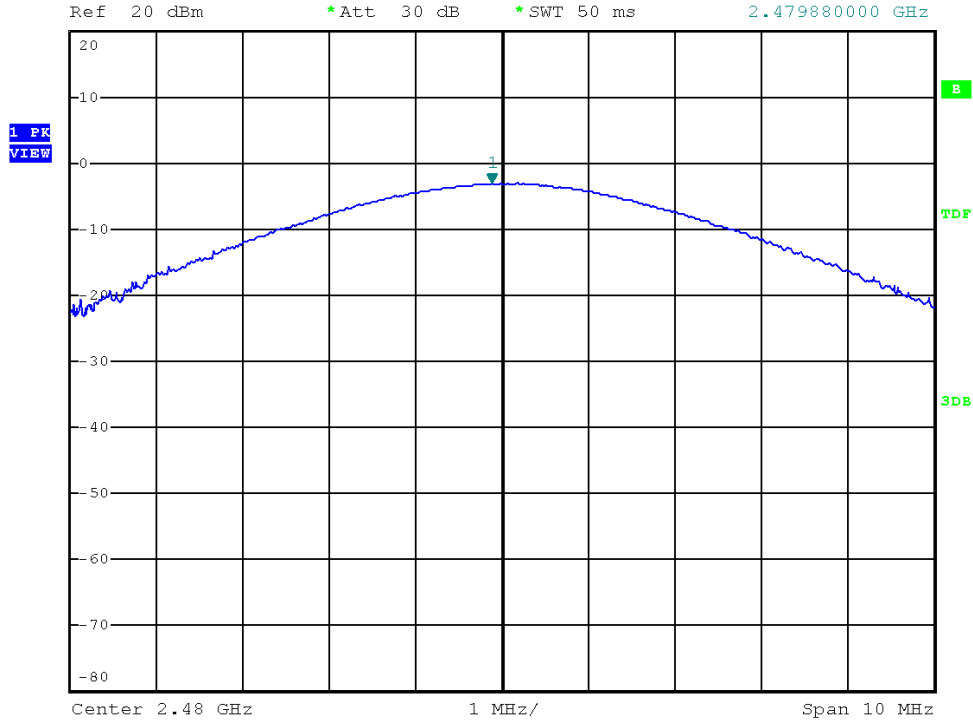



11. Band Edges Measurement


11.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

11.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

11.3 Test Setup Layout



11.4 List of Measuring Equipment Used

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28

11.5 Test Result and Data

Modulation Standard: GFSK (1Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
00	2402	2399.80	-42.05
78	2480	2483.50	-48.40



Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
00	2402	2399.80	-38.18
78	2480	2483.50	-49.18

Modulation Standard: 8DPSK (3Mbps)

Test Date: Jul. 05, 2012

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %


Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
00	2402	2400.00	-41.84
78	2480	2483.90	-51.20




Modulation Standard: GFSK (1Mbps)
Channel: 00



Ref 10 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1] -42.05 dBm
*VBW 300 kHz *SWT 125 ms 2.399800000 GHz

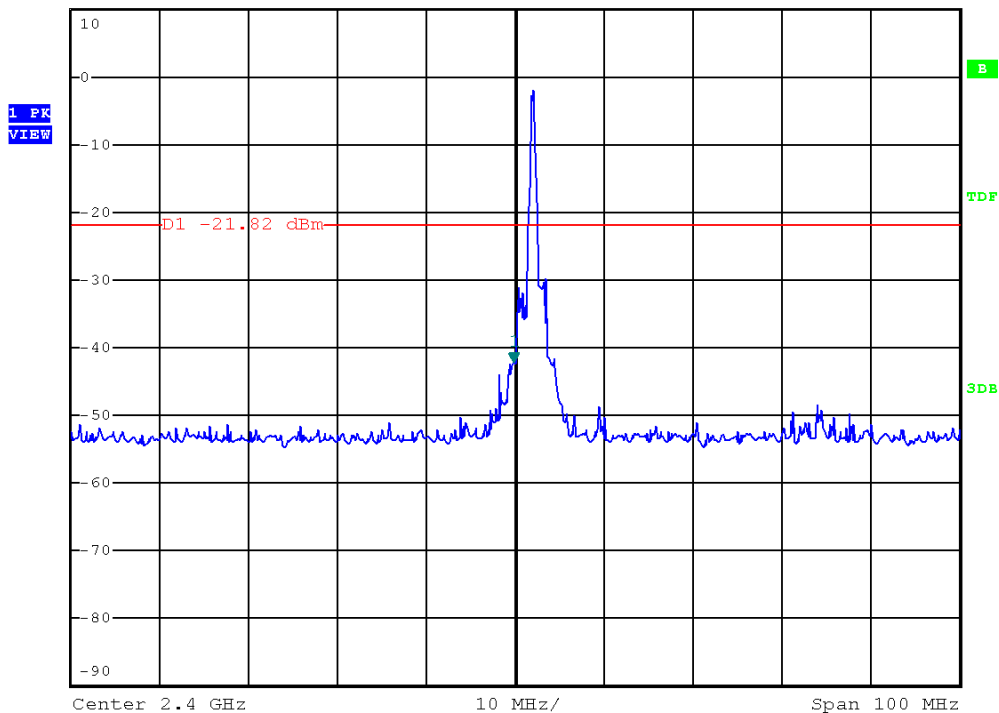

Ref 0 dBm *Att 10 dB *RBW 100 kHz Marker 1 [T1] -62.51 dBm
*VBW 300 kHz SWT 2.25 s 21.535000000 GHz

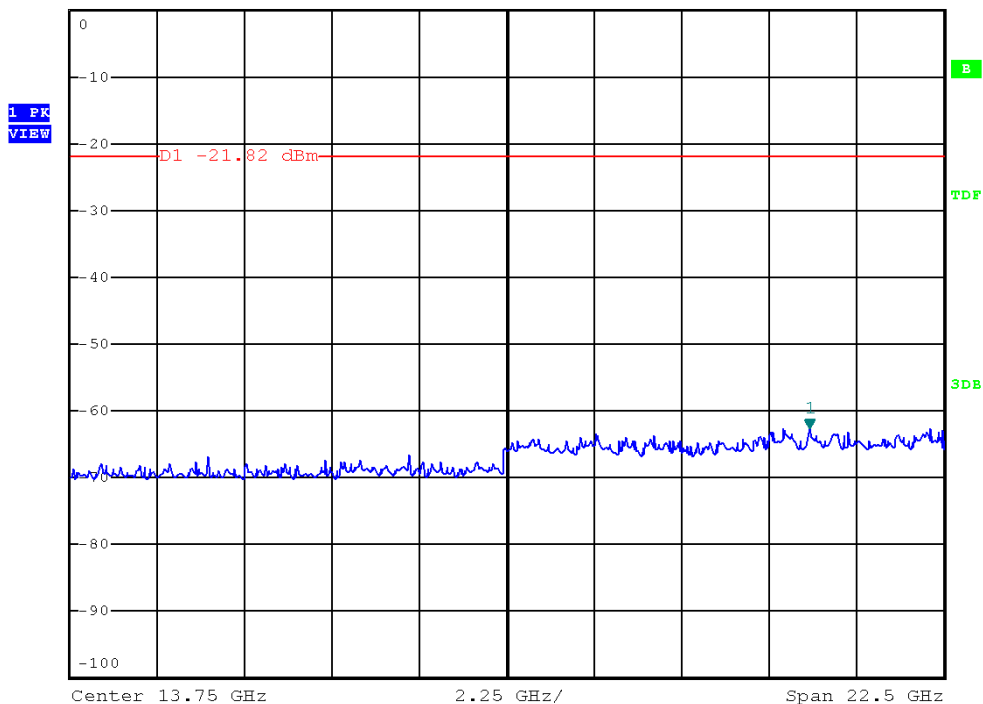





Modulation Standard: GFSK (1Mbps)
Channel: 78



Ref 10 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -48.40 dBm
*SWT 125 ms 2.483500000 GHz


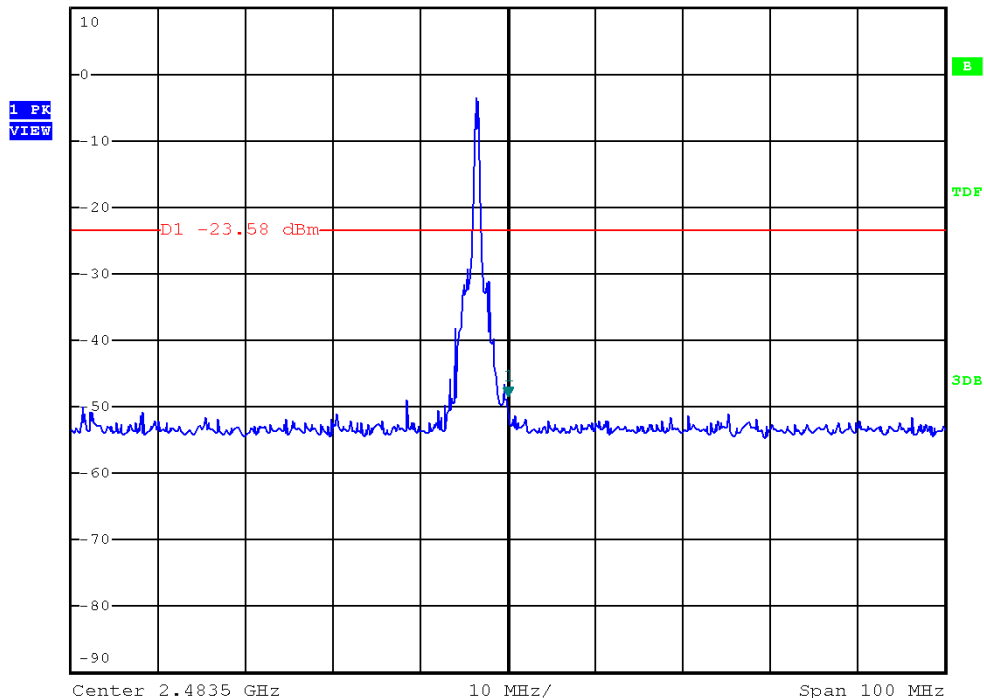


Ref 0 dBm *Att 10 dB *RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -62.14 dBm
SWT 2.25 s 23.875000000 GHz

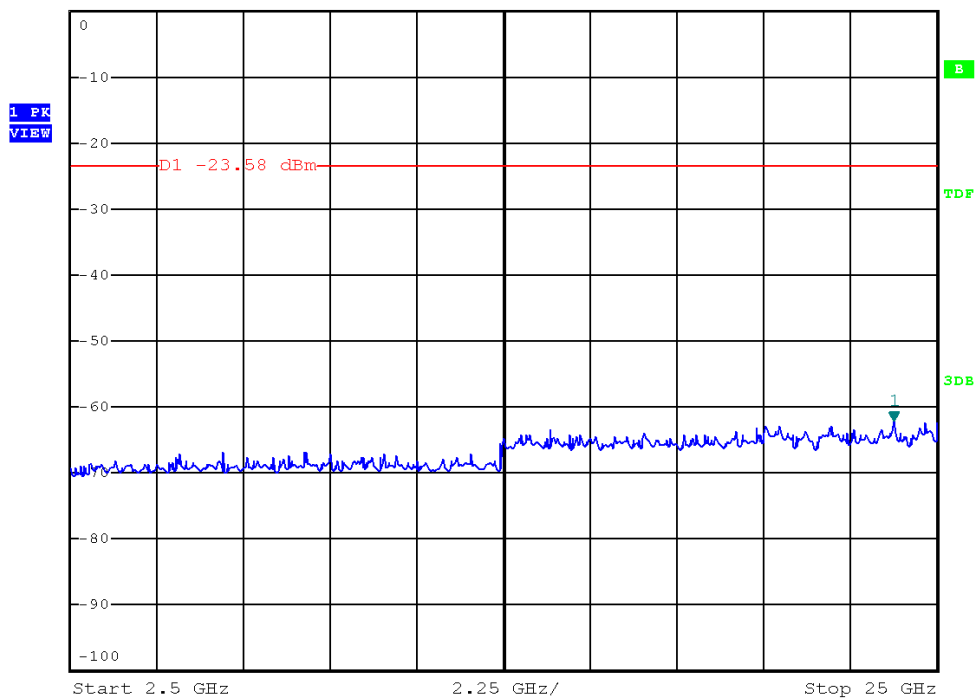





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

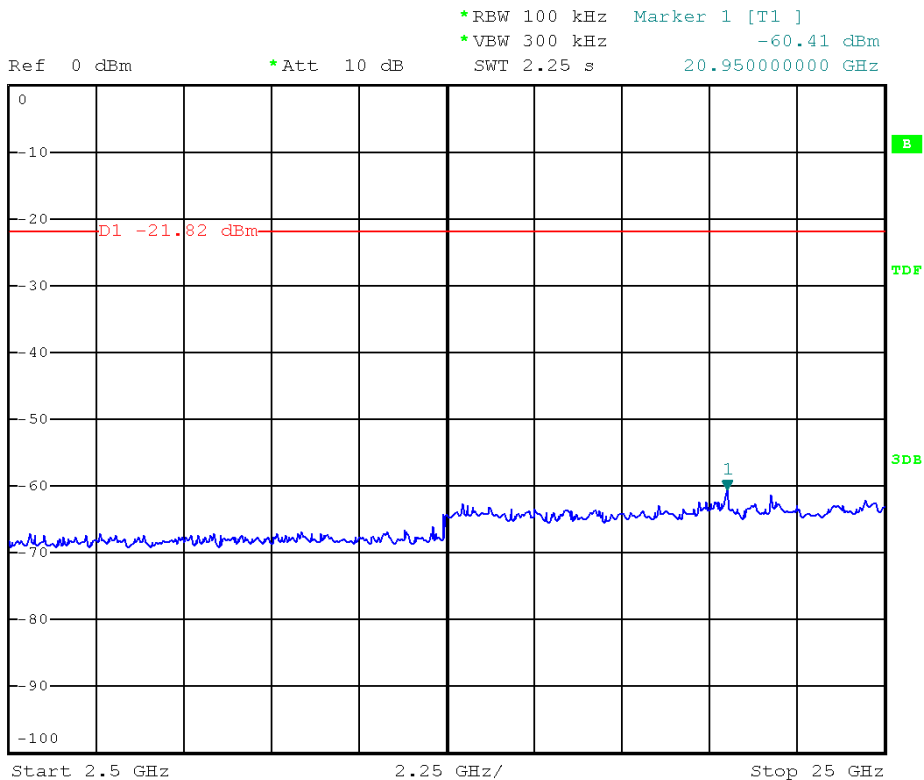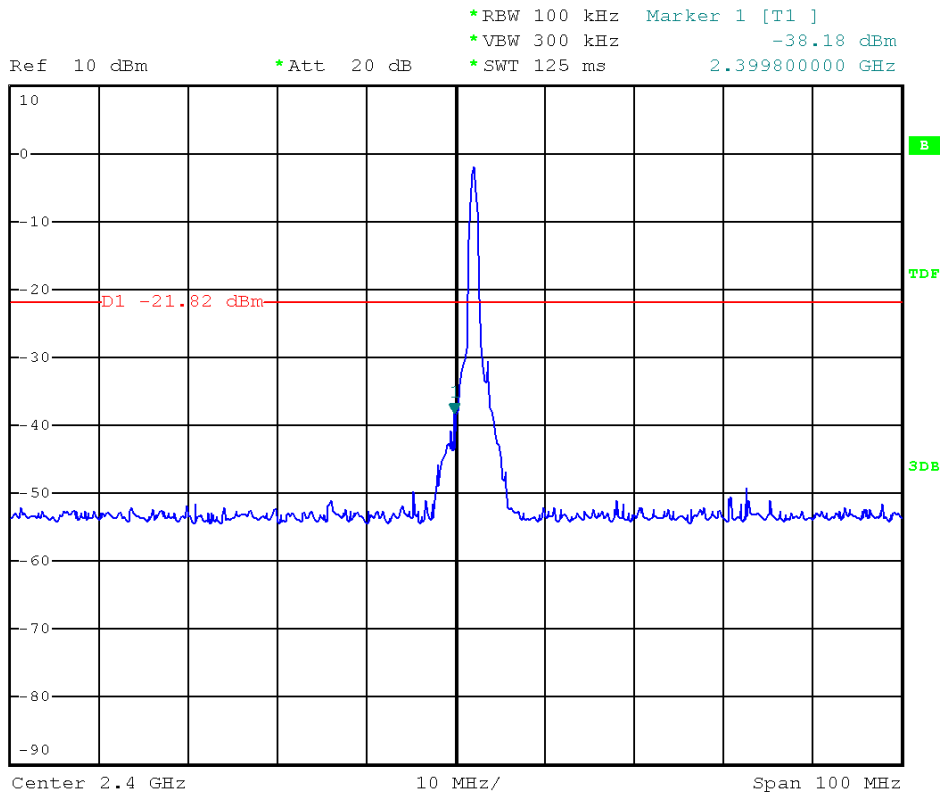





Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

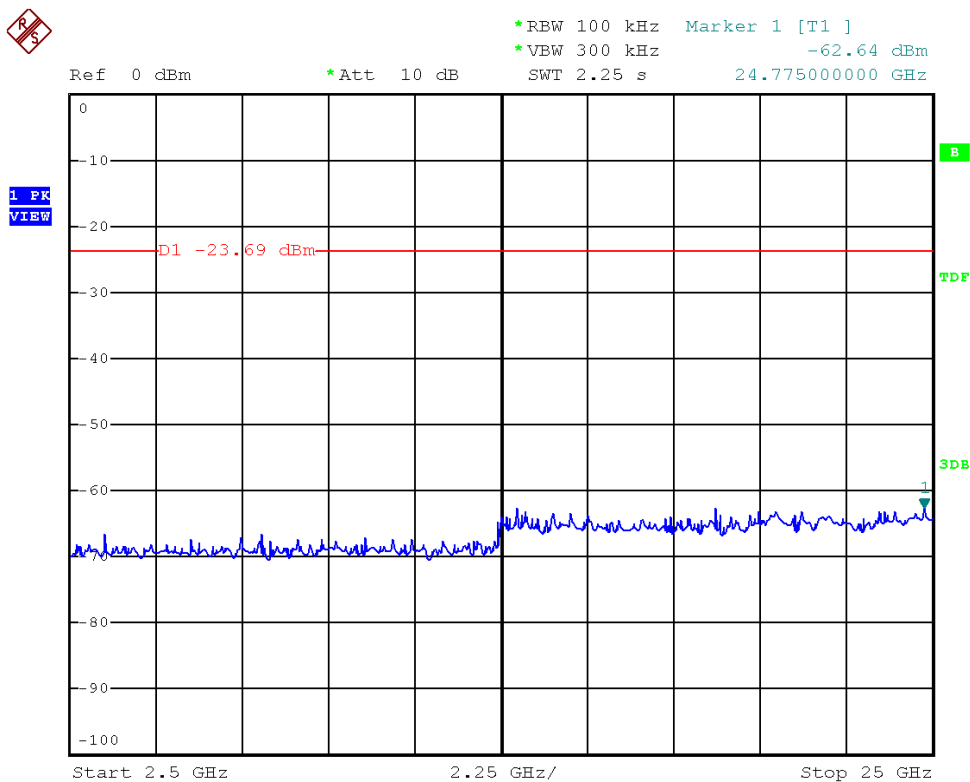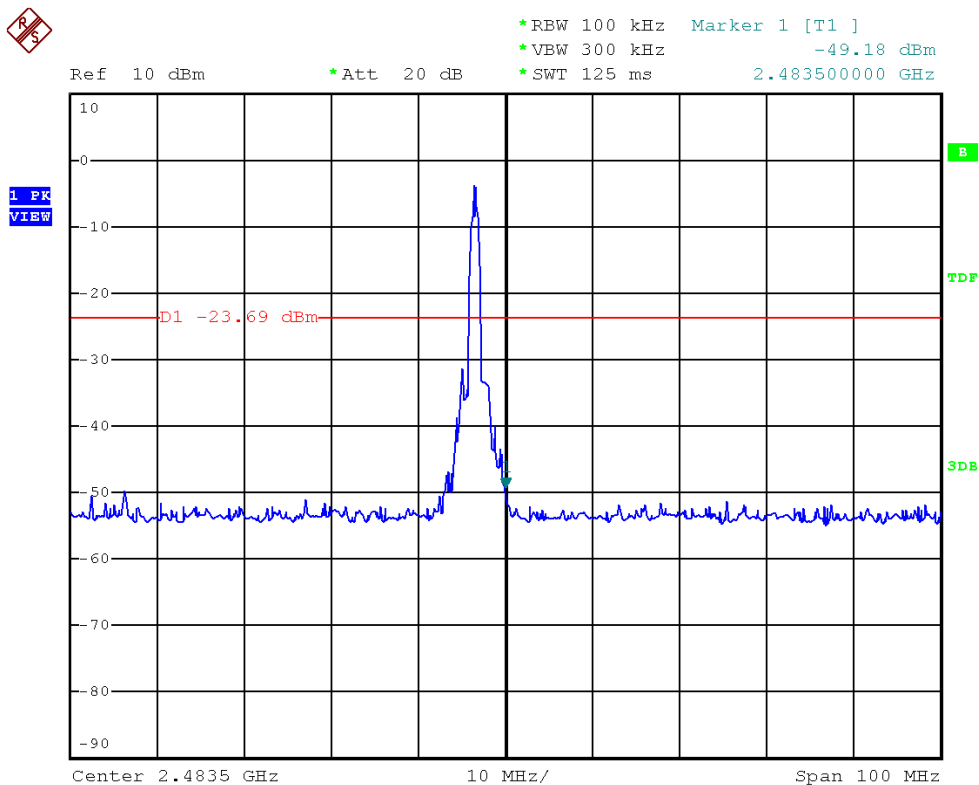





Modulation Standard: 8DPSK (3Mbps)

Channel: 00

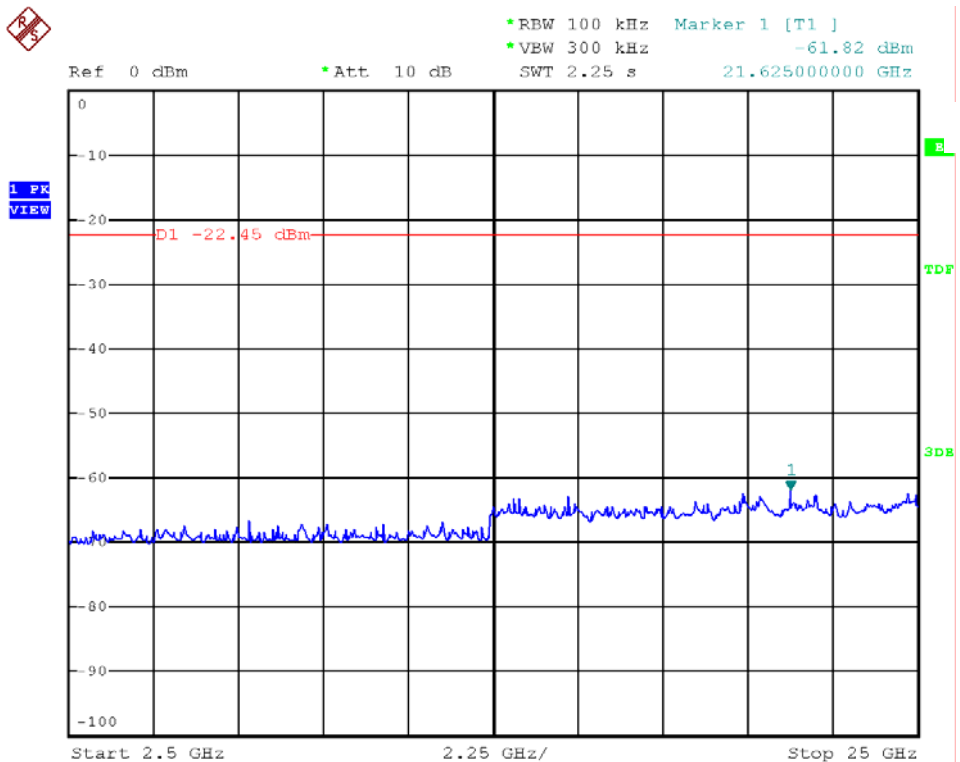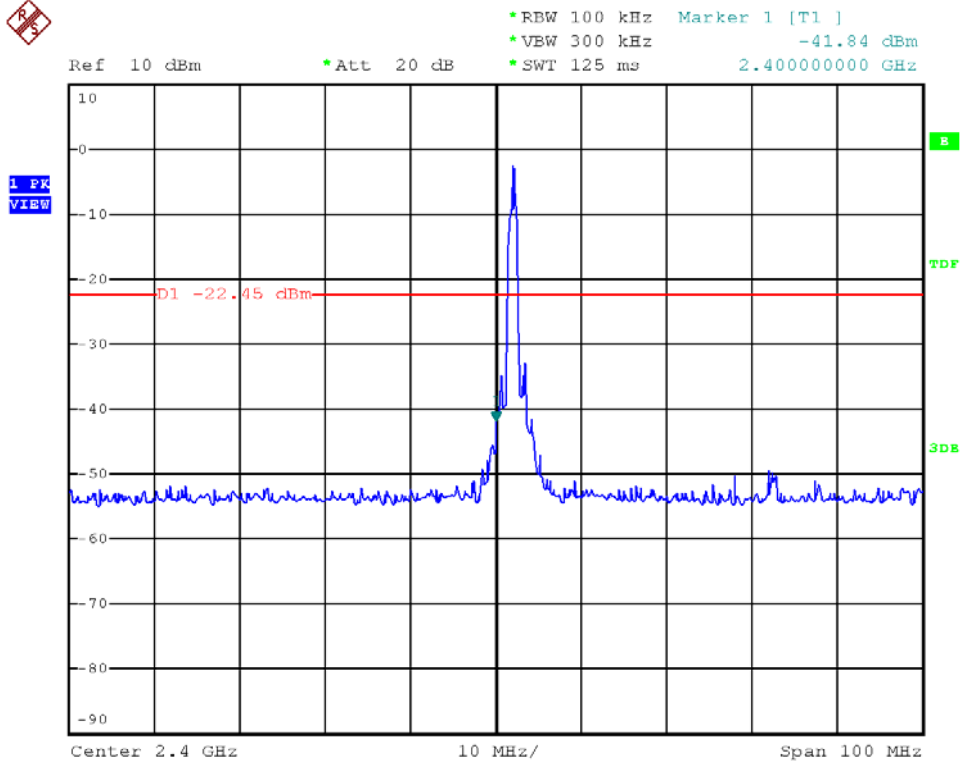



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

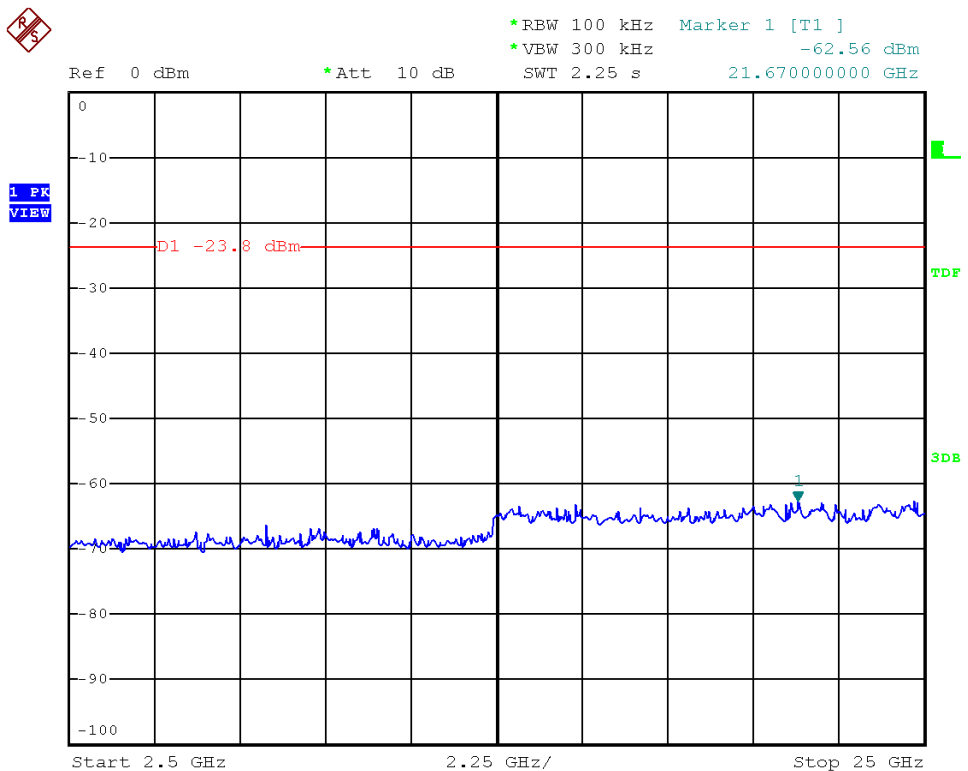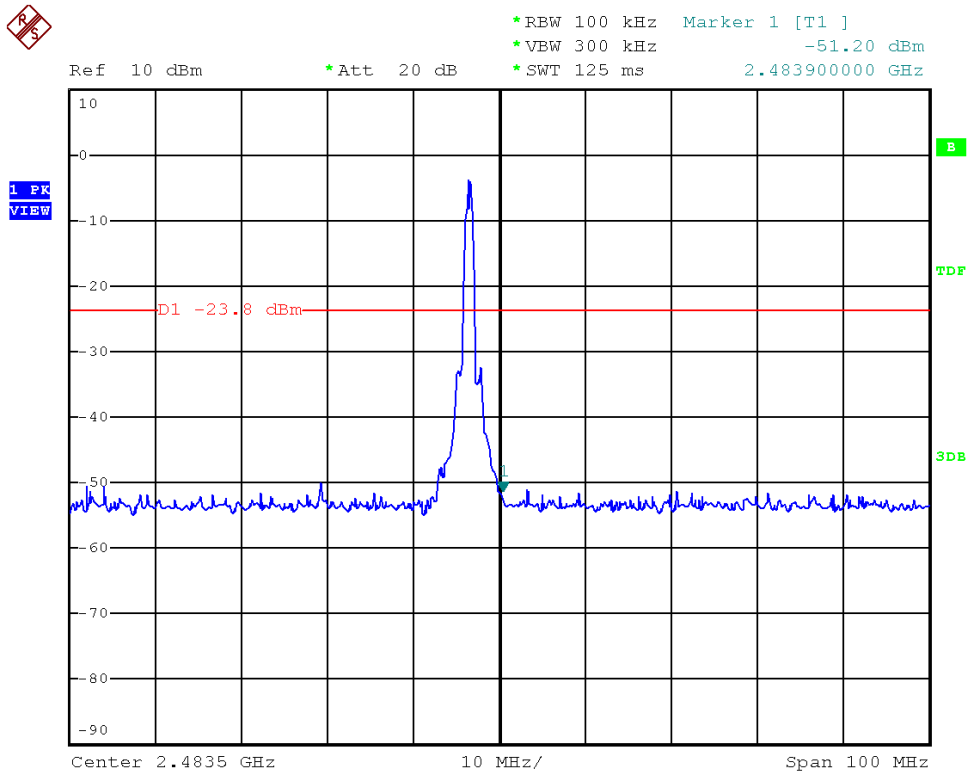



11.6 Restrict band emission Measurement Data

Test Date : Jul. 10, 2012
 Temperature : 25
 Humidity : 63 %
 Atmospheric Pressure : 1014 hPa
 Modulation Standard : GFSK (1Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2381.80	H	49.08	1.65	50.73	Peak	74	54	-23.27	360	1.00
--	H	---	---	---	Ave	74	54	---	---	---
2330.00	V	56.67	3.25	59.92	Peak	74	54	-14.08	360	1.00
2327.60	V	36.50	3.28	39.78	Ave	74	54	-14.22	360	1.00
Channel 78						Fundamental Frequency: 2480 MHz				
2487.09	H	49.09	0.24	49.33	Peak	74	54	-24.67	0	1.00
--	H	---	---	---	Ave	74	54	---	---	---
2486.52	V	48.74	-2.51	46.23	Peak	74	54	-27.77	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



Test Date : Jul. 10, 2012
 Temperature : 25
 Humidity : 63 %
 Atmospheric Pressure : 1014 hPa
 Modulation Standard : $\pi/4$ -DQPSK (2Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2381.15	H	49.10	1.65	50.75	Peak	74	54	-23.25	0	1.00
---	H	---	---	---	Ave	74	54	---	---	---
2381.61	V	49.13	2.39	51.52	Peak	74	54	-22.48	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---
Channel 78						Fundamental Frequency: 2480 MHz				
2485.47	H	48.95	0.27	49.22	Peak	74	54	-24.78	0	1.00
---	H	---	---	---	Ave	74	54	---	---	---
2485.68	V	49.23	-2.46	46.77	Peak	74	54	-27.23	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



Test Date : Jul. 10, 2012
 Temperature : 25
 Humidity : 63 %
 Atmospheric Pressure : 1014 hPa
 Modulation Standard : 8DPSK (3Mbps)

Channel 0						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2378.08	H	49.19	1.66	50.85	Peak	74	54	-23.15	0	1.00
---	H	---	---	---	Ave	74	54	---	---	---
2381.61	V	49.28	2.39	51.67	Peak	74	54	-22.33	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---
Channel 78						Fundamental Frequency: 2480 MHz				
2486.81	H	49.17	0.25	49.42	Peak	74	54	-24.58	0	1.00
---	H	---	---	---	Ave	74	54	---	---	---
2489.04	V	53.32	-2.63	50.69	Peak	74	54	-23.31	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



12. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

12.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.