



Test Report No:
2370861R-RFUSV01S-A

TEST REPORT

FCC Rules&Regulations

Product Name	ELD
Brand Name	RollingTrans
Model No.	RTEL47
FCC ID	UP589ELD3647I
Applicant's Name / Address	ATBS Technology Co. 8F, NO.68, SEC 3, NANJING E. RD., ZHONGSHAN DIST., TAIPEI CITY, TAIWAN (R.O.C.)
Manufacturer's Name / Address	ATBS Technology Co. 8F, NO.68, SEC 3, NANJING E. RD., ZHONGSHAN DIST., TAIPEI CITY, TAIWAN (R.O.C.)
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By	<i>Hailey Peng</i> Hailey Peng
Approved By	<i>Rueyuan Lin</i> Rueyuan Lin
Date of Receipt	Jul. 26, 2023
Date of Issue	Oct. 03, 2023
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions.....	4
Revision History.....	5
Summary of Test Result.....	6
Comments and Remarks.....	6
1. General Information.....	7
1.1. EUT Description.....	7
1.2. EUT Information.....	7
1.3. Testing Applied Standards.....	7
1.4. Testing Location Information.....	8
1.5. Measurement Uncertainty.....	8
1.6. List of Test Equipment.....	9
2. Test Configuration of EUT.....	10
2.1. Test Condition.....	10
2.2. Test Frequency Mode.....	10
2.3. Duty Cycle.....	11
2.4. The Worst Case Measurement Configuration.....	12
2.5. Tested System Details.....	13
2.6. Configuration of Tested System.....	13
3. Occupied Bandwidth & DTS Bandwidth.....	14
3.1. Test Setup.....	14
3.2. Test Limit.....	14
3.3. Test Procedures.....	14
3.4. Test Result of Occupied Bandwidth & DTS Bandwidth.....	14
4. Maximum Conducted Output Power.....	15
4.1. Test Setup.....	15
4.2. Test Limit.....	15
4.3. Test Procedures.....	15
4.4. Test Result of Maximum Conducted Output Power.....	15
5. Maximum Power Spectral Density.....	16
5.1. Test Setup.....	16
5.2. Test Limit.....	16
5.3. Test Procedures.....	16
5.4. Test Result of Maximum Power Spectral Density.....	16
6. Antenna Port Conducted Emission.....	17
6.1. Test Setup.....	17

6.2.	Test Limit	17
6.3.	Test Procedure	17
6.4.	Test Result of Antenna Port Conducted Emission	17
7.	Transmitter Radiated Spurious Emission	18
7.1.	Test Setup	18
7.2.	Test Limit	19
7.3.	Test Procedure	19
7.4.	Test Result of Transmitter Radiated Spurious Emission	19
Appendix A. Test Result of Occupied Bandwidth & DTS Bandwidth		
Appendix B. Test Result of Maximum Conducted Output Power		
Appendix C. Test Result of Maximum Power Spectral Density		
Appendix D. Test Result of Antenna Port Conducted Emission		
Appendix E. Test Result of Transmitter Radiated Spurious Emission		
Appendix F. Test Setup Photograph		

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Oct. 03, 2023

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
-	AC Power Line Conducted Emission	N/A	Note 1
3	Occupied Bandwidth & DTS Bandwidth	PASS	-
4	Maximum Conducted Output Power	PASS	-
5	Maximum Power Spectral Density	PASS	-
6	Antenna Port Conducted Emission	PASS	-
7	Transmitter Radiated Spurious Emission	PASS	-

Note:

1. It was supplied power by DC-Powered for EUT. It's not necessary to apply to AC Power Line Conducted Emission test.
2. The testing voltage is DC 5V (from fixture), and the EUT normal voltage is DC 12V. After evaluating, the EUT normal voltage (DC 12V) was performed test for FCC Part 15 Subpart B test report only (Please refer to the DEKRA Report No.: 2370861R-0E3012110014-A for detail.).

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1. General Information

1.1. EUT Description

Frequency Range	2400 ~ 2483.5 MHz
Operating Frequency	1 Mbps: 2402 ~ 2480 MHz 2 Mbps: 2402 ~ 2480 MHz
Channel Number	1 Mbps: 40 Channels 2 Mbps: 40 Channels
Mode	Bluetooth LE
Type of Modulation	GFSK

Antenna Information				
Ant.	Brand Name	Model No.	Type	Gain (dBi)
0	RIFO	RA00LPFA00MA000S	Chip	3.2

1.2. EUT Information

EUT Power Type	From DC power (DC 12V)			
EUT Function	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point

1.3. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- ◆ KDB 558074 D01 v05r02
- ◆ KDB 414788 D01 v01r01

1.4. Testing Location Information

Testing Location Information	
Test Laboratory : DEKRA Testing and Certification Co., Ltd.	
1 (TAF: 3024)	ADD: No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958
2 (TAF: 3024)	ADD: No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958
Test site number for address 1 includes HC-SR02. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.	

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted Emission	HC-SR12	Clemens Fang	21 / 68	2023/07/26
Radiated Emission	HC-CB04	Scott Chang	22.5 / 58	2023/08/03

1.5. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Test item	Uncertainty
Occupied Bandwidth & DTS Bandwidth	± 282.55 Hz
Maximum Conducted Output Power	± 1.16 dB
Maximum Power Spectral Density	± 2.47 dB
Antenna Port Conducted Emission	± 2.47 dB
Transmitter Radiated Spurious Emission	± 3.52 dB below 1 GHz ± 3.56 dB above 1 GHz

1.6. List of Test Equipment

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
High Speed Peak Power Meter Dual Input	Anritsu	ML2496A	1602004	0.3-40 GHz	2022/11/02	2023/11/01
Pulse Power Sensor	Anritsu	MA2411B	1531043	0.3-40 GHz	2022/11/02	2023/11/01
EXA Signal Analyzer	Keysight	N9010A	MY51440132	10 Hz-44 GHz	2022/12/13	2023/12/12
Pulse Power Sensor	Anritsu	MA2411B	1531044	0.3-40 GHz	2022/11/02	2023/11/01
Signal & Spectrum Analyzer	R&S	FSV40	101869	10Hz-40GHz	2023/07/03	2024/07/02

HC-CB04

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal and Spectrum Analyzer	R&S	FSVA40	101435	10 Hz-40 GHz	2023/05/29	2024/05/28
Signal Analyzer	R&S	FSVA40	101455	10 Hz-40 GHz	2022/09/29	2023/09/28
EXA Signal Analyzer	Keysight	N9010A	MY51440132	10 Hz-44 GHz	2022/12/13	2023/12/12
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1209	30 MHz-2 GHz	2023/06/13	2024/06/12
Double Ridged Horn Antenna	RF SPIN	DRH18-E	211212A18EN	1G-18GHz	2022/11/15	2023/11/14
Horn Antenna	Schwarzbeck	BBHA 9170	203	18G-40GHz	2023/02/13	2024/02/12
Pre-Amplifier	EMCI	EMC01820I	980364	30M-8 GHz,20 dB	2023/06/06	2024/06/05
Pre-Amplifier	EMEC	EM01G18GA	060835	1-18 GHz,50 dB	2023/07/24	2024/07/23
Pre-Amplifier	DEKRA	AP-400C	201801231	18G-40 GHz,48 dB	2022/09/27	2023/09/26
EMI Test Receiver	R&S	ESR7	102260	10 Hz-7 GHz	2022/12/01	2023/11/30
Magnetic Loop Antenna	Teseq	HLA 6121	44287	0.01-30 MHz	2022/10/21	2023/10/20
Coaxial Cable(10m)	Suhner	SF102_SF104	HC-CB04	30M-18 GHz	2022/08/08	2023/08/07
Coaxial Cable(3m)	Suhner,Rosnol	SF102_UP0264	HC-CB04_1	18G-40 GHz	2022/08/14	2023/08/13
DEKRA Testing System	DEKRA	Version 2.0	HC-CB04	N/A	N/A	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	DC 5V (From fixture)


2.2. Test Frequency Mode

Test Software Version	SmartRF Studio 8 v1.0.0
-----------------------	-------------------------

Modulation	Frequency (MHz)	Power Setting
GFSK (1 Mbps)	2402	Default
	2440	Default
	2480	Default
GFSK (2 Mbps)	2402	Default
	2440	Default
	2480	Default

2.3. Duty Cycle

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

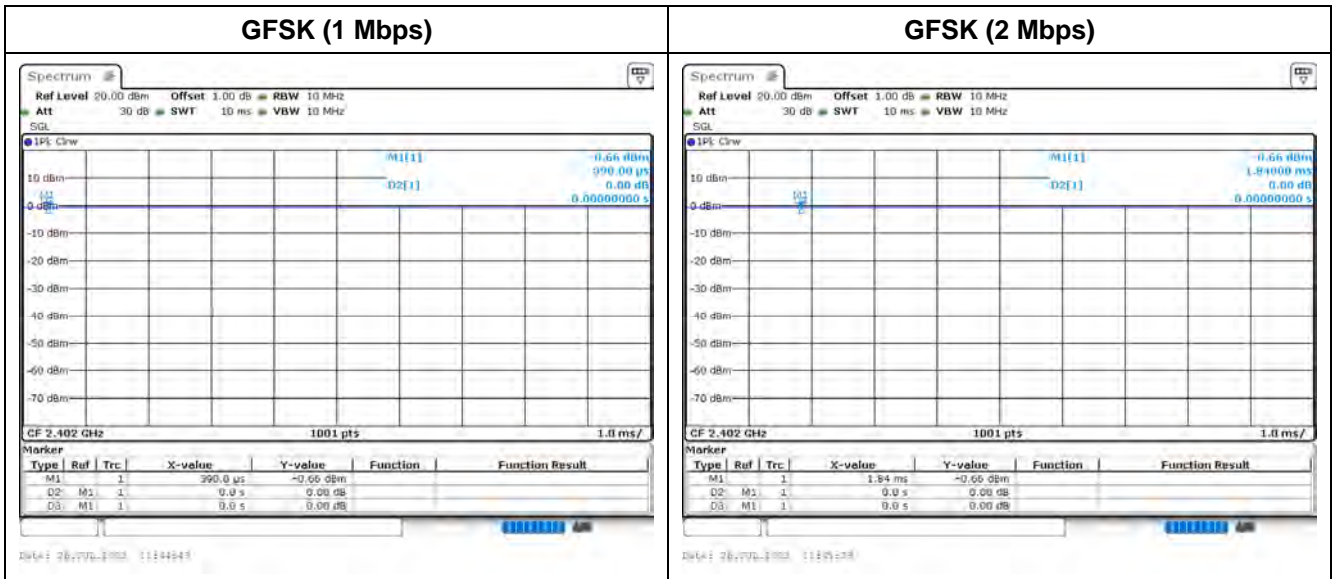

2.4. The Worst Case Measurement Configuration

Tests Item	Occupied Bandwidth & DTS Bandwidth Maximum Conducted Output Power Maximum Power Spectral Density Antenna Port Conducted Emission
Test Condition	Conducted measurement at transmit chains

Tests Item	Transmitter Radiated Spurious Emission
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Transmit
Operating Mode > 1GHz	Transmit


Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For radiated emission below 1 GHz has performed all modes of operation were investigated and the worst-case emissions are reported.

2.5. Tested System Details


No.	Equipment	Brand Name	Model No.	Serial No.
1	Fixture (DevelopmentPad)	TI	LP-XDS110ET	N/A
2	Notebook	DELL	Latitude E6320	8611271467

2.6. Configuration of Tested System

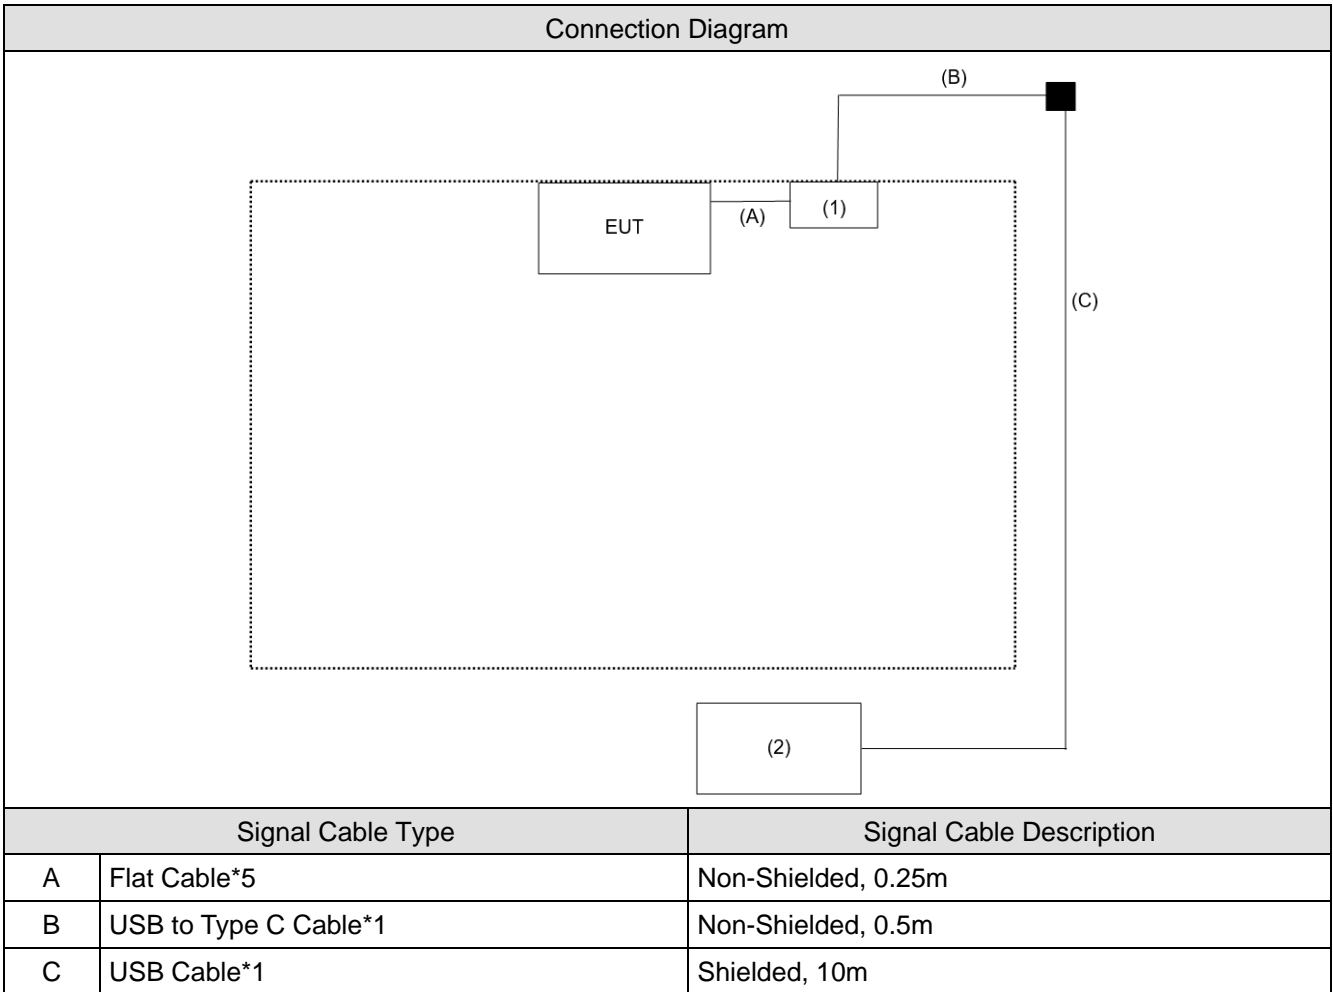

3. Occupied Bandwidth & DTS Bandwidth

3.1. Test Setup

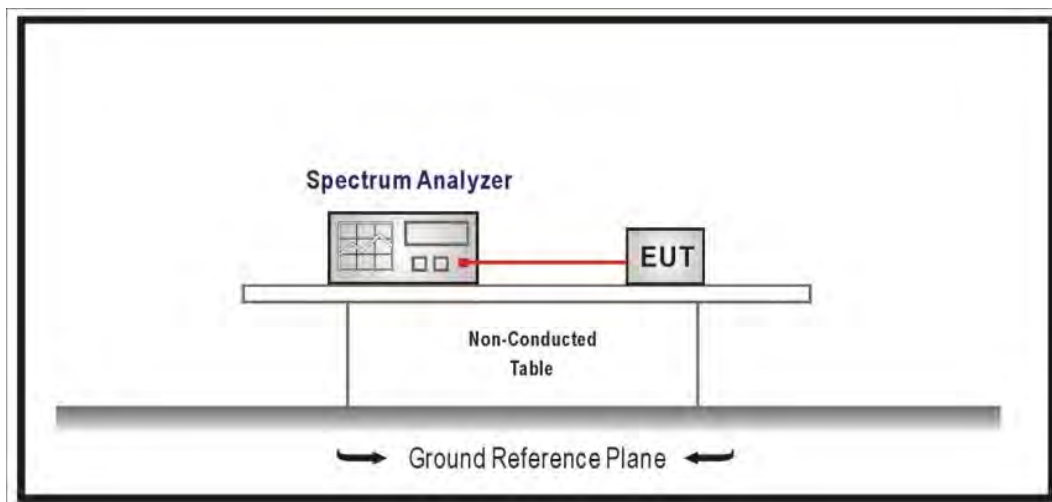

3.2. Test Limit

The 6 dB bandwidth: ≥ 500 kHz.

Occupied Bandwidth: N/A

3.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

3.4. Test Result of Occupied Bandwidth & DTS Bandwidth

Refer as Appendix A

4. Maximum Conducted Output Power

4.1. Test Setup

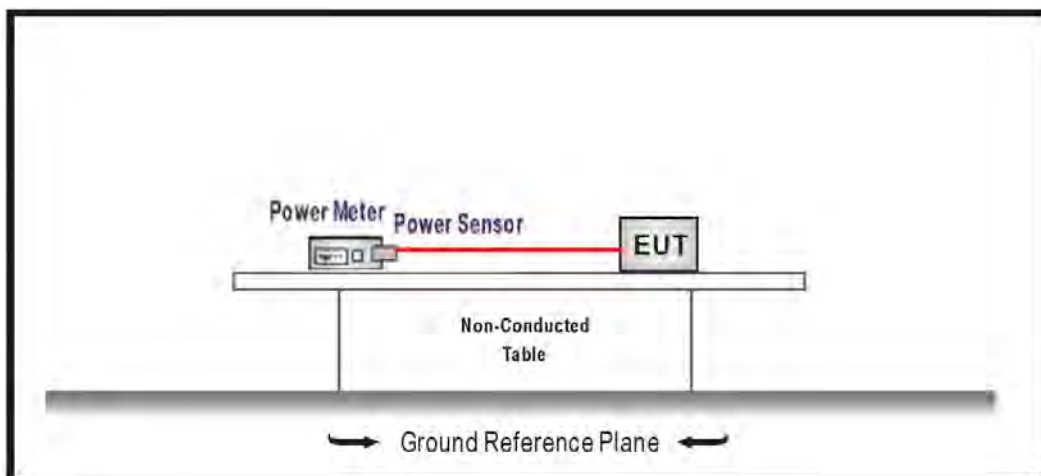

4.2. Test Limit

The Maximum Conducted Output Power shall be less 1 Watt.

4.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

4.4. Test Result of Maximum Conducted Output Power

Refer as Appendix B

5. Maximum Power Spectral Density

5.1. Test Setup

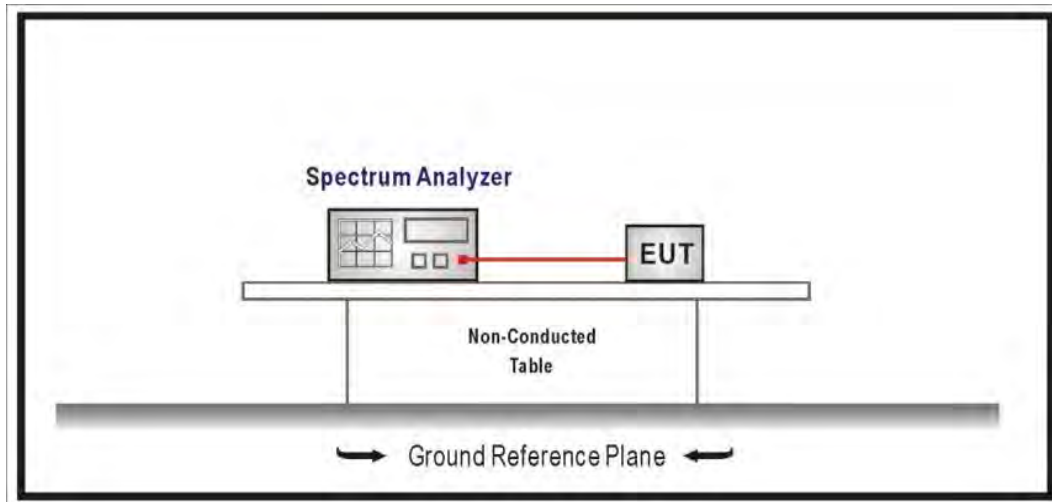

5.2. Test Limit

The peak power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

5.4. Test Result of Maximum Power Spectral Density

Refer as Appendix C

6. Antenna Port Conducted Emission

6.1. Test Setup

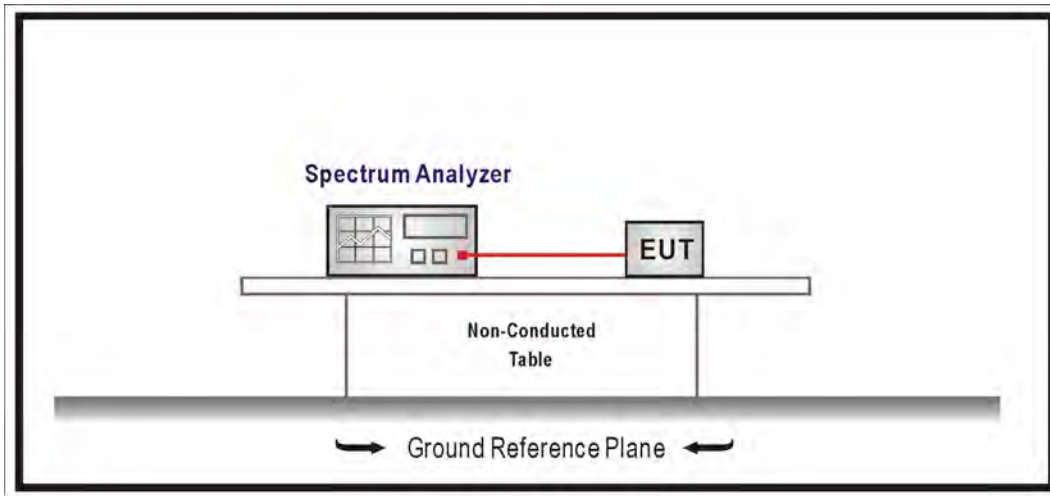

6.2. Test Limit

RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Remarks:

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limit.
2. If the transmitter complies with the conducted power limit based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

6.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.


6.4. Test Result of Antenna Port Conducted Emission

Refer as Appendix D


7. Transmitter Radiated Spurious Emission

7.1. Test Setup


9 kHz ~ 30 MHz

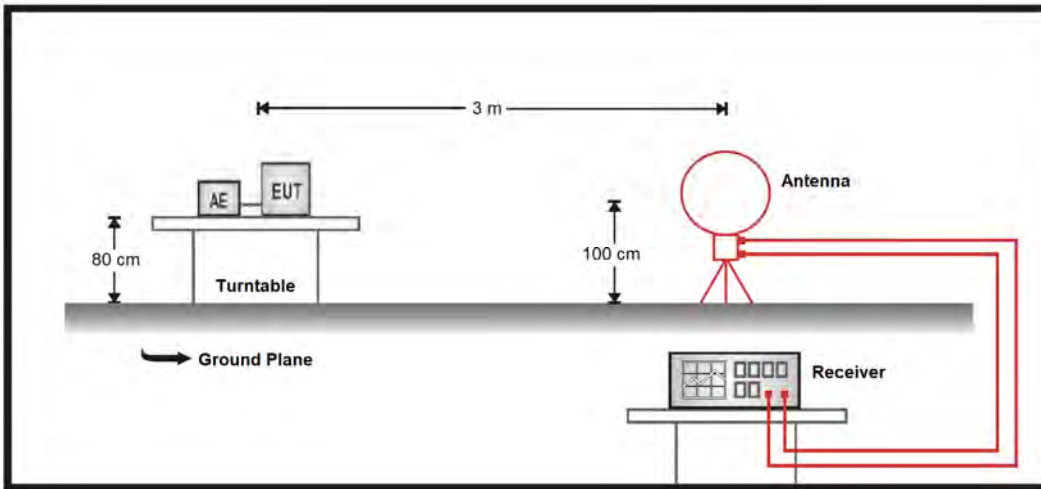

30 MHz ~ 1 GHz

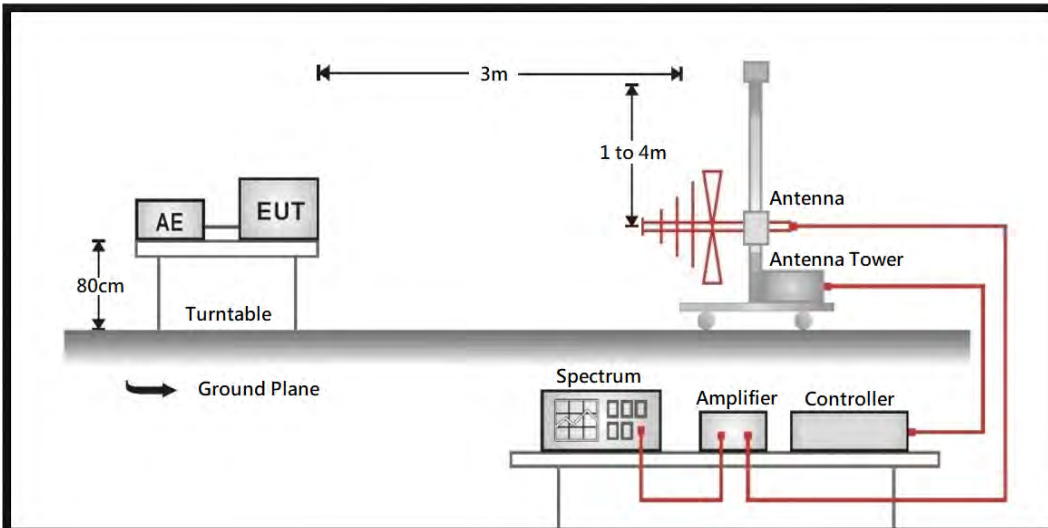

Above 1 GHz

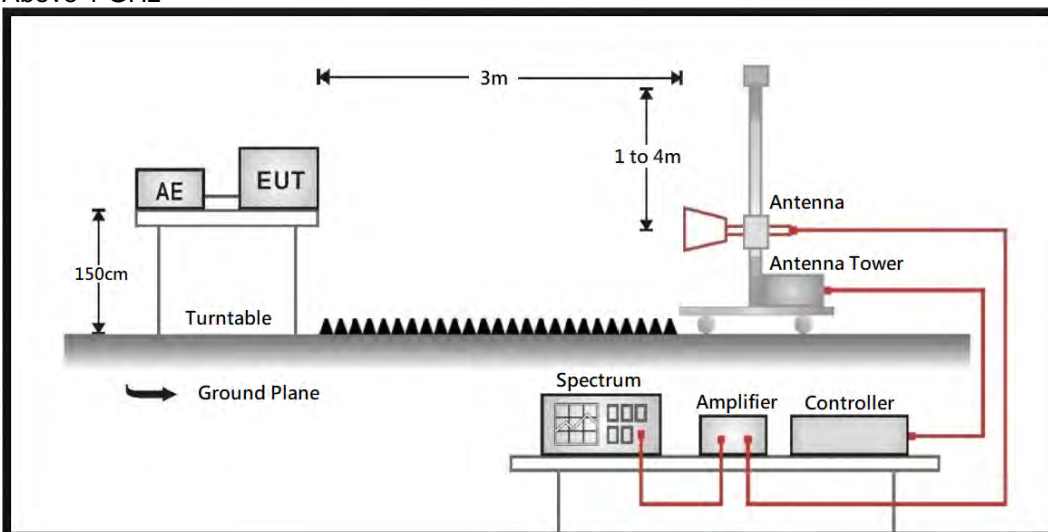

7.2. Test Limit

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9 kHz(include The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1 MHz.


7.4. Test Result of Transmitter Radiated Spurious Emission

Refer as Appendix E


Appendix A.1 Test Result of Occupied Bandwidth

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
GFSK (1 Mbps)	2402	1.093	-
	2440	1.093	-
	2480	1.098	-
GFSK (2 Mbps)	2402	2.127	-
	2440	2.132	-
	2480	2.117	-


GFSK (1 Mbps) / 2402 MHz

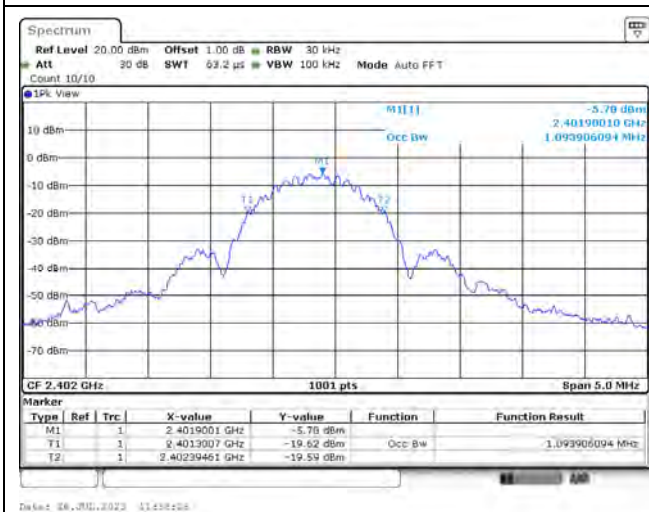


GFSK (1 Mbps) / 2440 MHz

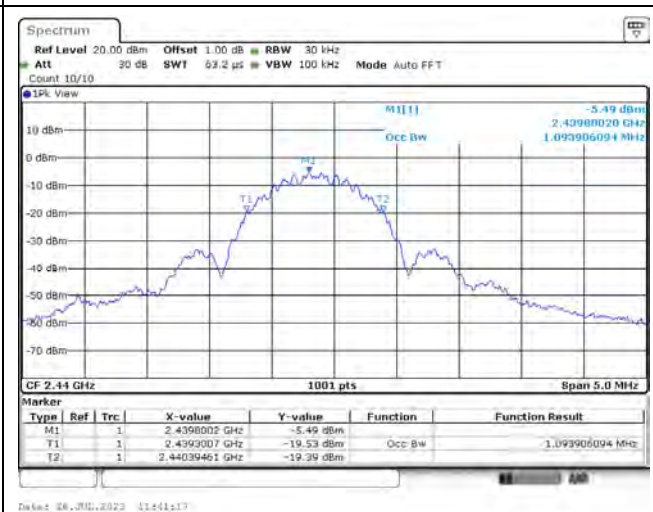


GFSK (1 Mbps) / 2480 MHz

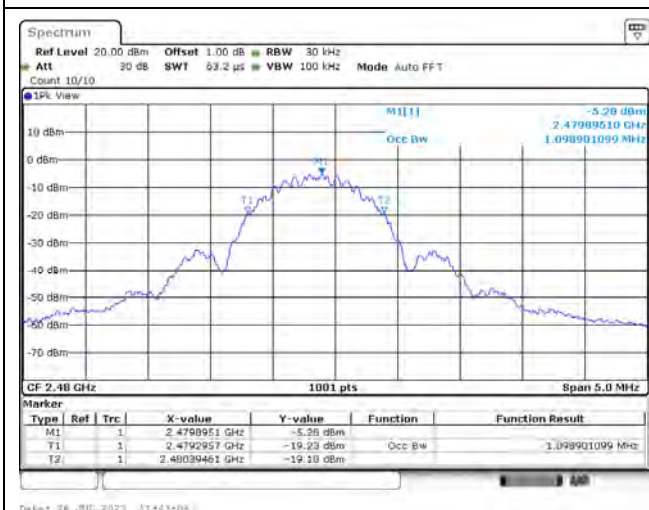


GFSK (2 Mbps) / 2402 MHz

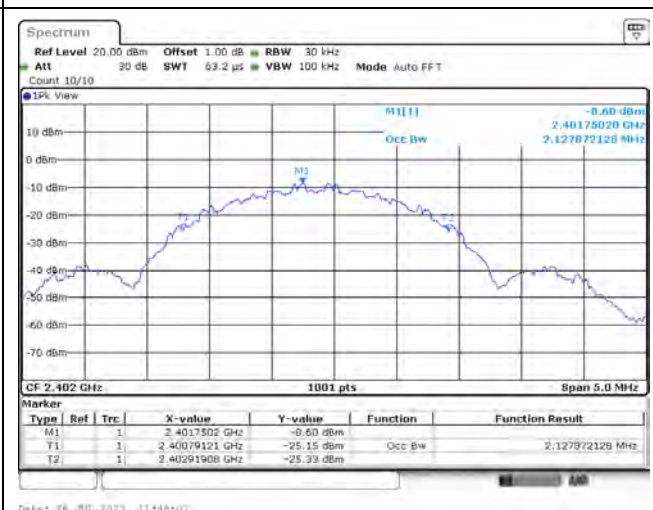

GFSK (2 Mbps) / 2440 MHz

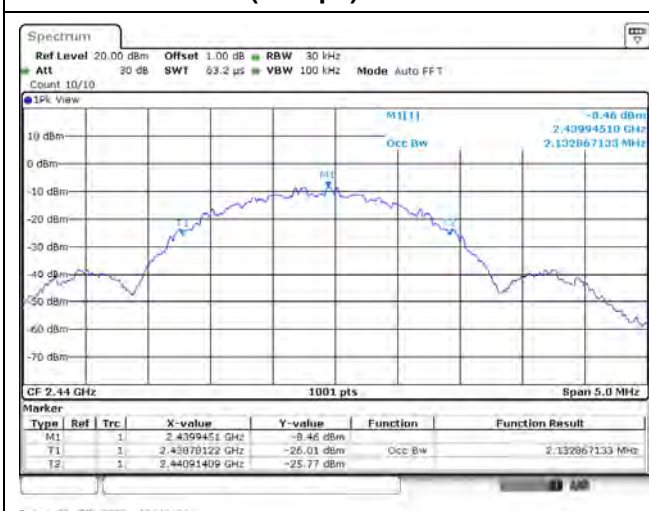


GFSK (2 Mbps) / 2480 MHz

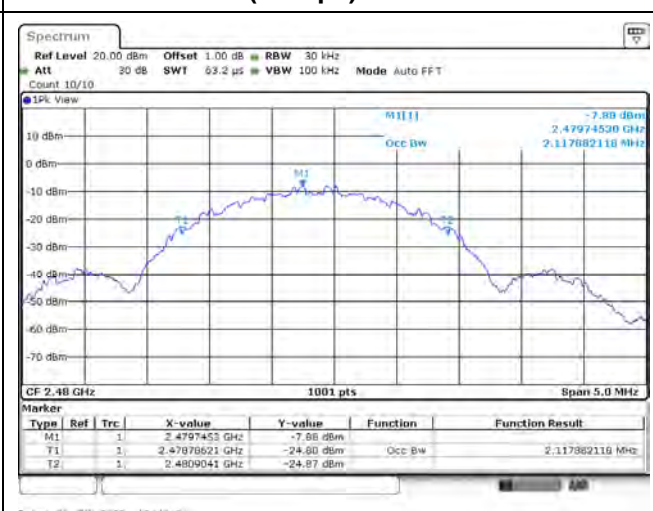


Appendix A.2 Test Result of DTS Bandwidth

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK (1 Mbps)	2402	0.764	0.50	Pass
	2440	0.759	0.50	Pass
	2480	0.759	0.50	Pass
GFSK (2 Mbps)	2402	1.413	0.50	Pass
	2440	1.413	0.50	Pass
	2480	1.408	0.50	Pass


GFSK (1 Mbps) / 2402 MHz

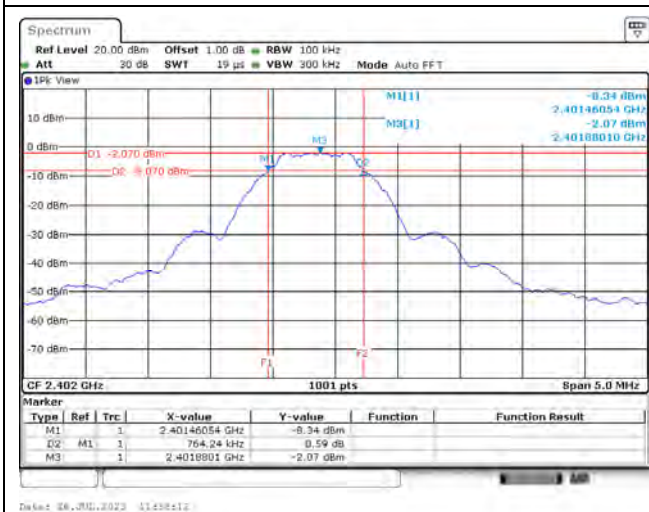


GFSK (1 Mbps) / 2440 MHz

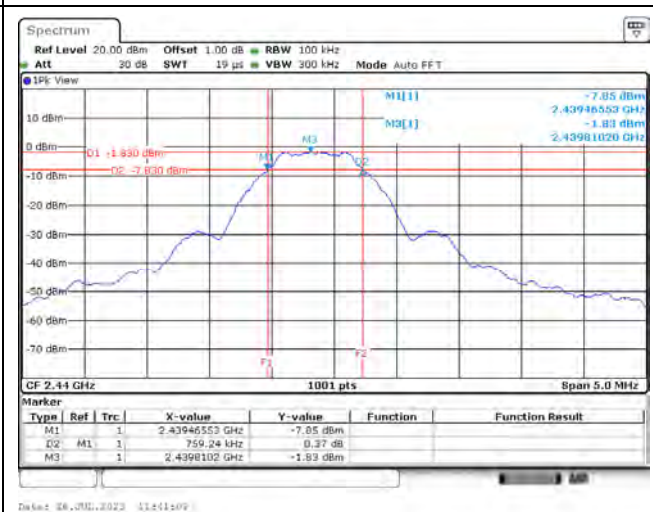


GFSK (1 Mbps) / 2480 MHz

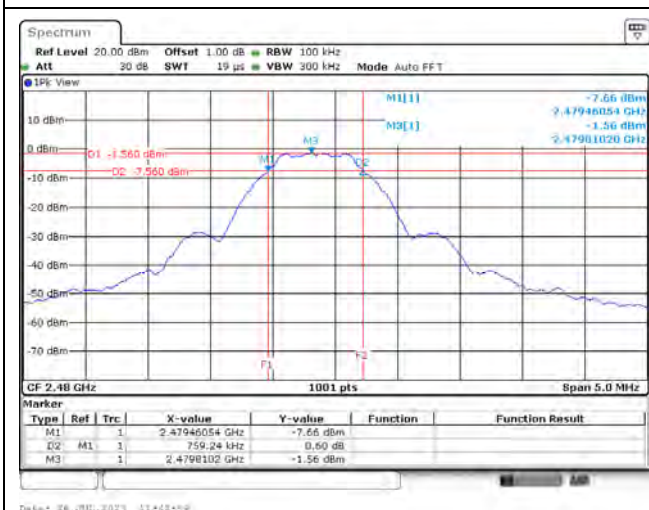


GFSK (2 Mbps) / 2402 MHz

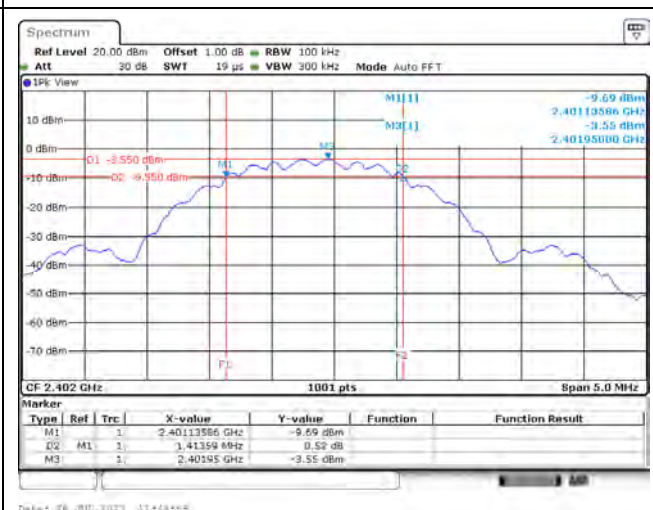

GFSK (2 Mbps) / 2440 MHz

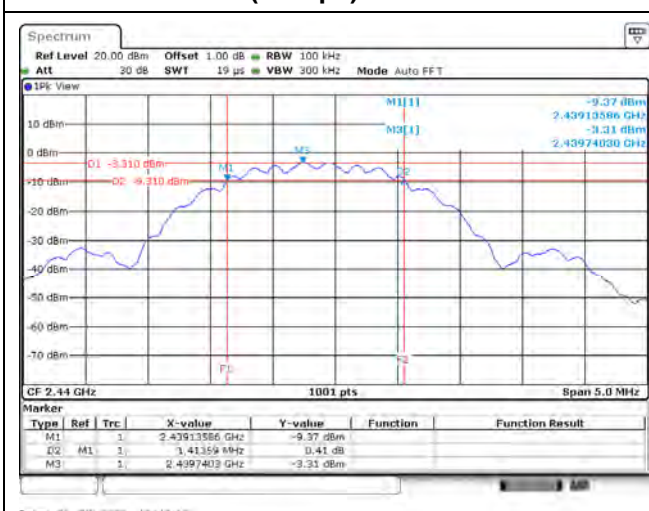

GFSK (2 Mbps) / 2480 MHz

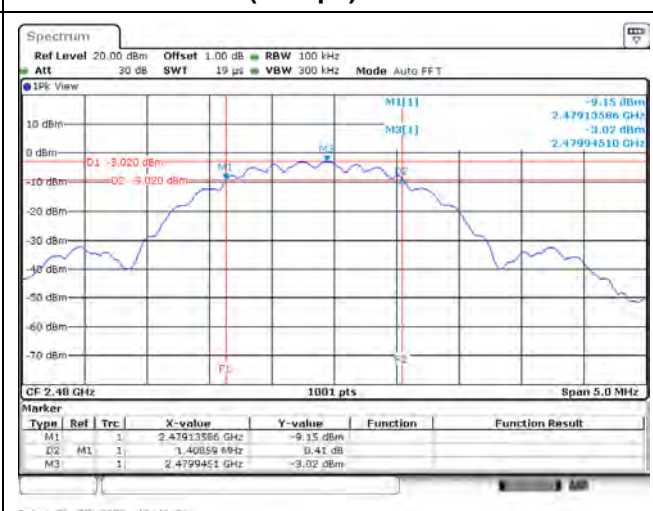

Appendix B. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
GFSK (1 Mbps)	2402	0.19	30.00	Pass
	2440	0.38	30.00	Pass
	2480	0.49	30.00	Pass
GFSK (2 Mbps)	2402	0.20	30.00	Pass
	2440	0.39	30.00	Pass
	2480	0.50	30.00	Pass

Appendix C. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Measure Value (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1 Mbps)	2402	-19.960	8.00	Pass
	2440	-19.700	8.00	Pass
	2480	-19.110	8.00	Pass
GFSK (2 Mbps)	2402	-19.970	8.00	Pass
	2440	-20.080	8.00	Pass
	2480	-19.130	8.00	Pass


GFSK (1 Mbps) / 2402 MHz




GFSK (1 Mbps) / 2440 MHz




GFSK (1 Mbps) / 2480 MHz

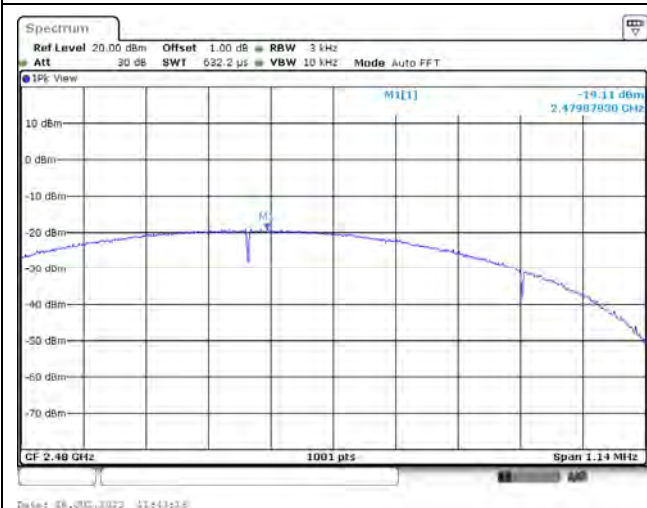


GFSK (2 Mbps) / 2402 MHz

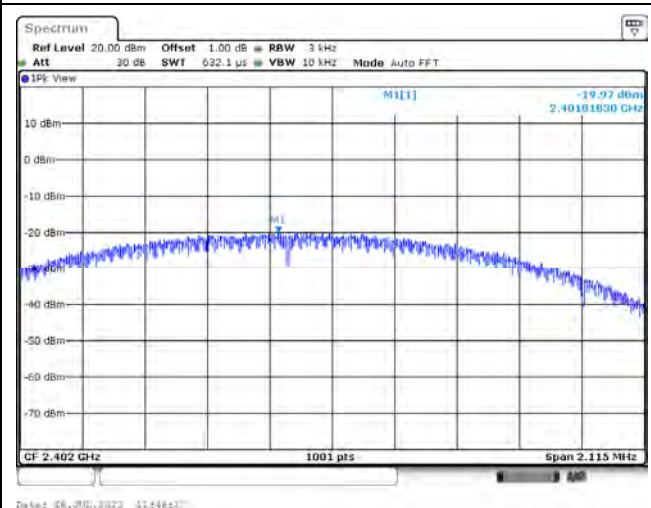

GFSK (2 Mbps) / 2440 MHz

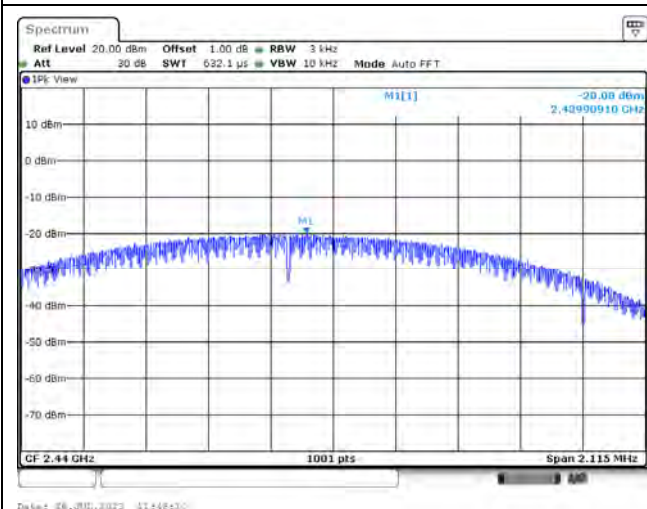


GFSK (2 Mbps) / 2480 MHz

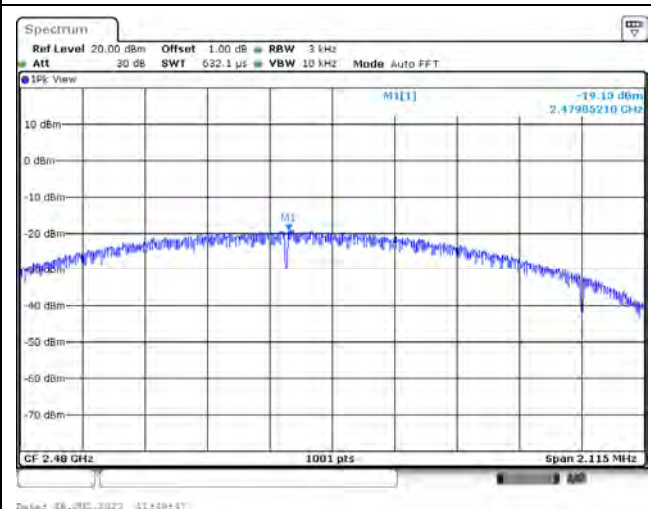


Appendix D. Test Result of Antenna Port Conducted Emission


GFSK (1 Mbps) / 2402 MHz

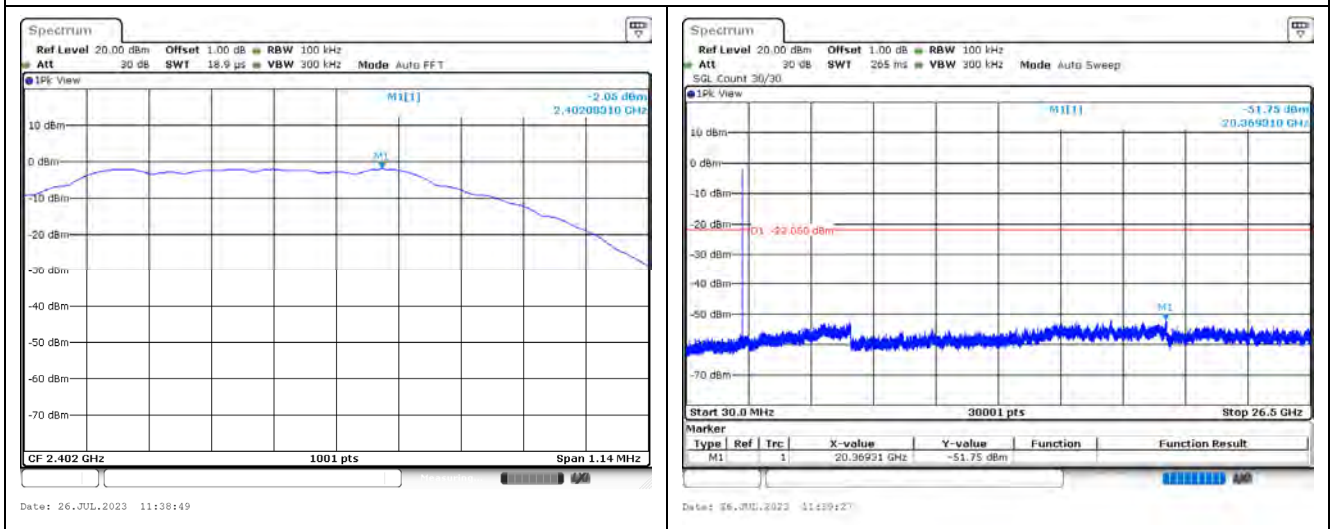



GFSK (1 Mbps) / 2440 MHz

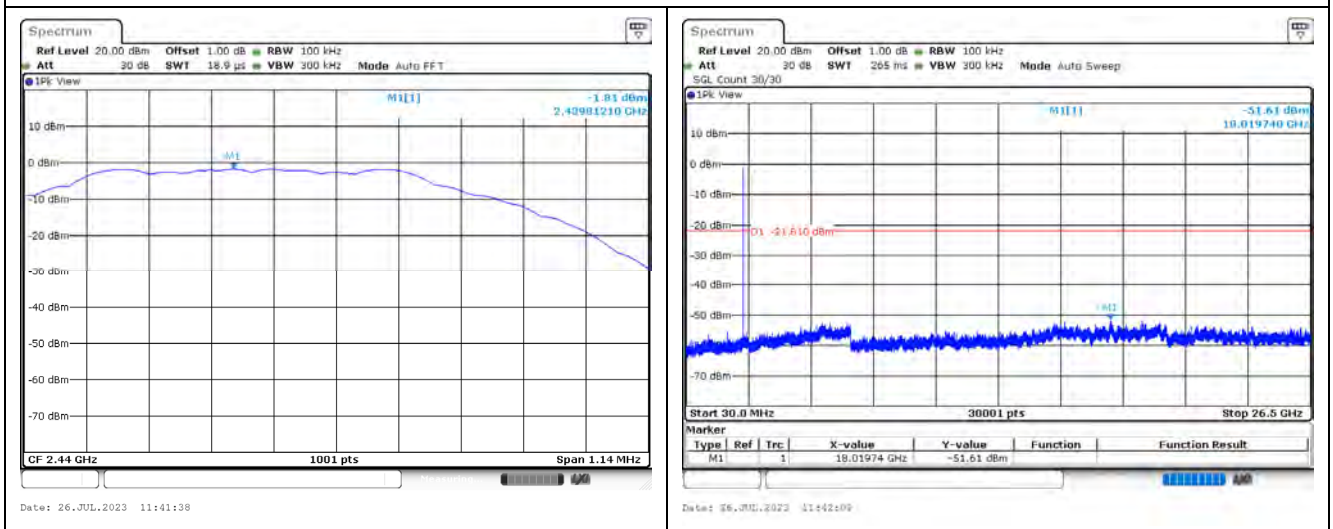



GFSK (1 Mbps) / 2480 MHz

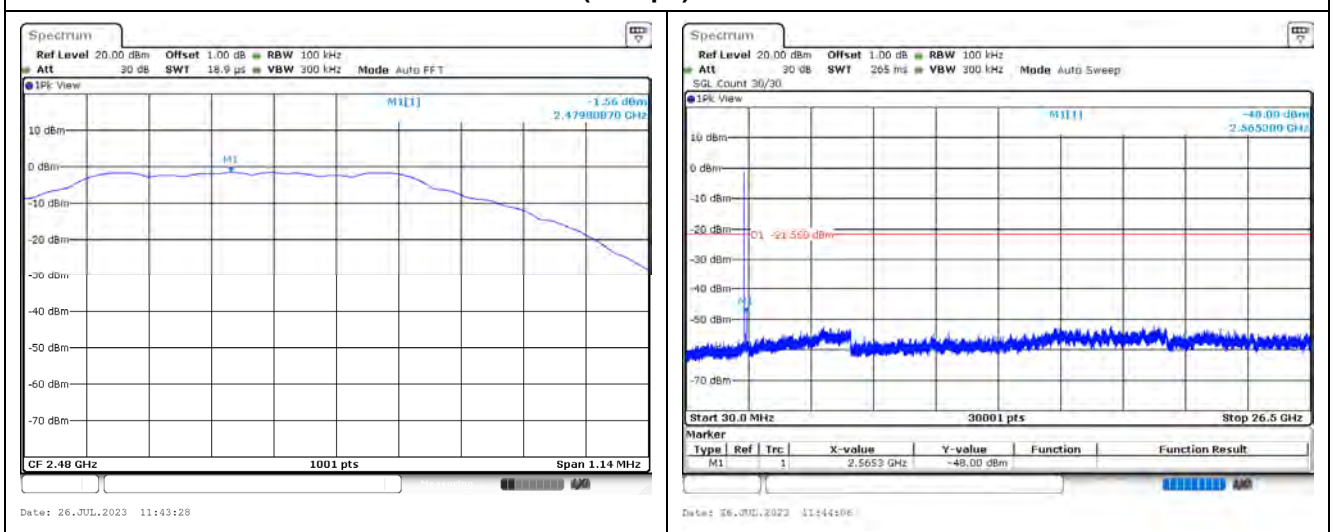



GFSK (2 Mbps) / 2402 MHz

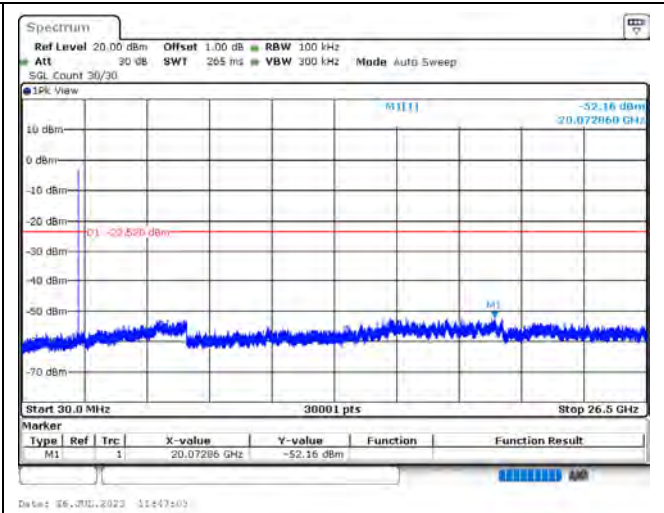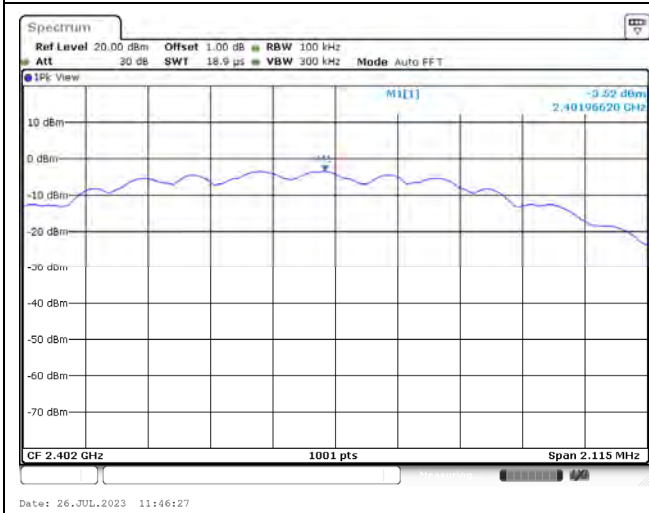


GFSK (2 Mbps) / 2440 MHz

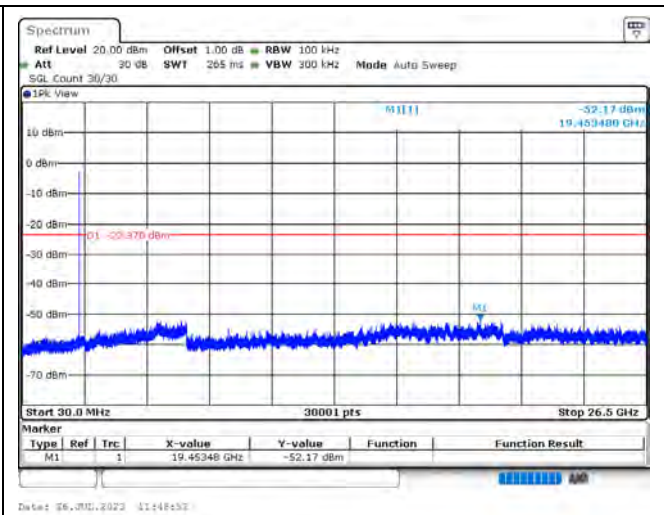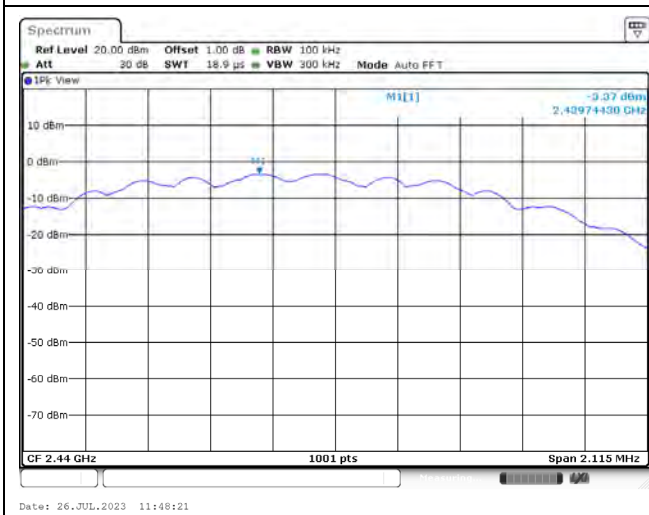


GFSK (2 Mbps) / 2480 MHz

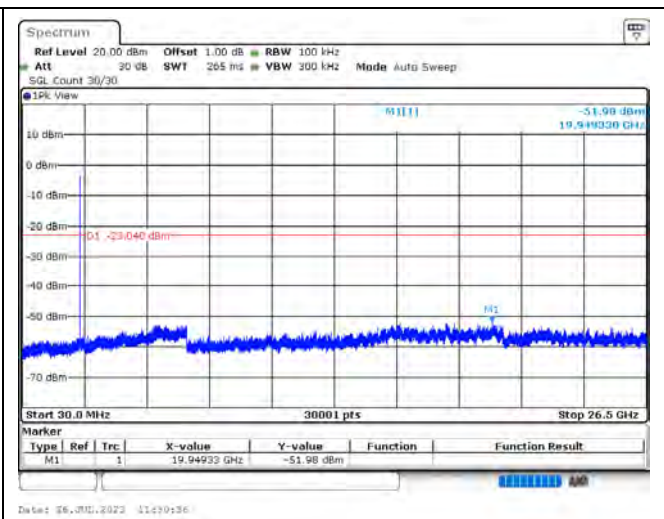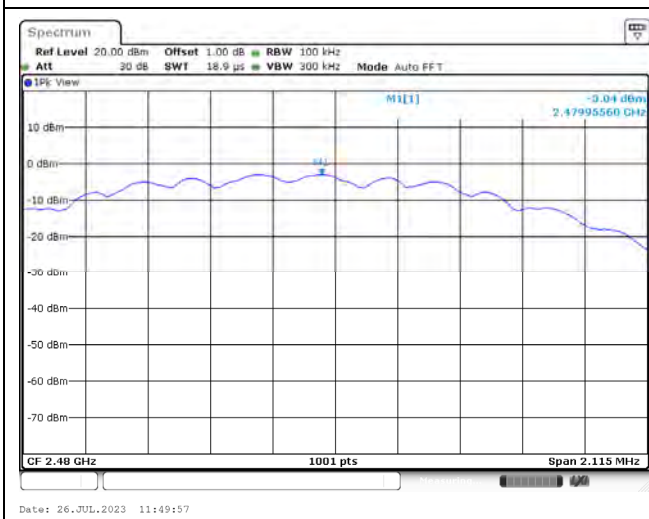


GFSK (1 Mbps) / 2402 MHz (Band Edge)

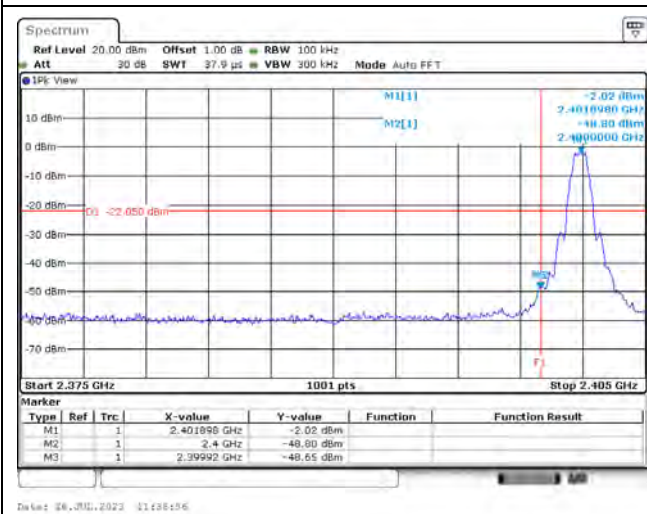


GFSK (1 Mbps) / 2480 MHz (Band Edge)

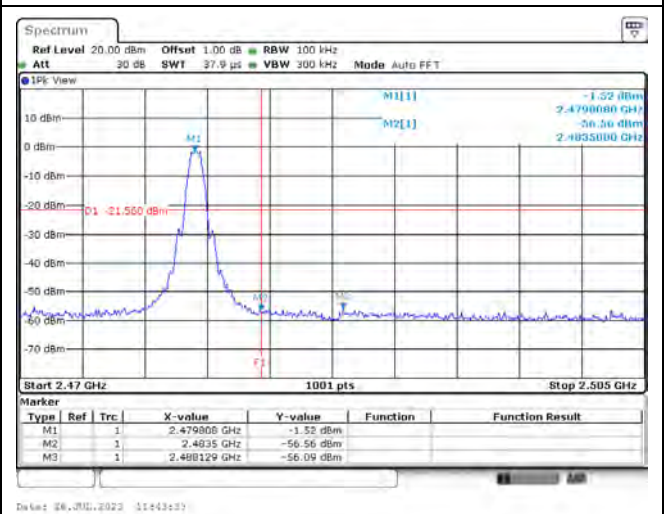

GFSK (2 Mbps) / 2402 MHz (Band Edge)

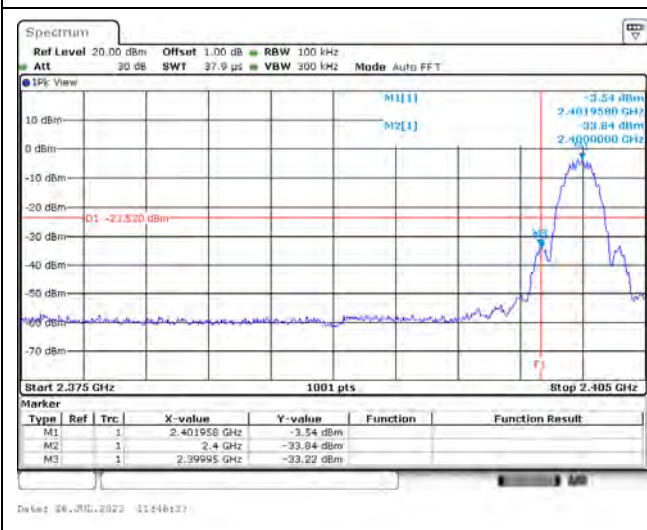


GFSK (2 Mbps) / 2480 MHz (Band Edge)

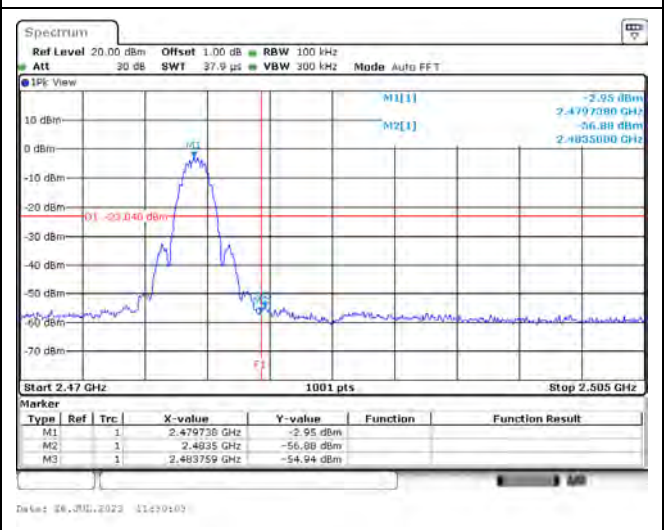

Appendix E. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Site :HC-CB04
 Condition :3m Horizontal
 Mode :LF_BLE_2M_TX_2480MHz
 Test By :Scott

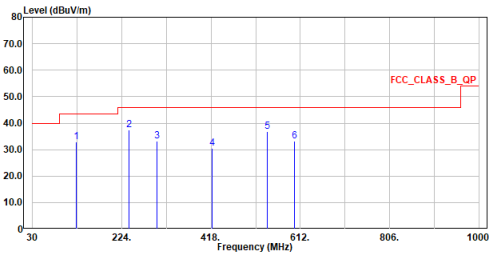


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	124.963	32.85	43.50	-10.65	37.89	-5.04	QP
2	240.005	37.32	46.00	-8.68	42.35	-5.03	QP
3	299.951	33.20	46.00	-12.80	36.17	-2.97	QP
4	420.037	30.52	46.00	-15.48	30.51	0.01	QP
5	540.026	36.92	46.00	-9.08	34.18	2.74	QP
6	600.069	33.11	46.00	-12.89	28.71	4.40	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m Vertical
 Mode :LF_BLE_2M_TX_2480MHz
 Test By :Scott

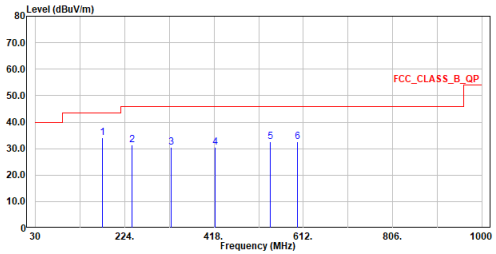


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	174.918	34.02	43.50	-9.48	38.10	-4.08	QP
2	240.005	31.30	46.00	-14.70	36.33	-5.03	QP
3	324.977	30.43	46.00	-15.57	32.63	-2.20	QP
4	420.037	30.55	46.00	-15.45	30.54	0.01	QP
5	540.026	32.65	46.00	-13.35	29.91	2.74	QP
6	600.069	32.59	46.00	-13.41	28.19	4.40	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :BLE_1M_TX_2402MHz
 Test By :Scott

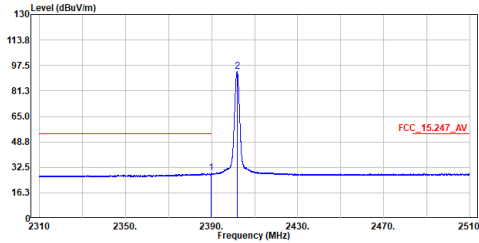

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.660	28.76	54.00	-25.24	17.71	11.05	Average
2	2401.840	93.55	-----	-----	82.44	11.11	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :BLE_1M_TX_2402MHz
 Test By :Scott

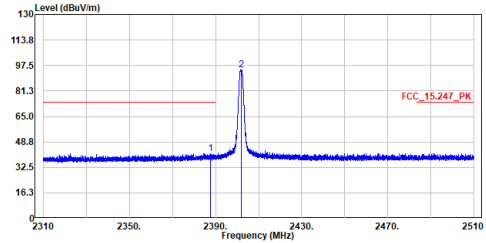

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.580	41.17	74.00	-32.83	30.12	11.05	Peak
2	2402.100	94.49	-----	-----	83.38	11.11	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_1M_TX_2402MHz
 Test By :Scott

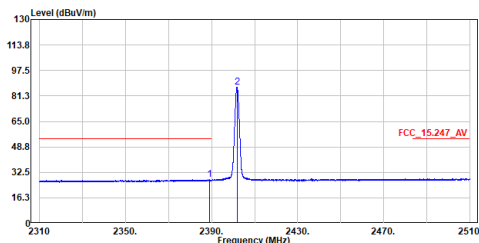

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.980	28.00	54.00	-26.00	16.95	11.05	Average
2	2401.840	86.95	-----	-----	75.84	11.11	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_1M_TX_2402MHz
 Test By :Scott

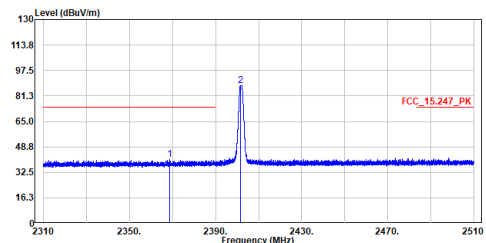

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2368.540	40.48	74.00	-33.52	29.53	10.95	Peak
2	2401.600	87.94	-----	-----	76.83	11.11	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_1M_TX_2402MHz
 Test By :Scott

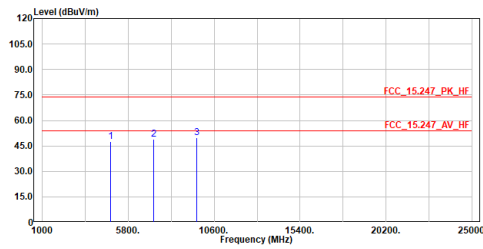

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4804.000	47.34	74.00	-26.66	63.22	-15.88	Peak
2	7206.000	48.85	74.00	-25.15	58.34	-9.49	Peak
3	9608.000	49.75	74.00	-24.25	56.42	-6.67	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Vertical
 Mode :BLE_1M_TX_2402MHz
 Test By :Scott

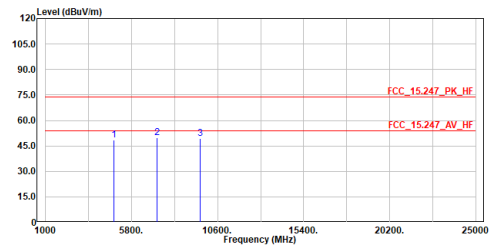

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4804.000	48.26	74.00	-25.74	64.14	-15.88	Peak
2	7206.000	49.75	74.00	-24.25	59.24	-9.49	Peak
3	9608.000	49.16	74.00	-24.84	55.83	-6.67	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_1M_TX_2440MHz
 Test By :Scott

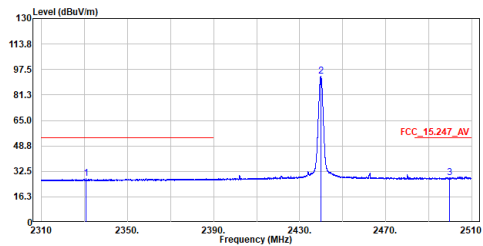

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2330.700	27.86	54.00	-26.14	17.53	10.33	Average
2	2439.860	93.14	-----	-----	82.35	10.79	Average
3	2499.660	28.37	54.00	-25.63	17.31	11.06	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_1M_TX_2440MHz
 Test By :Scott

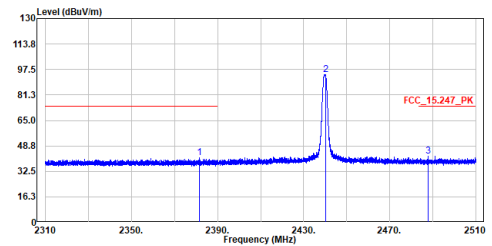

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2381.460	41.39	74.00	-32.61	30.84	10.55	Peak
2	2440.100	94.13	-----	-----	83.33	10.80	Peak
3	2487.880	42.14	74.00	-31.86	31.13	11.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_1M_TX_2440MHz
 Test By :Scott

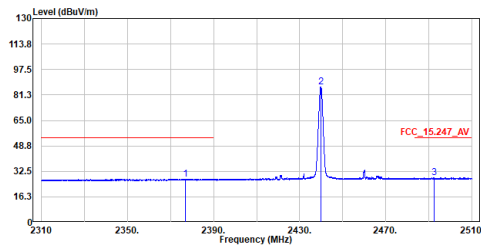

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2377.020	27.67	54.00	-26.33	17.13	10.54	Average
2	2439.840	86.58	-----	-----	75.79	10.79	Average
3	2492.620	28.47	54.00	-25.53	17.44	11.03	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_1M_TX_2440MHz
 Test By :Scott

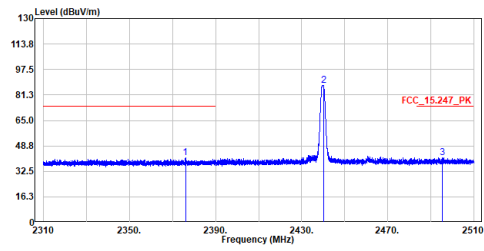

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2376.000	41.35	74.00	-32.65	30.82	10.53	Peak
2	2440.100	87.56	-----	-----	76.76	10.80	Peak
3	2495.300	41.30	74.00	-32.70	30.26	11.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_1M_TX_2440MHz
 Test By :Scott

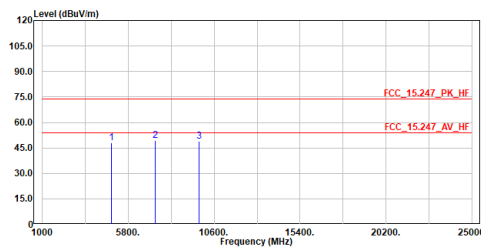

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4880.000	48.22	74.00	-25.78	63.78	-15.56	Peak
2	7320.000	49.51	74.00	-24.49	58.83	-9.32	Peak
3	9760.000	49.07	74.00	-24.93	55.44	-6.37	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Vertical
 Mode :BLE_1M_TX_2440MHz
 Test By :Scott

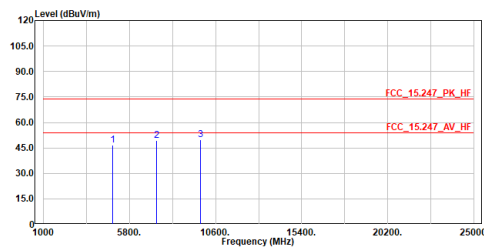

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4880.000	46.48	74.00	-27.52	62.04	-15.56	Peak
2	7320.000	49.34	74.00	-24.66	58.66	-9.32	Peak
3	9760.000	49.76	74.00	-24.24	56.13	-6.37	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :BLE_1M_TX_2480MHz
 Test By :Scott

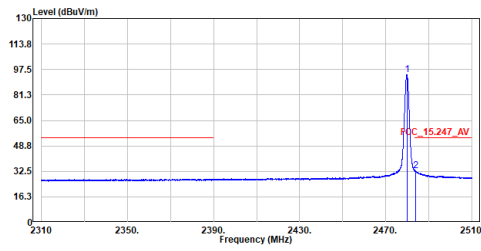

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2479.860	94.18	-----	-----	82.69	11.49	Average
2	2483.780	33.09	54.00	-20.91	21.57	11.52	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :BLE_1M_TX_2480MHz
 Test By :Scott

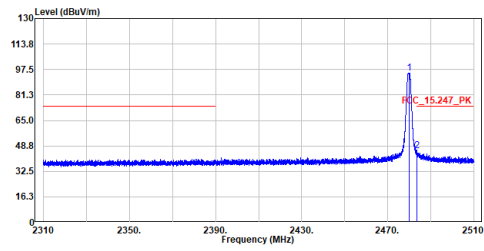

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2480.100	95.14	-----	-----	83.65	11.49	Peak
2	2483.660	45.49	74.00	-28.51	33.98	11.51	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_1M_TX_2480MHz
 Test By :Scott

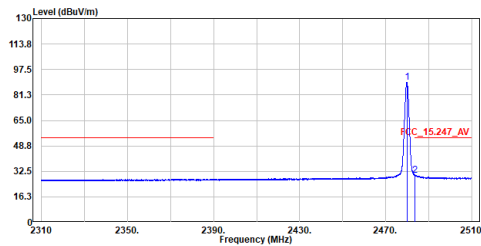

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2479.860	89.46	-----	-----	77.97	11.49	Average
2	2483.540	30.15	54.00	-23.85	18.65	11.50	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_1M_TX_2480MHz
 Test By :Scott

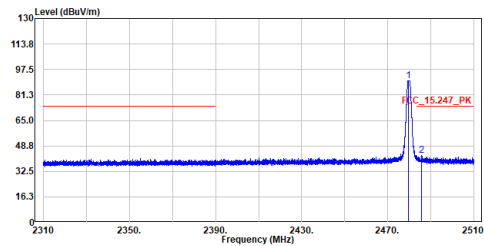

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2479.580	90.46	-----	-----	78.97	11.49	Peak
2	2485.880	42.54	74.00	-31.46	31.02	11.52	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_1M_TX_2480MHz
 Test By :Scott

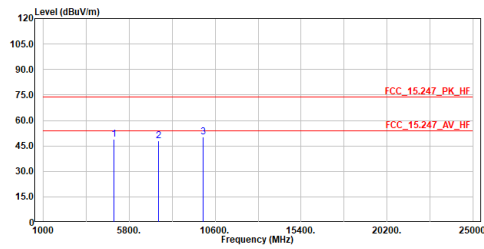

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.000	48.82	74.00	-25.18	64.03	-15.21	Peak
2	7440.000	48.15	74.00	-25.85	57.31	-9.16	Peak
3	9920.000	50.29	74.00	-23.71	56.34	-6.05	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Vertical
 Mode :BLE_1M_TX_2480MHz
 Test By :Scott

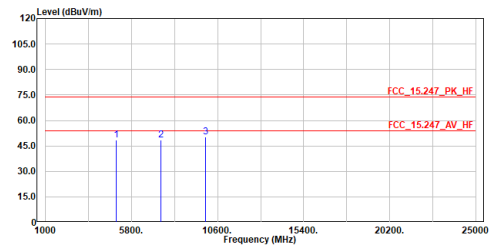

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.000	48.48	74.00	-25.52	63.69	-15.21	Peak
2	7440.000	48.36	74.00	-25.64	57.52	-9.16	Peak
3	9920.000	50.07	74.00	-23.93	56.12	-6.05	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_2M_TX_2402MHz
 Test By :Scott

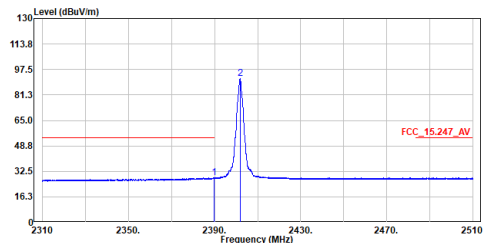

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	28.33	54.00	-25.67	17.28	11.05	Average
2	2401.860	91.49	-----	-----	80.38	11.11	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_2M_TX_2402MHz
 Test By :Scott

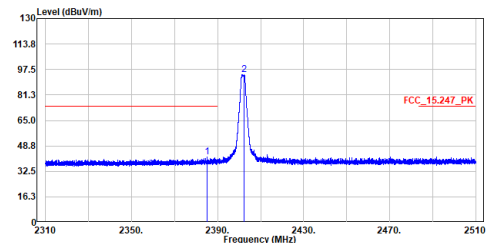

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2385.140	41.65	74.00	-32.35	30.63	11.02	Peak
2	2402.340	94.16	-----	-----	83.05	11.11	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_2M_TX_2402MHz
 Test By :Scott

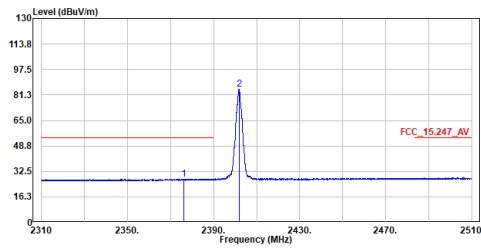

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2376.240	27.64	54.00	-26.36	16.64	11.00	Average
2	2401.860	84.81	-----	-----	73.70	11.11	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_2M_TX_2402MHz
 Test By :Scott

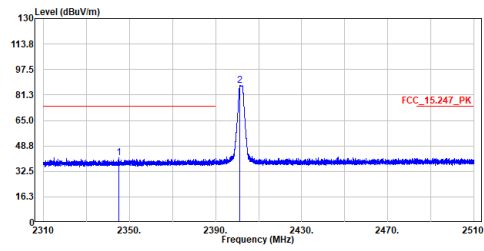

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2345.000	40.99	74.00	-33.01	30.15	10.84	Peak
2	2401.360	87.55	-----	-----	76.44	11.11	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :BLE_2M_TX_2402MHz
 Test By :Scott

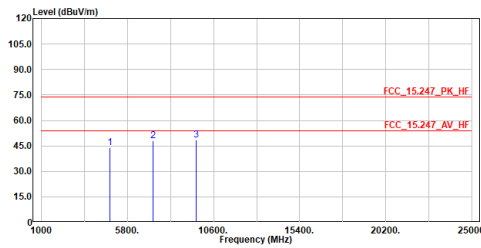

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4804.000	43.78	74.00	-30.22	59.66	-15.88	Peak
2	7206.000	47.88	74.00	-26.12	57.37	-9.49	Peak
3	9608.000	48.62	74.00	-25.38	55.29	-6.67	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_2M_TX_2402MHz
 Test By :Scott

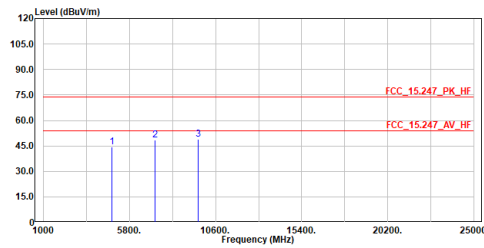

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4804.000	44.29	74.00	-29.71	60.17	-15.88	Peak
2	7206.000	48.38	74.00	-25.62	57.87	-9.49	Peak
3	9608.000	48.91	74.00	-25.09	55.58	-6.67	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :BLE_2M_TX_2440MHz
 Test By :Scott

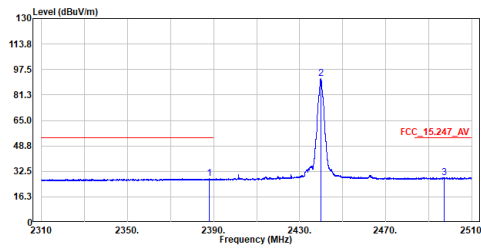

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.000	27.81	54.00	-26.19	17.23	10.58	Average
2	2439.840	91.56	-----	-----	80.77	10.79	Average
3	2497.340	28.42	54.00	-25.58	17.36	11.06	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :BLE_2M_TX_2440MHz
 Test By :Scott

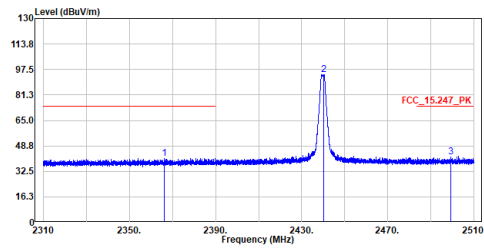

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2366.040	40.95	74.00	-33.05	30.46	10.49	Peak
2	2440.360	94.26	-----	-----	83.45	10.81	Peak
3	2499.240	41.86	74.00	-32.14	30.80	11.06	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_2M_TX_2440MHz
 Test By :Scott

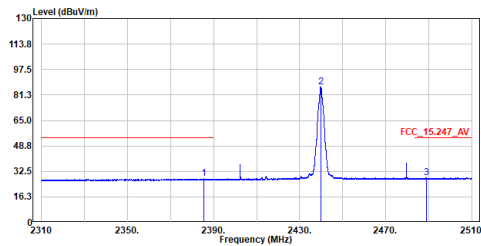

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2385.460	27.79	54.00	-26.21	17.23	10.56	Average
2	2439.860	86.49	-----	-----	75.70	10.79	Average
3	2488.900	28.30	54.00	-25.70	17.29	11.01	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_2M_TX_2440MHz
 Test By :Scott

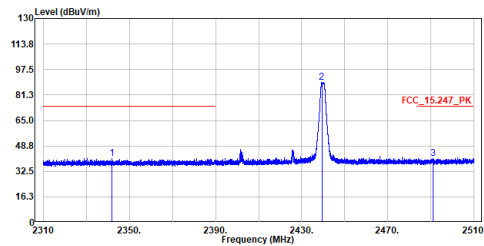

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2341.800	40.95	74.00	-33.05	30.57	10.38	Peak
2	2439.360	89.18	-----	-----	78.39	10.79	Peak
3	2491.060	40.88	74.00	-33.12	29.86	11.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_2M_TX_2440MHz
 Test By :Scott

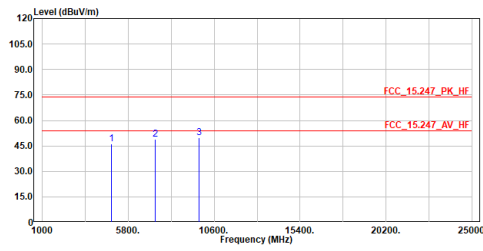

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4880.000	46.01	74.00	-27.99	61.57	-15.56	Peak
2	7320.000	48.98	74.00	-25.02	58.30	-9.32	Peak
3	9760.000	49.67	74.00	-24.33	56.04	-6.37	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Vertical
 Mode :BLE_2M_TX_2440MHz
 Test By :Scott

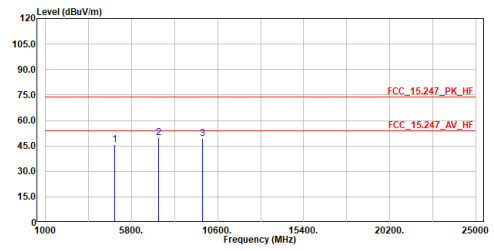

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4880.000	45.71	74.00	-28.29	61.27	-15.56	Peak
2	7320.000	49.75	74.00	-24.25	59.07	-9.32	Peak
3	9760.000	49.30	74.00	-24.70	55.67	-6.37	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_2M_TX_2480MHz
 Test By :Scott

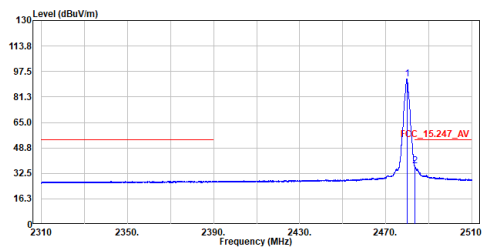

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2479.860	92.89	-----	-----	81.40	11.49	Average
2	2483.520	37.10	54.00	-16.90	25.60	11.50	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_2M_TX_2480MHz
 Test By :Scott

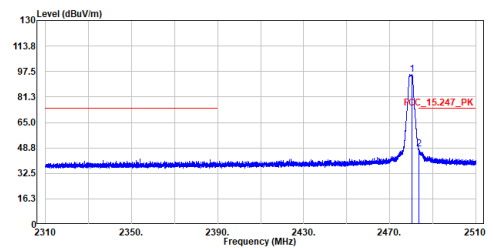

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2480.360	95.56	-----	-----	84.07	11.49	Peak
2	2483.620	47.94	74.00	-26.06	36.44	11.50	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_2M_TX_2480MHz
 Test By :Scott

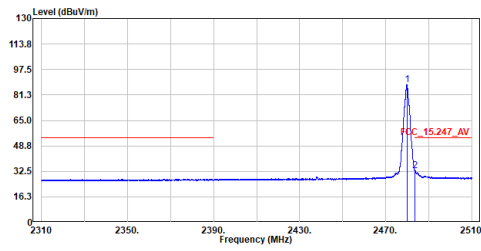

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2479.840	87.75	-----	-----	76.26	11.49	Average
2	2483.540	32.76	54.00	-21.24	21.26	11.50	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_2M_TX_2480MHz
 Test By :Scott

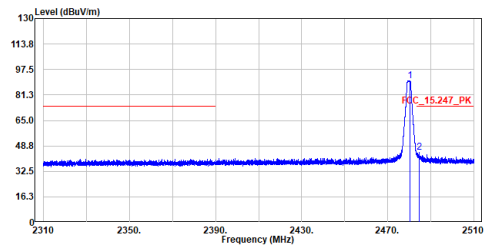

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2480.340	90.45	-----	-----	78.96	11.49	Peak
2	2484.700	44.50	74.00	-29.50	32.98	11.52	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :BLE_2M_TX_2480MHz
 Test By :Scott

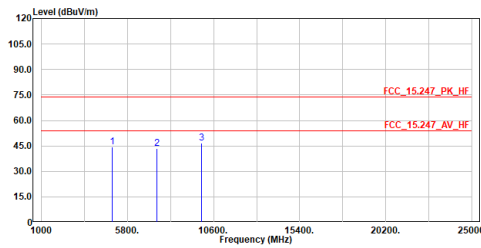

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.000	44.41	74.00	-29.59	61.75	-17.34	Peak
2	7440.000	43.64	74.00	-30.36	56.12	-12.48	Peak
3	9920.000	46.57	74.00	-27.43	55.42	-8.85	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :BLE_2M_TX_2480MHz
 Test By :Scott

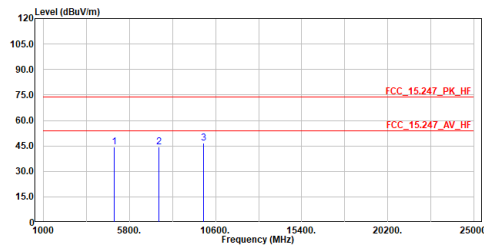

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.000	44.16	74.00	-29.84	61.50	-17.34	Peak
2	7440.000	44.29	74.00	-29.71	56.77	-12.48	Peak
3	9920.000	46.44	74.00	-27.56	55.29	-8.85	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.