



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

802.11 a/b/g/n Long-Range Wireless USB Adaptor

Model:

**AWUS051NH, AWUS050NH, OUS50, WISP-50,
SoLo-50, OUS50EX, WISP-50EX, SoLo-50EX**

Trade Name: ALFA

Issued to

ALFA Network Inc.

4F-1, No. 106, Rueiguang Rd., Neihu Distric, Taipei City, Taiwan.

Issued by



Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsemc.com.tw>
service@ccsrf.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED	8
5. FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 EQUIPMENT.....	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT.....	12
6.2 SUPPORT EQUIPMENT	12
7. FCC PART 15.247 REQUIREMENTS.....	13
7.1 6DB BANDWIDTH.....	13
7.2 PEAK POWER.....	26
7.3 AVERAGE POWER.....	39
7.4 BAND EDGES MEASUREMENT	52
7.5 PEAK POWER SPECTRAL DENSITY	69
7.6 SPURIOUS EMISSIONS.....	82
7.7 POWERLINE CONDUCTED EMISSIONS.....	117
APPENDIX I RADIO FREQUENCY EXPOSURE	120
APPENDIX II PHOTOGRAPHS OF TEST SETUP	124



1. TEST RESULT CERTIFICATION

Applicant: ALFA Network Inc.
4F-1, No. 106, Rueiguang Rd., Neihu District, Taipei City, Taiwan.

Equipment Under Test: 802.11 a/b/g/n Long-Range Wireless USB Adaptor

Trade Name: ALFA

Model: AWUS051NH, AWUS050NH, OUS50, WISP-50,
SoLo-50, OUS50EX, WISP-50EX, SoLo-50EX

Date of Test: October 17 ~ November 17, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	802.11 a/b/g/n Long-Range Wireless USB Adaptor	
Trade Name	ALFA	
Model Number	AWUS051NH, AWUS050NH, OUS50, WISP-50, SoLo-50, OUS50EX, WISP-50EX, SoLo-50EX	
Model Discrepancy	All the specification and layout are identical except they come with different external appearance and model numbers.	
	Model No.	Appearance Size
	AWUS051NH	Small
	AWUS050NH	Small
	OUS50	Big
	WISP-50	Big
	SoLo-50	Big
	OUS50EX	Big
	WISP-50EX	Big
	SoLo-50EX	Big
Power Adapter	Powered from host device via USB cable	
Frequency Range	IEEE 802.11a/ draft 802.11n Standard-20 MHz: 5.725~5.850 GHz IEEE 802.11b/g/ draft 802.11n Standard-20 MHz: 2.412~2.462 GHz draft 802.11n Wide-40 MHz: 2.422~2.452 GHz	
Transmit Power	IEEE 802.11a mode: 17.70 dBm draft 802.11n Standard-20 MHz Channel mode: 17.88 dBm draft 802.11n Wide-40 MHz Channel mode: 17.60 dBm IEEE 802.11b mode: 12.72 dBm IEEE 802.11g mode: 14.15 dBm draft 802.11n Standard-20 MHz Channel mode: 13.77 dBm draft 802.11n Wide-40 MHz Channel mode: 13.46 dBm	
Modulation Technique & Transmit Data Rate	IEEE 802.11a: OFDM (54, 48, 36, 24, 18, 12, 9, 6 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps) IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)	
Number of Channels	IEEE 802.11a mode: 5 Channels draft 802.11n Standard-20 MHz Channel mode: 5 Channels draft 802.11n Wide-40 MHz Channel mode: 2 Channels IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels	
Antenna Specification	Antenna Type: Dipole Antenna Antenna Gain: IEEE 802.11a/n: 2 dBi IEEE 802.11b/g/n mode: 2 dBi	
Software Version	QA_RT2870_V1_4_0_12_beta	

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: UQ205 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

After the preliminary test, the EUT (Model: AWUS051NH) had been tested under operating and standby condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed. The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

We' ve trying to use higher RF output power to do the test but it can't meet standard limit so we must tune down the out put power to meet it.

Client will set the RF output power of produced device for sale as the one which indicated in the FCC test report .

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

IEEE 802.11a mode:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low(5745MHz), Channel Mid(5785MHz) and Channel High(5825MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low(5755MHz) and Channel High(5795MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/05/2010

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/26/2010
Test Receiver	Rohde&Schwarz	ESCI	100064	11/30/2009
Switch Controller	TRC	Switch Controller	SC94050010	05/02/2010
4 Port Switch	TRC	4 Port Switch	SC94050020	05/02/2010
Loop Antenna	EMCO	6502	8905/2356	05/28/2010
Horn-Antenna	TRC	HA-0502	06	06/03/2010
Horn-Antenna	TRC	HA-0801	04	10/19/2010
Horn-Antenna	TRC	HA-1201A	01	10/14/2010
Horn-Antenna	TRC	HA-1301A	01	10/14/2010
Bilog- Antenna	Sunol Sciences	JB3	A030205	09/11/2010
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC MRA: TW1039 IC: IC 2324G-1/-2	10/17/2010 11/04/2010
Test S/W	LABVIEW (V 6.1)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver 9kHz-30MHz	Rohde & Schwarz	ESHS30	828144/003	11/25/2009
TWO-Line V-Network 9kHz-30MHz	Schaffner	NNB41	03/10013	06/10/2010
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	04/08/2010
Test S/W	LABVIEW (V 6.1)			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 2.81
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	+/-3.7046
3M Semi Anechoic Chamber / Above 1GHz	+/-3.0958

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	ASUS	M5200AE	5BN0AG019631	PD9WM3B2 100	N/A	AC I/P: Unshielded, 1.8m with a core DC O/P: Unshielded, 1.8m
2.	LCD Monitor	Samsung	710V	GS17H9NXA05864E	FCC DoC	VGA Cable: Shielded, 1.8m with two cores	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3.	USB Mouse	Logitech	M-CAA43	LZE03262922	FCC DoC	Shielded, 1.8m	N/A
4.	Notebook PC	DELL	PP05L	7T390 A03	E2K5HCKT	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
5.	Wireless Pre-N Router (Remote)	BELKIN	F5D8230-4	N/A	SA3-AGNO9 01APO100	N/A	Unshielded, 1.8m

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration

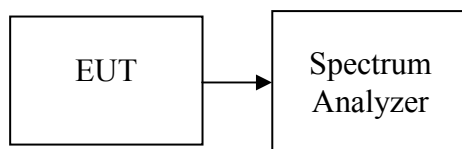

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = Base mode, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	12.25	>500	PASS
Mid	2437	12.25		PASS
High	2462	11.25		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.50	>500	PASS
Mid	2437	16.50		PASS
High	2462	16.58		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.75	>500	PASS
Mid	2437	17.67		PASS
High	2462	17.58		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.28	>500	PASS
Mid	2437	36.28		PASS
High	2452	36.40		PASS

**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	16.00	>500	PASS
Mid	5785	16.50		PASS
High	5825	16.50		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	17.25	>500	PASS
Mid	5785	17.00		PASS
High	5825	17.58		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5755	36.05	>500	PASS
High	5795	36.28		PASS



Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

Agilent 10:10:17 Oct 26, 2009

R T


6dB BW, b Mode Low Ch.

 Δ Mkr1 12.25 MHz

Ref 20 dBm

Atten 10 dB

-0.50 dB

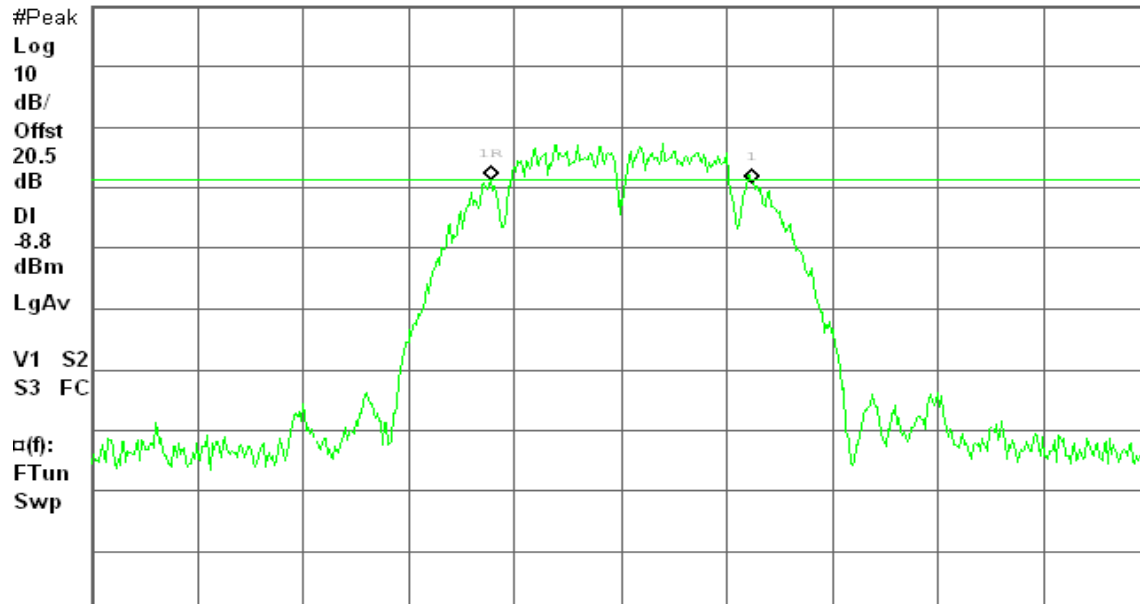

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 10:16:58 Oct 26, 2009

R T


6dB BW, b Mode Mid Ch.

 Δ Mkr1 12.25 MHz

Ref 20 dBm

Atten 10 dB

-0.11 dB

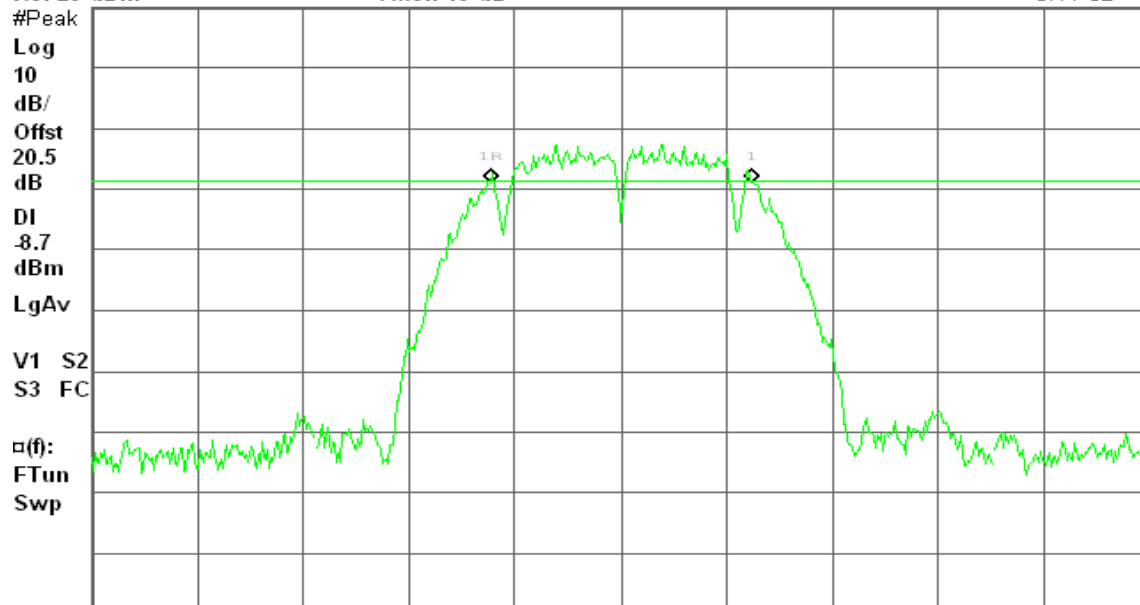

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 10:21:25 Oct 26, 2009

R T

6dB BW, b Mode High Ch.

Δ Mkr1 11.25 MHz

Ref 20 dBm

Atten 10 dB

0.53 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-8.3

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

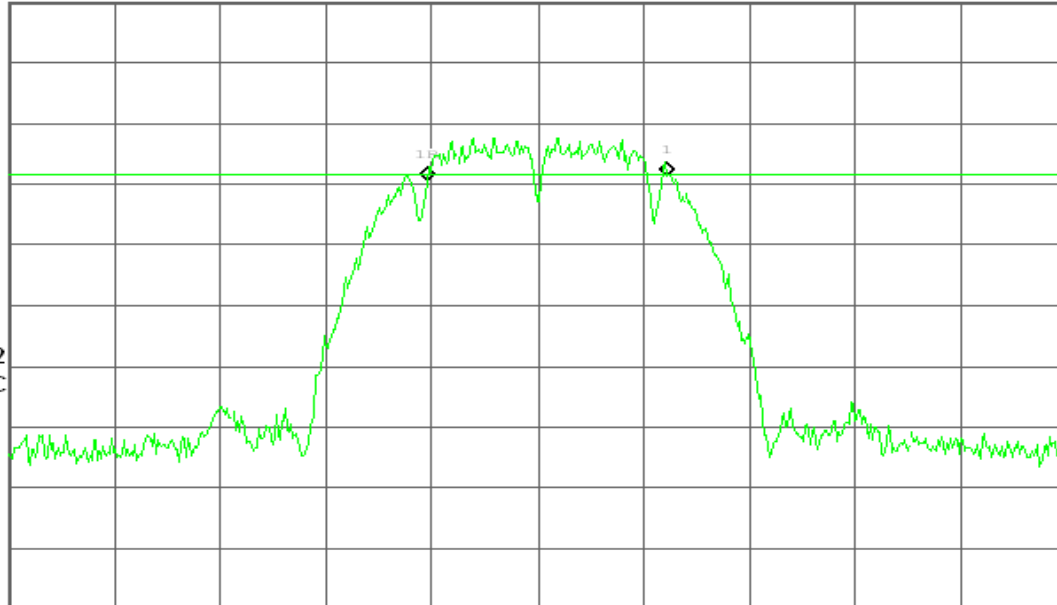

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 10:42:35 Oct 26, 2009

R T

6dB BW, g Mode Low Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

-0.38 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-14.9

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

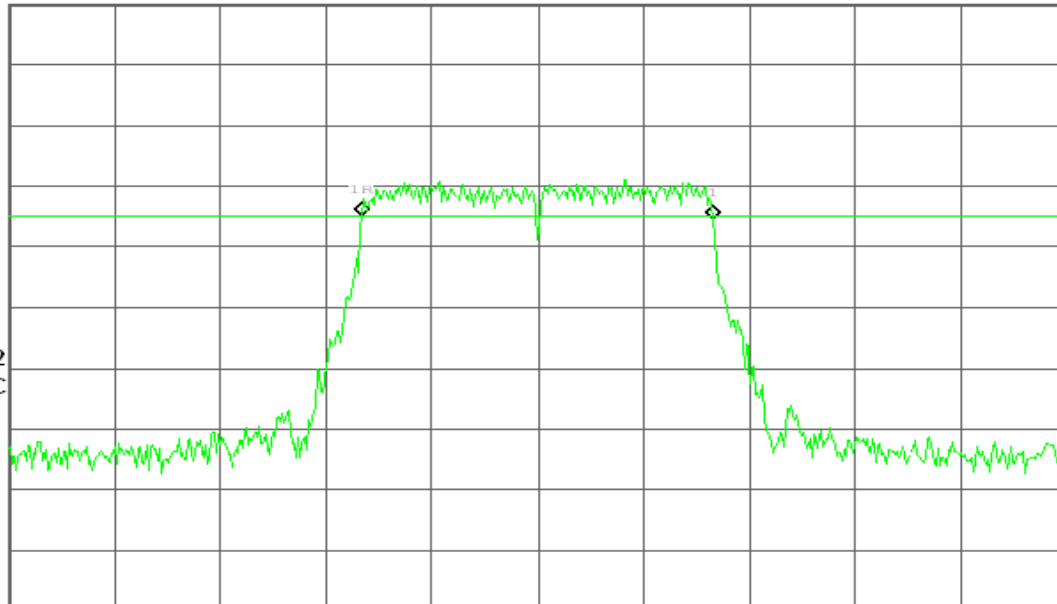

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

**6dB Bandwidth (CH Mid)**

* Agilent 10:47:14 Oct 26, 2009

R T

6dB BW, g Mode Mid Ch.

 Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

1.63 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-12.5

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

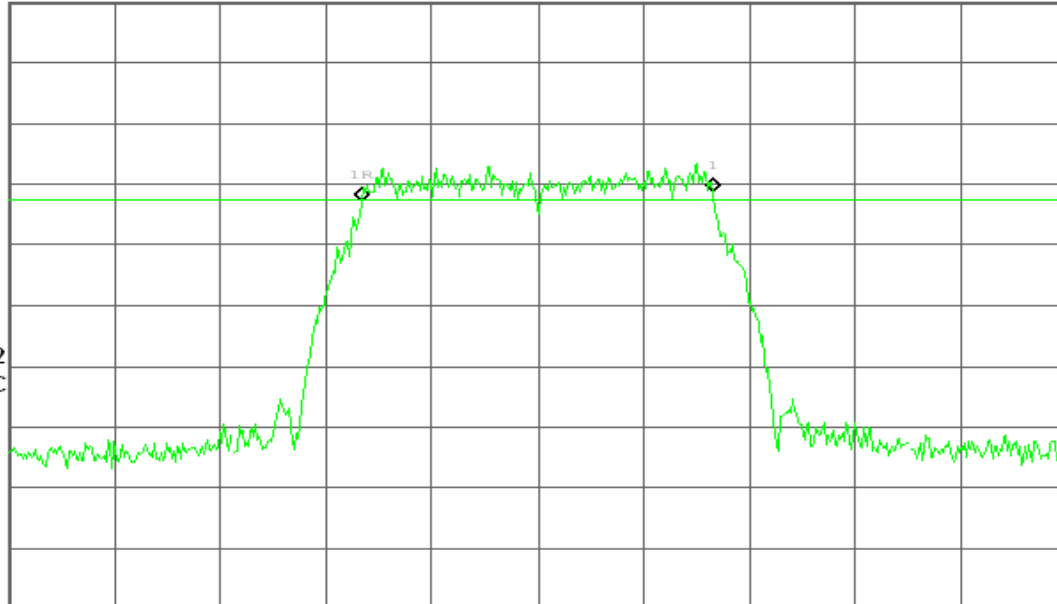

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB 6dB Bandwidth (CH High)

* Agilent 10:51:26 Oct 26, 2009

R T

6dB BW, g Mode High Ch.

 Δ Mkr1 16.58 MHz

Ref 20 dBm

Atten 10 dB

1.95 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-12.3

dBm

LgAv


V1 S2

S3 FC

 $\square(f)$:

FTun

Swp

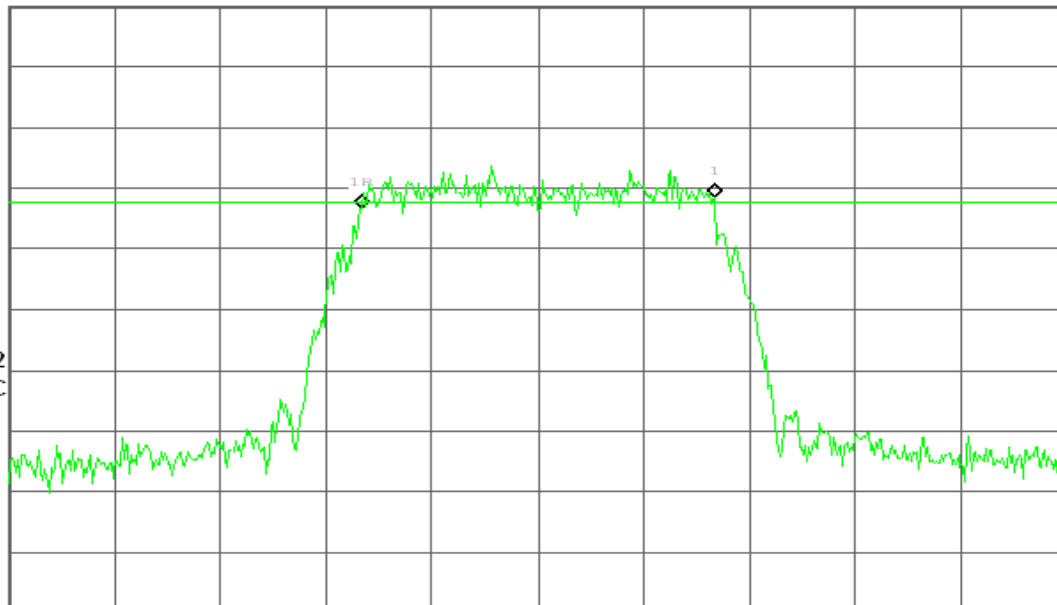

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



draft 802.11n Standard-20 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 12:05:02 Oct 26, 2009

R T

6dB BW, g Mode Low Ch.

Δ Mkr1 17.75 MHz

Ref 20 dBm

Atten 10 dB

1.16 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-15.5

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

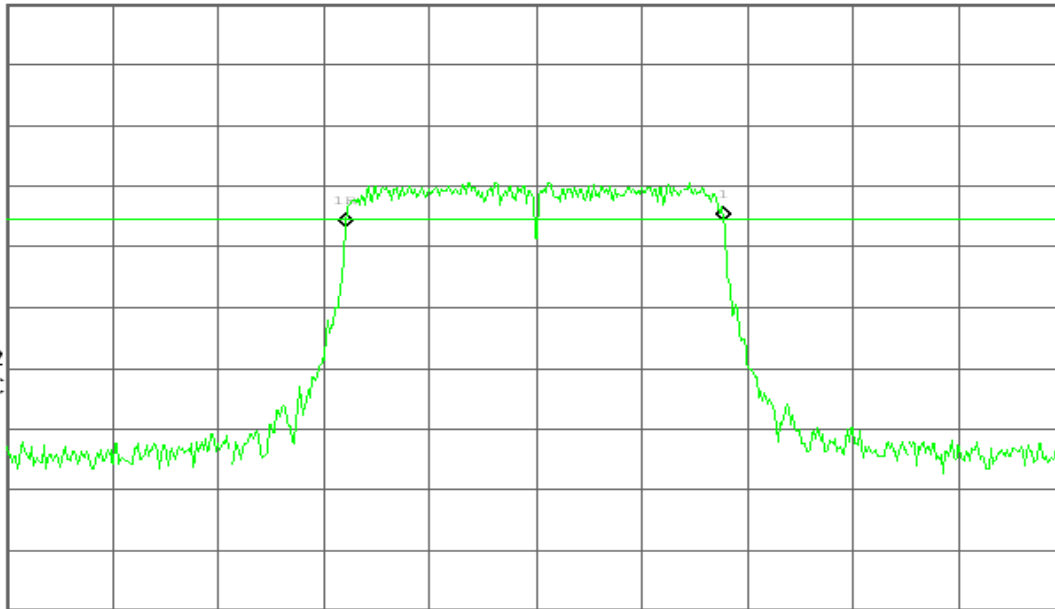

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 12:09:30 Oct 26, 2009

R T

6dB BW, g Mode Mid Ch.

Δ Mkr1 17.67 MHz

Ref 20 dBm

Atten 10 dB

-2.12 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-14.8

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

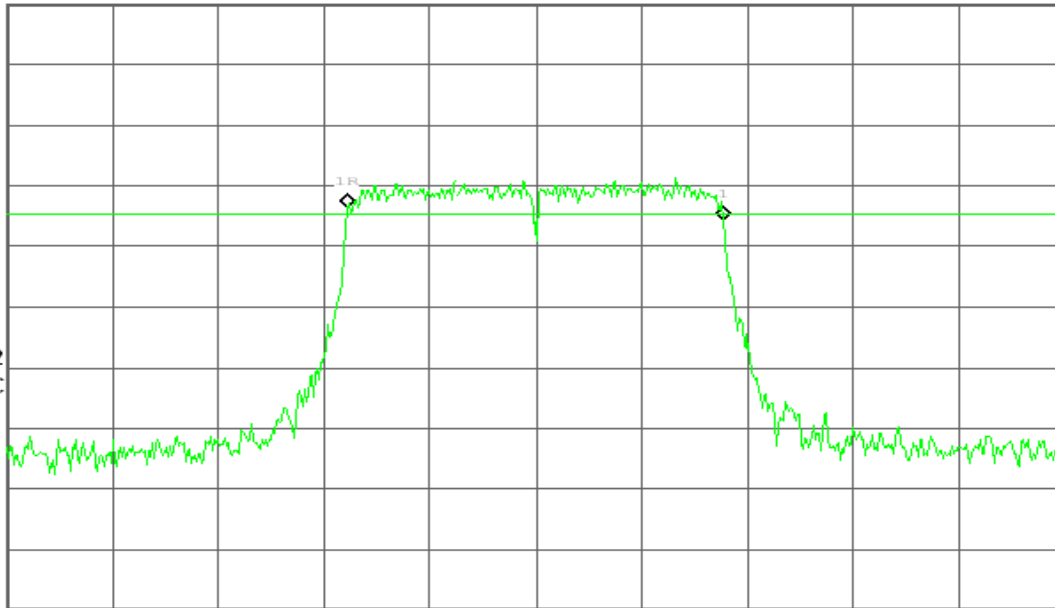

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 12:14:32 Oct 26, 2009

R T

6dB BW, g Mode High Ch.

Δ Mkr1 17.58 MHz

Ref 20 dBm

Atten 10 dB

-0.15 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-14.4

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

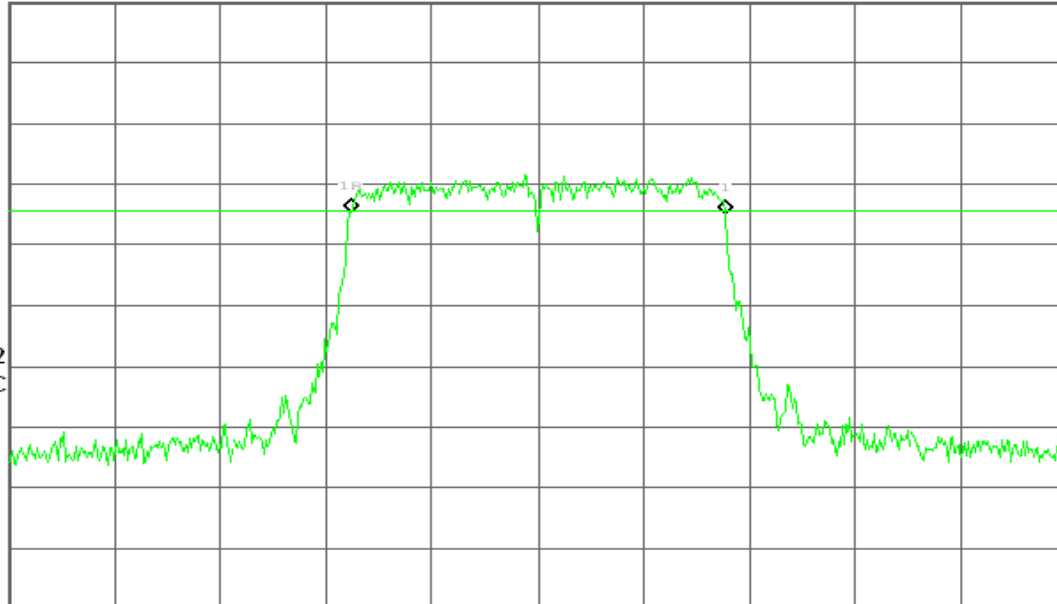

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

draft 802.11n Wide-40 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 12:22:11 Oct 26, 2009

R T

6dB BW, g Mode Low Ch.

Δ Mkr1 36.28 MHz

Ref 20 dBm

Atten 10 dB

-0.77 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-17.9

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

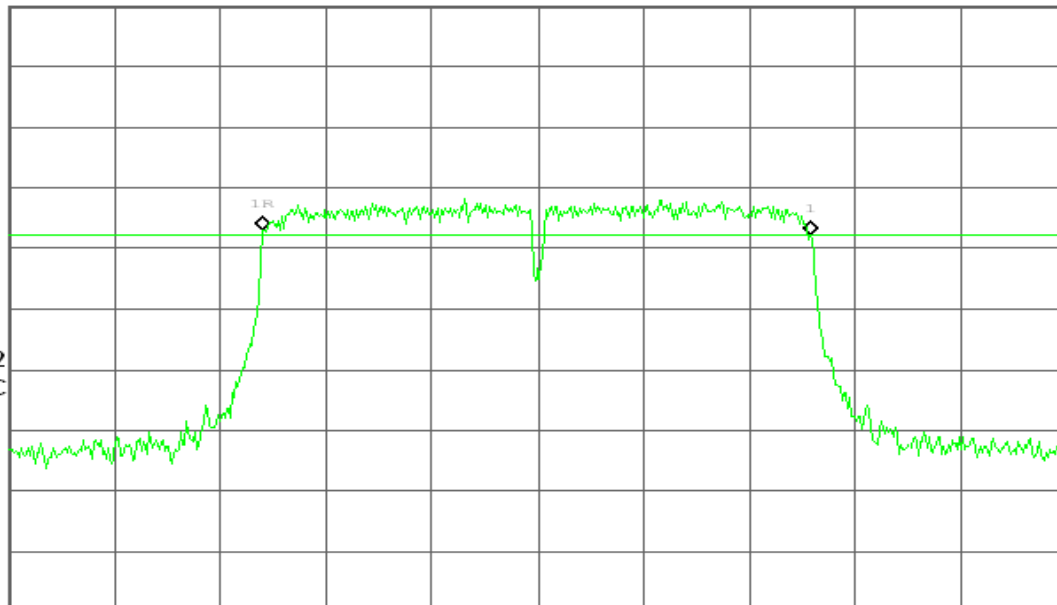

Center 2.422 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 12:27:09 Oct 26, 2009

R T

6dB BW, g Mode Mid Ch.

Δ Mkr1 36.28 MHz

Ref 20 dBm

Atten 10 dB

0.20 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-15.8

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

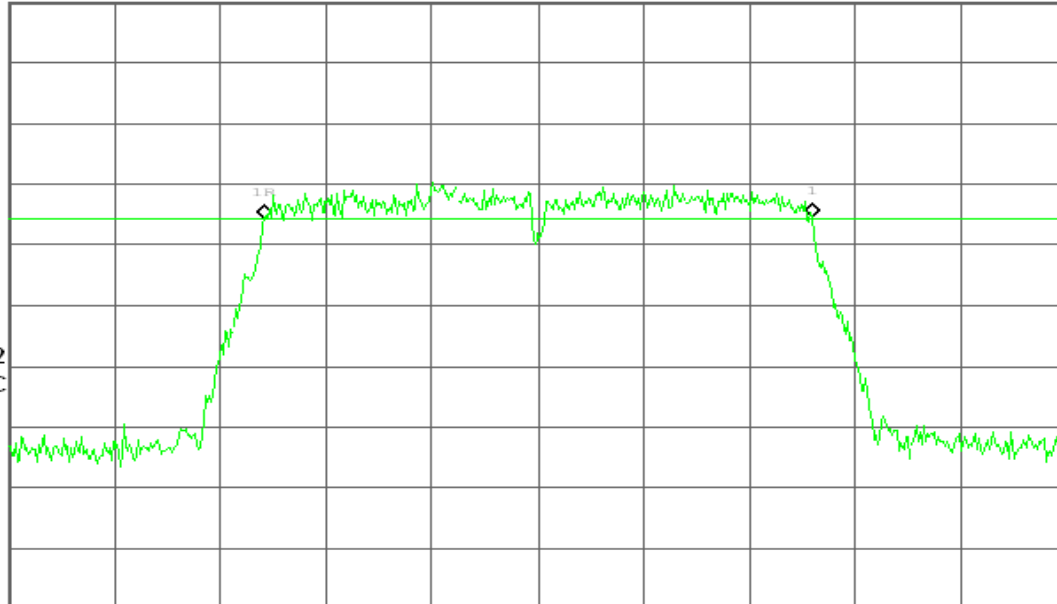

Center 2.437 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 12:32:00 Oct 26, 2009

R L

6dB BW, g Mode High Ch.

Δ Mkr1 36.40 MHz

Ref 20 dBm

Atten 10 dB

0.07 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-18.1

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

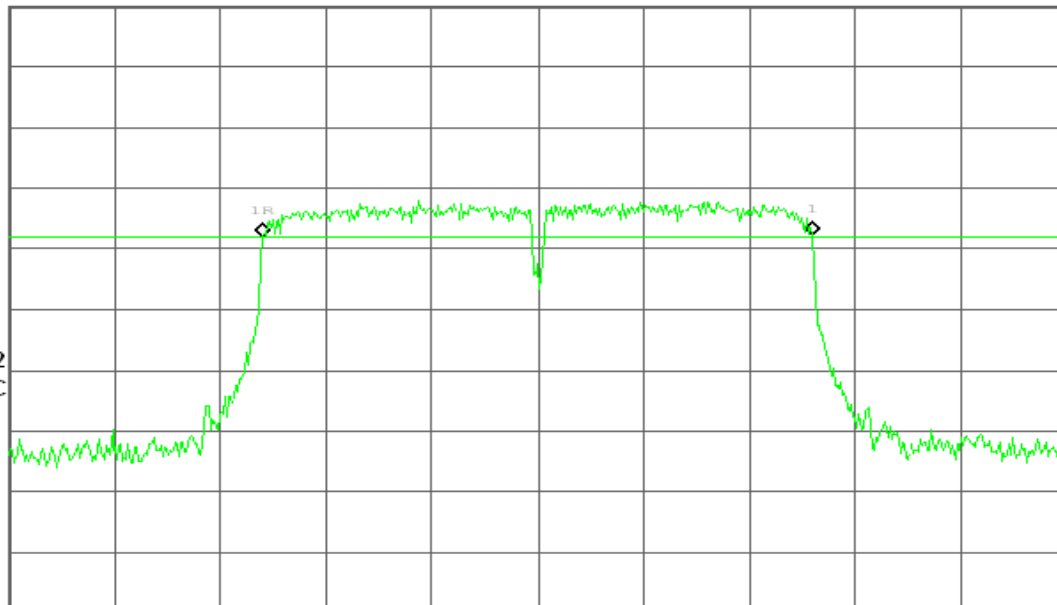

Center 2.452 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)



IEEE 802.11a mode 6dB Bandwidth (CH Low)

Agilent 12:45:36 Oct 28, 2009

R T

6dB BW, a Mode Low Ch.

Δ Mkr1 16.00 MHz

Ref 20 dBm

Atten 10 dB

-0.74 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-8.5

dBm

LgAv


V1 S2

S3 FC

α(f):

FTun

Swp

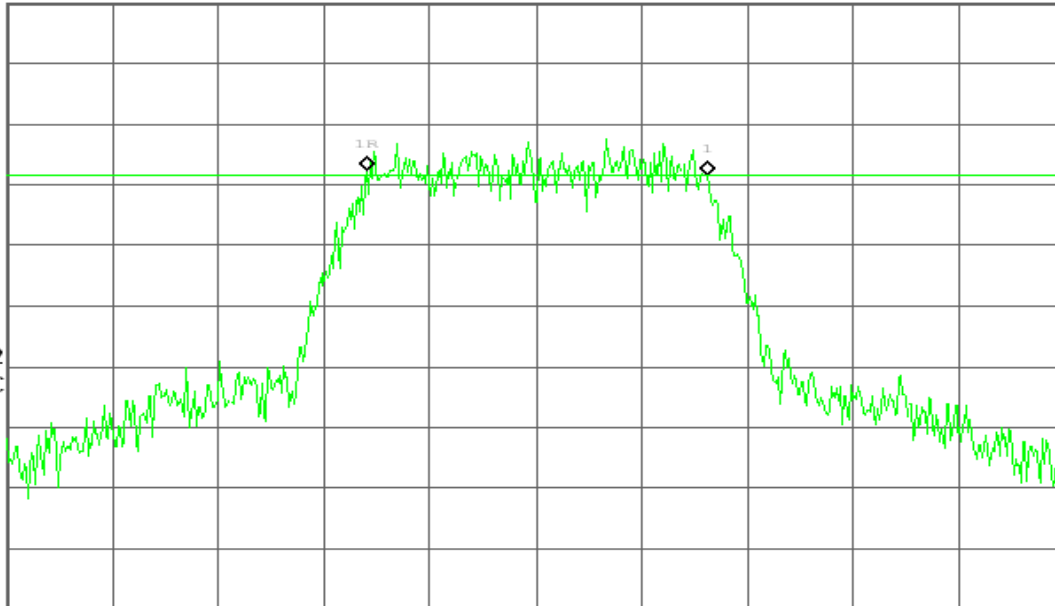

Center 5.745 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 12:54:05 Oct 28, 2009

R T

6dB BW, a Mode Mid Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

-0.45 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-10.4

dBm

LgAv


V1 S2

S3 FC

α(f):

FTun

Swp

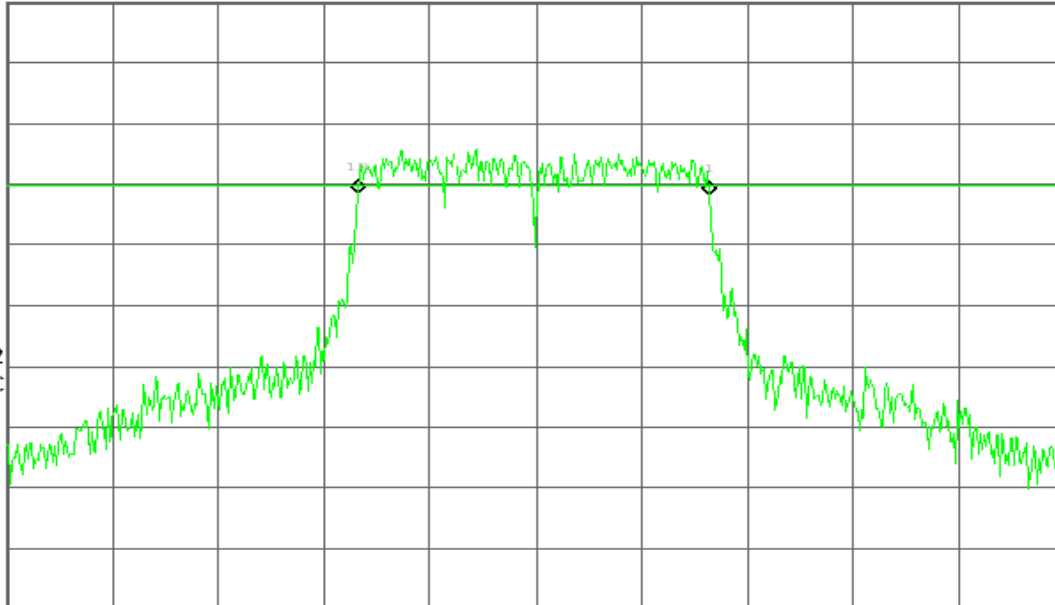

Center 5.785 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 12:58:53 Oct 28, 2009

R T


6dB BW, a Mode High Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

-1.28 dB

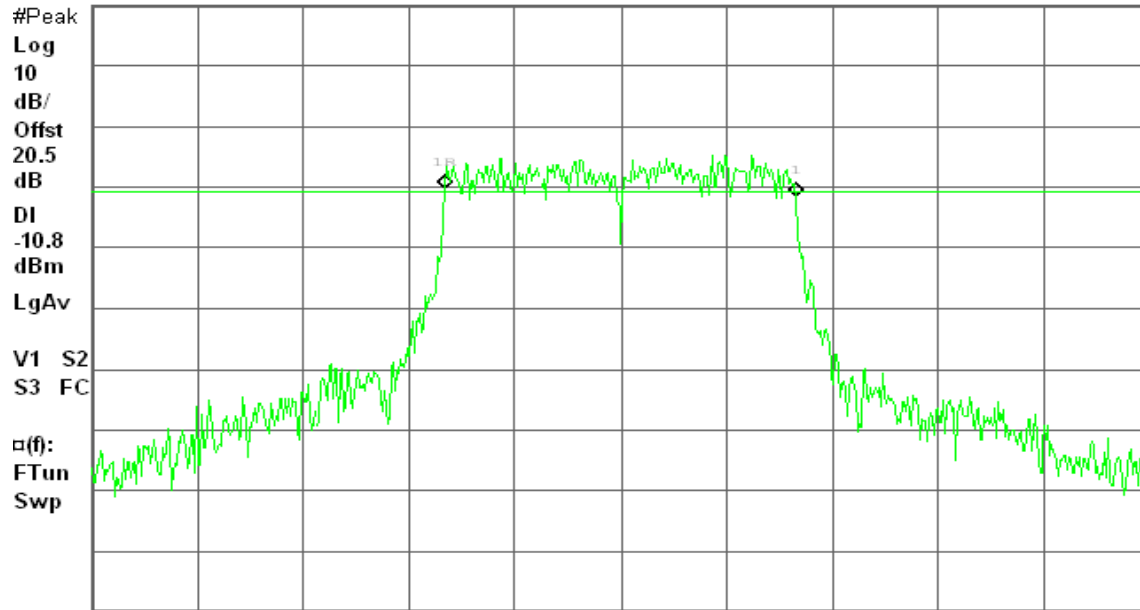

Center 5.825 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

draft 802.11n Standard-20 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 13:04:09 Oct 28, 2009

R T


6dB BW, a Mode Low Ch.

Δ Mkr1 17.25 MHz

Ref 20 dBm

Atten 10 dB

-0.59 dB

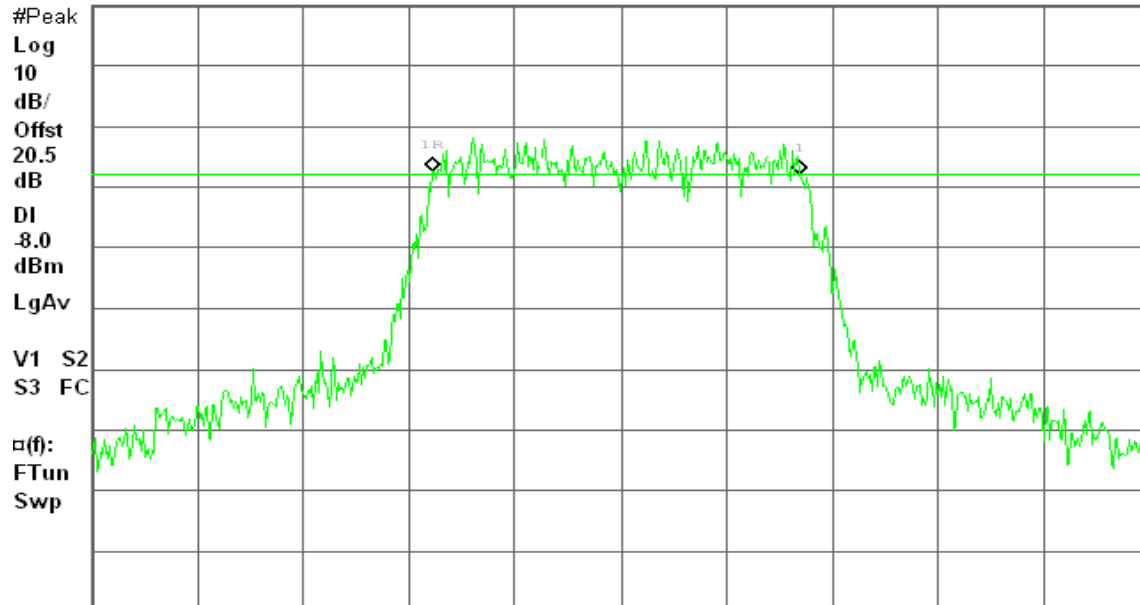

Center 5.745 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

**6dB Bandwidth (CH Mid)**

* Agilent 13:08:47 Oct 28, 2009

R T

6dB BW, a Mode Mid Ch.

 Δ Mkr1 17.00 MHz

Ref 20 dBm

Atten 10 dB

0.62 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-8.5

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

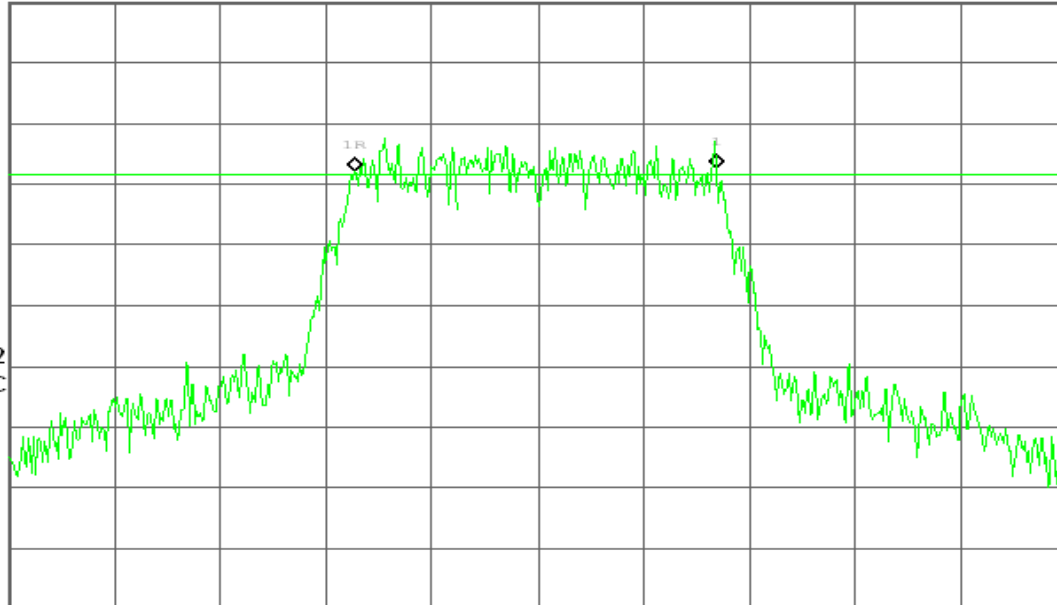

Center 5.785 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

* Agilent 13:15:21 Oct 28, 2009

R T

6dB BW, a Mode High Ch.

 Δ Mkr1 17.58 MHz

Ref 20 dBm

Atten 10 dB

-0.32 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-9.7

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

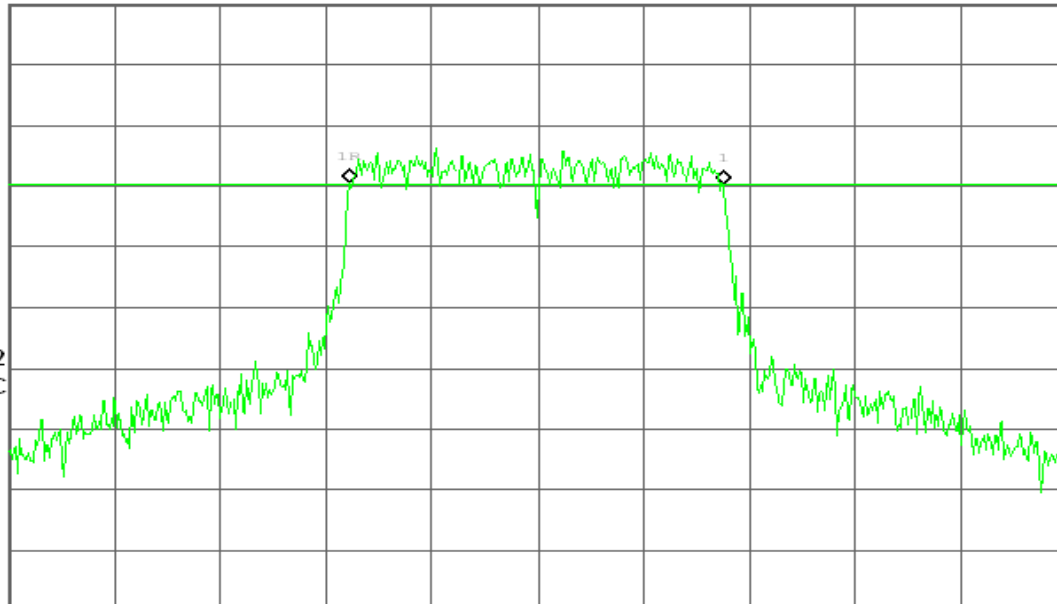

Center 5.825 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



draft 802.11n Wide-40 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 13:21:32 Oct 28, 2009

R T

6dB BW, a Mode Low Ch.

 Δ Mkr1 36.05 MHz

Ref 20 dBm

Atten 10 dB

-2.29 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-11.3

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

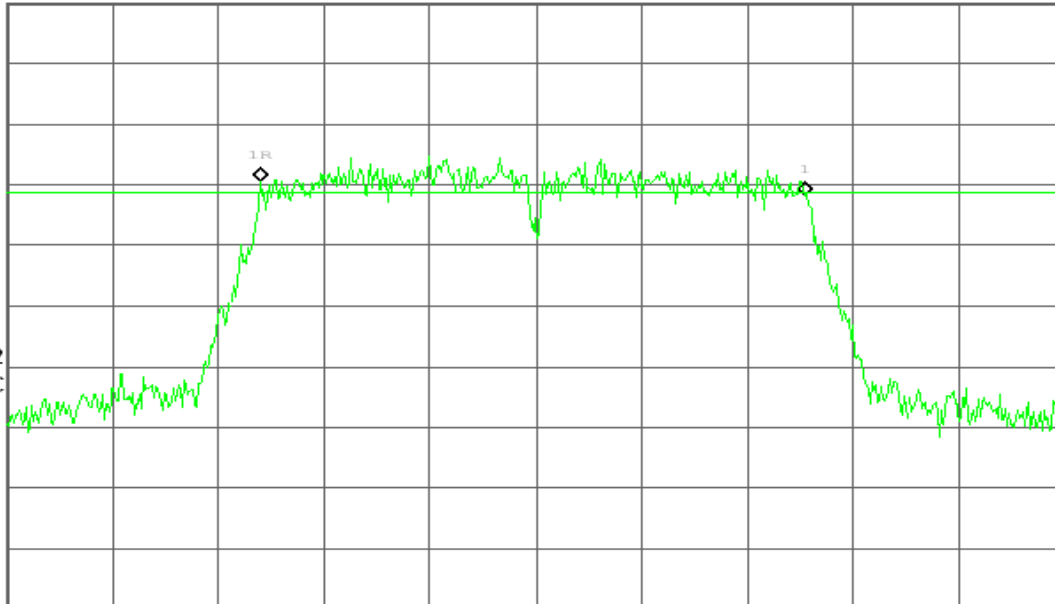

Center 5.755 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 13:26:09 Oct 28, 2009

R T

6dB BW, a Mode High Ch.

 Δ Mkr1 36.28 MHz

Ref 20 dBm

Atten 10 dB

-0.06 dB

#Peak

Log

10

dB/

Offst

20.5

dB

DI

-13.6

dBm

LgAv


V1 S2

S3 FC

 $\alpha(f)$:

FTun

Swp

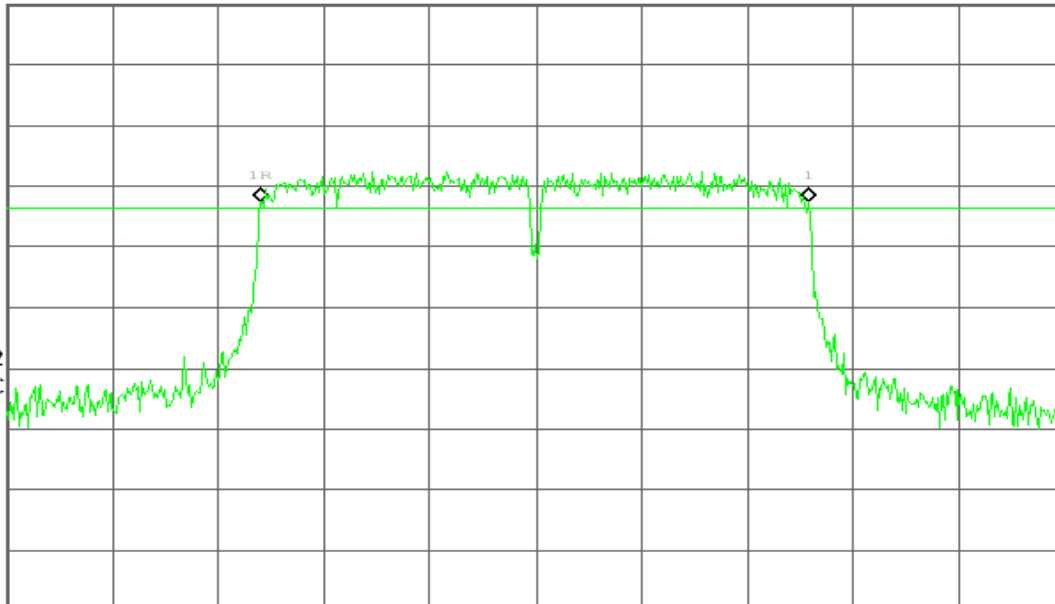

Center 5.795 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

1. Peak power is measured using the spectrum analyzer's internal channel power integration function.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	12.33	0.01710	1.00	PASS
Mid	2437	12.35	0.01718		PASS
High	2462	12.72	0.01871		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	13.04	0.02014	1.00	PASS
Mid	2437	13.96	0.02489		PASS
High	2462	14.15	0.02600		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	13.34	0.02158	1.00	PASS
Mid	2437	13.43	0.02203		PASS
High	2452	13.77	0.02382		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	13.01	0.02000	1.00	PASS
Mid	2437	13.46	0.02218		PASS
High	2452	13.27	0.02123		PASS

**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5745	17.70	0.0589	1.00	PASS
Mid	5785	16.99	0.0500		PASS
High	5825	16.70	0.0468		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5745	17.29	0.0536	1.00	PASS
Mid	5785	16.91	0.0491		PASS
High	5825	17.88	0.0614		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5755	17.34	0.0542	1.00	PASS
High	5795	17.60	0.0575		PASS




Test Plot

IEEE 802.11b mode

Peak Power (CH Low)

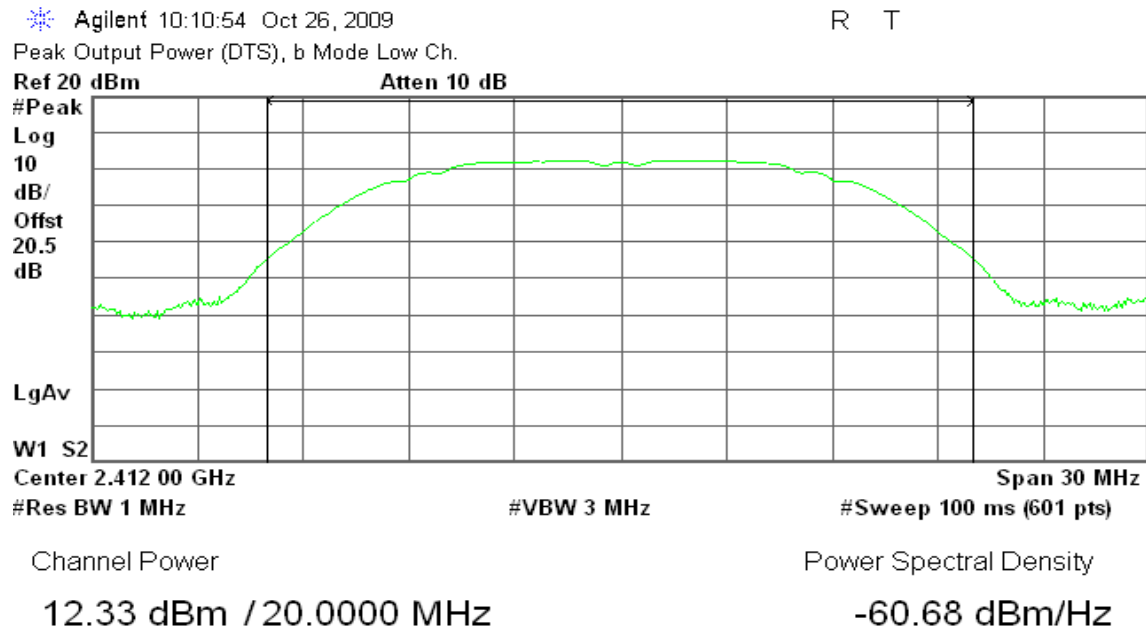

Peak Power (CH Mid)

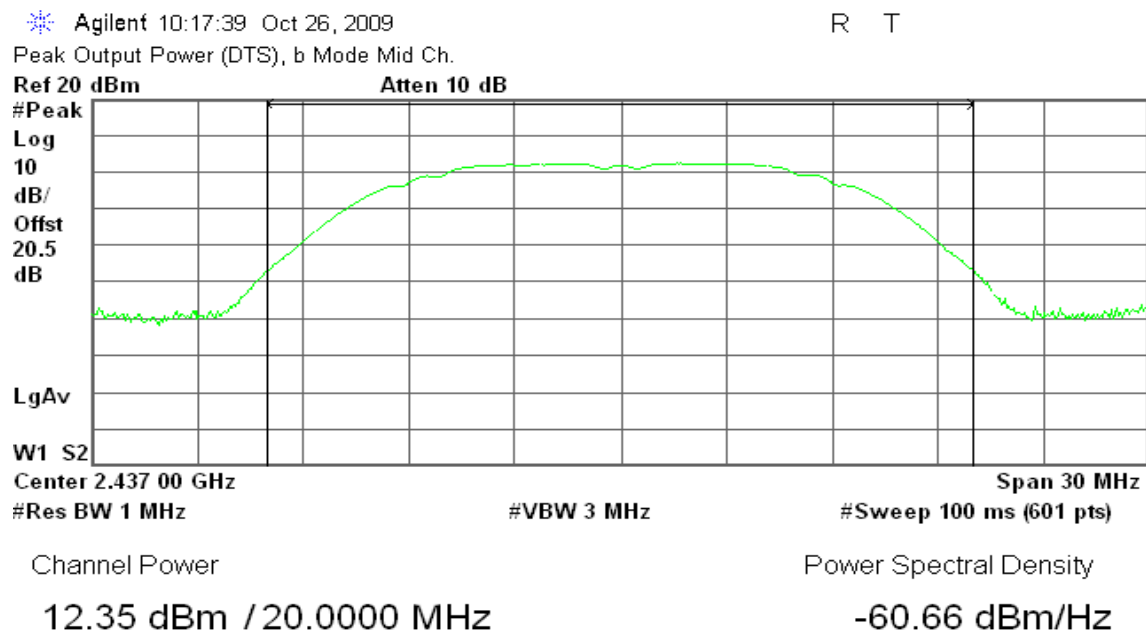



Peak Power (CH High)


Agilent 10:22:05 Oct 26, 2009

R T

Peak Output Power (DTS), b Mode High Ch.

Ref 20 dBm

Atten 10 dB

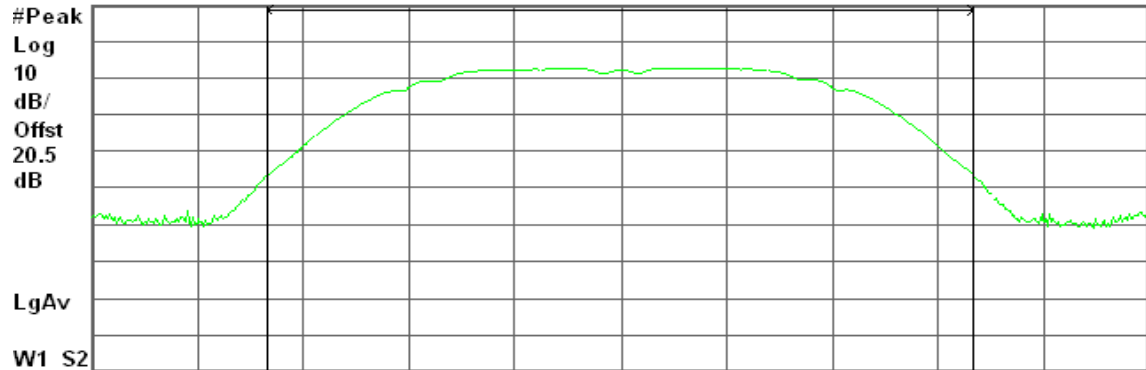

Center 2.462 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

12.72 dBm / 20.0000 MHz

-60.29 dBm/Hz

IEEE 802.11g mode

Peak Power (CH Low)


Agilent 10:43:14 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 10 dB

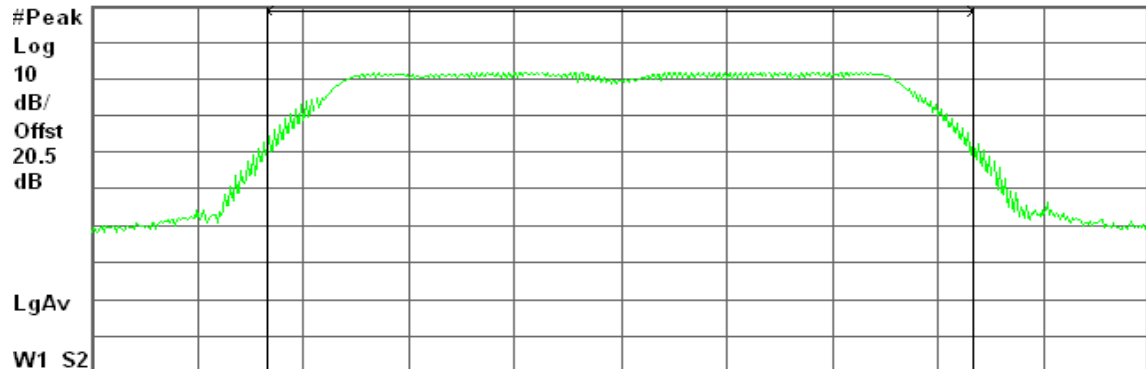

Center 2.412 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.04 dBm / 20.0000 MHz

-59.97 dBm/Hz



Peak Power (CH Mid)


* Agilent 10:47:49 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 10 dB

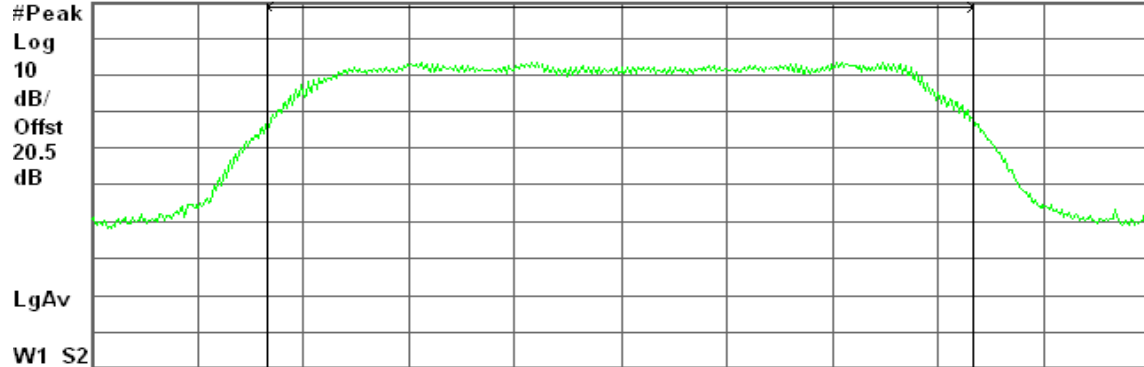

Center 2.437 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.96 dBm / 20.0000 MHz

-59.05 dBm/Hz

Peak Power (CH High)


* Agilent 10:52:04 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 10 dB

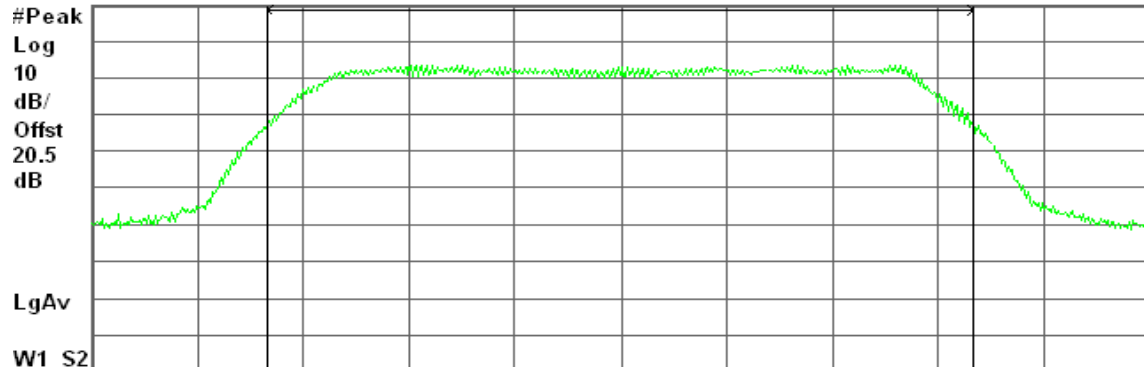

Center 2.462 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

14.15 dBm / 20.0000 MHz

-58.86 dBm/Hz



draft 802.11n Standard-20 MHz Channel mode

Peak Power (CH Low)


Agilent 12:05:45 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 10 dB

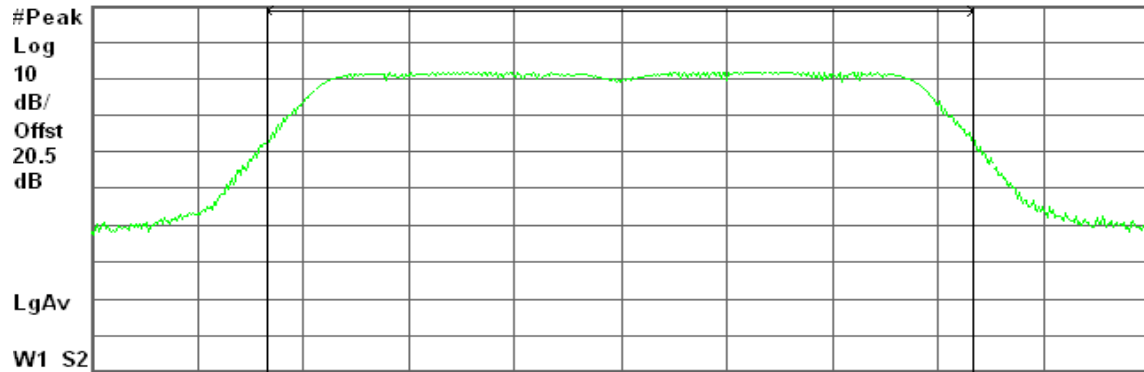

Center 2.412 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.34 dBm / 20.0000 MHz

-59.67 dBm/Hz

Peak Power (CH Mid)


Agilent 12:10:23 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 10 dB

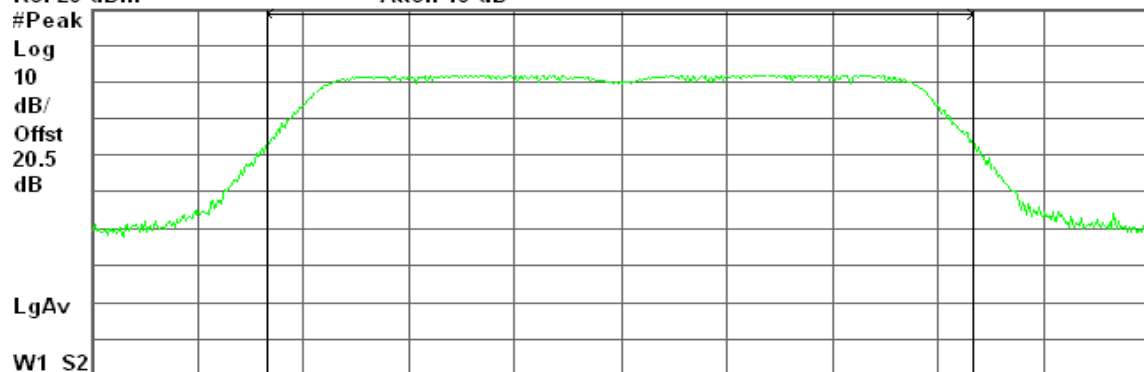

Center 2.437 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.43 dBm / 20.0000 MHz

-59.58 dBm/Hz

**Peak Power (CH High)**


* Agilent 12:15:20 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 10 dB

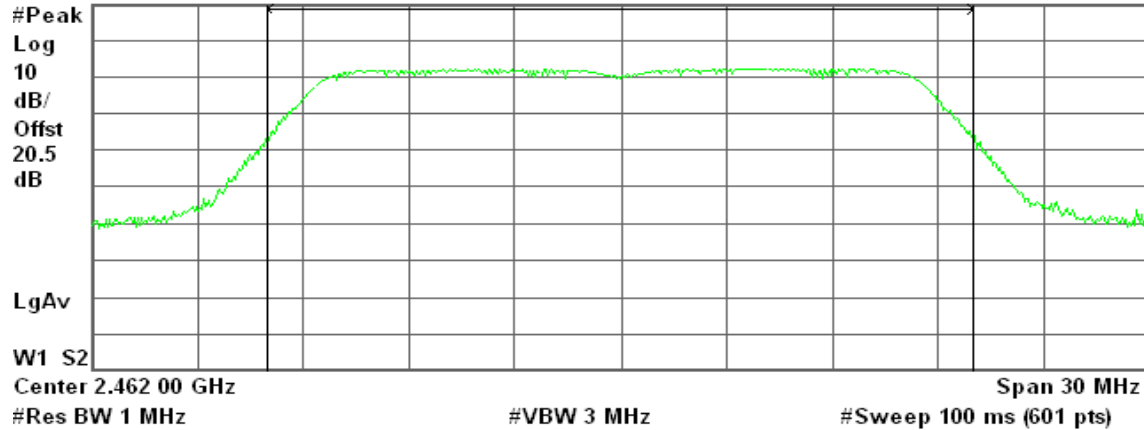

Channel Power

Power Spectral Density

13.77 dBm / 20.0000 MHz

-59.24 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode**Peak Power (CH Low)**


* Agilent 12:23:16 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 10 dB

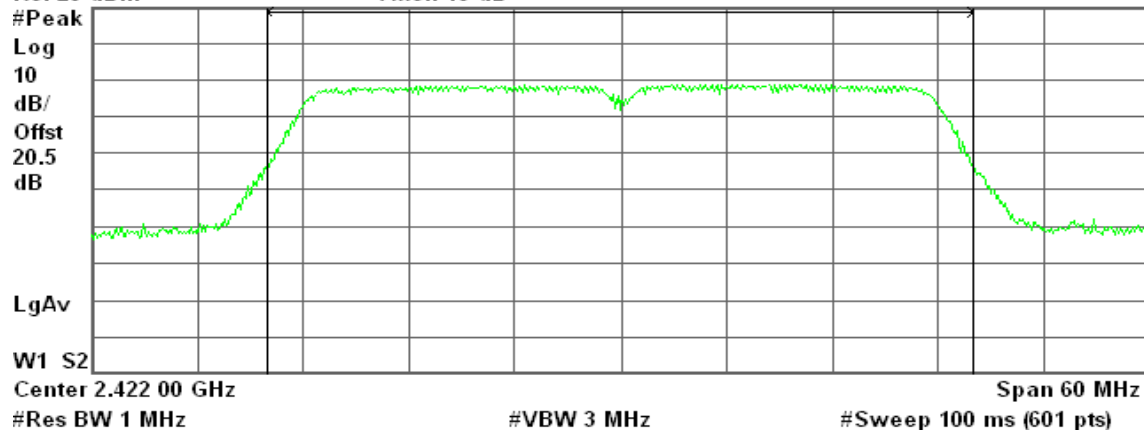

Channel Power

Power Spectral Density

13.01 dBm / 40.0000 MHz

-63.01 dBm/Hz



Peak Power (CH Mid)


Agilent 12:28:15 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 10 dB

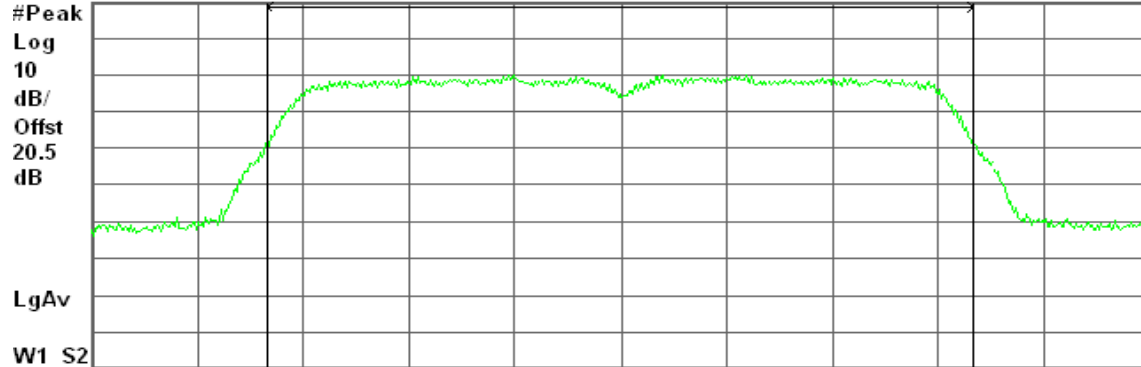

Center 2.437 00 GHz

Span 60 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.46 dBm / 40.0000 MHz

-62.56 dBm/Hz

Peak Power (CH High)


Agilent 12:32:42 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 10 dB

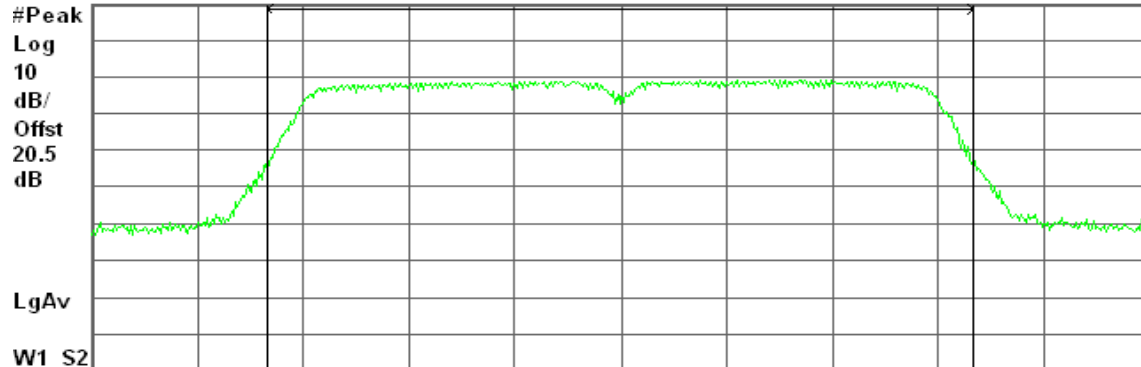

Center 2.452 00 GHz

Span 60 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.27 dBm / 40.0000 MHz

-62.75 dBm/Hz




IEEE 802.11a mode

Peak Power (CH Low)

* Agilent 14:37:19 Nov 17, 2009

R T

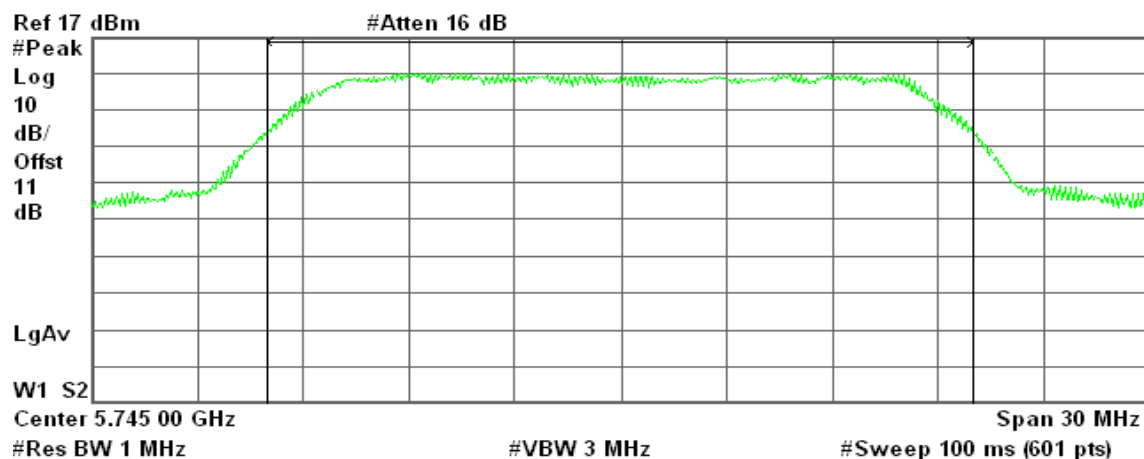

Channel Power

17.70 dBm / 20.0000 MHz


Power Spectral Density

-55.31 dBm/Hz

Peak Power (CH Mid)

* Agilent 14:39:28 Nov 17, 2009

R T

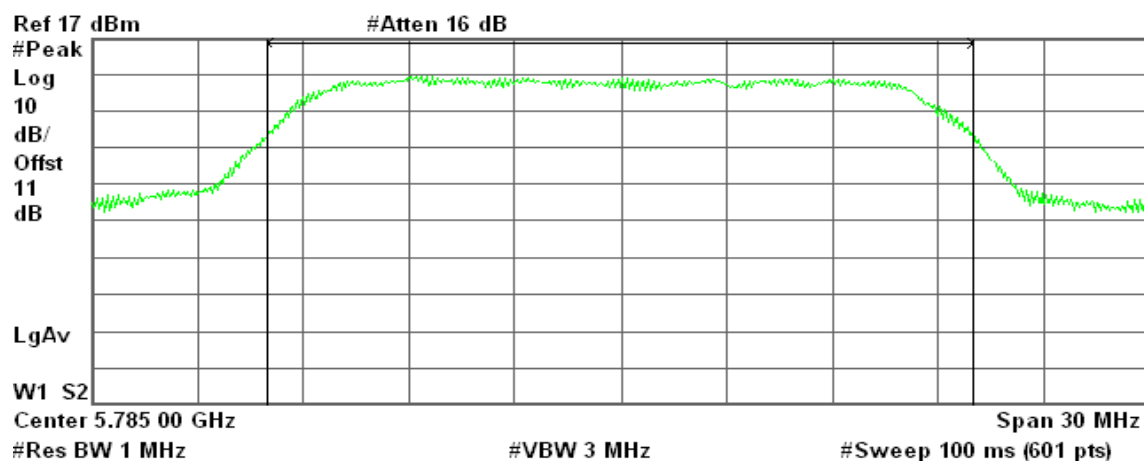

Channel Power

16.99 dBm / 20.0000 MHz

Power Spectral Density


-56.02 dBm/Hz



Peak Power (CH High)

Agilent 14:41:19 Nov 17, 2009

R T

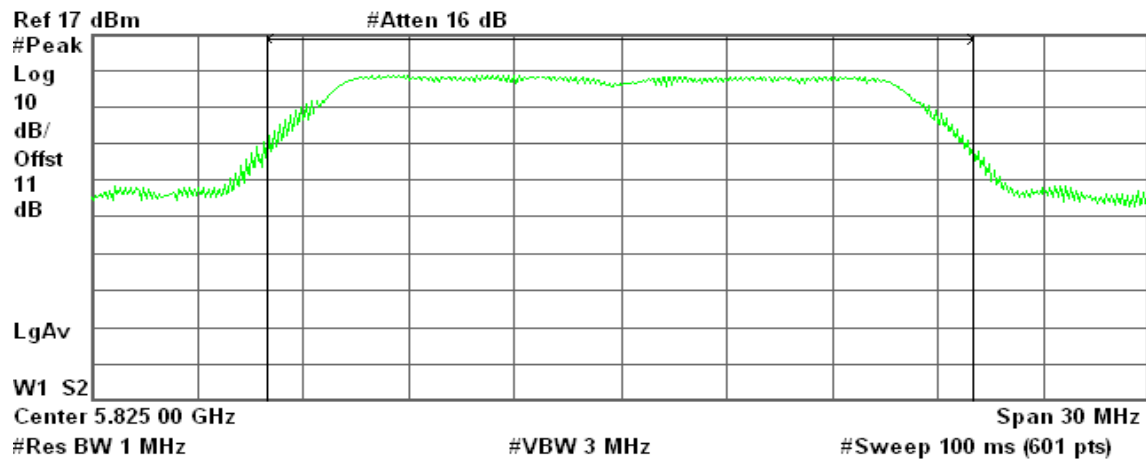

Channel Power

16.70 dBm / 20.0000 MHz

Power Spectral Density


-56.31 dBm/Hz

draft 802.11n Standard-20 MHz Channel mode

Peak Power (CH Low)

Agilent 14:49:07 Nov 17, 2009

R T

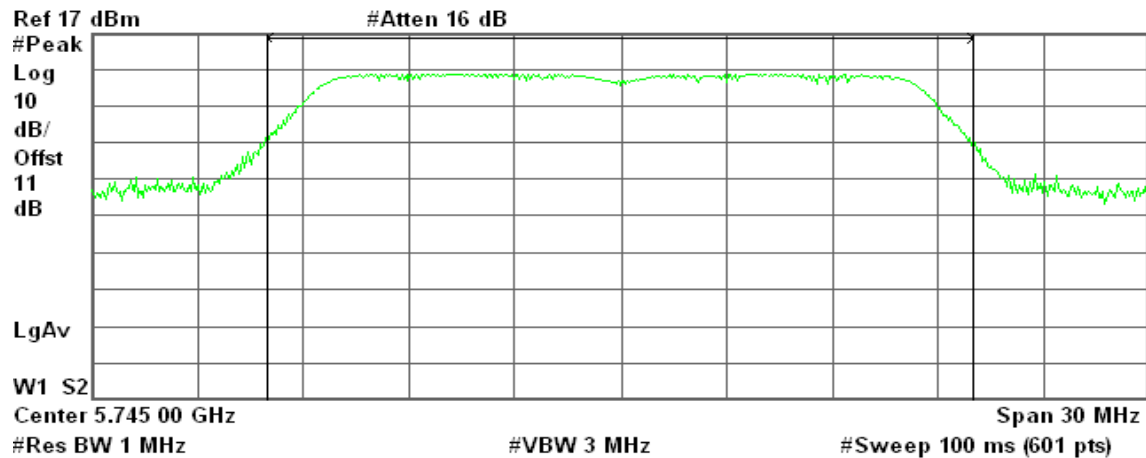

Channel Power

17.29 dBm / 20.0000 MHz

Power Spectral Density


-55.72 dBm/Hz



Peak Power (CH Mid)

Agilent 14:47:23 Nov 17, 2009

R T

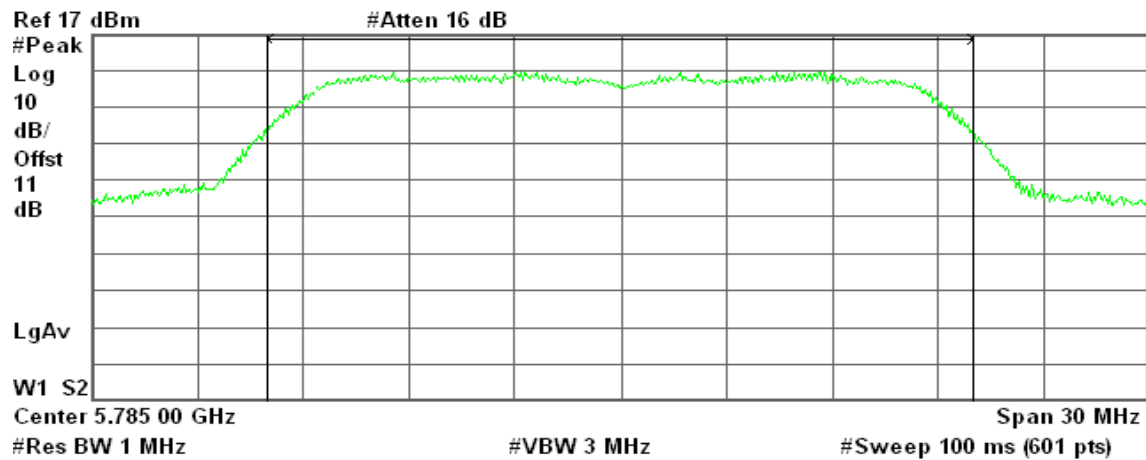

Channel Power

16.91 dBm / 20.0000 MHz


Power Spectral Density

-56.10 dBm/Hz

Peak Power (CH High)

Agilent 14:43:02 Nov 17, 2009

R T

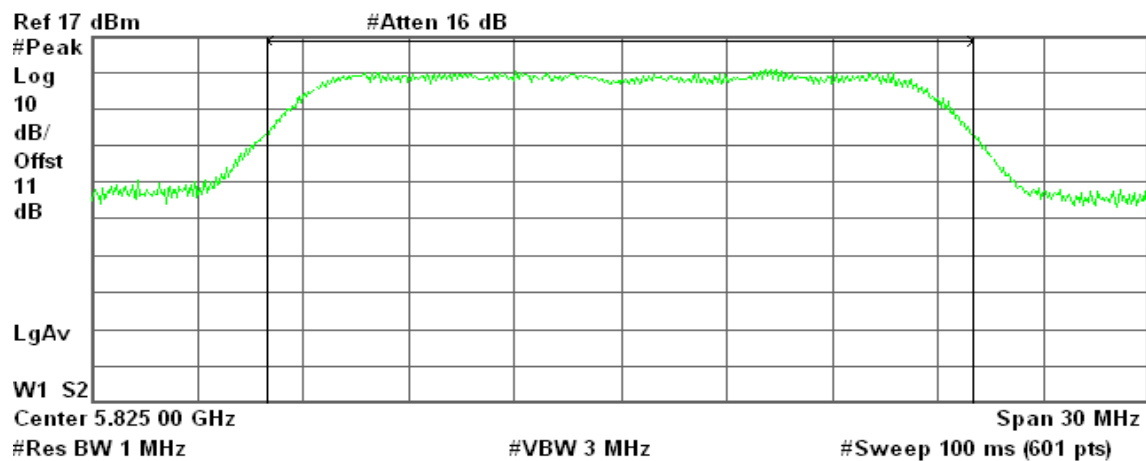

Channel Power

17.88 dBm / 20.0000 MHz

Power Spectral Density

-55.13 dBm/Hz




draft 802.11n Wide-40 MHz Channel mode

Peak Power (CH Low)

Agilent 14:57:58 Nov 17, 2009

R T

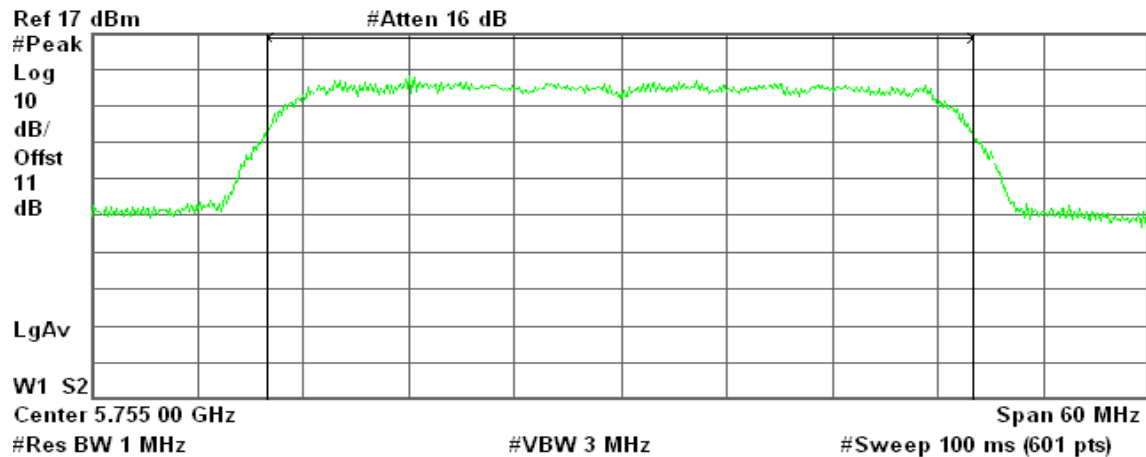

Channel Power

17.34 dBm / 40.0000 MHz


Power Spectral Density

-58.68 dBm/Hz

Peak Power (CH High)

Agilent 14:59:57 Nov 17, 2009

R T

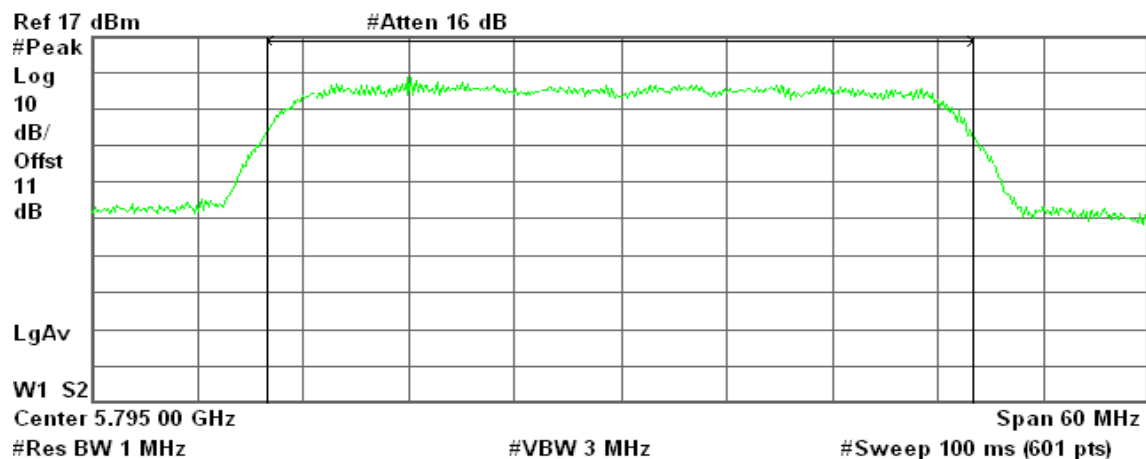

Channel Power

17.60 dBm / 40.0000 MHz

Power Spectral Density

-58.42 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	9.31	8.53100
Mid	2437	9.43	8.77001
High	2462	9.87	9.70510

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	5.74	3.74973
Mid	2437	5.73	0.00374
High	2462	5.94	0.00393

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	6.07	0.00405
Mid	2437	6.53	0.00450
High	2462	6.36	0.00433

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2422	5.85	0.00385
Mid	2437	5.60	0.00363
High	2452	6.05	0.00403

**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5745	9.84	0.0096
Mid	5785	9.17	0.0083
High	5825	9.53	0.0090

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5745	9.86	0.0097
Mid	5785	9.20	0.0083
High	5825	9.65	0.0092

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5755	9.66	0.0092
High	5795	9.52	0.0090




Test Plot

IEEE 802.11b mode

Average Power (CH Low)

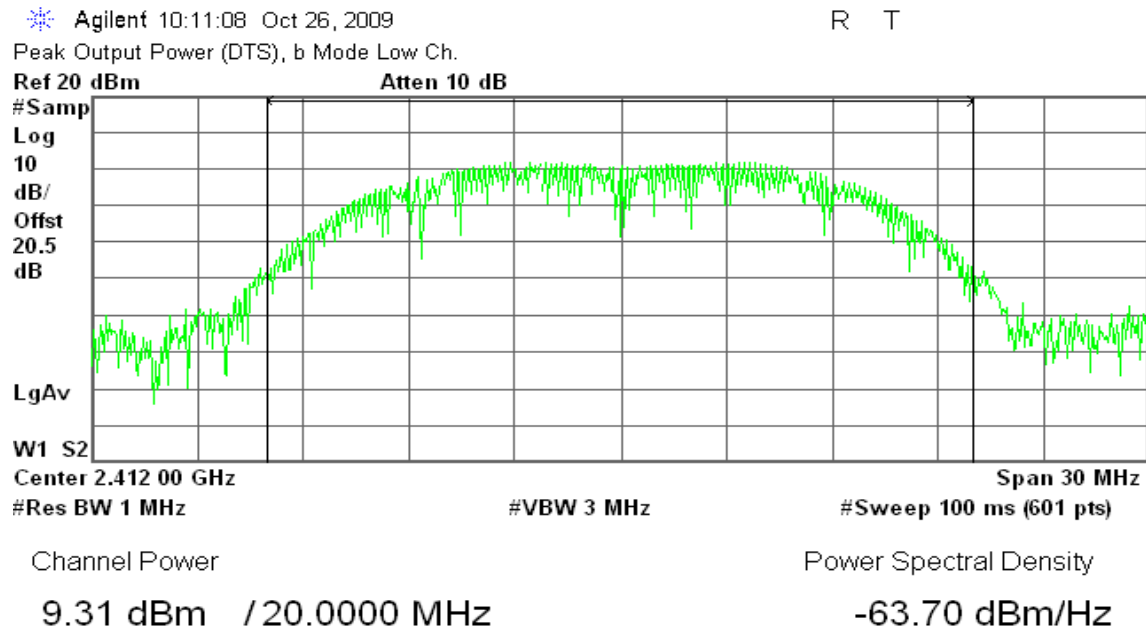

Average Power (CH Mid)

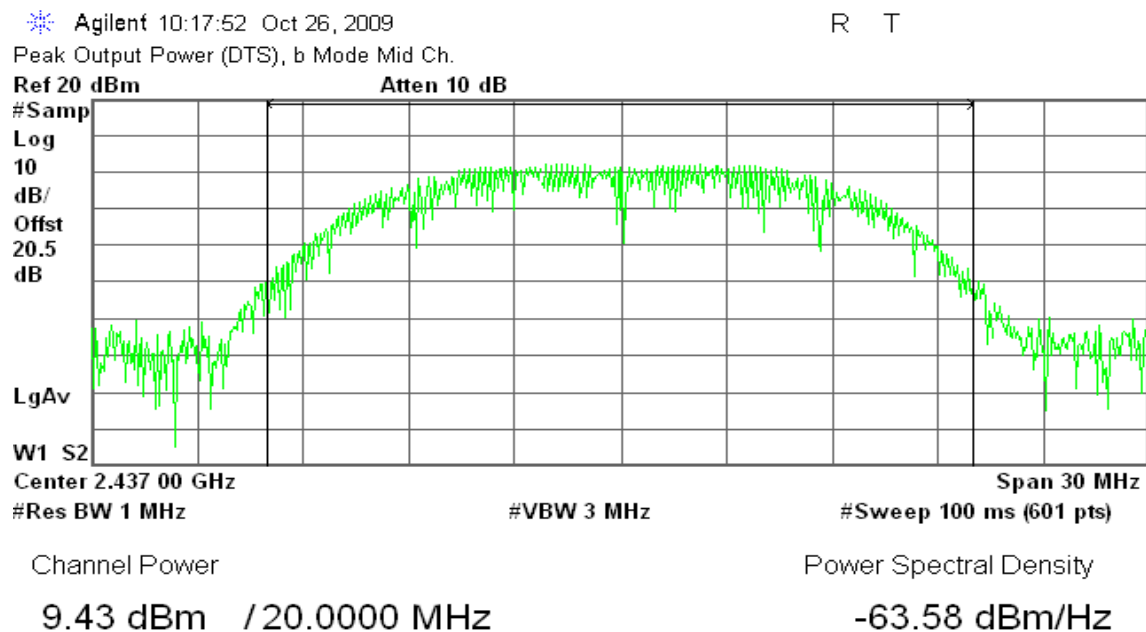



Average Power (CH High)


Agilent 10:22:20 Oct 26, 2009

R T

Peak Output Power (DTS), b Mode High Ch.

Ref 20 dBm

Atten 10 dB

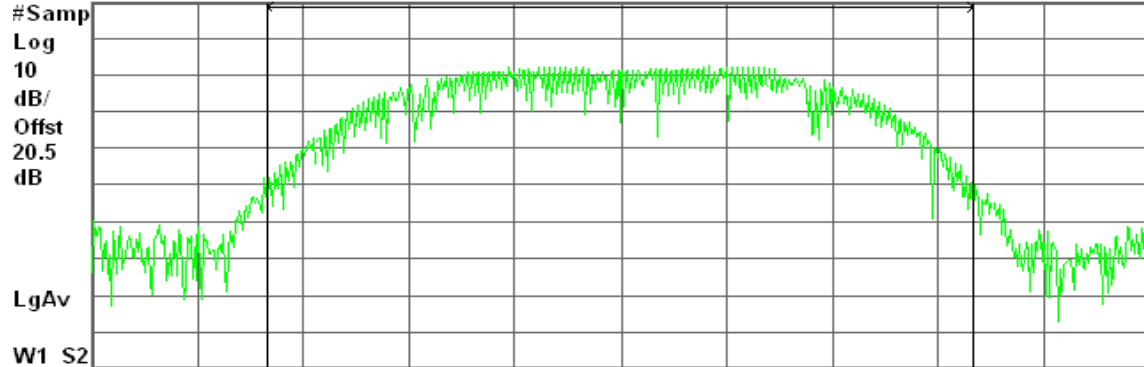

Center 2.462 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

9.87 dBm / 20.0000 MHz

-63.15 dBm/Hz

IEEE 802.11g mode

Average Power (CH Low)


Agilent 10:43:27 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 10 dB

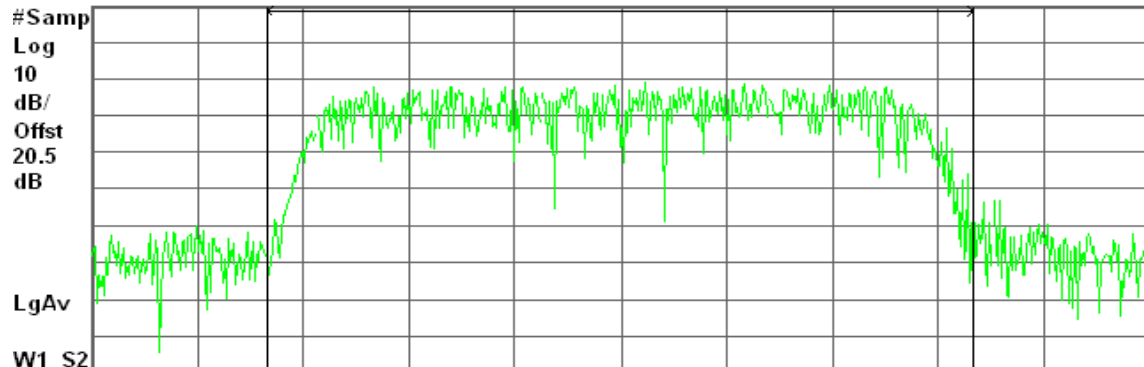

Center 2.412 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

5.74 dBm / 20.0000 MHz

-67.27 dBm/Hz

**Average Power (CH Mid)**


* Agilent 10:48:02 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 10 dB

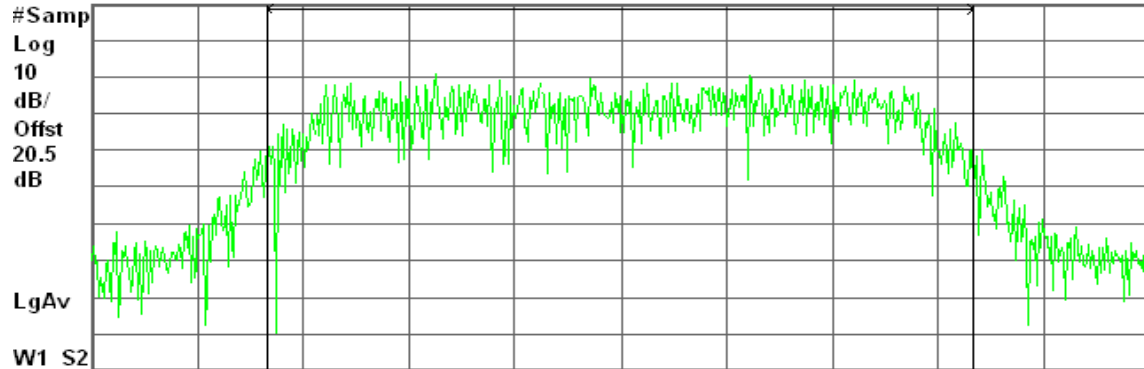

Center 2.437 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

5.73 dBm / 20.0000 MHz

-67.28 dBm/Hz

Average Power (CH High)


* Agilent 10:52:18 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 10 dB

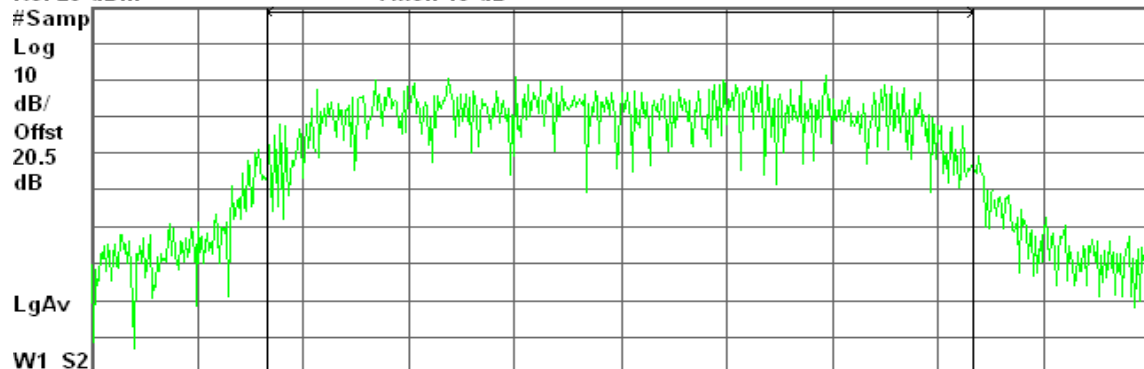

Center 2.462 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

5.94 dBm / 20.0000 MHz

-67.07 dBm/Hz



draft 802.11n Standard-20 MHz Channel mode

Average Power (CH Low)


Agilent 12:06:01 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 10 dB

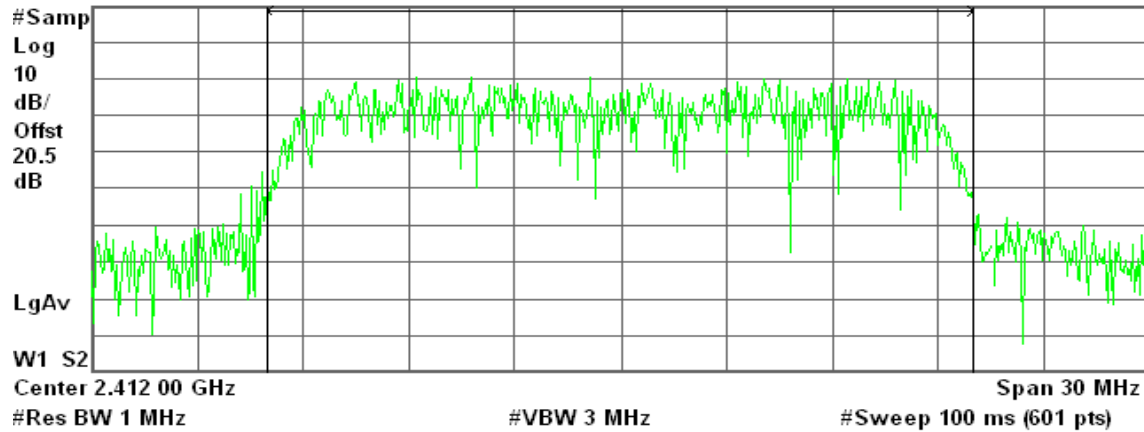

Channel Power

Power Spectral Density

6.07 dBm / 20.0000 MHz

-66.94 dBm/Hz

Average Power (CH Mid)


Agilent 12:10:41 Oct 26, 2009

R L

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 10 dB

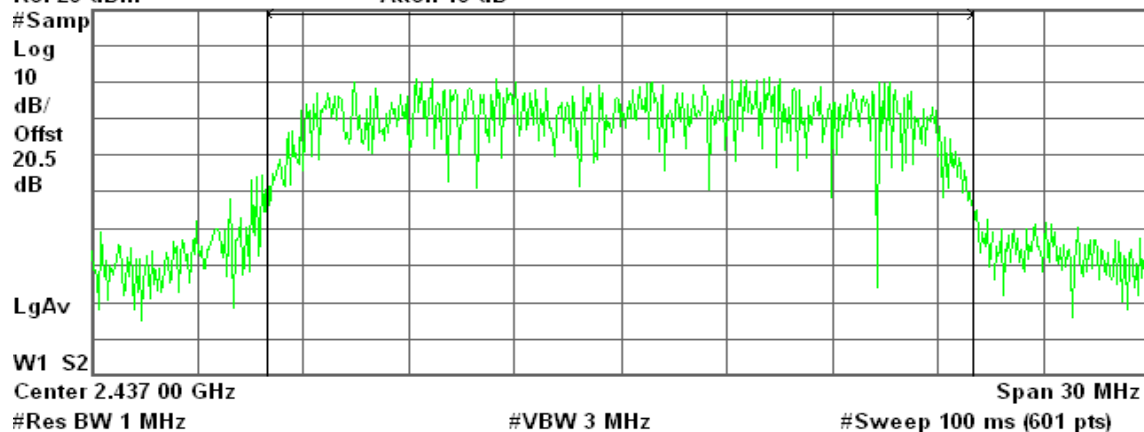

Channel Power

Power Spectral Density

6.53 dBm / 20.0000 MHz

-66.48 dBm/Hz



Average Power (CH High)


Agilent 12:15:54 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 10 dB

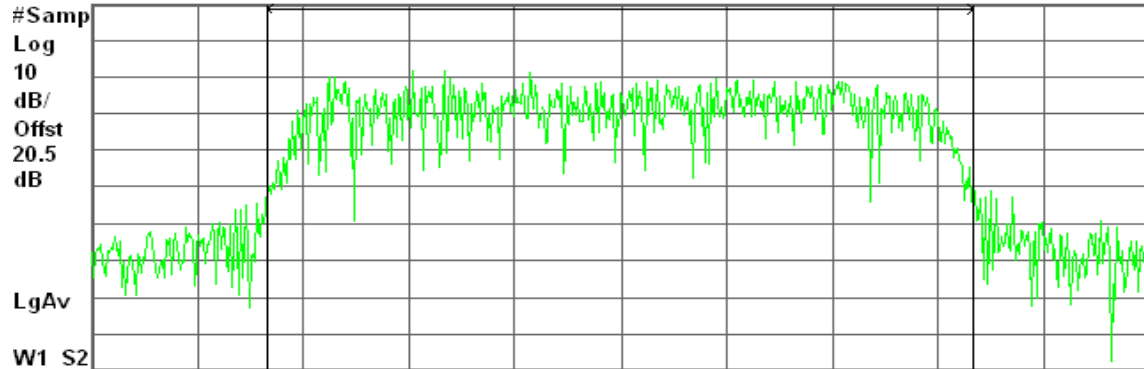

Center 2.462 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

6.36 dBm / 20.0000 MHz

-66.65 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode

Average Power (CH Low)


Agilent 12:23:37 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Low Ch.

Ref 20 dBm

Atten 10 dB

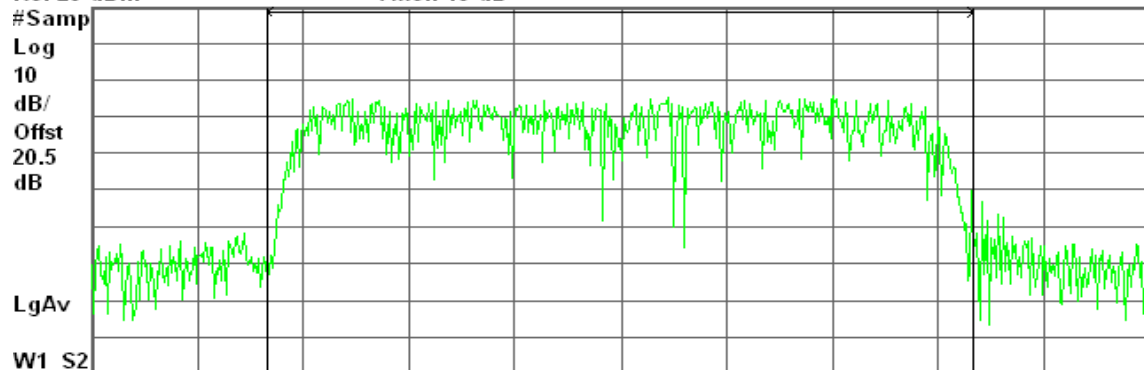

Center 2.422 00 GHz

Span 60 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

5.85 dBm / 40.0000 MHz

-70.17 dBm/Hz

**Average Power (CH Mid)**


* Agilent 12:28:28 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 10 dB

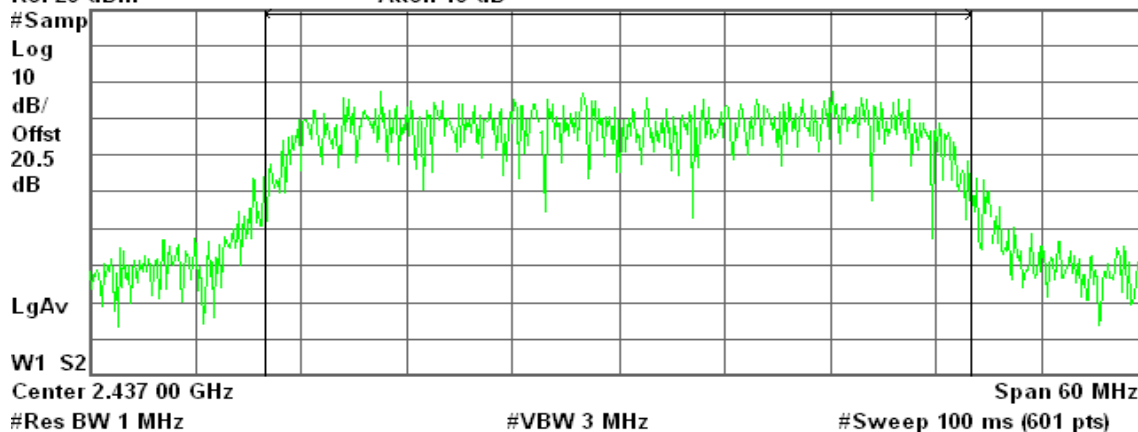

Channel Power

5.60 dBm / 40.0000 MHz

Power Spectral Density

-70.42 dBm/Hz

Average Power (CH High)


* Agilent 12:32:58 Oct 26, 2009

R T

Peak Output Power (DTS), g Mode High Ch.

Ref 20 dBm

Atten 10 dB

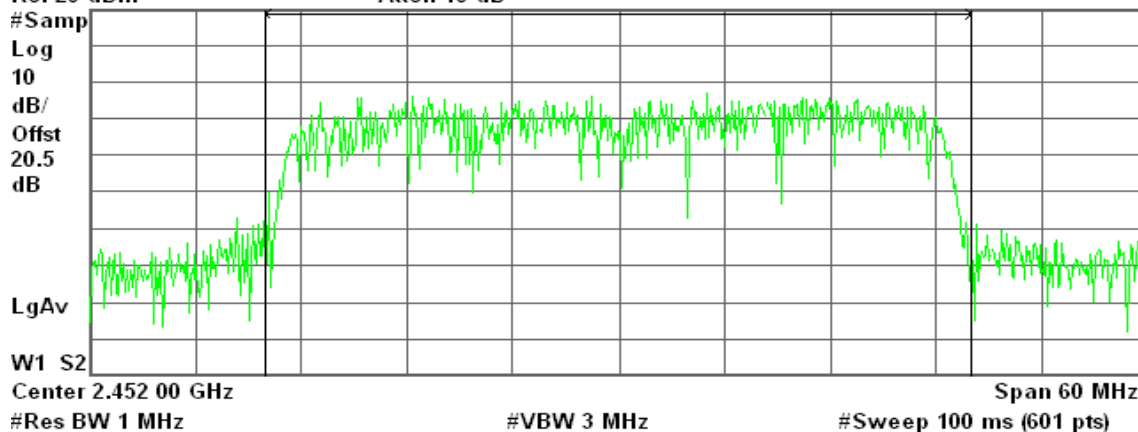

Channel Power

6.05 dBm / 40.0000 MHz

Power Spectral Density

-69.97 dBm/Hz




IEEE 802.11a mode

Average Power (CH Low)

Agilent 14:37:02 Nov 17, 2009


R T

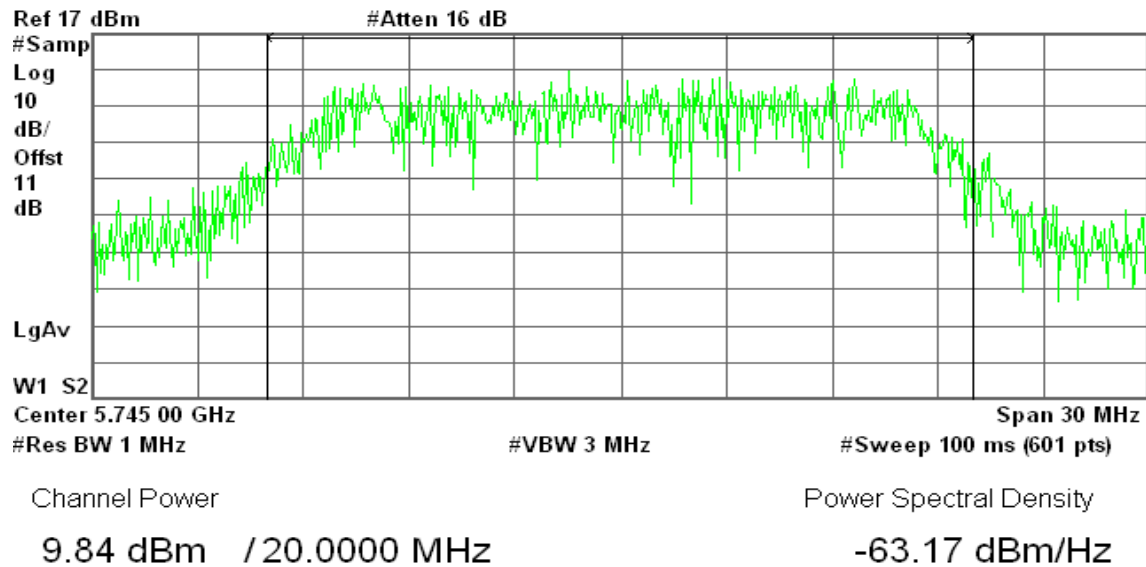

Average Power (CH Mid)

Agilent 14:39:14 Nov 17, 2009

R T

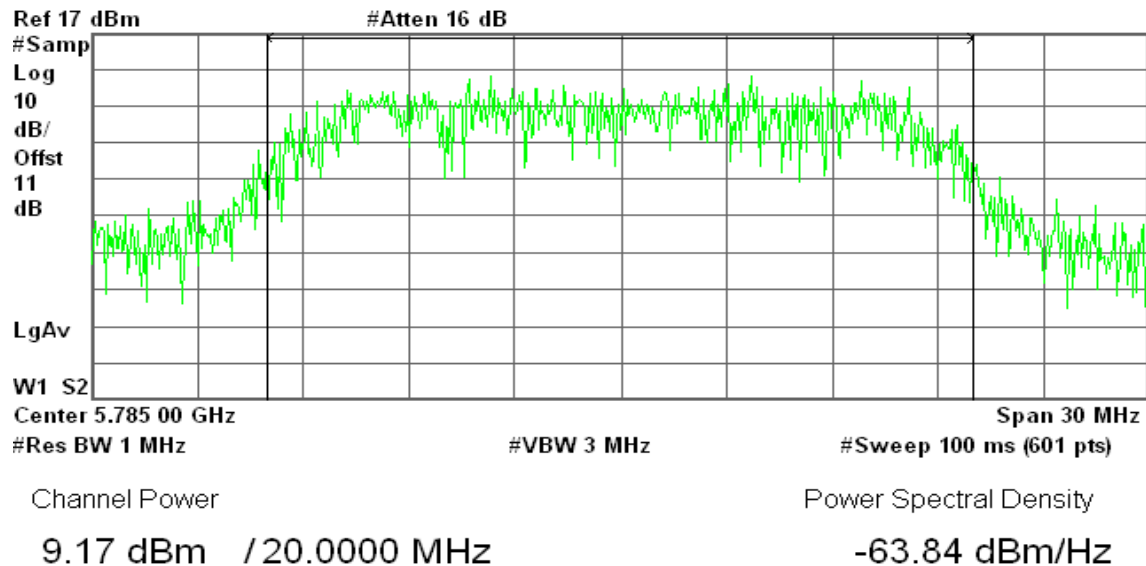




Average Power (CH High)

Agilent 14:41:07 Nov 17, 2009

R T

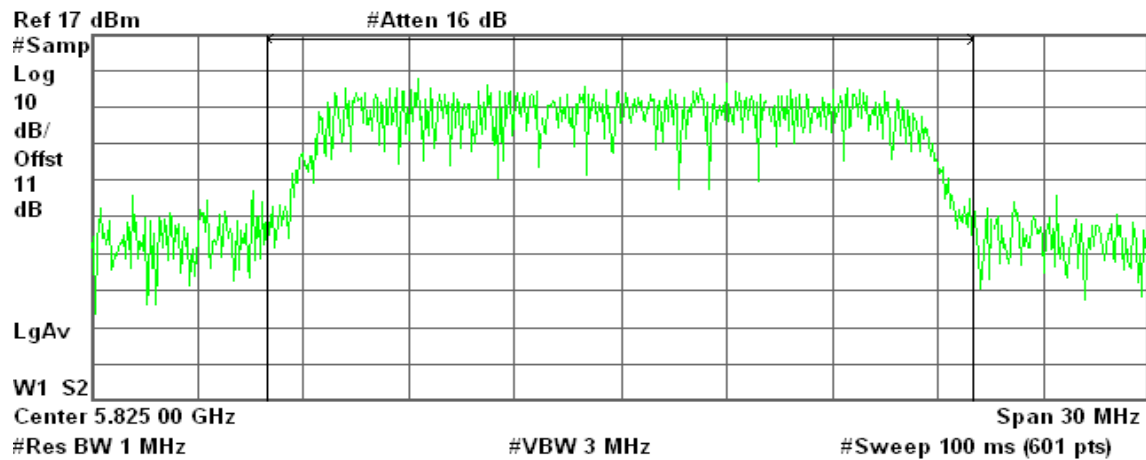

Channel Power

9.53 dBm / 20.0000 MHz

Power Spectral Density


-63.48 dBm/Hz

draft 802.11n Standard-20 MHz Channel mode

Average Power (CH Low)

Agilent 14:48:49 Nov 17, 2009

R T

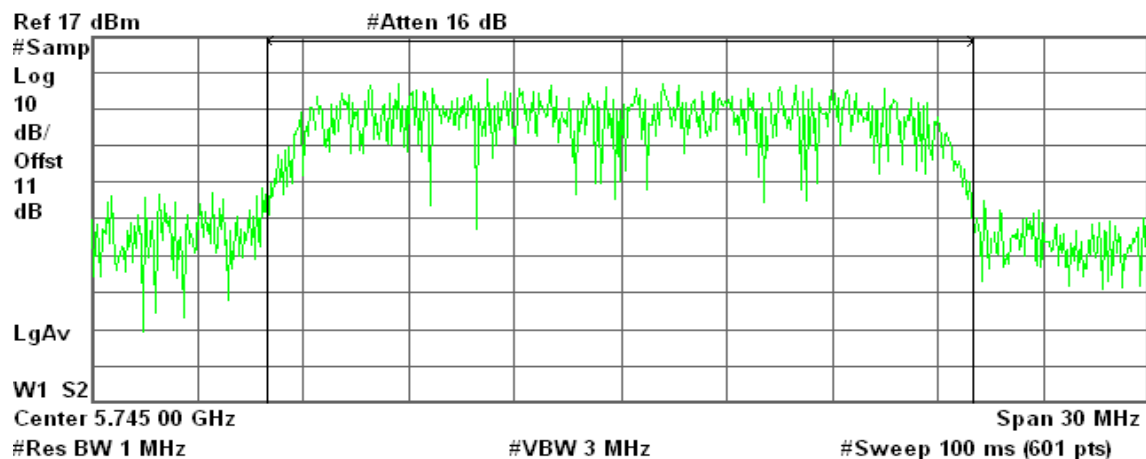

Channel Power

9.86 dBm / 20.0000 MHz

Power Spectral Density


-63.15 dBm/Hz



Average Power (CH Mid)

Agilent 14:47:10 Nov 17, 2009

R T

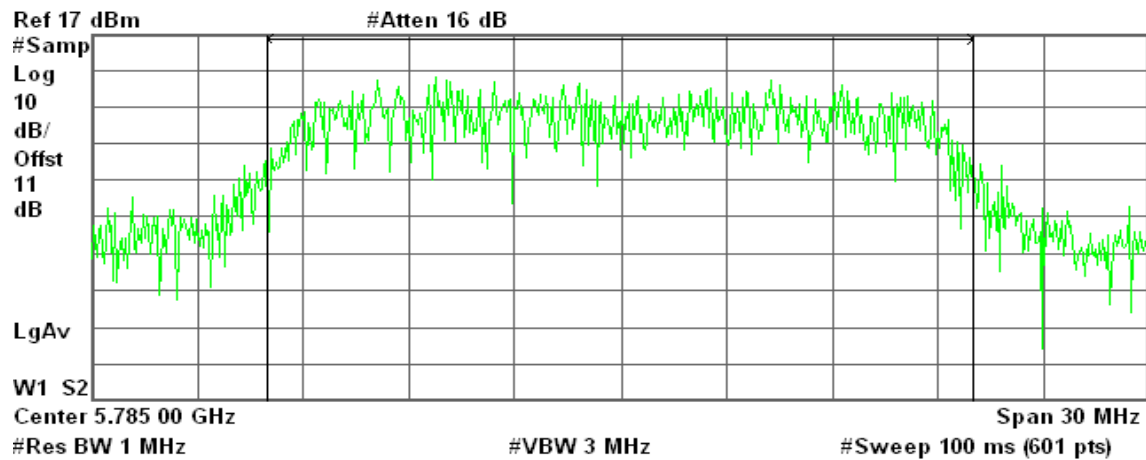

Channel Power

9.20 dBm / 20.0000 MHz


Power Spectral Density

-63.81 dBm/Hz

Average Power (CH High)

Agilent 14:42:44 Nov 17, 2009

R T

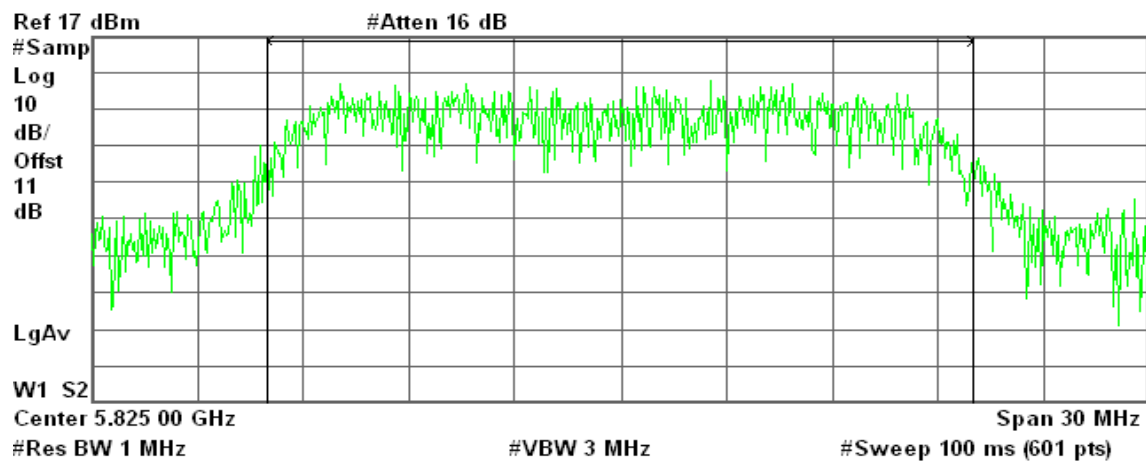

Channel Power

9.65 dBm / 20.0000 MHz

Power Spectral Density

-63.36 dBm/Hz




draft 802.11n Wide-40 MHz Channel mode

Average Power (CH Low)

Agilent 14:57:27 Nov 17, 2009

R T

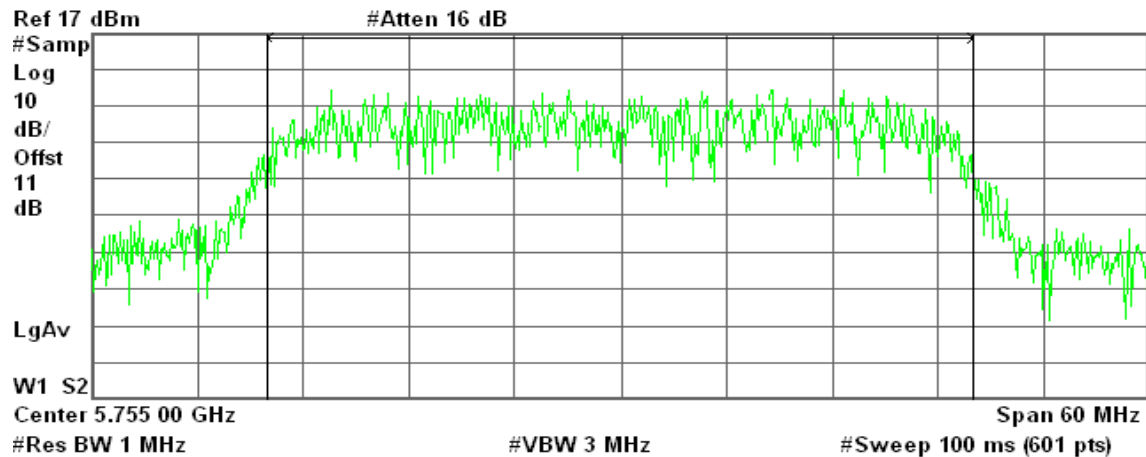

Channel Power

9.66 dBm / 40.0000 MHz


Power Spectral Density

-66.36 dBm/Hz

Average Power (CH High)

Agilent 14:59:42 Nov 17, 2009

R T

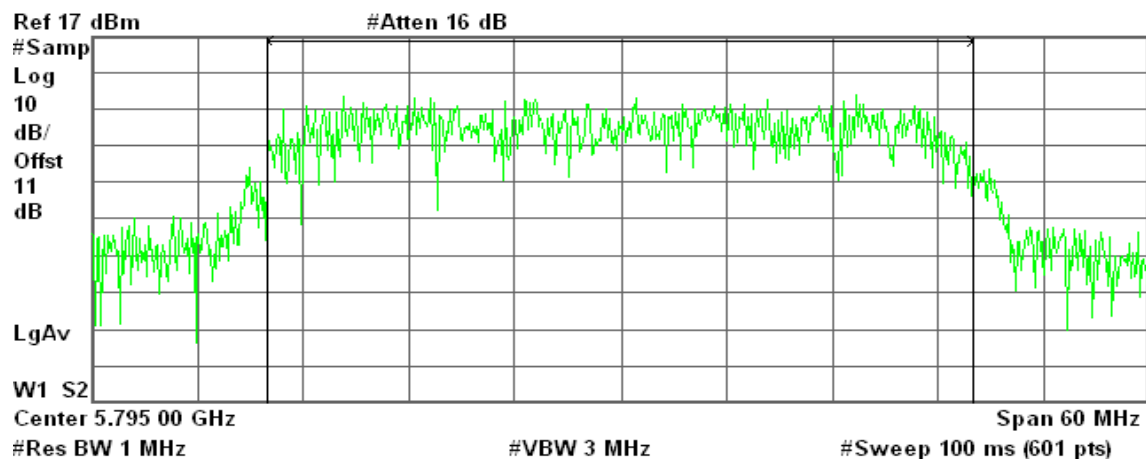

Channel Power

9.52 dBm / 40.0000 MHz

Power Spectral Density


-66.50 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration


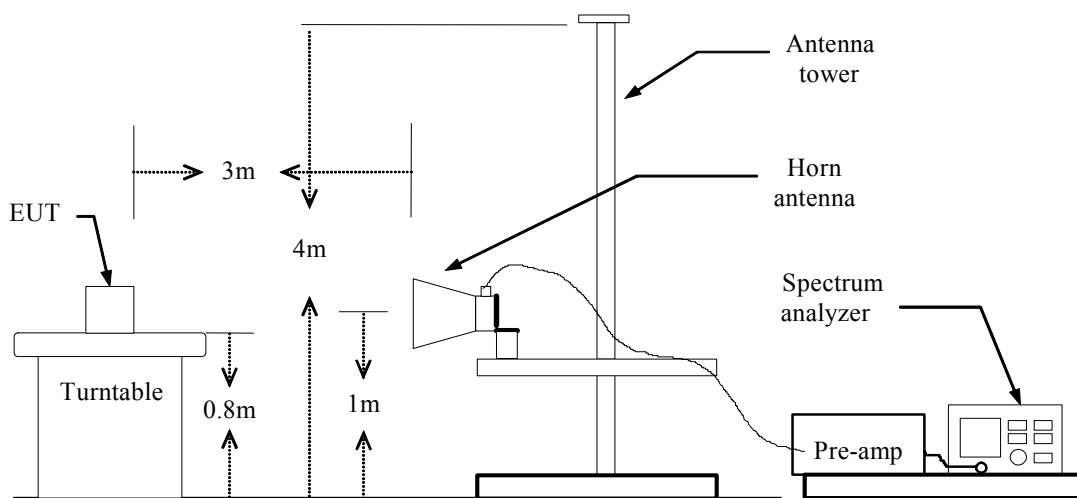


TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.

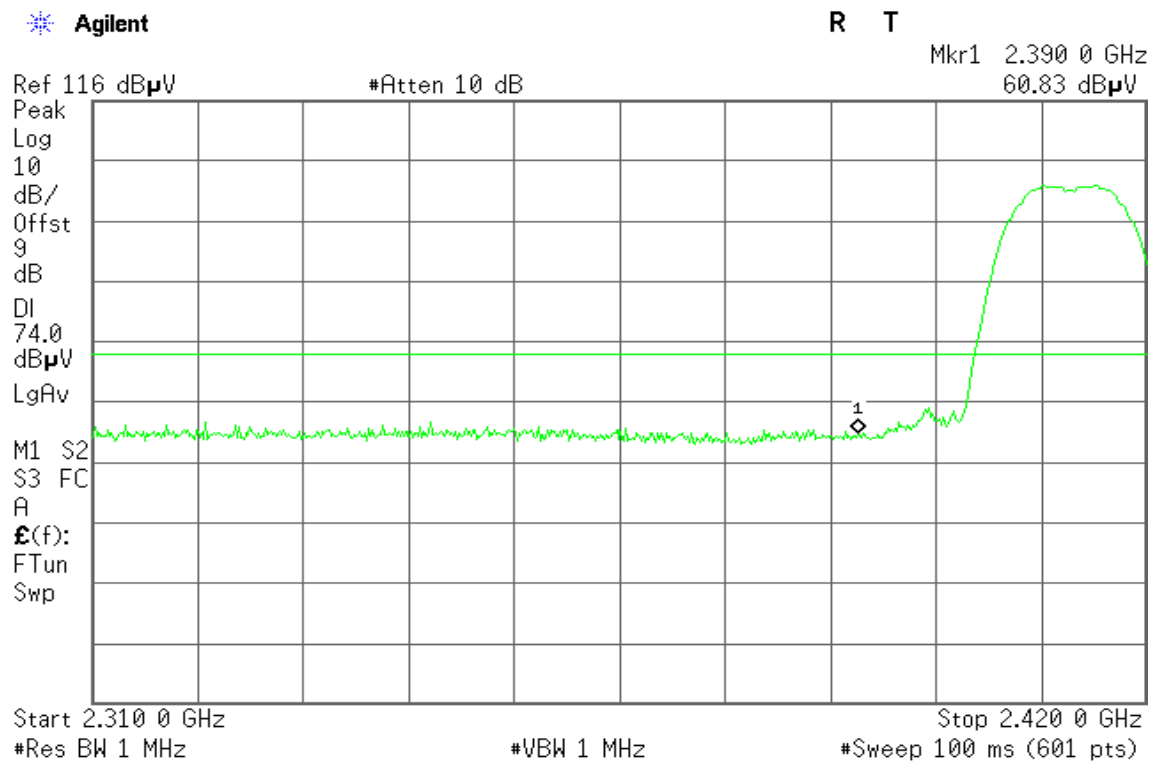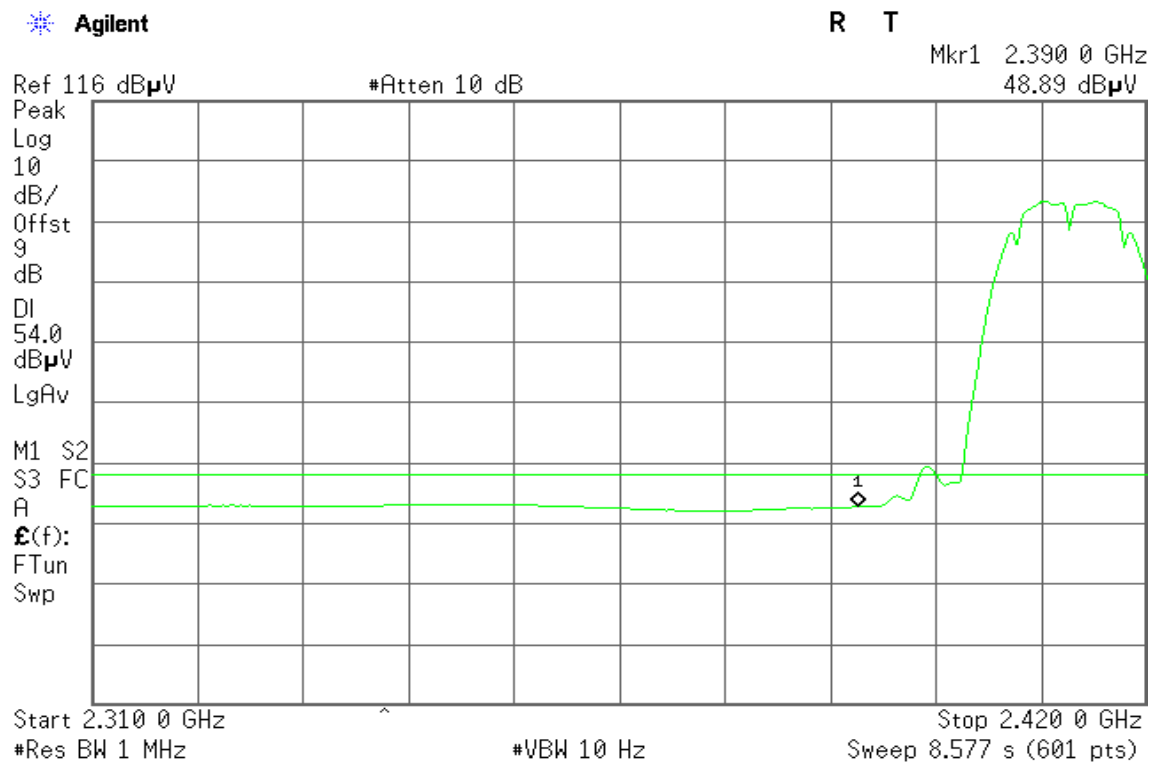**Band Edges (IEEE 802.11b mode / CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak

Polarity: Horizontal

Agilent

R T


Mkr1 2.390 0 GHz
55.50 dB μ V

Ref 116 dB μ V

#Atten 10 dB

Peak
Log
10
dB/
Offst
9
dB
DI
74.0
dB μ V
LgAv

M1 S2
S3 FC
A
£(f):
FTun
Swp

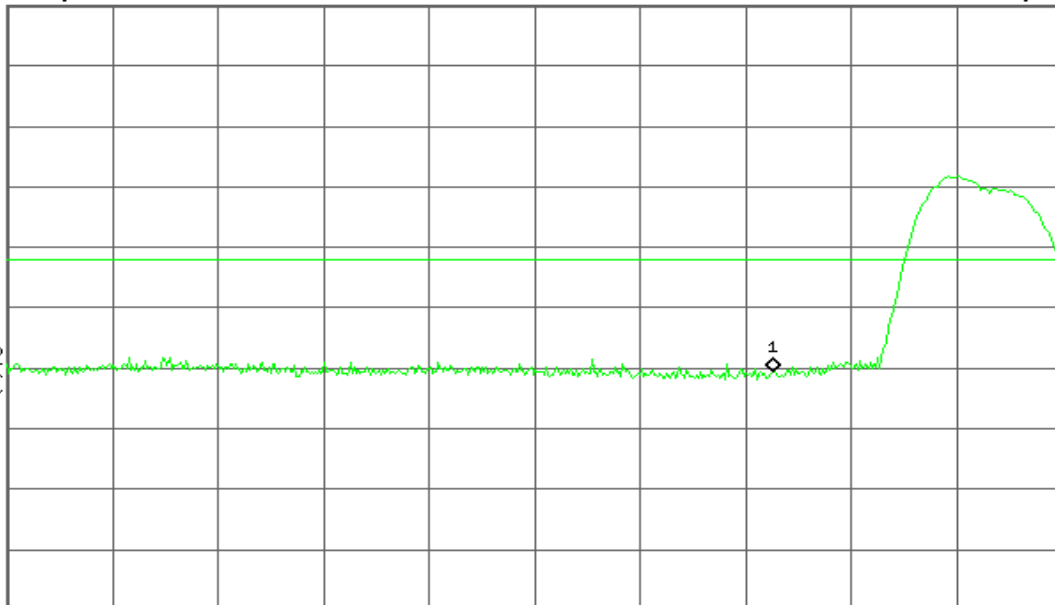

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.420 0 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.390 0 GHz
43.36 dB μ V

Ref 116 dB μ V

#Atten 10 dB

Peak
Log
10
dB/
Offst
9
dB
DI
54.0
dB μ V
LgAv

M1 S2
S3 FC
A
£(f):
FTun
Swp



Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.420 0 GHz

Sweep 8.577 s (601 pts)

**Band Edges (IEEE 802.11b mode / CH High)****Detector mode: Peak****Polarity: Vertical**

Agilent

R T

Mkr1 2.483 50 GHz
61.29 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A

 $\mathcal{E}(f)$:

FTun

Swp

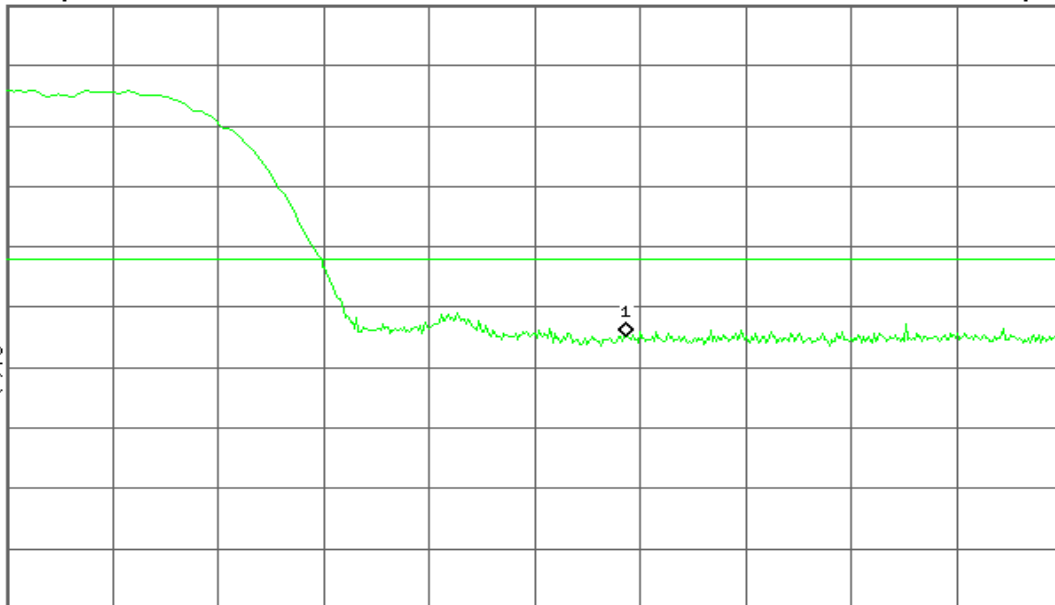

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

Agilent

R T

Mkr1 2.483 50 GHz
48.83 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A

 $\mathcal{E}(f)$:

FTun

Swp

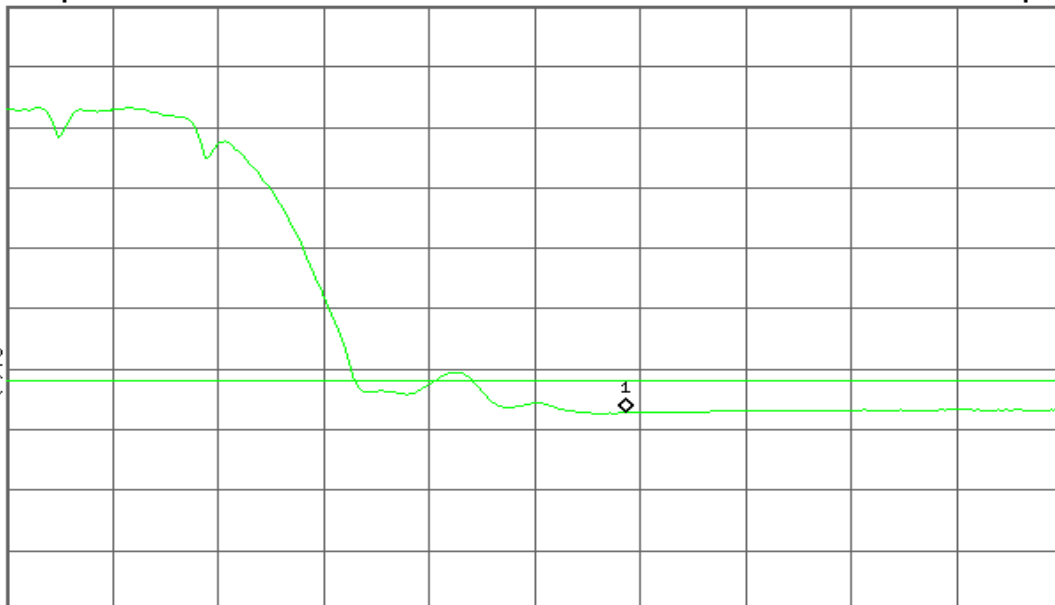

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
55.18 dB μ V

Ref 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A

$\mathcal{E}(f)$:

FTun

Swp

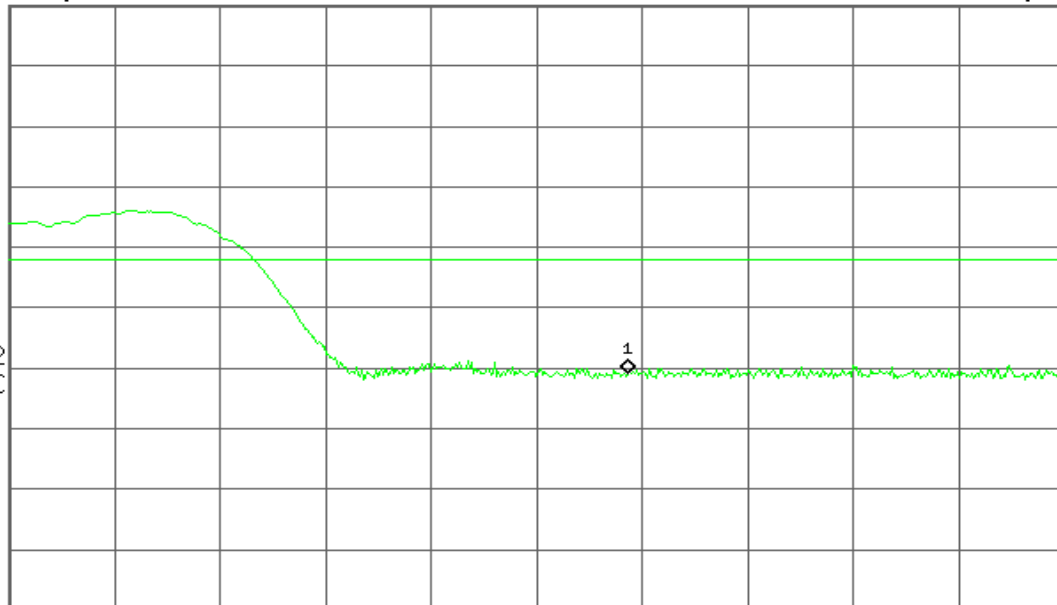

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
43.07 dB μ V

Ref 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A

$\mathcal{E}(f)$:

FTun

Swp

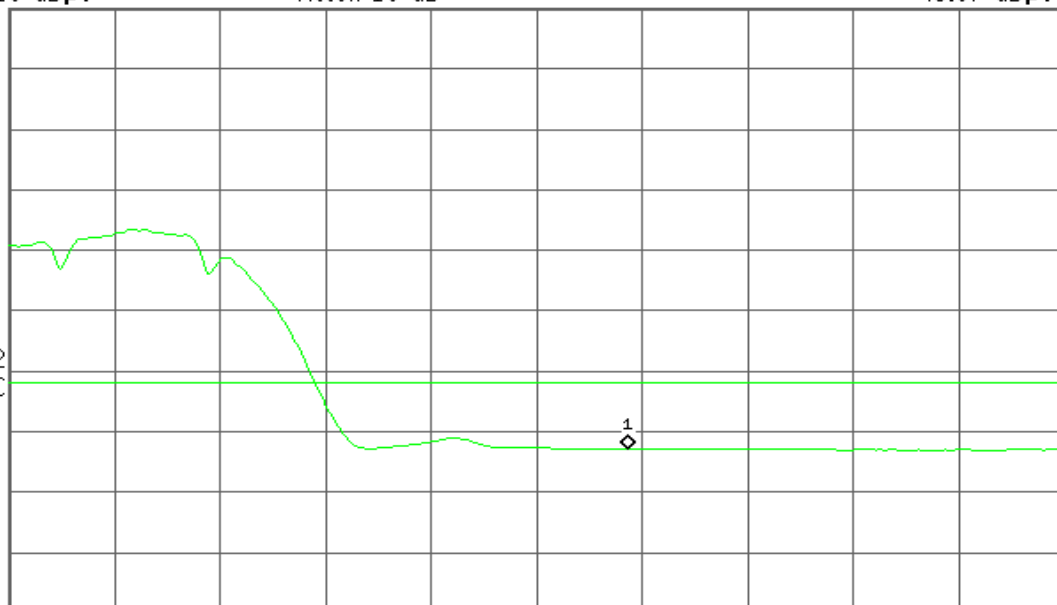



Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

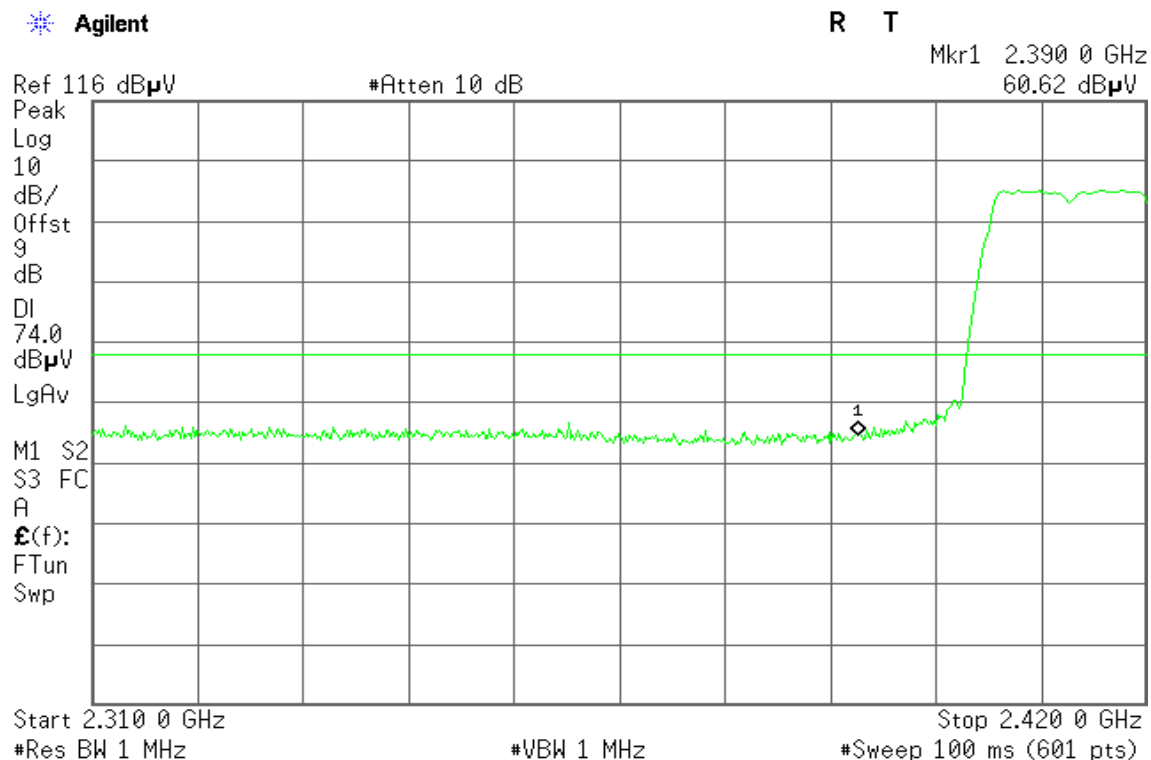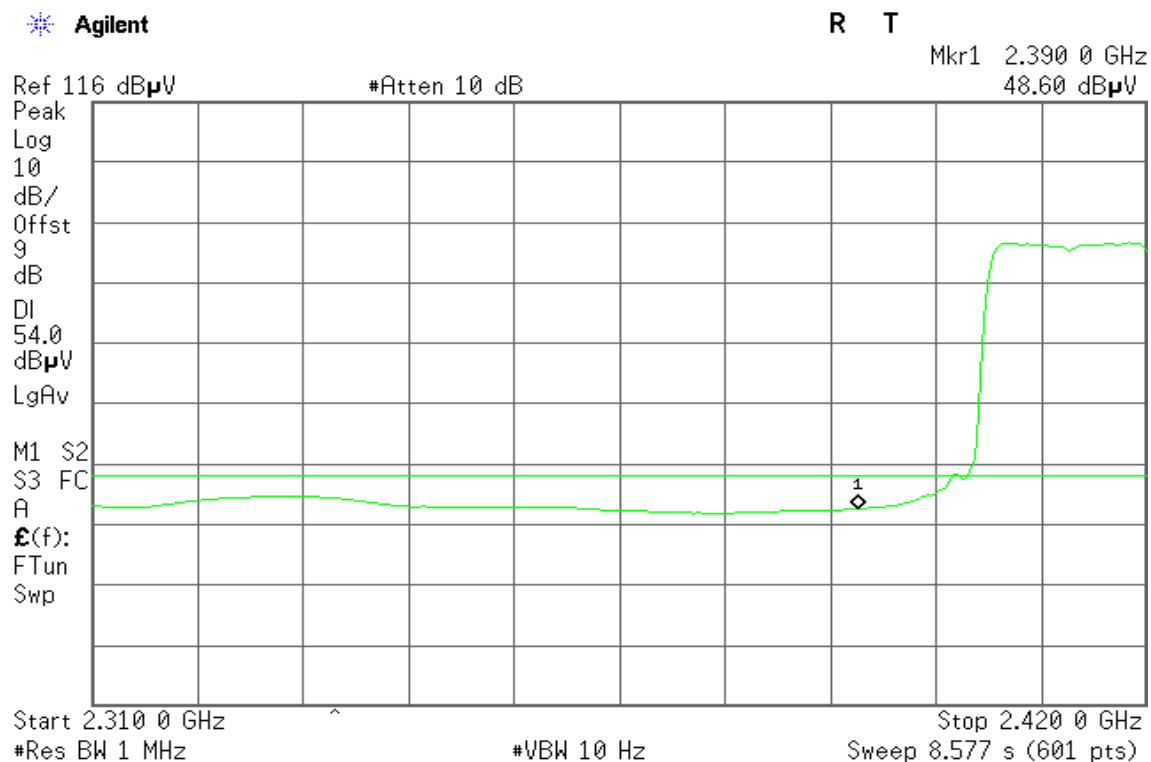**Band Edges (IEEE 802.11g mode / CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

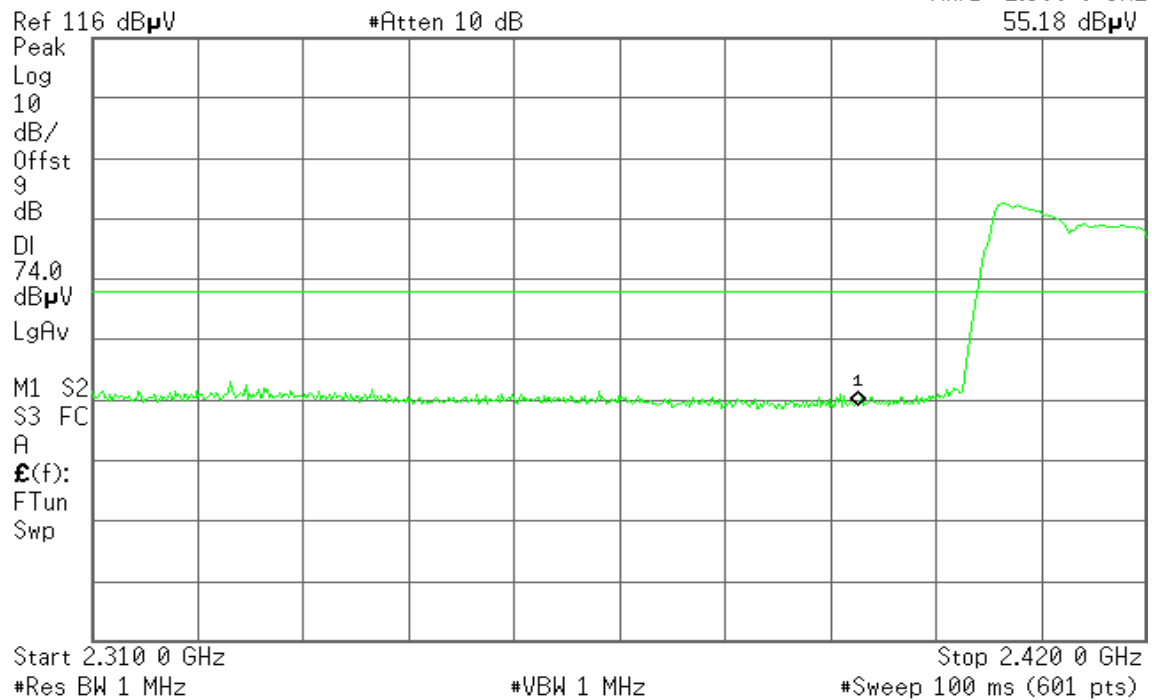




Detector mode: Average

Polarity: Horizontal

Agilent

R T

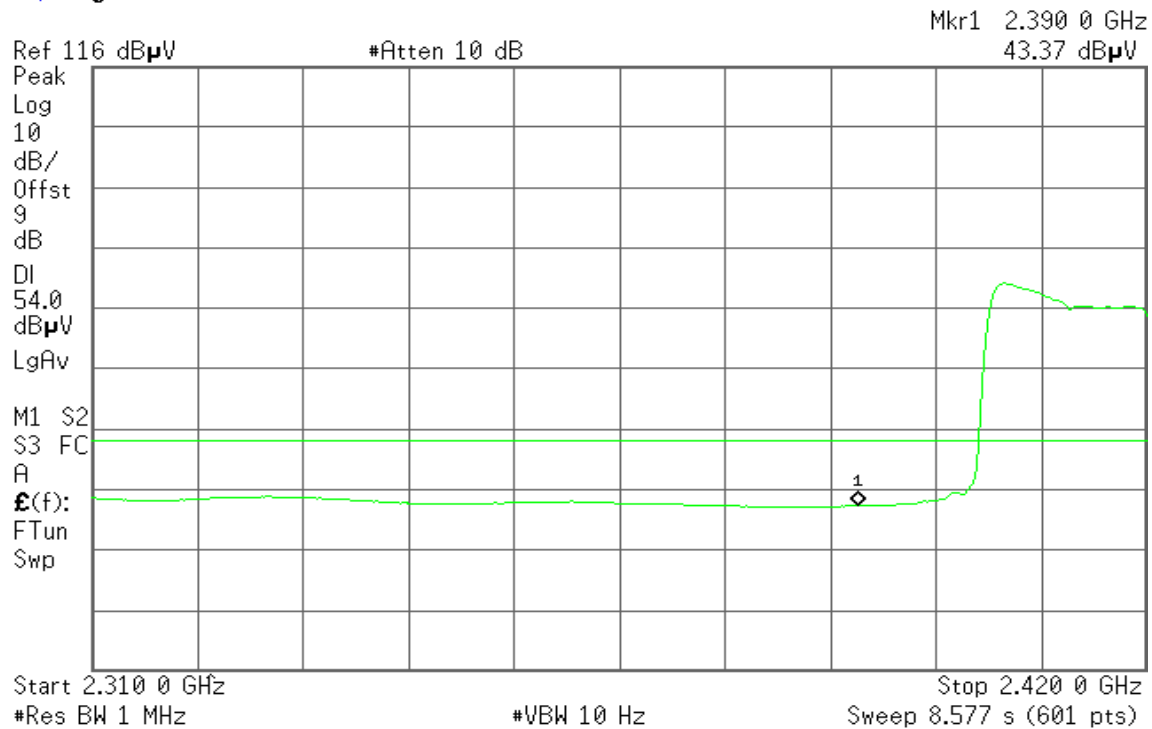

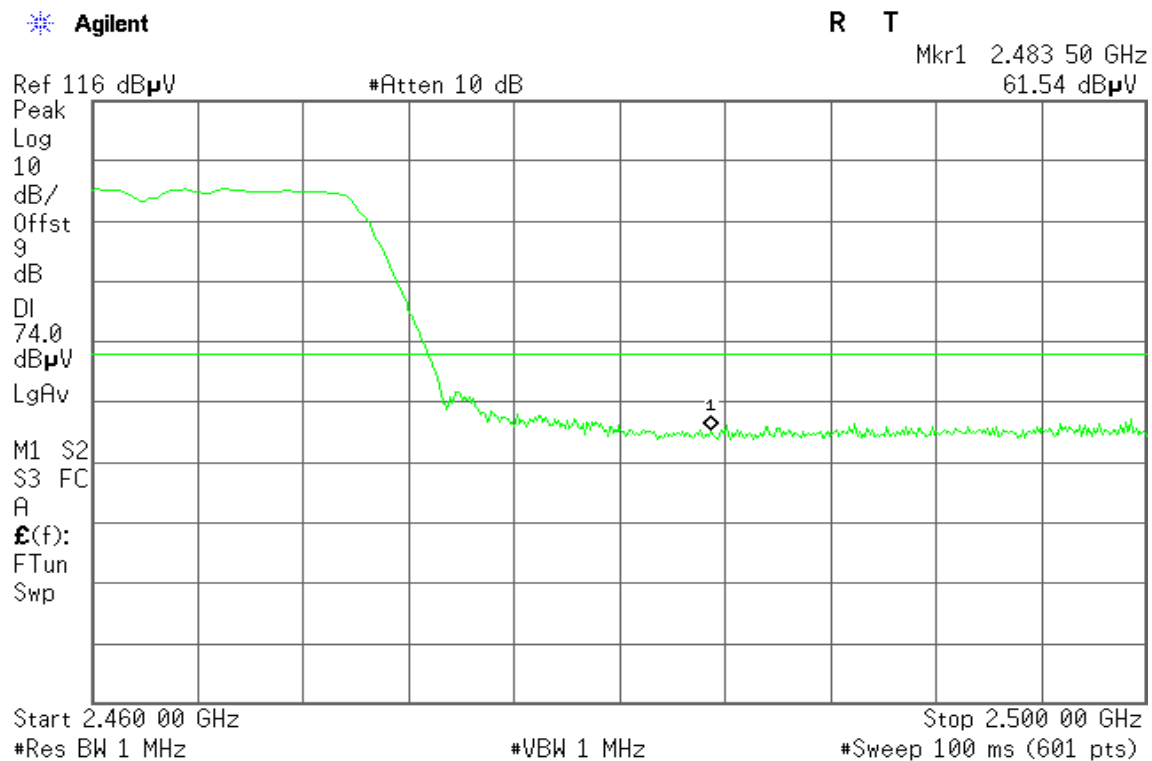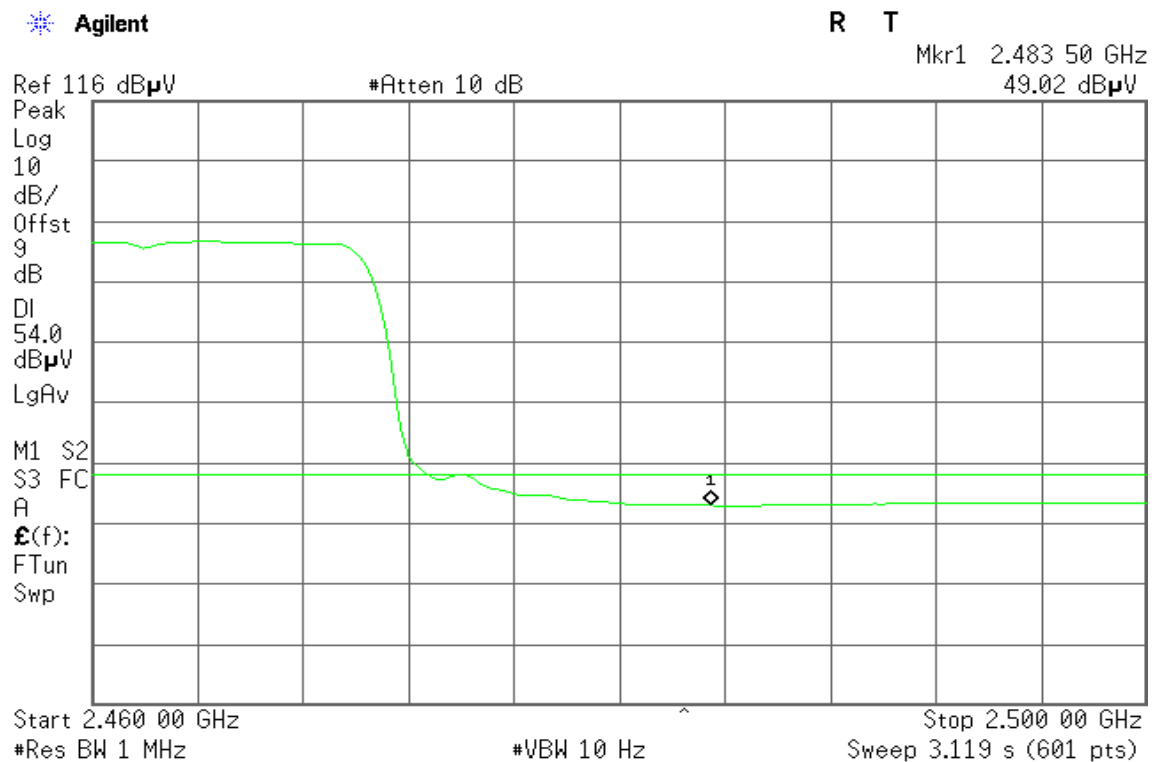**Band Edges (IEEE 802.11g mode / CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
55.83 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A

E(f):

FTun

Swp

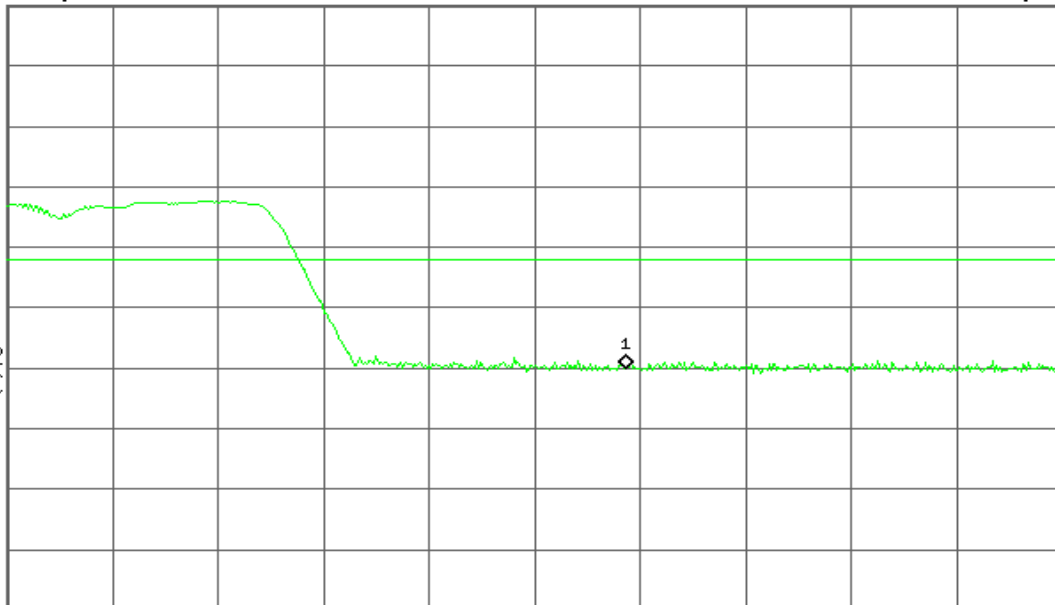

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
43.14 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A

E(f):

FTun

Swp

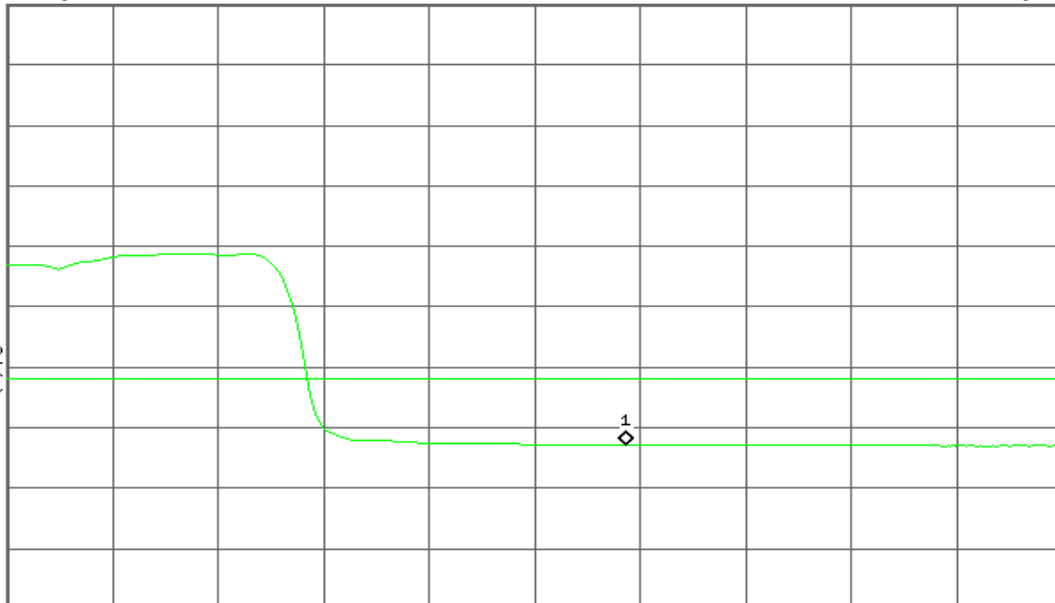



Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

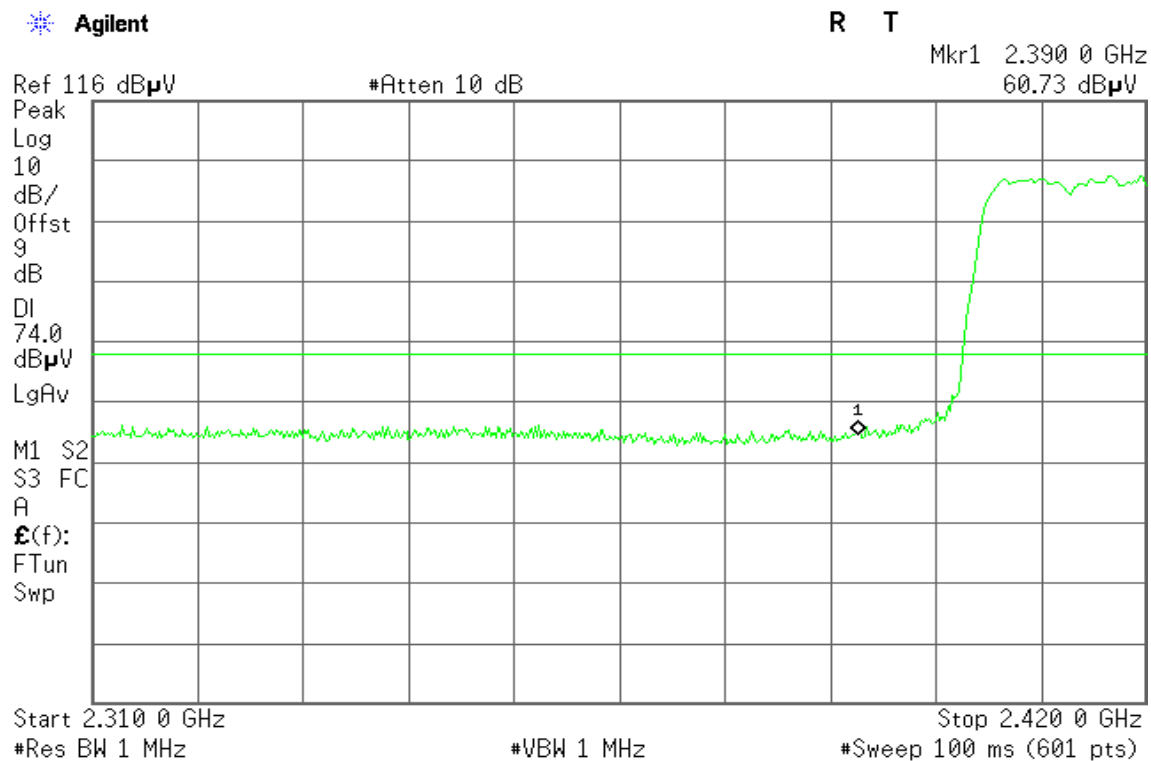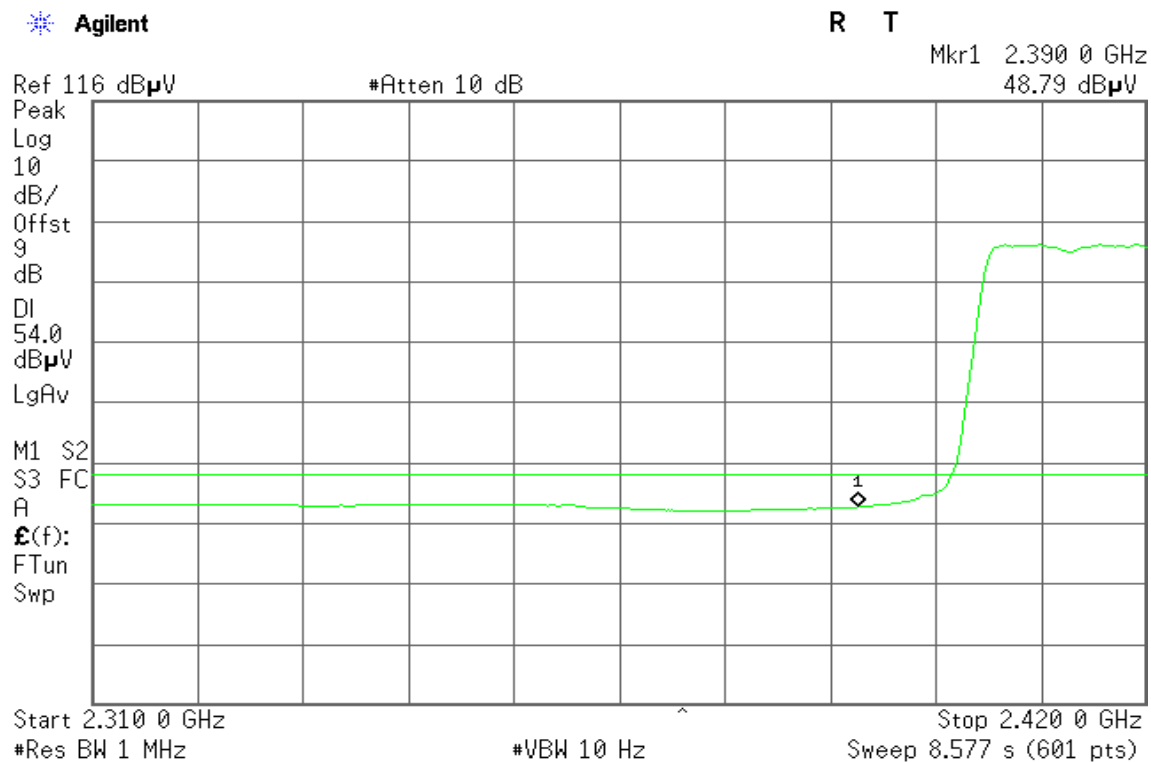**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Ref 116 dB μ V

#Atten 10 dB

Mkr1 2.390 0 GHz
55.56 dB μ V

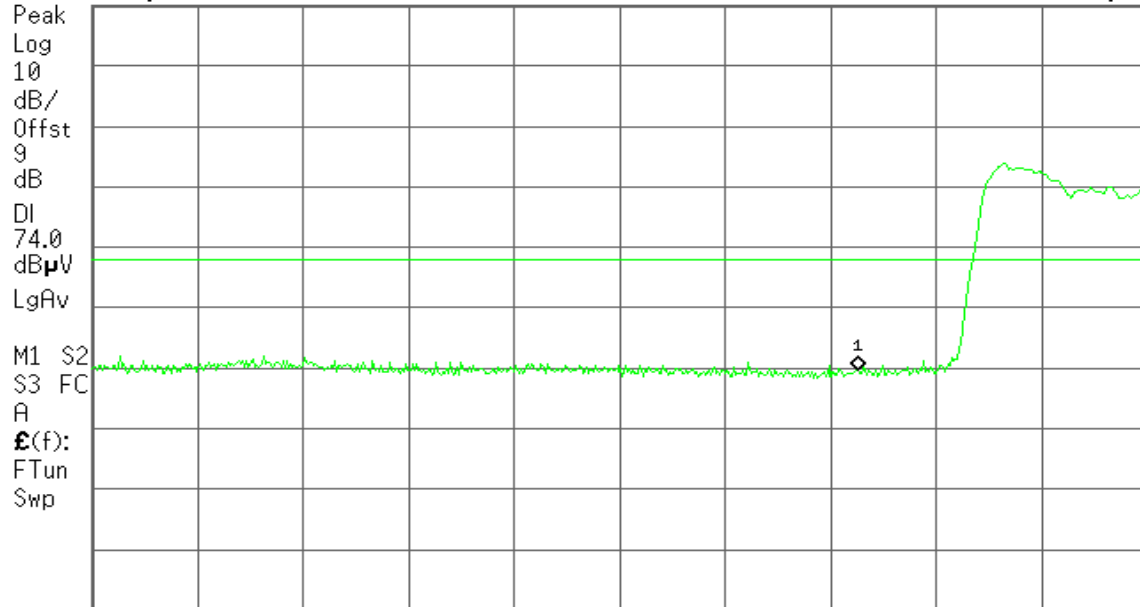

Detector mode: Average

Polarity: Horizontal


Agilent



R T

Ref 116 dB μ V

#Atten 10 dB

Mkr1 2.390 0 GHz
43.35 dB μ V

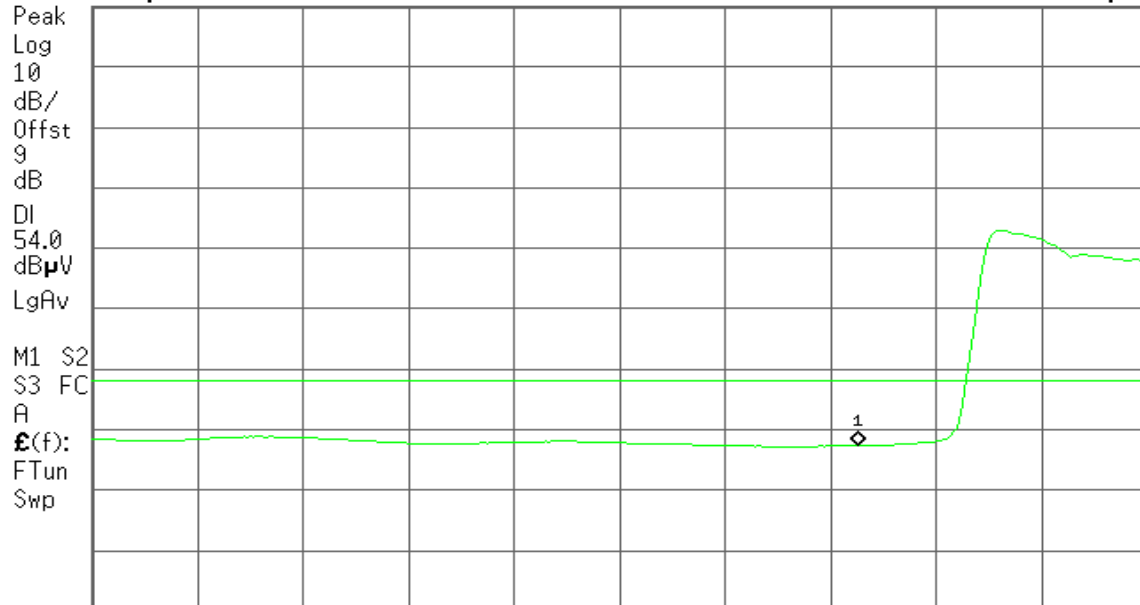

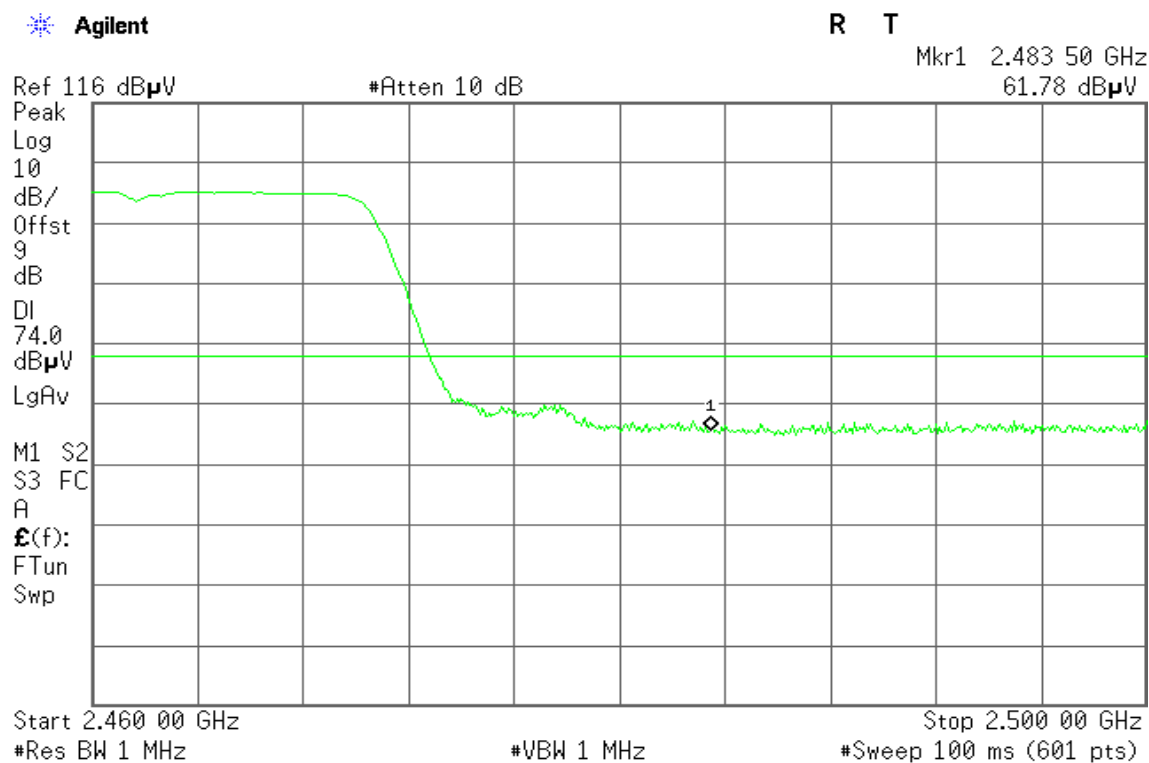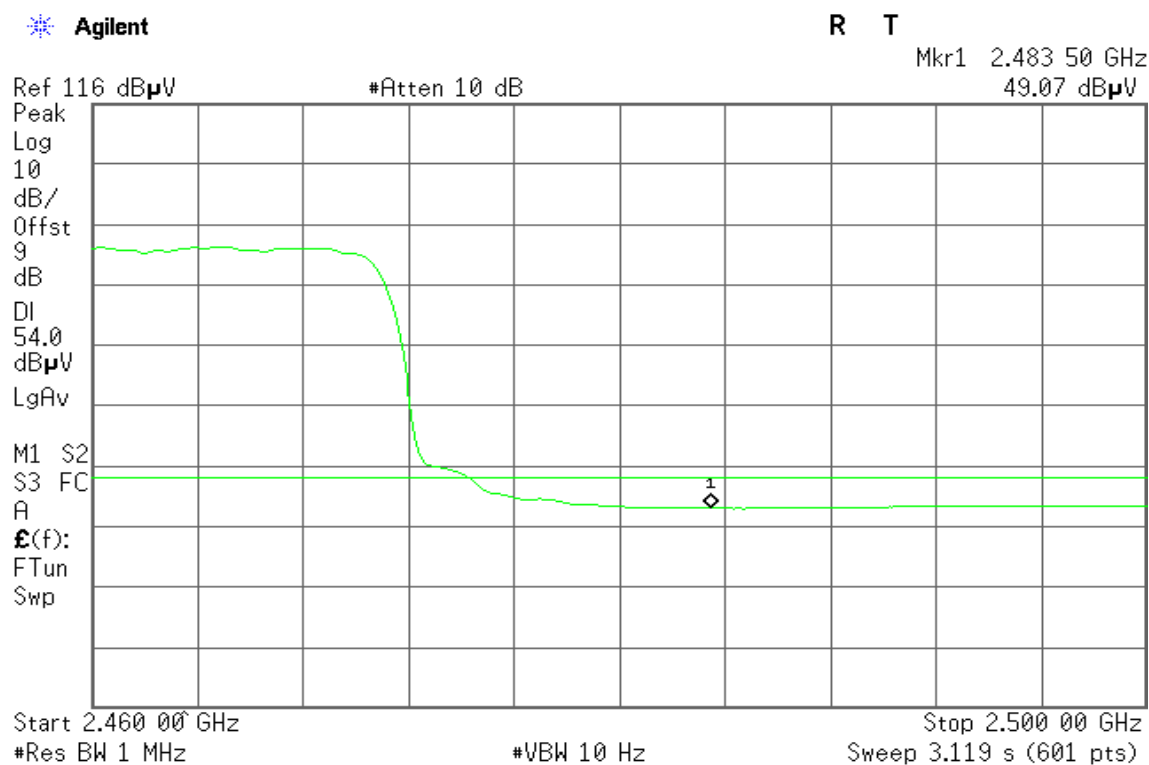**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
54.41 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
43.21 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A

E(f):

FTun

Swp



Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

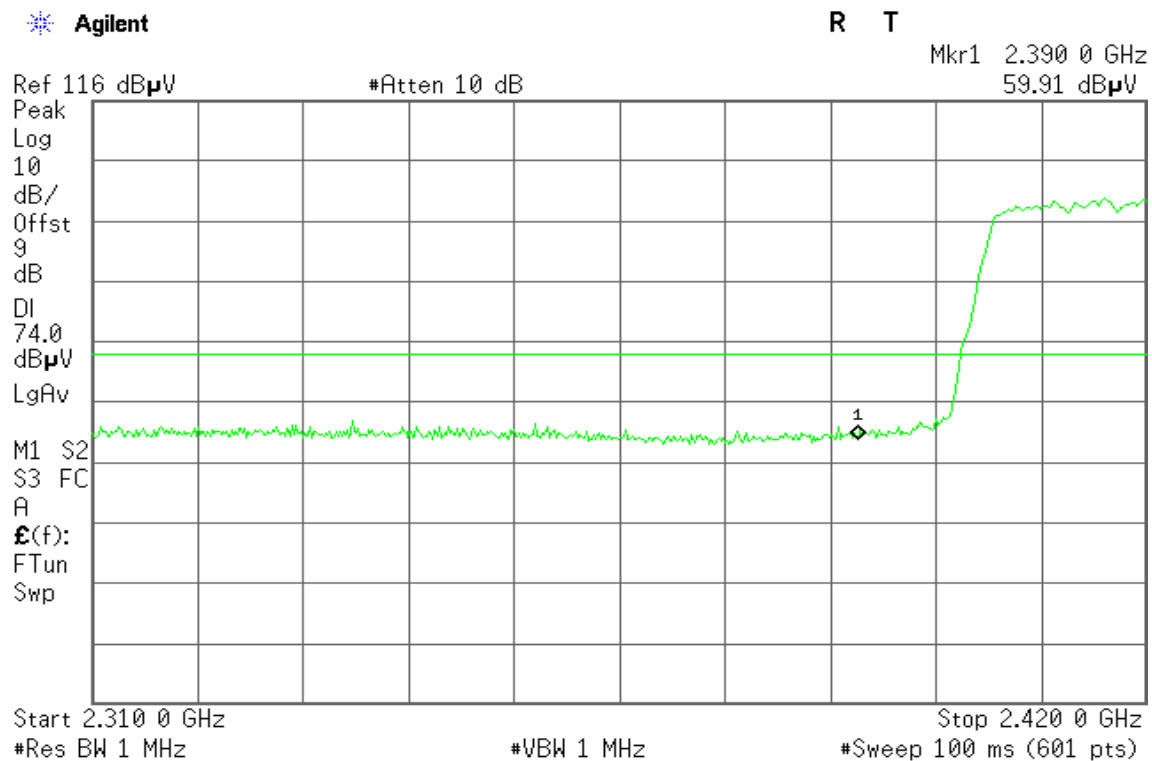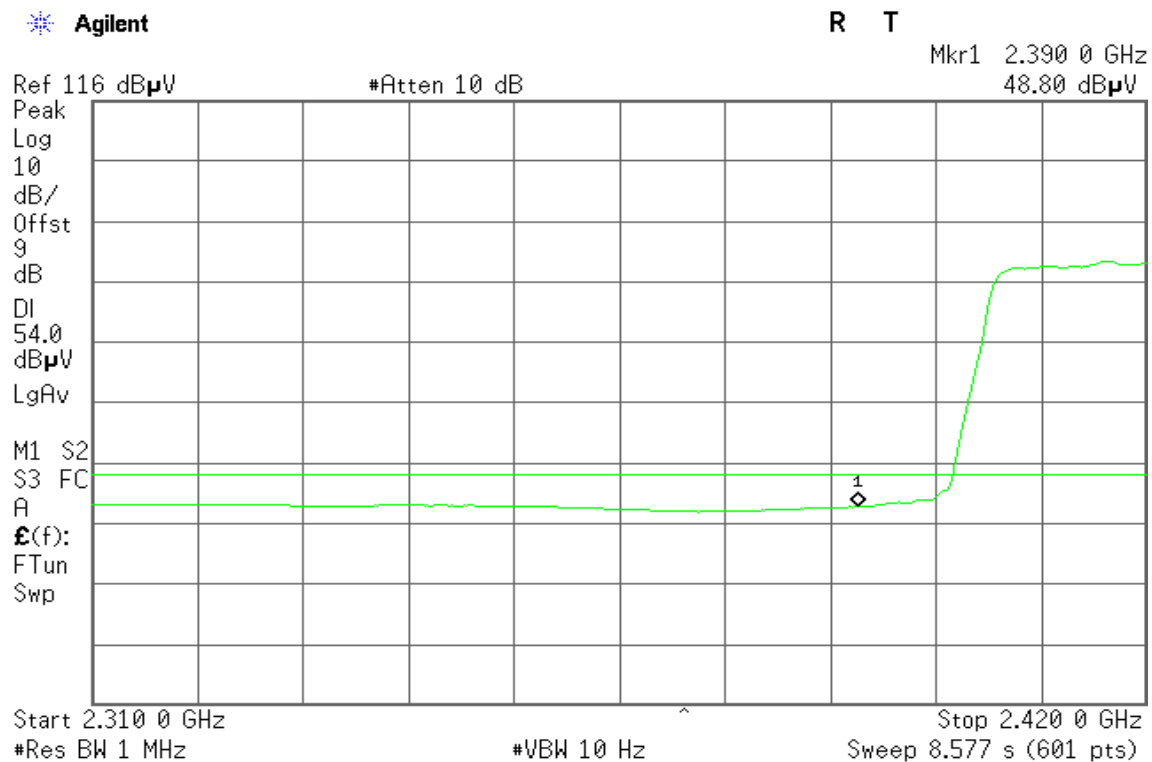**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.390 0 GHz
55.85 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A

E(f):

FTun

Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.420 0 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.390 0 GHz
43.49 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A

E(f):

FTun

Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.420 0 GHz

Sweep 8.577 s (601 pts)

**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical**

* Agilent

R T

Mkr1 2.483 50 GHz
60.23 dB μ VRef 116 dB μ V

Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

* Agilent

R T

Mkr1 2.483 50 GHz
48.90 dB μ VRef 116 dB μ V

Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
55.17 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
43.27 dB μ VRef 116 dB μ V

#Atten 10 dB

Peak

Log

10

dB/

Offst

9

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz


Sweep 3.119 s (601 pts)

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s.
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-20.88	8.00	PASS
Mid	2437	-20.77		PASS
High	2462	-20.35		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-23.09	8.00	PASS
Mid	2437	-22.46		PASS
High	2462	-21.52		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-22.52	8.00	PASS
Mid	2437	-22.50		PASS
High	2462	-21.69		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-24.77	8.00	PASS
Mid	2437	-23.58		PASS
High	2452	-24.76		PASS

**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-16.44	8.00	PASS
Mid	5785	-18.37		PASS
High	5825	-17.94		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-17.32	8.00	PASS
Mid	5785	-16.99		PASS
High	5825	-16.87		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5755	-16.71	8.00	PASS
High	5795	-19.68		PASS




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

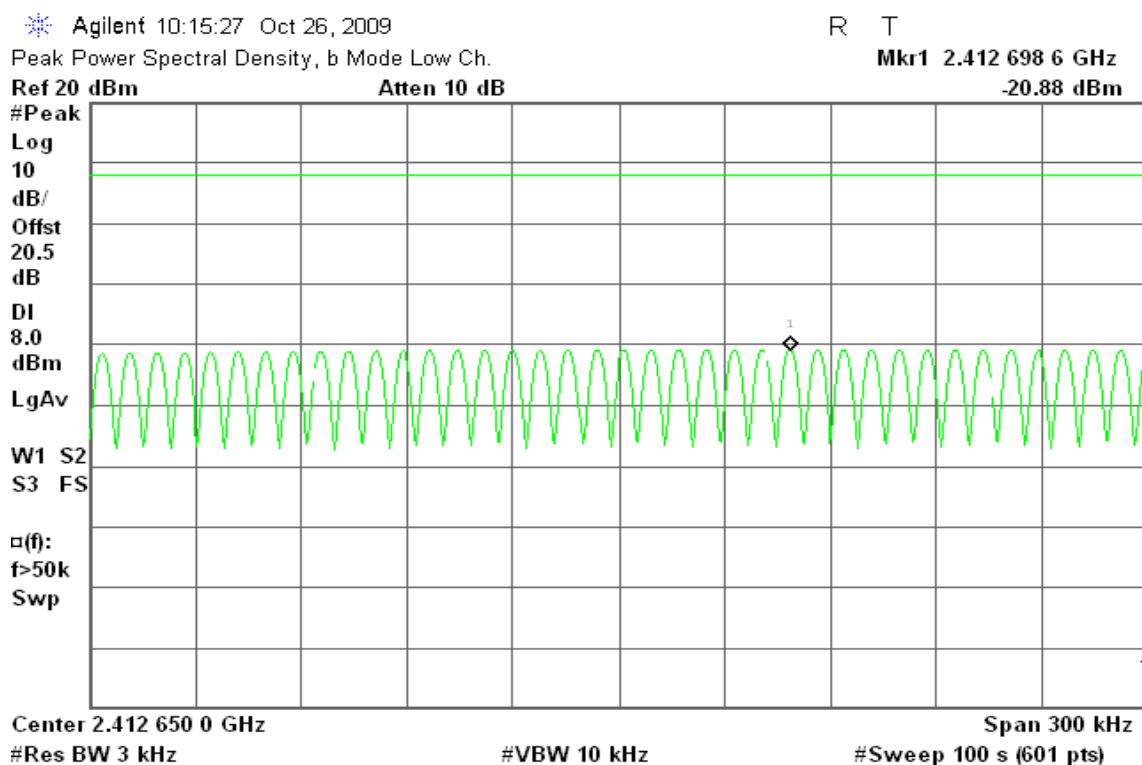

PPSD (CH Mid)

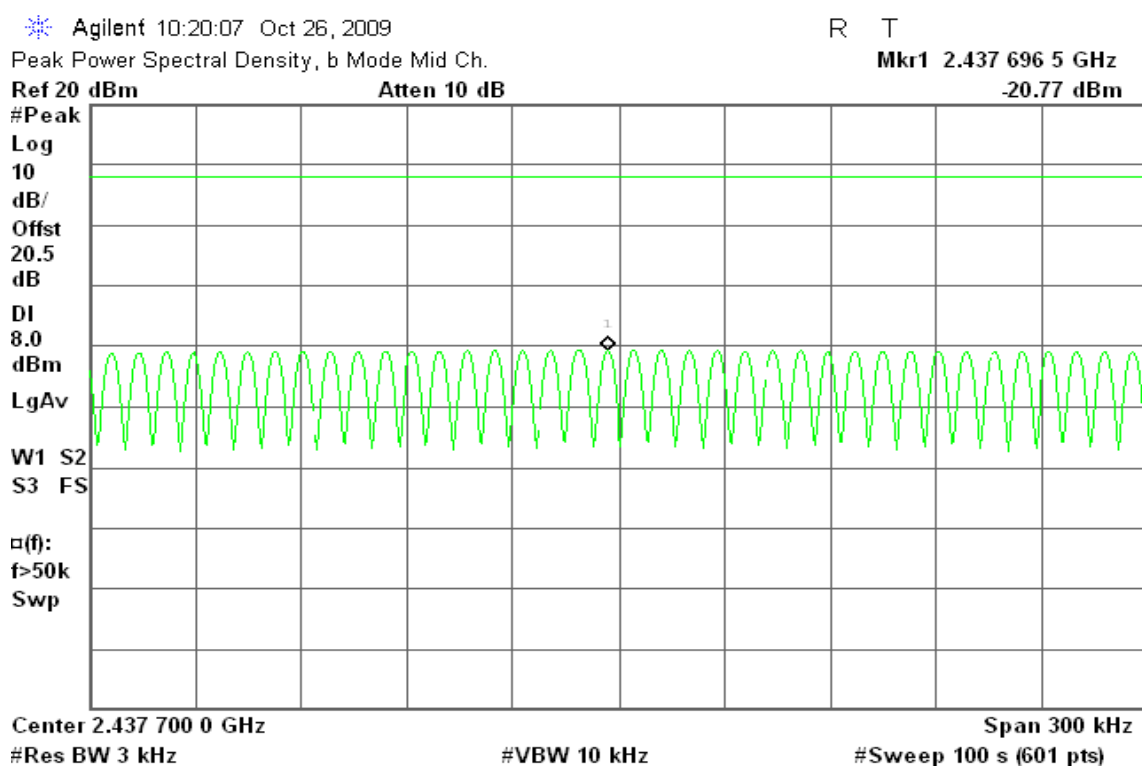

**PPSD (CH High)**

* Agilent 10:28:09 Oct 26, 2009

R T


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.462 712 1 GHz

Ref 20 dBm

Atten 10 dB

-20.35 dBm

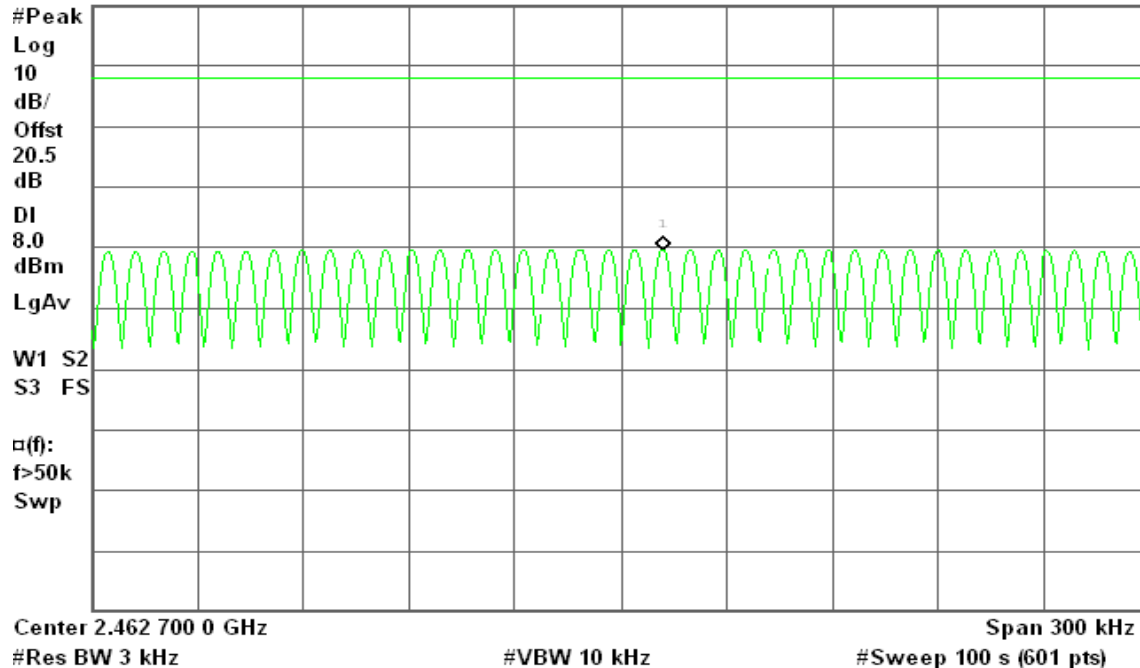**IEEE 802.11g mode****PPSD (CH Low)**

* Agilent 10:46:02 Oct 26, 2009

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.414 149 5 GHz

Ref 20 dBm

Atten 10 dB

-23.09 dBm

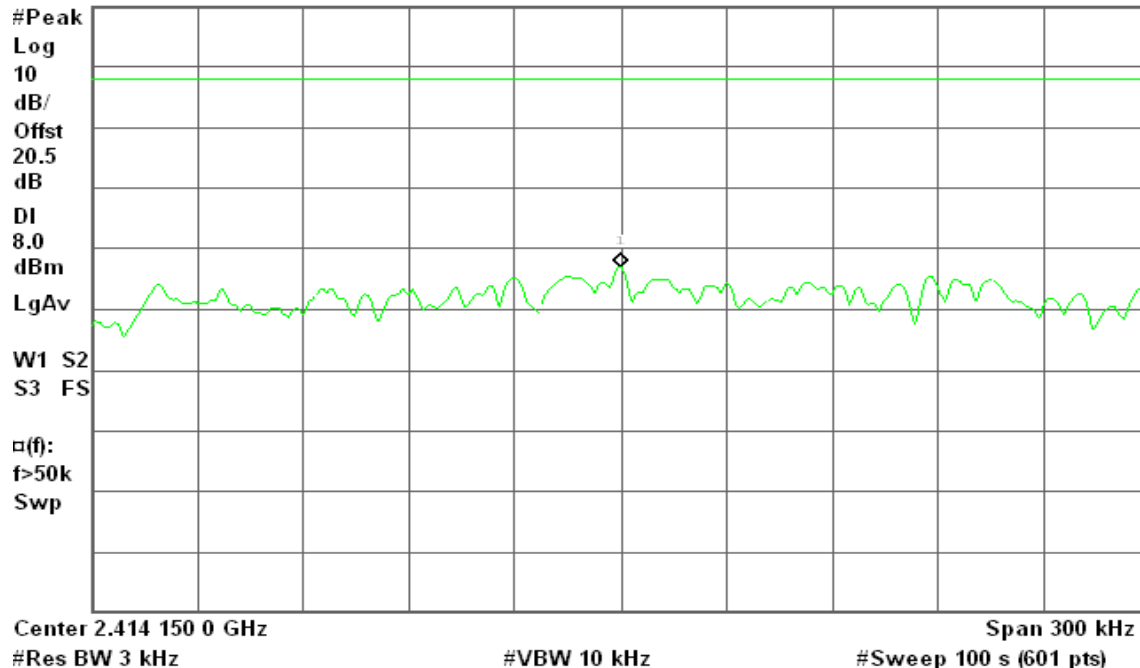



PPSD (CH Mid)

* Agilent 10:50:15 Oct 26, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.440 536 4 GHz

Ref 20 dBm

Atten 10 dB

-22.46 dBm

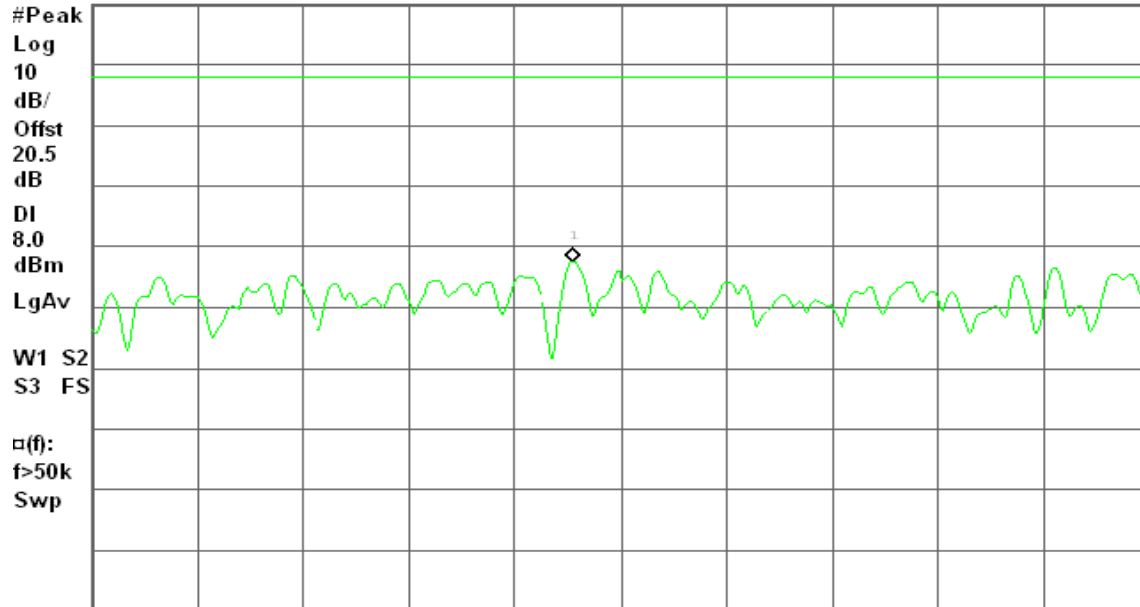

Center 2.440 550 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

* Agilent 10:54:35 Oct 26, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.464 053 0 GHz

Ref 20 dBm

Atten 10 dB

-21.52 dBm

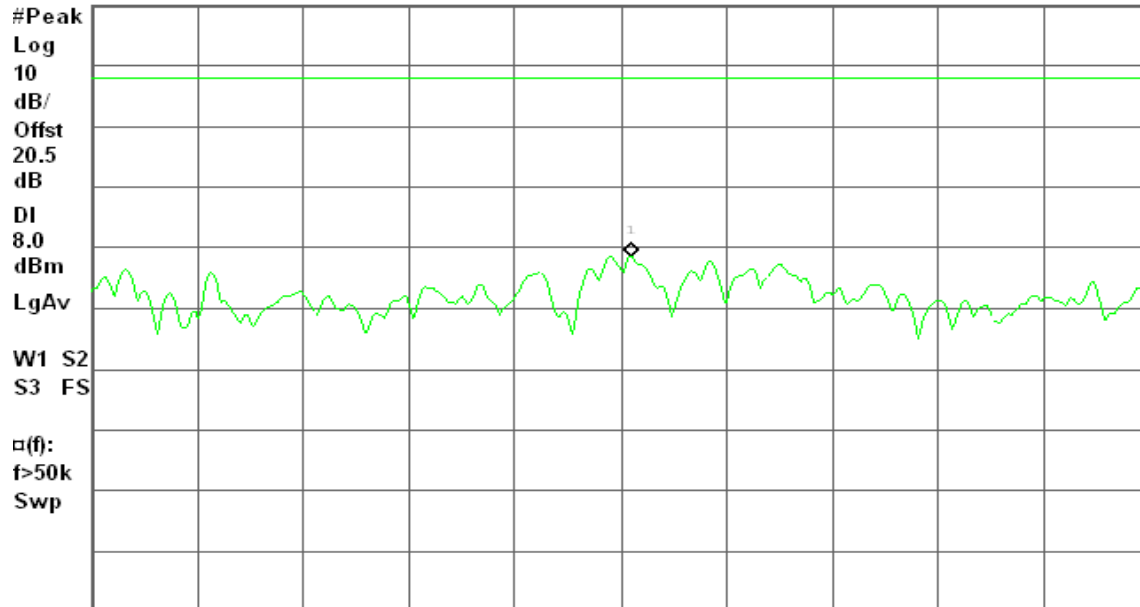

Center 2.464 050 0 GHz

Span 300 kHz

#Res BW 3 kHz


#VBW 10 kHz

#Sweep 100 s (601 pts)




draft 802.11n Standard-20 MHz Channel mode

PPSD (CH Low)

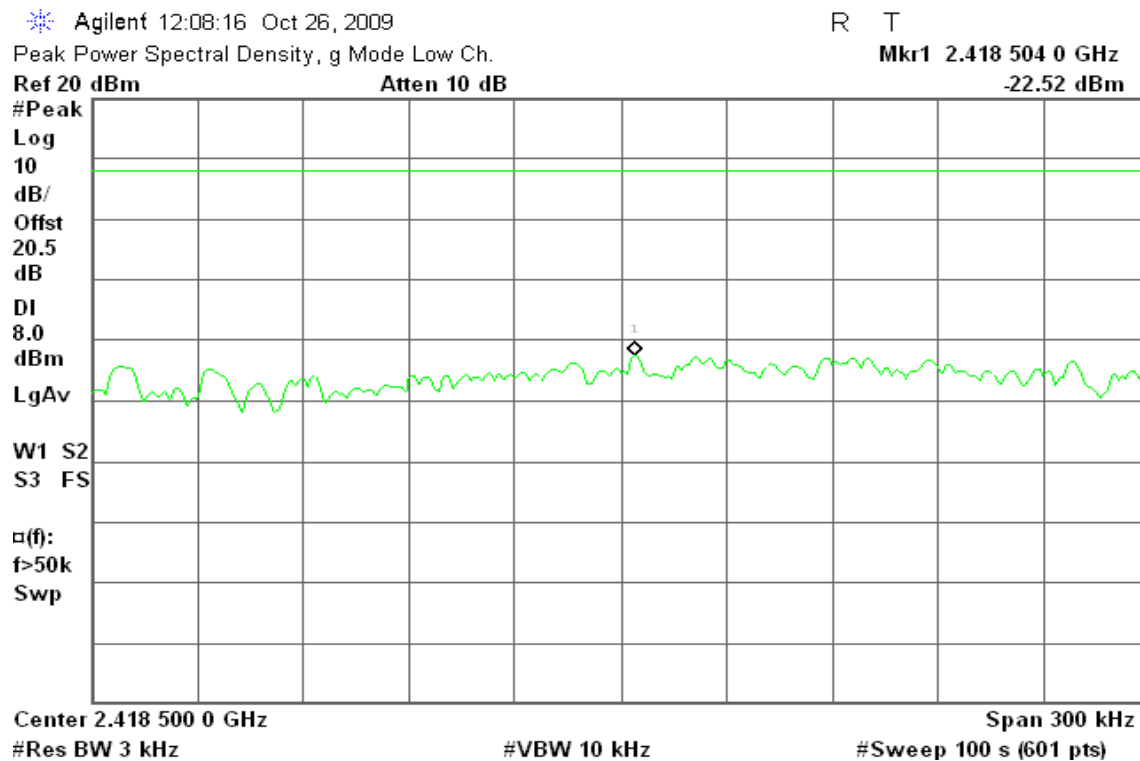

PPSD (CH Mid)

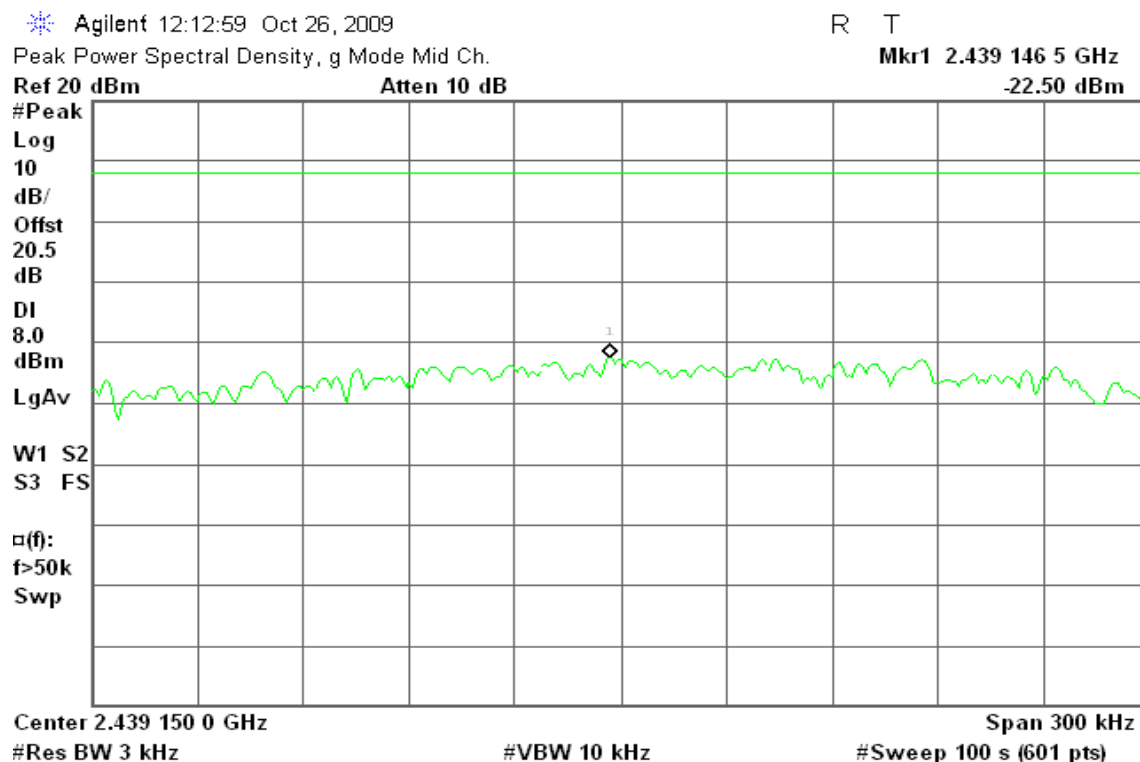



PPSD (CH High)

Agilent 12:18:34 Oct 26, 2009

R L


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.464 149 5 GHz

Ref 20 dBm

Atten 10 dB

-21.69 dBm

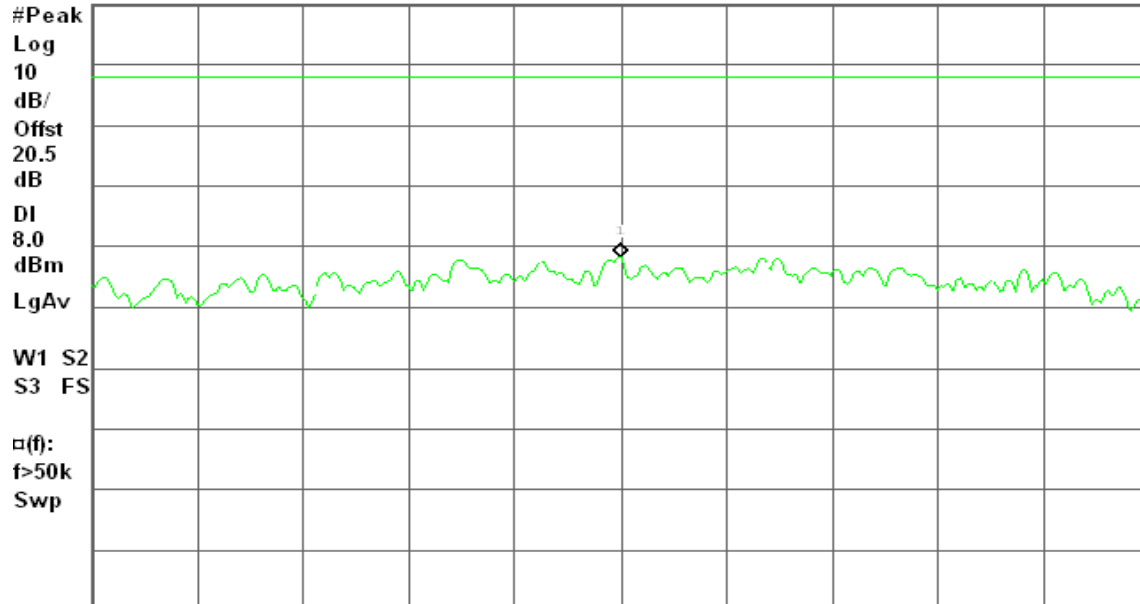

Center 2.464 150 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

draft 802.11n Wide-40 MHz Channel mode

PPSD (CH Low)

Agilent 12:25:55 Oct 26, 2009

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.425 412 3 GHz

Ref 20 dBm

Atten 10 dB

-24.77 dBm

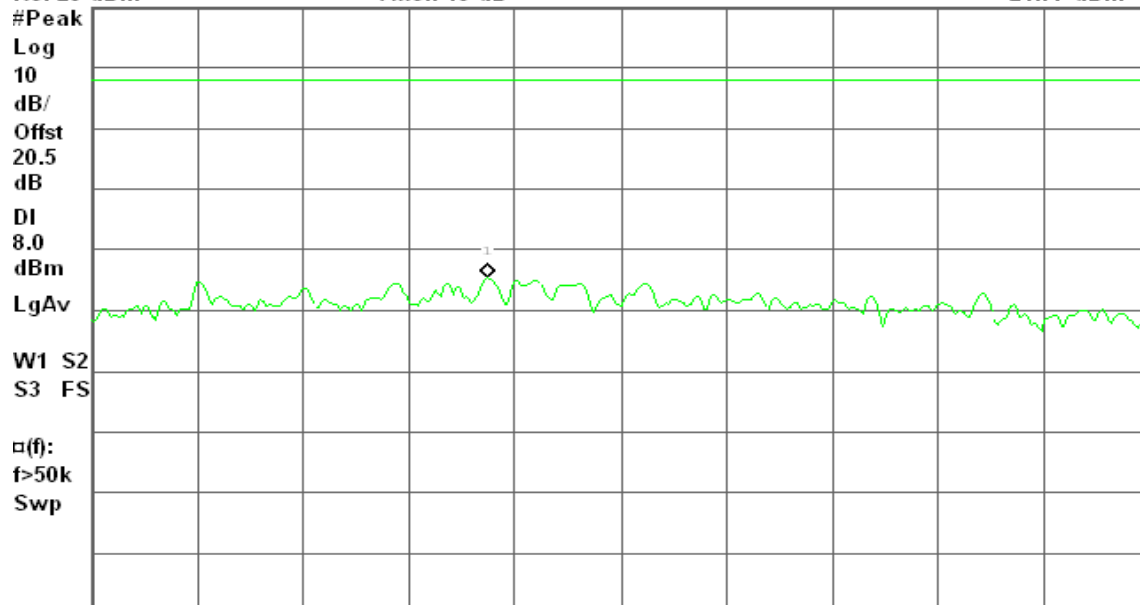

Center 2.425 450 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

* Agilent 12:30:42 Oct 26, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.449 265 3 GHz

Ref 20 dBm

Atten 10 dB

-23.58 dBm

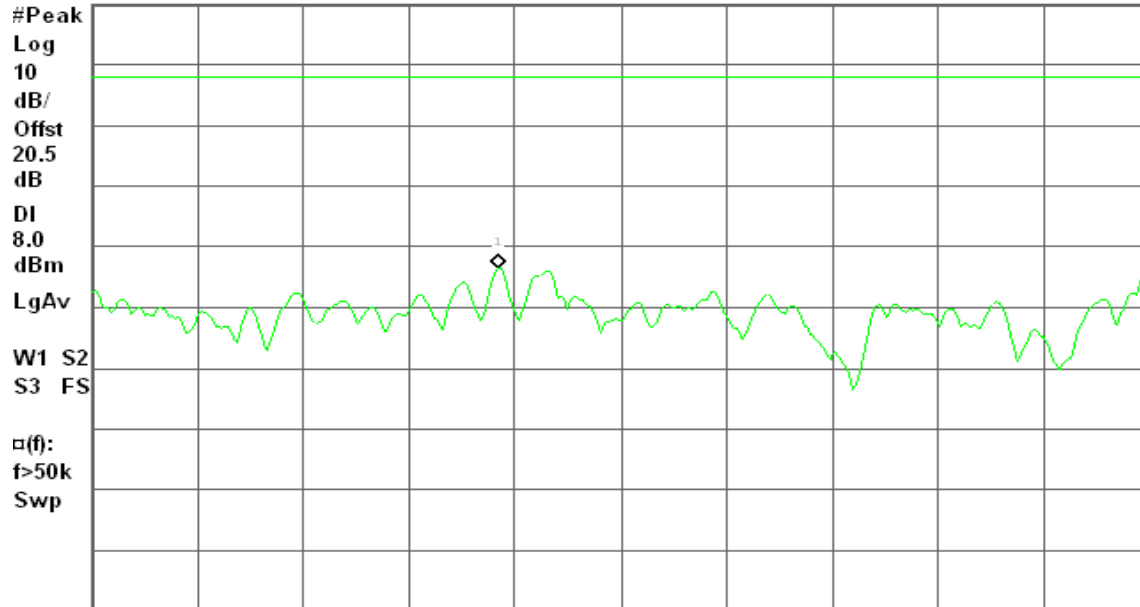

Center 2.449 300 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

* Agilent 12:35:16 Oct 26, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.455 384 9 GHz

Ref 20 dBm

Atten 10 dB

-24.76 dBm

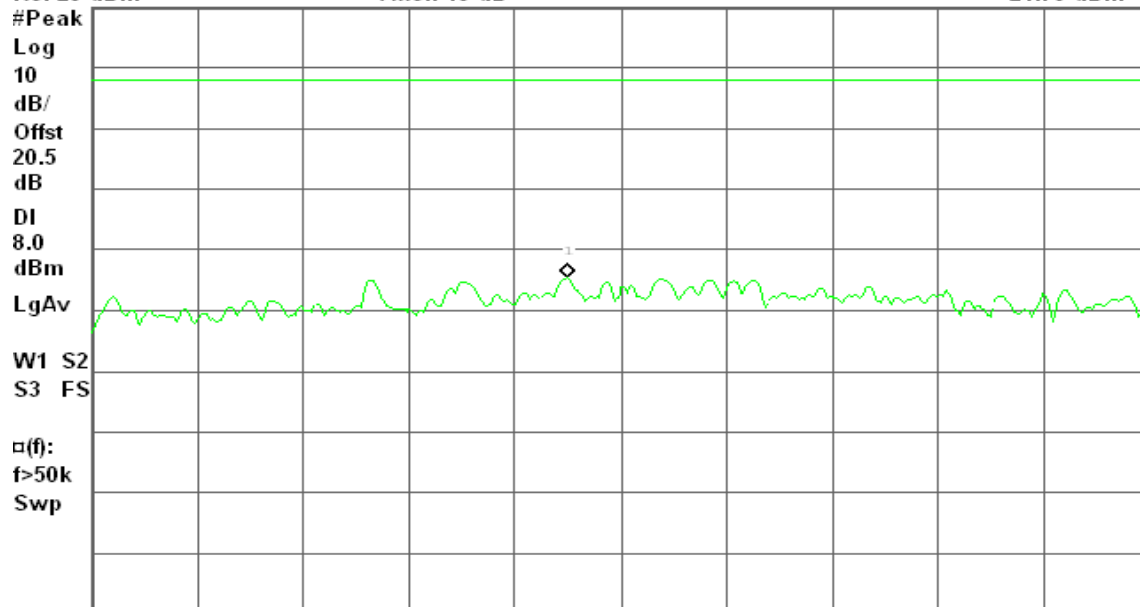

Center 2.455 400 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



IEEE 802.11a mode

PPSD (CH Low)

Agilent 12:52:20 Oct 28, 2009

R T


Peak Power Spectral Density, a Mode Low Ch.

Mkr1 5.751 021 6 GHz

Ref 20 dBm

Atten 10 dB

-16.44 dBm

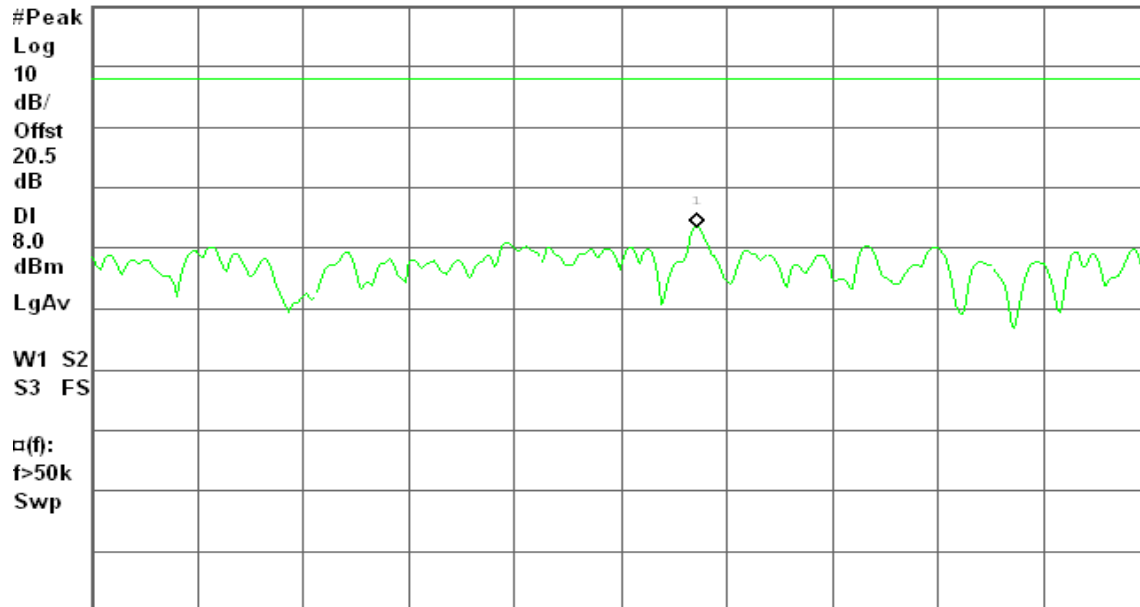

Center 5.751 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH Mid)

Agilent 12:57:27 Oct 28, 2009

R T


Peak Power Spectral Density, a Mode Mid Ch.

Mkr1 5.790 272 1 GHz

Ref 20 dBm

Atten 10 dB

-18.37 dBm

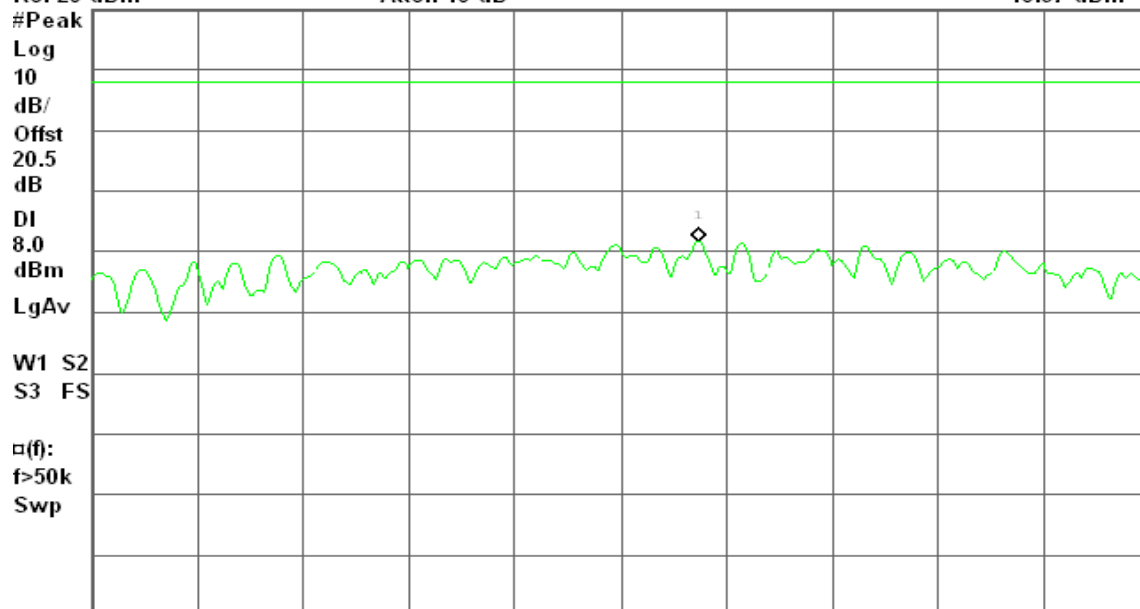

Center 5.790 250 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH High)

Agilent 13:02:09 Oct 28, 2009

R T


Peak Power Spectral Density, a Mode High Ch.

Mkr1 5.817 772 1 GHz

Ref 20 dBm

Atten 10 dB

-17.94 dBm

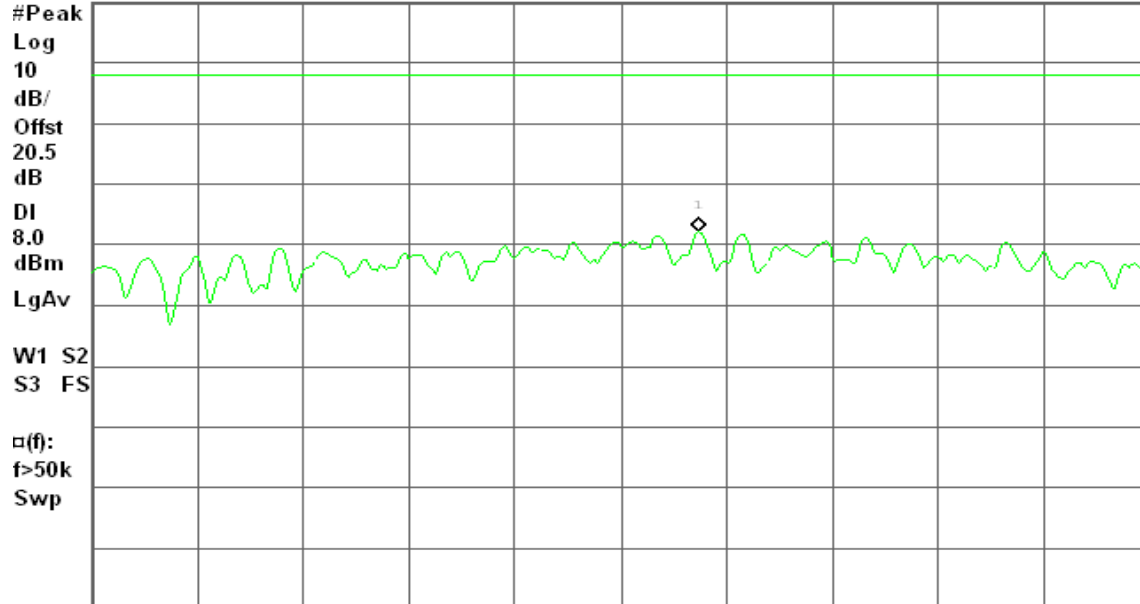

Center 5.817 750 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

draft 802.11n Standard-20 MHz Channel mode

PPSD (CH Low)

Agilent 13:07:09 Oct 28, 2009

R T


Peak Power Spectral Density, a Mode Low Ch.

Mkr1 5.741 427 9 GHz

Ref 20 dBm

Atten 10 dB

-17.32 dBm

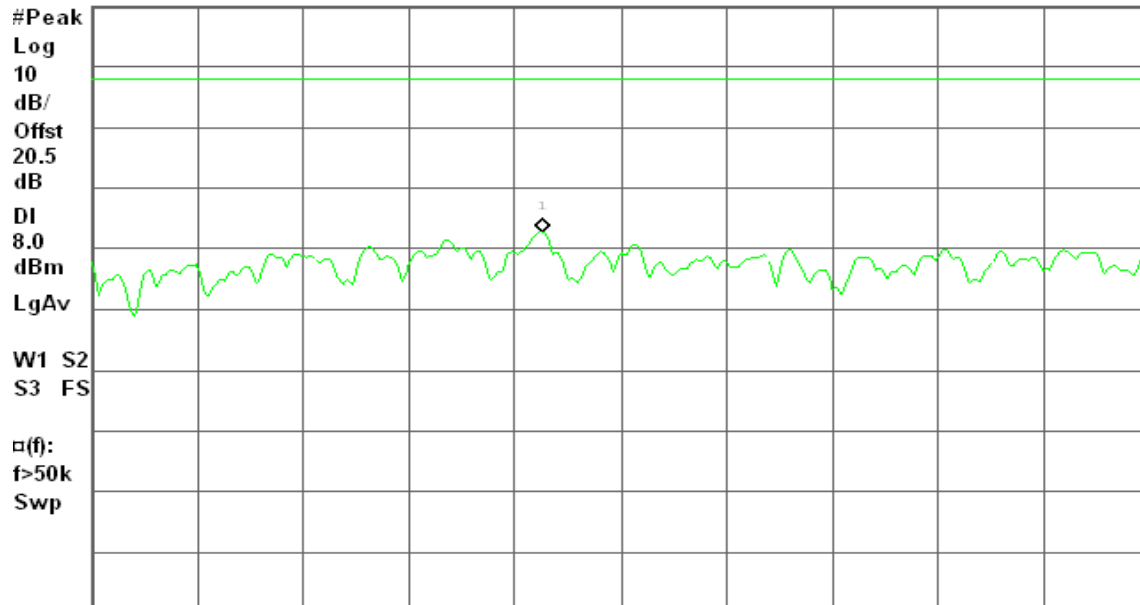

Center 5.741 450 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 13:12:49 Oct 28, 2009

R T


Peak Power Spectral Density, a Mode Mid Ch.

Mkr1 5.777 254 5 GHz

Ref 20 dBm

Atten 10 dB

-16.99 dBm

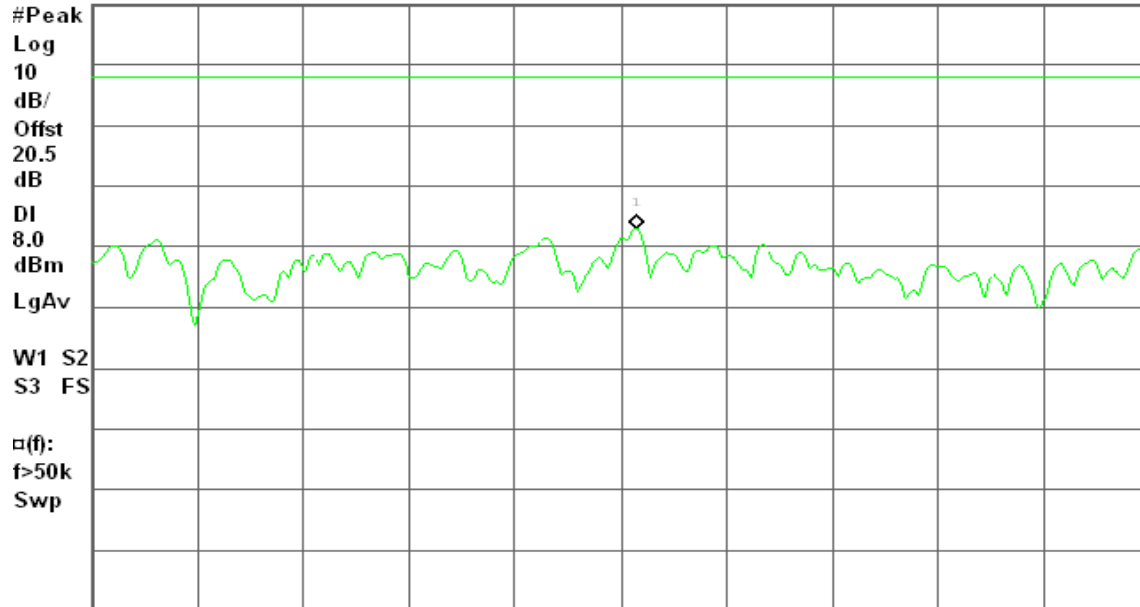

Center 5.777 250 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 13:18:44 Oct 28, 2009

R T


Peak Power Spectral Density, a Mode High Ch.

Mkr1 5.818 329 4 GHz

Ref 20 dBm

Atten 10 dB

-16.87 dBm

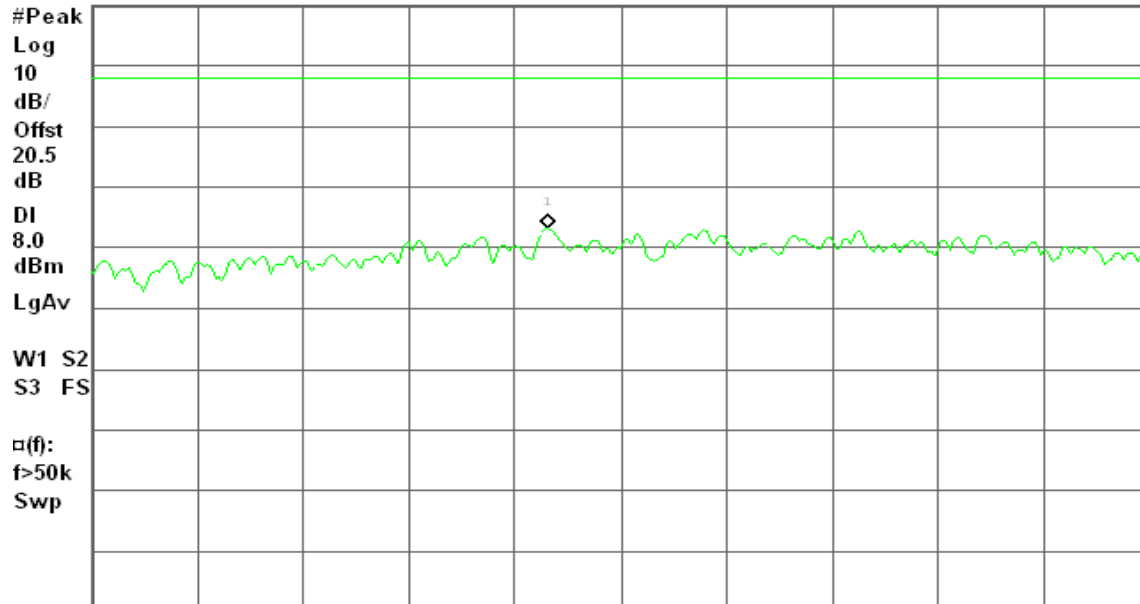

Center 5.818 350 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



draft 802.11n Wide-40 MHz Channel mode

PPSD (CH Low)

Agilent 13:24:49 Oct 28, 2009

R T


Peak Power Spectral Density, a Mode Low Ch.

Mkr1 5.751 620 1 GHz

Ref 20 dBm

Atten 10 dB

-16.71 dBm

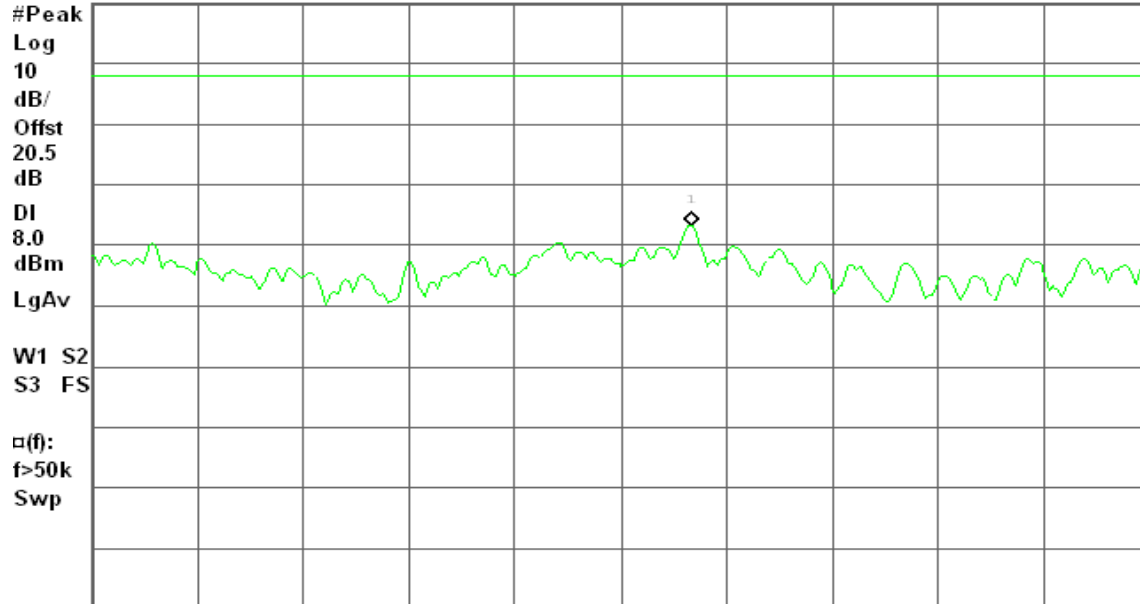

Center 5.751 600 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 13:29:20 Oct 28, 2009

R T


Peak Power Spectral Density, a Mode High Ch.

Mkr1 5.787 147 5 GHz

Ref 20 dBm

Atten 10 dB

-19.68 dBm

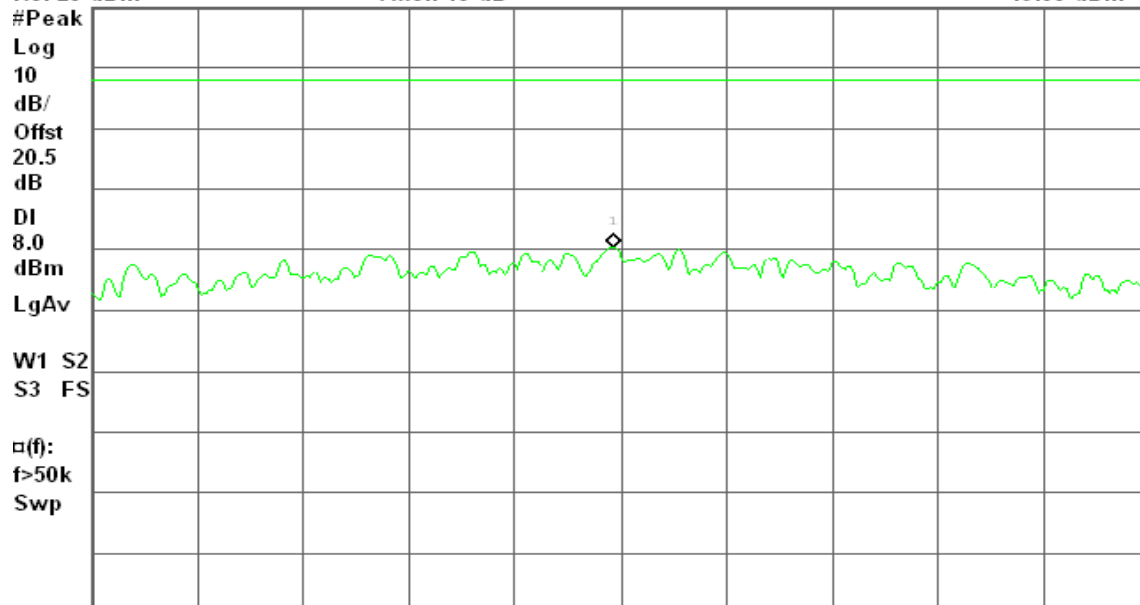

Center 5.787 150 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




7.6 SPURIOUS EMISSIONS

7.6.1 CONDUCTED MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13GHz to 26GHz range for IEEE 802.11b/g, 20GHz to 40GHz range for IEEE 802.11a with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted.



Test Plot

IEEE 802.11b mode

CH Low

* Agilent 10:16:09 Oct 26, 2009

R T


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-3.16 dBm

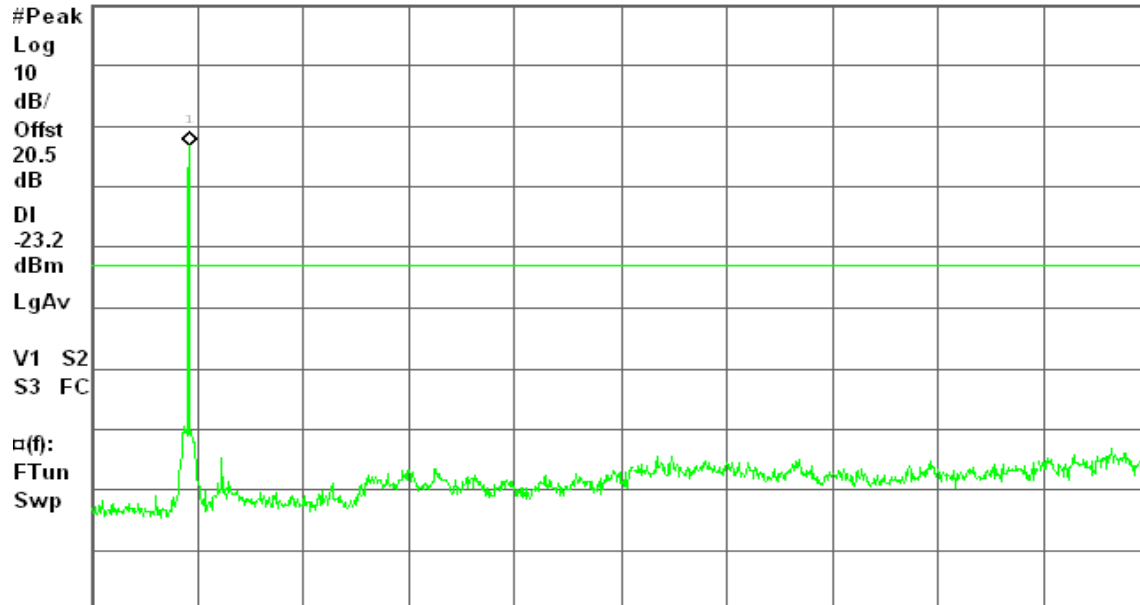

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

* Agilent 10:20:49 Oct 26, 2009

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-2.65 dBm

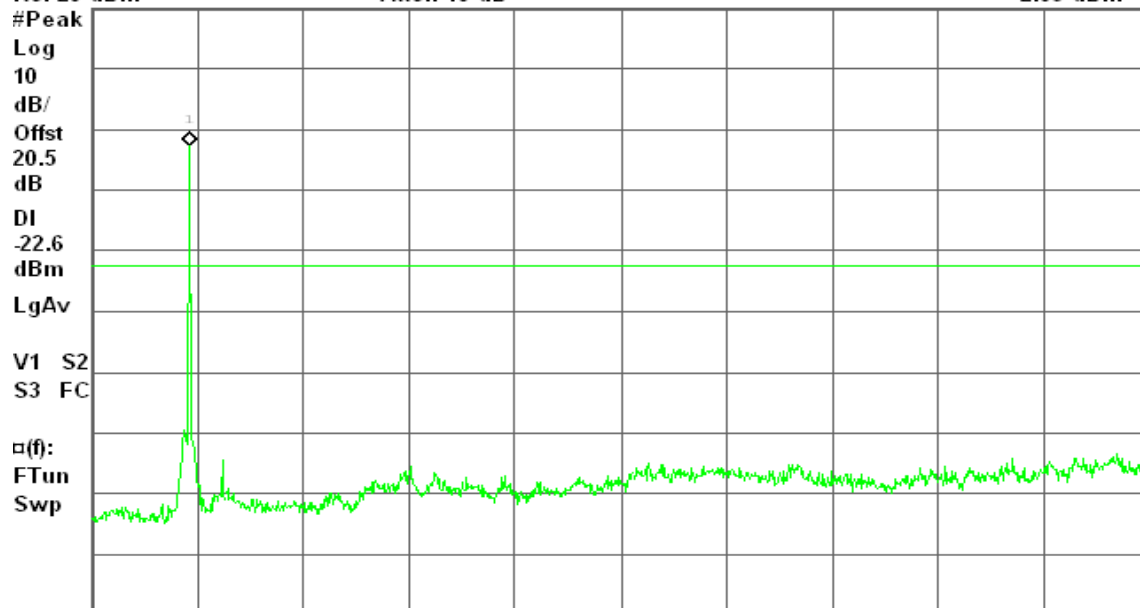

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**CH High**

* Agilent 10:29:03 Oct 26, 2009

R T


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

-2.15 dBm

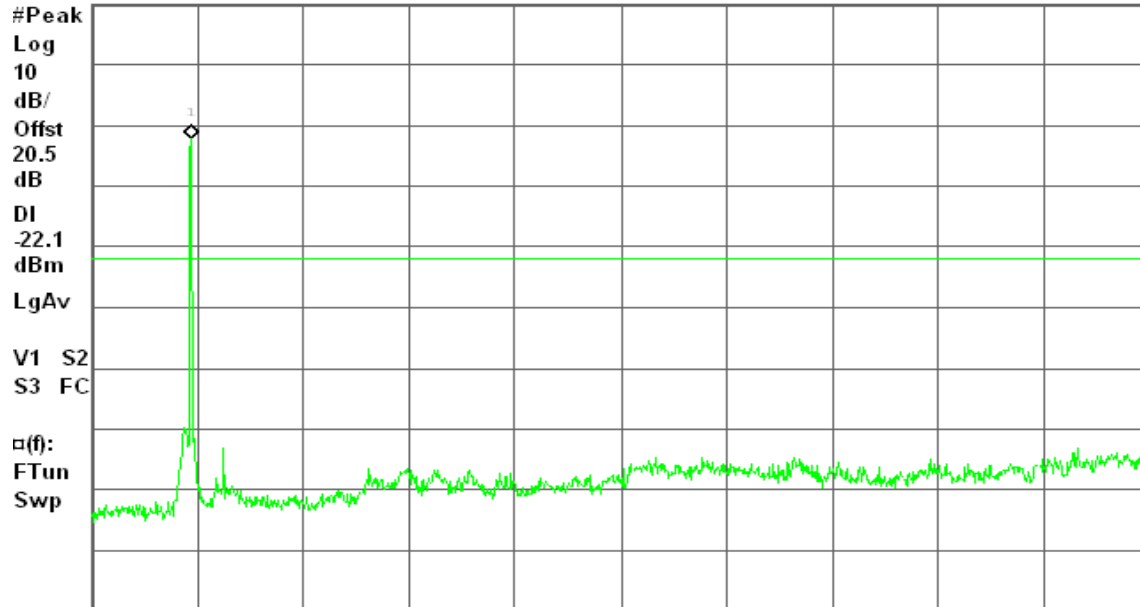

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11g mode**CH Low**

* Agilent 10:46:44 Oct 26, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-9.58 dBm

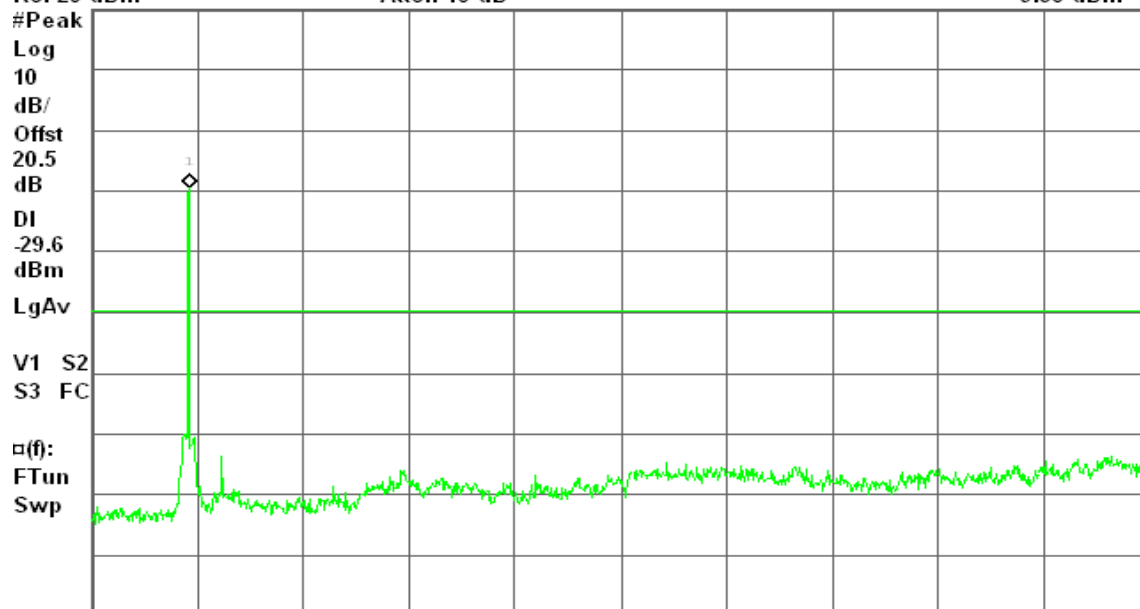

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

* Agilent 10:50:55 Oct 26, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-7.51 dBm

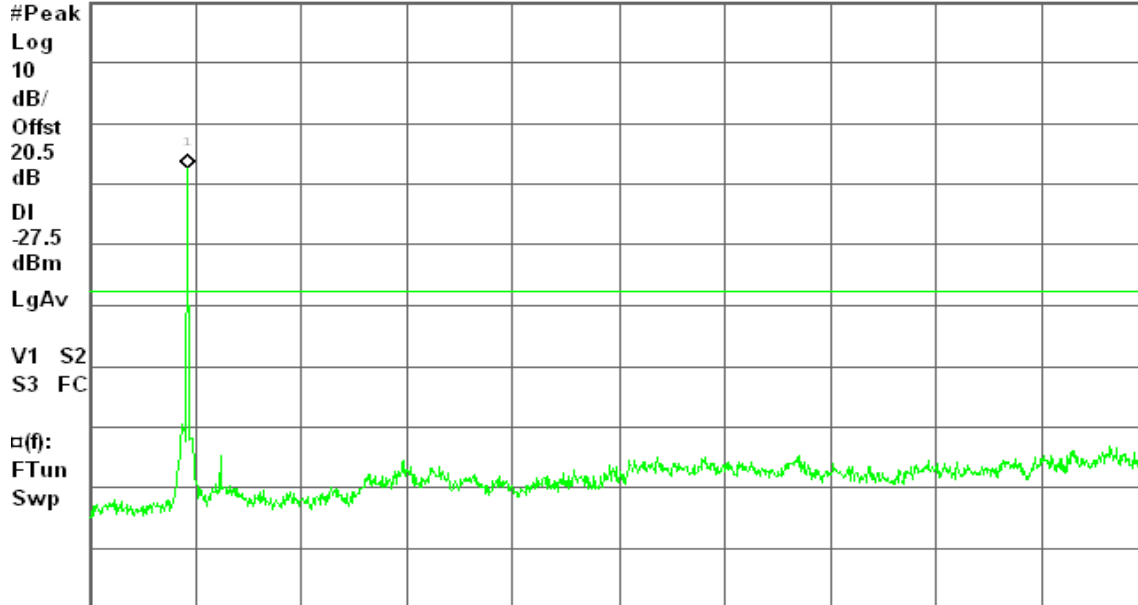

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

* Agilent 10:55:16 Oct 26, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

-8.47 dBm

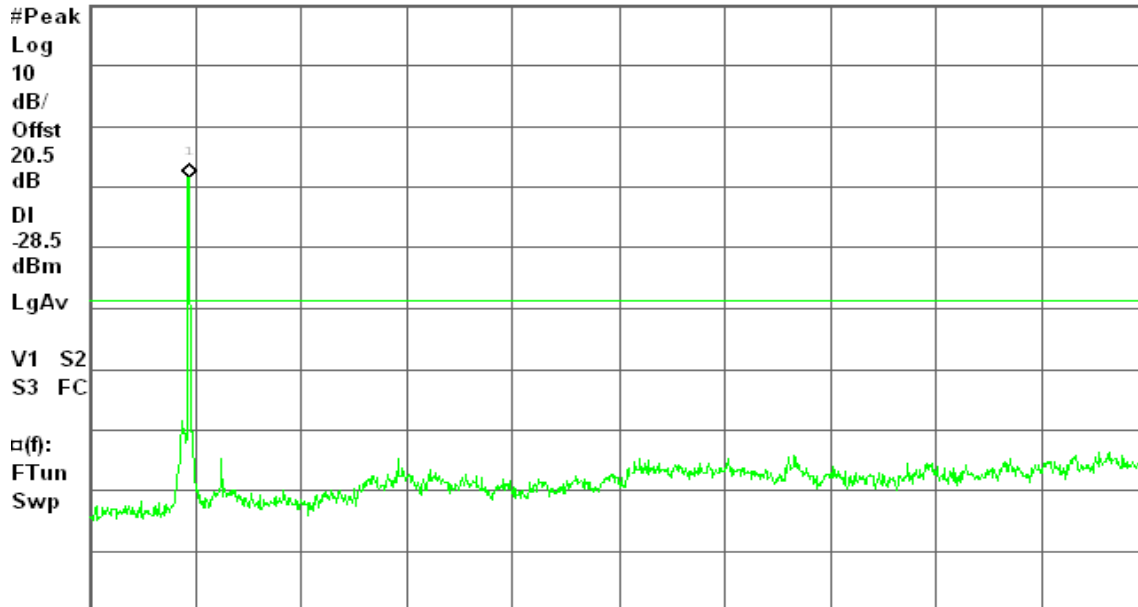

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



draft 802.11n Standard-20 MHz Channel mode

CH Low

Agilent 12:08:58 Oct 26, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-9.47 dBm

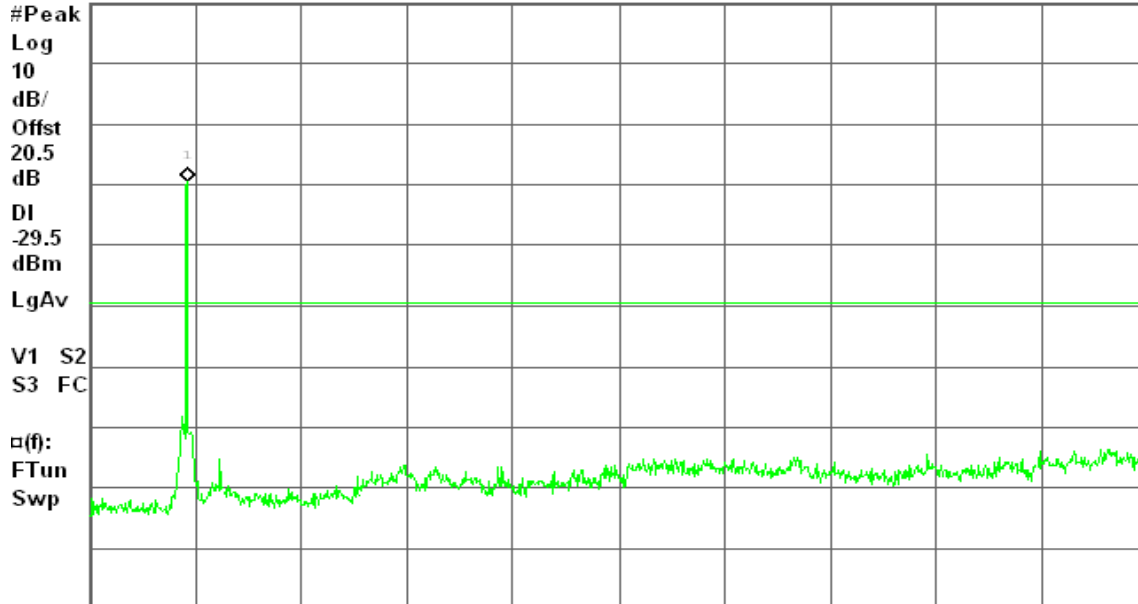

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 12:13:53 Oct 26, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-9.64 dBm

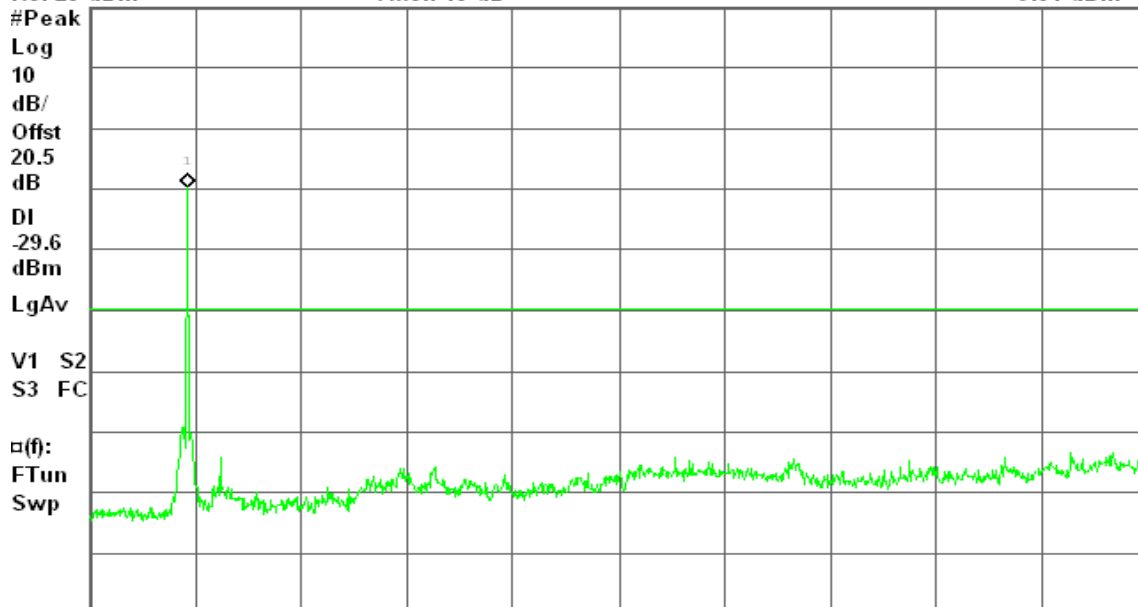

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 12:19:21 Oct 26, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

-9.07 dBm

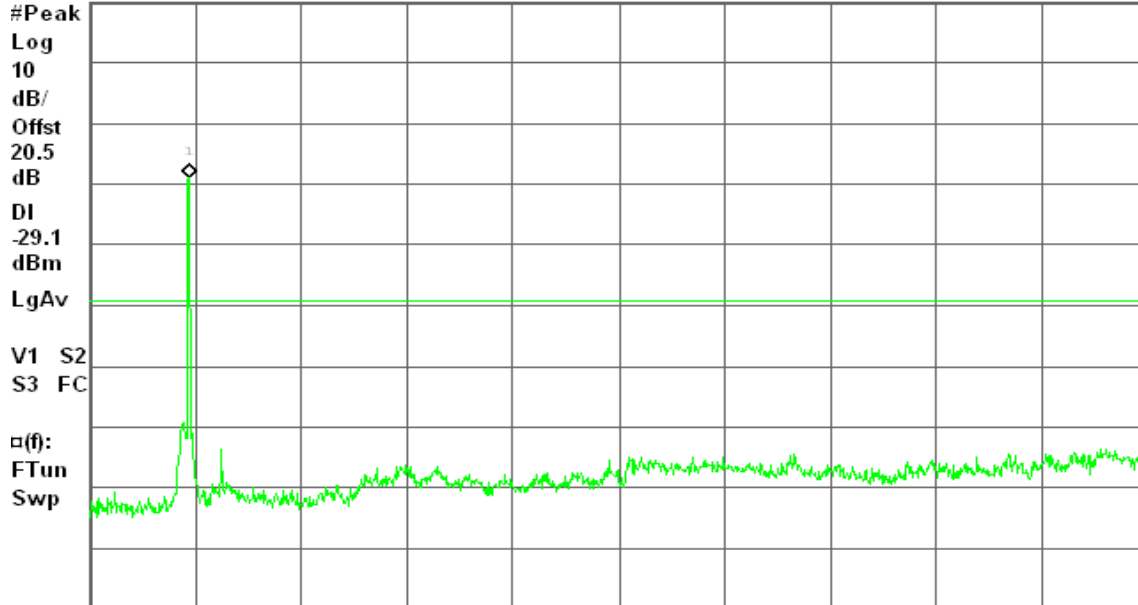

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

draft 802.11n Wide-40 MHz Channel mode

CH Low

Agilent 12:26:39 Oct 26, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-12.74 dBm

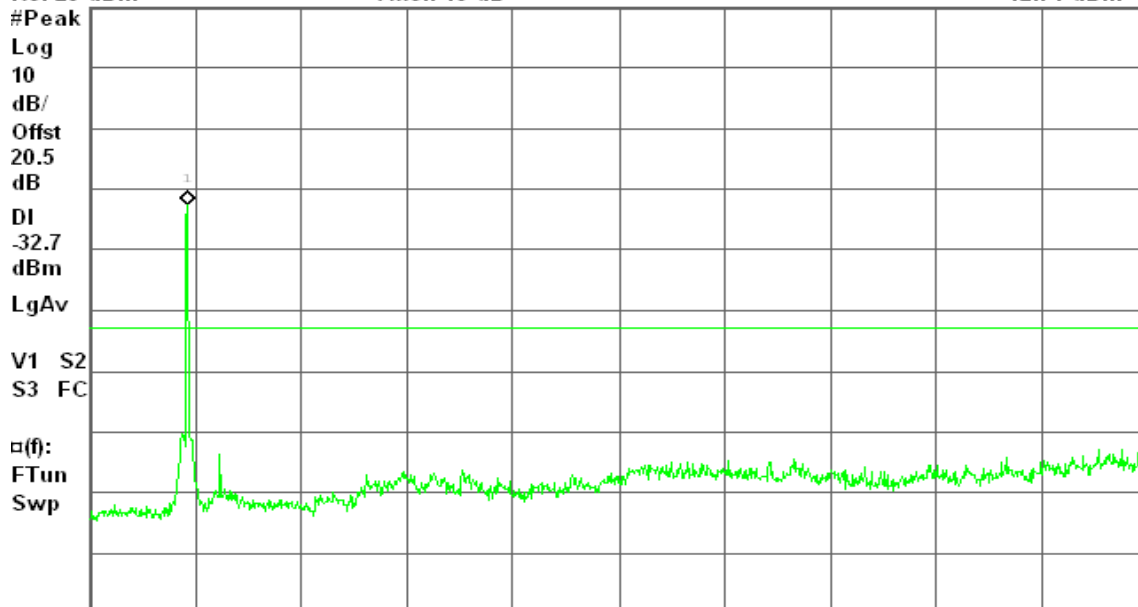

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

* Agilent 12:31:26 Oct 26, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-10.84 dBm

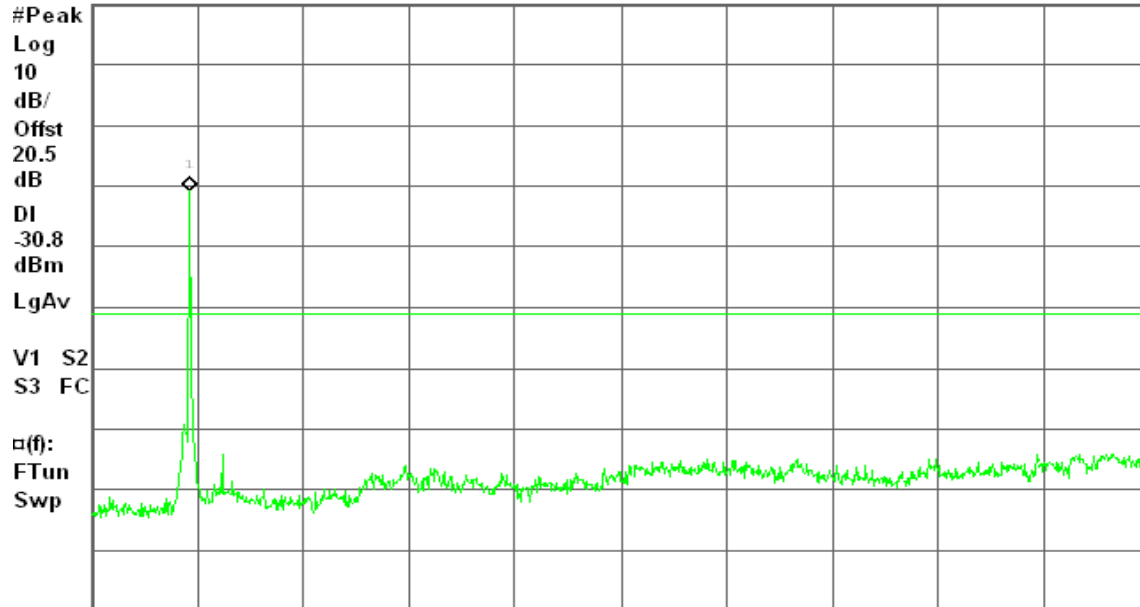

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

* Agilent 12:35:59 Oct 26, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-12.01 dBm

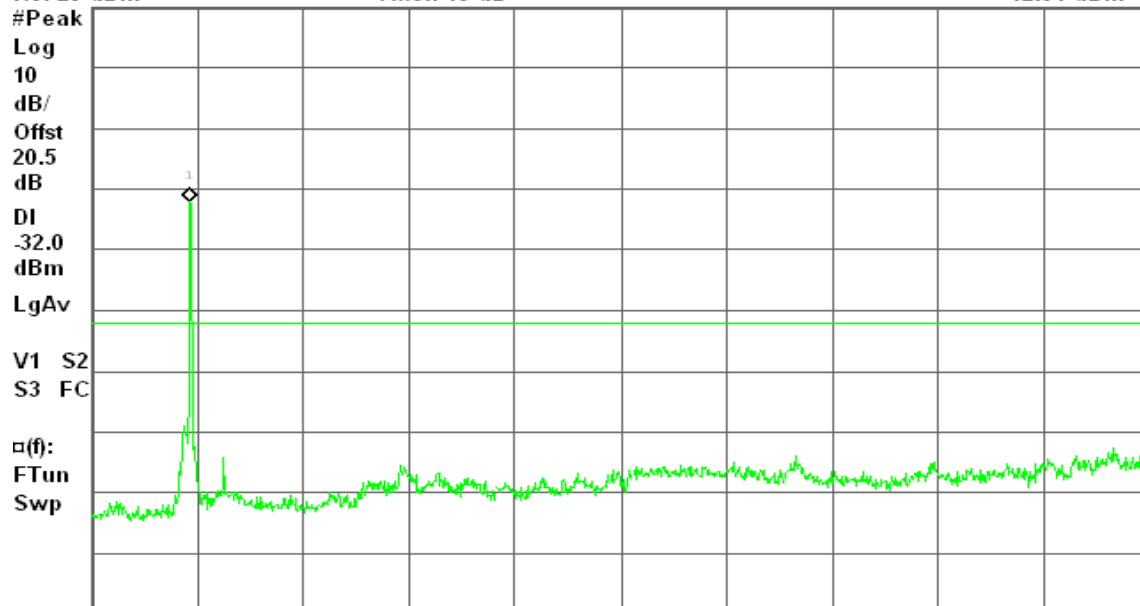

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



IEEE 802.11a mode

CH Low

Agilent 12:53:07 Oct 28, 2009

R T


Spurious, a Mode Low Ch.

Mkr1 5.75 GHz

Ref 20 dBm

Atten 10 dB

-3.46 dBm

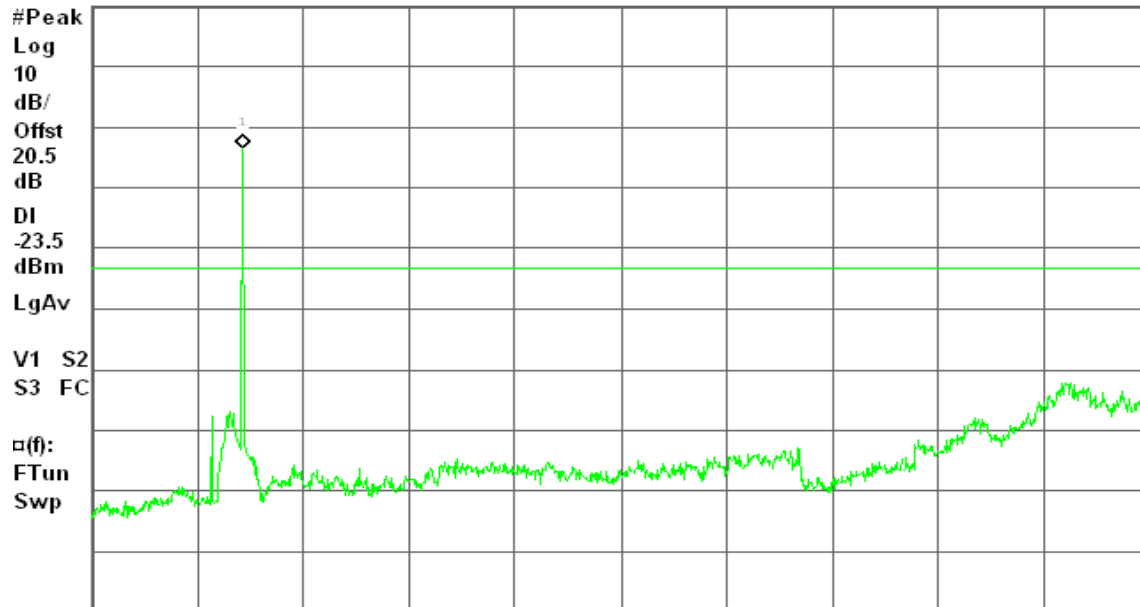

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)

CH Mid

Agilent 12:58:16 Oct 28, 2009

R T


Spurious, a Mode Mid Ch.

Mkr1 5.79 GHz

Ref 20 dBm

Atten 10 dB

-4.60 dBm

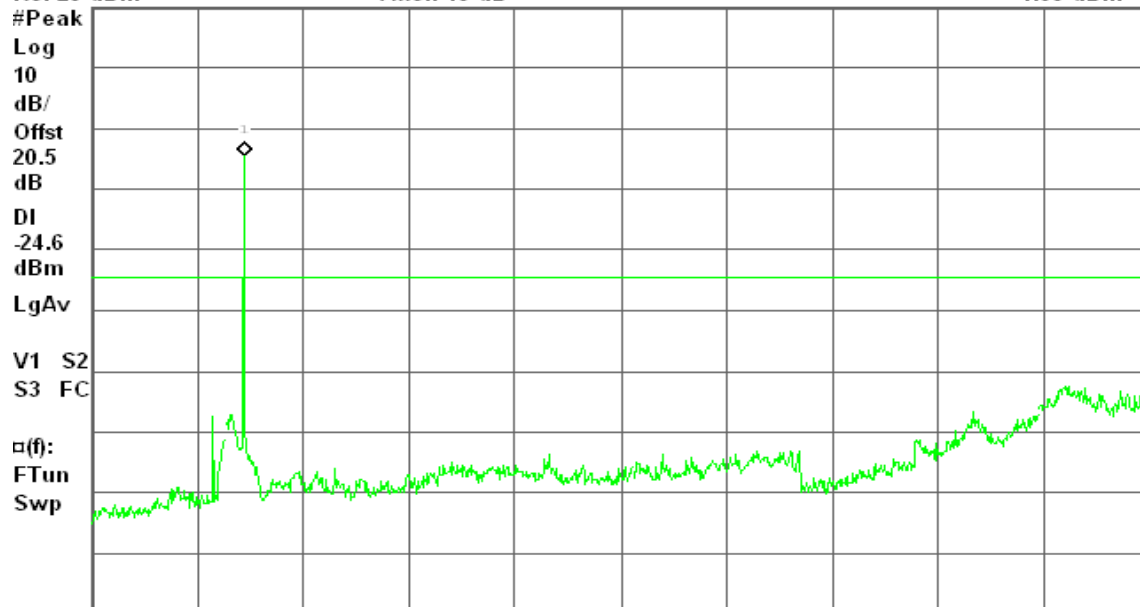

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)



CH High

Agilent 13:02:55 Oct 28, 2009

R T


Spurious, a Mode High Ch.

Mkr1 5.83 GHz

Ref 20 dBm

Atten 10 dB

-5.35 dBm

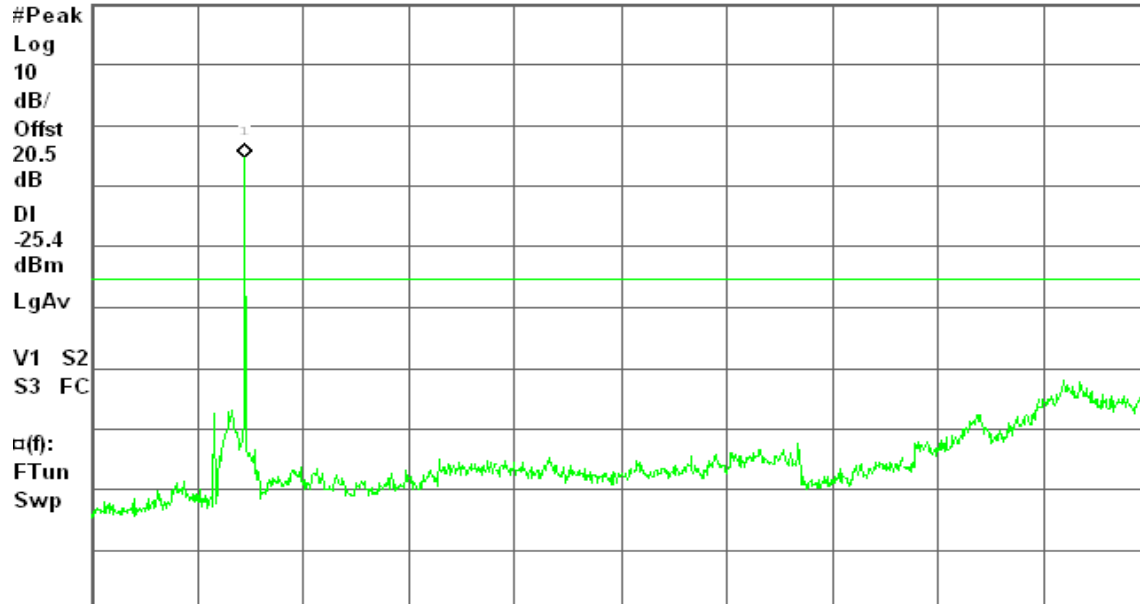

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)

draft 802.11n Standard-20 MHz Channel mode

CH Low

Agilent 13:08:07 Oct 28, 2009

R T


Spurious, a Mode Low Ch.

Mkr1 5.75 GHz

Ref 20 dBm

Atten 10 dB

-3.67 dBm

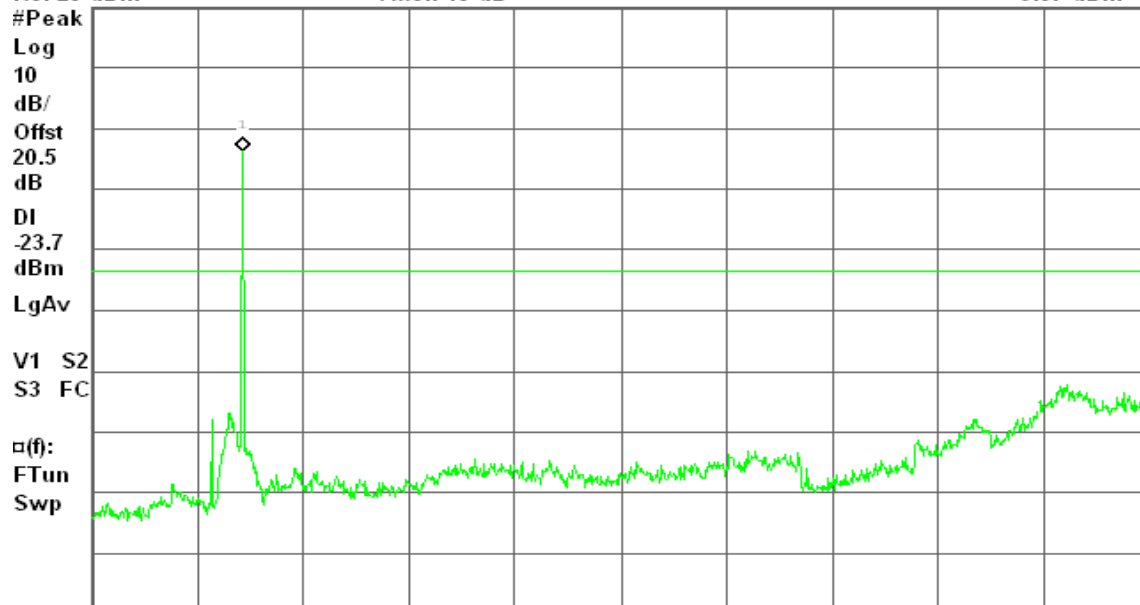

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)



CH Mid

Agilent 13:13:40 Oct 28, 2009

R T


Spurious, a Mode Mid Ch.

Mkr1 5.79 GHz

Ref 20 dBm

Atten 10 dB

-3.82 dBm

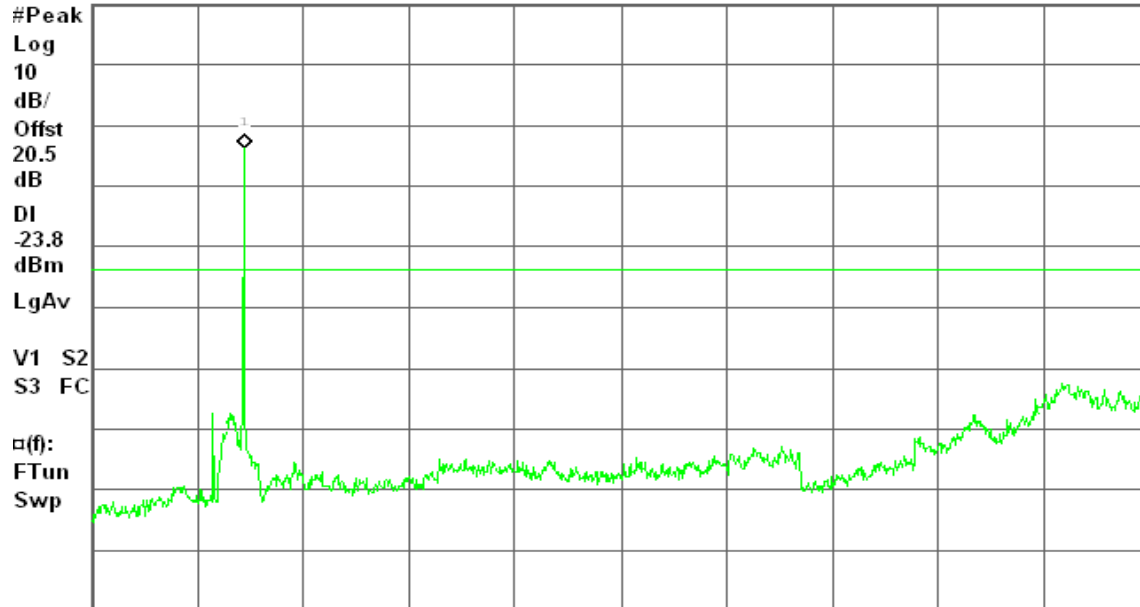

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)

CH High

Agilent 13:19:35 Oct 28, 2009

R T


Spurious, a Mode High Ch.

Mkr1 5.83 GHz

Ref 20 dBm

Atten 10 dB

-5.63 dBm

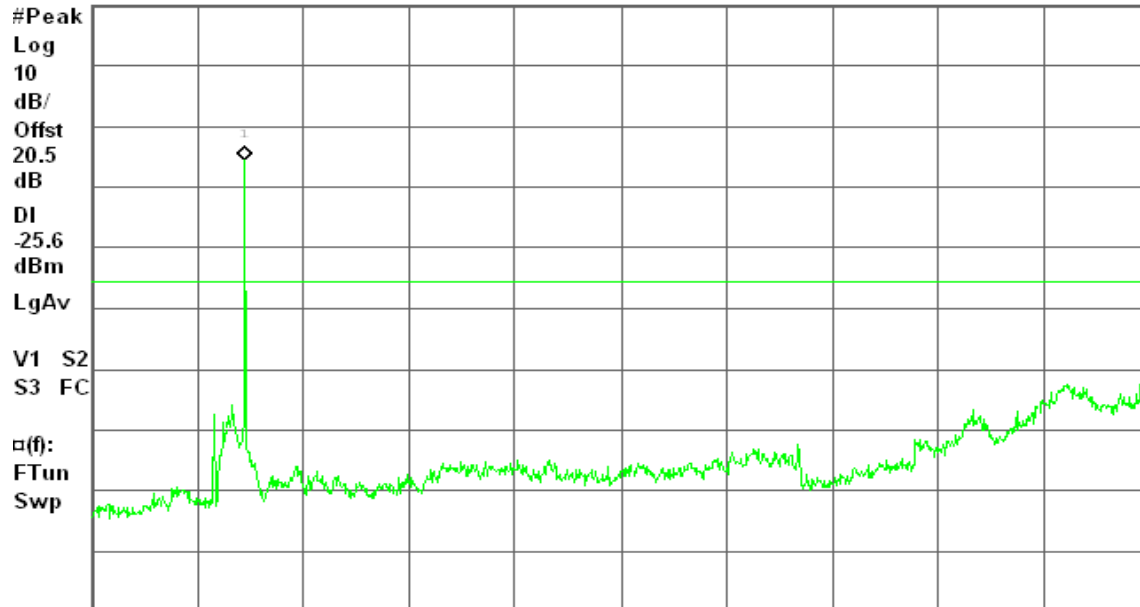

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)



draft 802.11n Wide-40 MHz Channel mode

CH Low

Agilent 13:25:40 Oct 28, 2009

R T


Spurious, a Mode Low Ch.

Mkr1 5.75 GHz

Ref 20 dBm

Atten 10 dB

-6.75 dBm

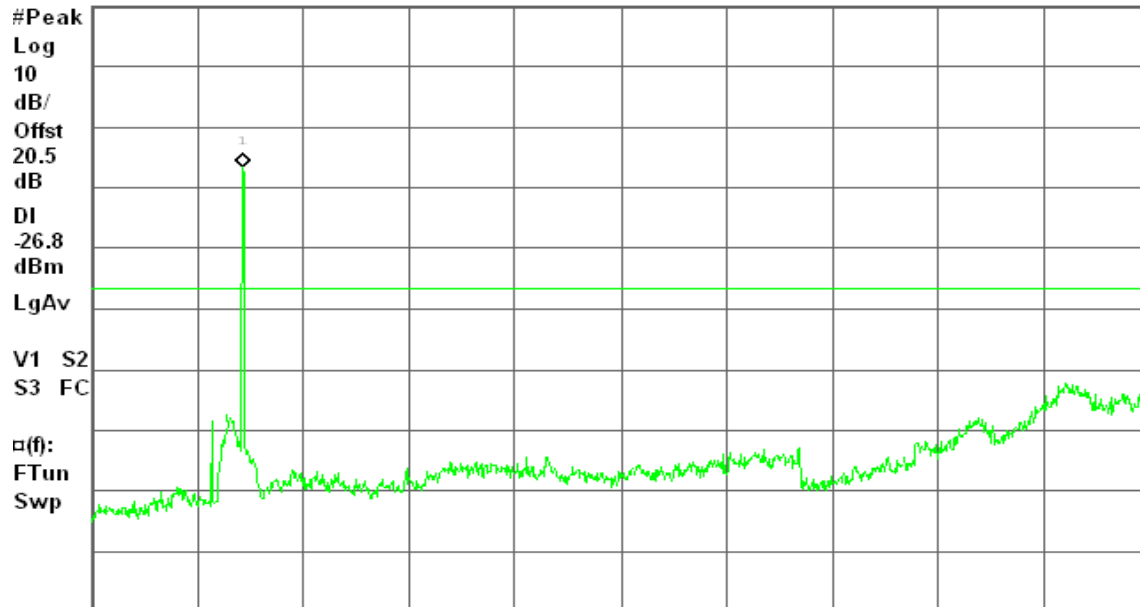

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)

CH High

Agilent 13:30:10 Oct 28, 2009

R T


Spurious, a Mode High Ch.

Mkr1 5.79 GHz

Ref 20 dBm

Atten 10 dB

-8.45 dBm

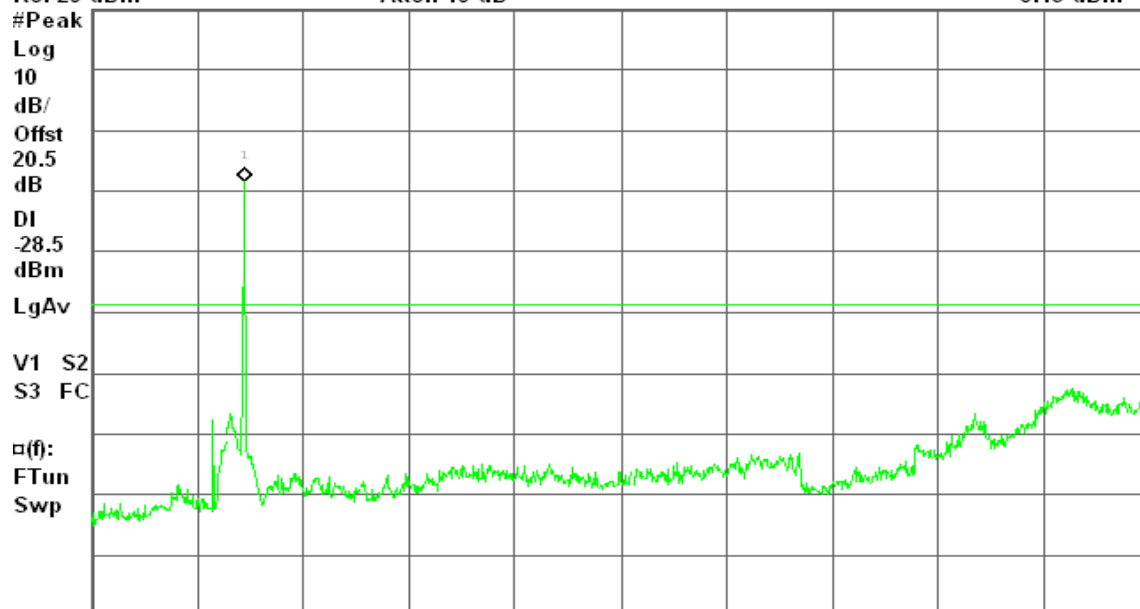

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)



7.6.2 Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

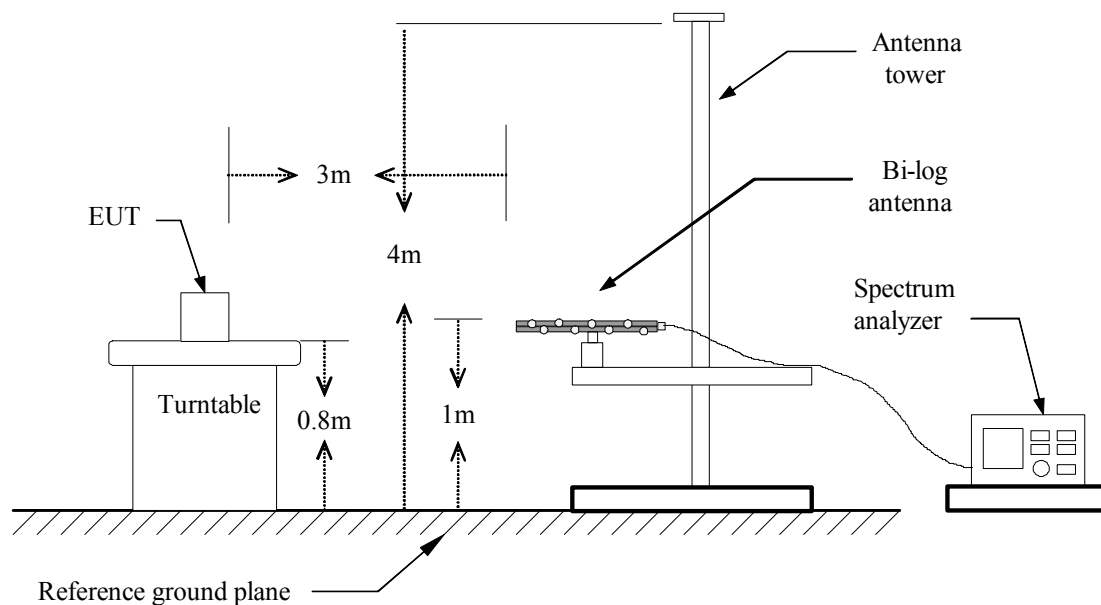

Above 1 GHz

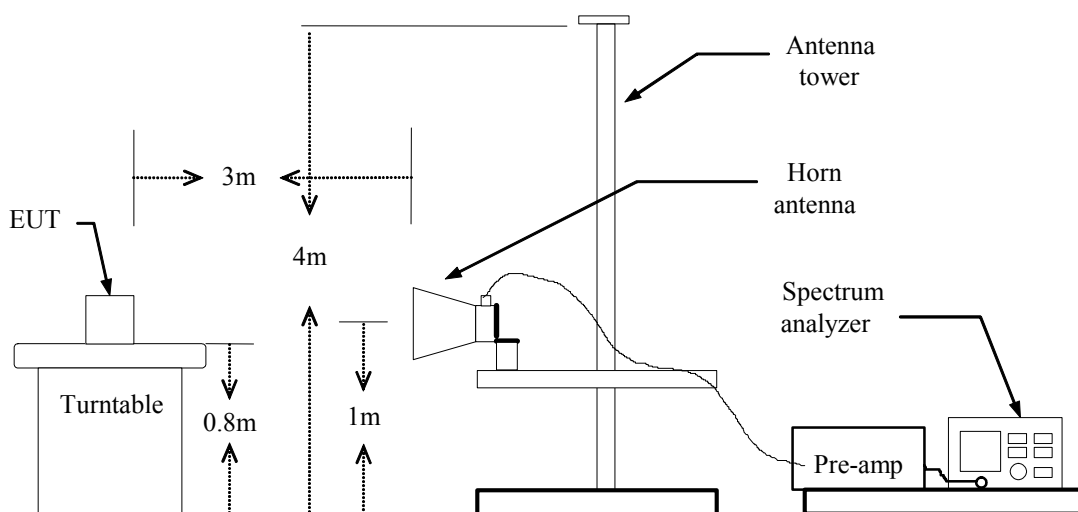



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** October 20, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 55% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
39.70	V	47.79	-8.88	38.91	40.00	-1.09	Peak
47.78	V	52.06	-13.74	38.31	40.00	-1.69	Peak
240.17	V	48.47	-10.68	37.79	46.00	-8.21	Peak
479.43	V	43.11	-4.54	38.57	46.00	-7.43	Peak
715.47	V	37.09	-1.05	36.03	46.00	-9.97	Peak
959.58	V	32.84	2.05	34.90	46.00	-11.10	Peak
31.62	H	33.71	-2.94	30.76	40.00	-9.24	Peak
240.17	H	48.15	-10.68	37.47	46.00	-8.53	Peak
319.38	H	46.94	-8.20	38.74	46.00	-7.26	Peak
479.43	H	41.42	-4.54	36.88	46.00	-9.12	Peak
715.47	H	32.84	-1.05	31.78	46.00	-14.22	Peak
959.58	H	38.52	2.05	40.58	46.00	-5.42	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Quasi-peak limit (dBuV/m)}$.

**Above 1 GHz****Operation Mode:** Tx / IEEE 802.11b mode / CH Low**Test Date:** October 24, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1320.00	V	62.44	43.06	-7.36	55.08	35.70	74.00	54.00	-18.30	AVG
2303.33	V	65.73	52.26	-1.75	63.99	50.51	74.00	54.00	-3.49	AVG
2493.33	V	62.17	50.75	-1.43	60.74	49.32	74.00	54.00	-4.68	AVG
6433.33	V	55.23	50.80	2.77	58.00	53.57	74.00	54.00	-0.43	AVG
N/A										
1320.00	H	61.46	42.89	-7.36	54.10	35.53	74.00	54.00	-18.47	AVG
2300.00	H	59.14	45.86	-1.75	57.39	44.11	74.00	54.00	-9.89	AVG
6433.33	H	51.49	47.45	2.77	54.26	50.22	74.00	54.00	-3.78	AVG
N/A										

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

**Operation Mode:** Tx / IEEE 802.11b mode / CH Mid**Test Date:** October 24, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1080.00	V	59.26	---	-7.81	51.45	---	74.00	54.00	-2.55	Peak
1320.00	V	61.78	44.07	-7.36	54.42	36.71	74.00	54.00	-17.29	AVG
1333.33	V	59.20	---	-7.34	51.86	---	74.00	54.00	-2.14	Peak
2320.00	V	64.14	52.31	-1.72	62.42	50.59	74.00	54.00	-3.41	AVG
2490.00	V	62.53	50.64	-1.44	61.10	49.20	74.00	54.00	-4.80	AVG
6500.00	V	55.00	50.71	2.85	57.85	53.56	74.00	54.00	-0.44	AVG
1330.00	H	61.43	42.43	-7.35	54.08	35.08	74.00	54.00	-18.92	AVG
2300.00	H	58.00	46.22	-1.75	56.25	44.47	74.00	54.00	-9.53	AVG
6500.00	H	52.03	45.97	2.85	54.88	48.82	74.00	54.00	-5.18	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / IEEE 802.11b mode / CH High**Test Date:** October 24, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	62.43	43.95	-7.92	54.51	36.03	74.00	54.00	-17.97	AVG
1330.00	V	61.90	43.88	-7.35	54.55	36.53	74.00	54.00	-17.47	AVG
2326.67	V	64.19	52.12	-1.71	62.49	50.41	74.00	54.00	-3.59	AVG
2506.67	V	63.36	51.02	-1.41	61.95	49.61	74.00	54.00	-4.39	AVG
6566.67	V	53.07	50.06	3.03	56.10	53.09	74.00	54.00	-0.91	AVG
N/A										
1023.33	H	65.38	43.14	-7.92	57.46	35.22	74.00	54.00	-18.78	AVG
1320.00	H	59.62	42.35	-7.36	52.26	34.99	74.00	54.00	-19.01	AVG
2300.00	H	58.26	45.67	-1.75	56.51	44.18	74.00	54.00	-9.82	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / IEEE 802.11g mode / CH Low**Test Date:** October 24, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1020.00	V	64.97	43.94	-7.92	57.04	36.02	74.00	54.00	-17.98	AVG
1320.00	V	61.70	43.10	-7.36	54.34	35.74	74.00	54.00	-18.26	AVG
2323.33	V	64.83	53.53	-1.71	63.11	51.82	74.00	54.00	-2.18	AVG
2493.33	V	63.00	50.51	-1.43	61.57	49.08	74.00	54.00	-4.92	AVG
6433.33	V	56.35	50.87	2.77	59.12	53.64	74.00	54.00	-0.36	AVG
N/A										
1020.00	H	63.60	43.19	-7.92	55.68	35.27	74.00	54.00	-18.73	AVG
1320.00	H	61.37	43.31	-7.36	54.01	35.95	74.00	54.00	-18.05	AVG
2290.00	H	58.51	45.44	-1.77	56.74	43.67	74.00	54.00	-10.33	AVG
6433.33	H	51.29	47.95	2.77	54.06	50.72	74.00	54.00	-3.28	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / IEEE 802.11g mode/ CH Mid**Test Date:** October 24, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	66.79	43.97	-7.92	58.87	36.05	74.00	54.00	-17.95	AVG
1320.00	V	61.65	43.61	-7.36	54.29	36.25	74.00	54.00	-17.75	AVG
1330.00	V	61.37	13.61	-7.35	54.02	6.26	74.00	54.00	-47.74	AVG
2290.00	V	64.52	53.49	-1.77	62.75	51.72	74.00	54.00	-2.28	AVG
2503.33	V	62.30	49.67	-1.41	60.89	48.26	74.00	54.00	-5.74	AVG
6500.00	V	55.42	50.56	2.85	58.27	53.41	74.00	54.00	-0.59	AVG
1116.67	H	58.93	---	-7.74	51.18	---	74.00	54.00	-2.82	Peak
1320.00	H	61.82	43.73	-7.36	54.46	36.37	74.00	54.00	-17.63	AVG
1560.00	H	60.62	41.96	-6.46	54.16	35.50	74.00	54.00	-18.50	AVG
2296.67	H	59.28	45.81	-1.76	57.52	44.05	74.00	54.00	-9.95	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / IEEE 802.11g mode/ CH High**Test Date:** October 24, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1020.00	V	65.38	43.86	-7.92	57.45	35.94	74.00	54.00	-18.06	AVG
1320.00	V	61.88	44.16	-7.36	54.52	36.80	74.00	54.00	-17.20	AVG
2306.67	V	64.73	52.31	-1.74	62.99	50.57	74.00	54.00	-3.43	AVG
2506.67	V	62.12	51.10	-1.41	60.71	49.69	74.00	54.00	-4.31	AVG
6566.67	V	53.02	50.11	3.03	56.05	53.14	74.00	54.00	-0.86	AVG
N/A										
1026.67	H	59.29	---	-7.91	51.38	---	74.00	54.00	-2.62	Peak
1320.00	H	61.95	42.99	-7.36	54.59	35.63	74.00	54.00	-18.37	AVG
1560.00	H	57.47	---	-6.46	51.02	---	74.00	54.00	-2.98	Peak
2296.67	H	58.85	46.82	-1.76	57.10	45.06	74.00	54.00	-8.94	AVG
6566.67	H	51.55	45.65	3.03	54.58	48.68	74.00	54.00	-5.32	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: October 24, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	63.40	43.54	-7.92	55.48	35.62	74.00	54.00	-18.38	AVG
1320.00	V	61.75	43.74	-7.36	54.39	36.38	74.00	54.00	-17.62	AVG
2310.00	V	64.82	53.31	-1.74	63.09	51.57	74.00	54.00	-2.43	AVG
2520.00	V	61.77	50.76	-1.38	60.39	49.38	74.00	54.00	-4.62	AVG
6433.33	V	56.69	50.76	2.77	59.46	53.53	74.00	54.00	-0.47	AVG
N/A										
1020.00	H	63.34	42.90	-7.92	55.41	34.98	74.00	54.00	-19.02	AVG
1043.33	H	62.08	43.06	-7.88	54.20	35.18	74.00	54.00	-18.82	AVG
1320.00	H	62.25	44.20	-7.36	54.89	36.84	74.00	54.00	-17.16	AVG
1560.00	H	57.80	---	-6.46	51.34	---	74.00	54.00	-2.66	Peak
2293.33	H	59.32	46.12	-1.76	57.56	44.36	74.00	54.00	-9.64	AVG
6433.33	H	52.10	47.68	2.77	54.87	50.45	74.00	54.00	-3.55	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: October 24, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	62.26	43.66	-7.92	54.34	35.74	74.00	54.00	-18.26	AVG
1113.33	V	57.57	---	-7.75	49.82	---	74.00	54.00	-4.18	Peak
1320.00	V	61.69	43.57	-7.36	54.32	36.21	74.00	54.00	-17.79	AVG
2323.33	V	65.01	53.60	-1.71	63.30	51.89	74.00	54.00	-2.11	AVG
2493.33	V	61.96	52.31	-1.43	60.53	50.88	74.00	54.00	-3.12	AVG
6500.00	V	55.58	50.50	2.85	58.43	53.35	74.00	54.00	-0.65	AVG
1043.33	H	62.06	43.12	-7.88	54.18	35.24	74.00	54.00	-18.76	AVG
1320.00	H	62.17	42.76	-7.36	54.81	35.40	74.00	54.00	-18.60	AVG
2303.33	H	58.60	46.82	-1.75	56.86	45.07	74.00	54.00	-8.93	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: October 24, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	62.80	42.96	-7.92	54.89	35.04	74.00	54.00	-18.96	AVG
1046.67	V	59.47	---	-7.87	51.60	---	74.00	54.00	-2.40	Peak
1320.00	V	62.07	43.39	-7.36	54.71	36.03	74.00	54.00	-17.97	AVG
2323.33	V	64.57	53.46	-1.71	62.86	51.75	74.00	54.00	-2.25	AVG
2510.00	V	61.91	50.86	-1.40	60.51	49.46	74.00	54.00	-4.54	AVG
6566.67	V	53.08	50.07	3.03	56.11	53.10	74.00	54.00	-0.90	AVG
1023.33	H	62.54	42.51	-7.92	54.63	34.59	74.00	54.00	-19.41	AVG
1320.00	H	61.84	41.00	-7.36	54.48	33.64	74.00	54.00	-20.36	AVG
1560.00	H	57.31	---	-6.46	50.86	---	74.00	54.00	-3.14	Peak
2280.00	H	58.40	44.09	-1.79	56.61	42.30	74.00	54.00	-11.70	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Low

Test Date: October 24, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	62.48	43.75	-7.92	54.57	35.83	74.00	54.00	-18.17	AVG
1320.00	V	61.38	43.28	-7.36	54.02	35.92	74.00	54.00	-18.08	AVG
2323.33	V	64.12	53.13	-1.71	62.40	51.42	74.00	54.00	-2.58	AVG
6458.33	V	55.66	50.87	2.80	58.46	53.67	74.00	54.00	-0.33	AVG
N/A										
1020.00	H	59.51	---	-7.92	51.59	---	74.00	54.00	-2.41	Peak
1320.00	H	61.38	41.86	-7.36	54.02	34.50	74.00	54.00	-19.50	AVG
1333.33	H	58.76	---	-7.34	51.42	---	74.00	54.00	-2.58	Peak
1560.00	H	60.67	41.55	-6.46	54.21	35.09	74.00	54.00	-18.91	AVG
2273.33	H	58.54	45.27	-1.80	56.75	43.47	74.00	54.00	-10.53	AVG
6458.33	H	51.96	46.20	2.80	54.76	49.00	74.00	54.00	-5.00	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Mid

Test Date: October 24, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1320.00	V	61.56	43.07	-7.36	54.19	35.71	74.00	54.00	-18.29	AVG
2290.00	V	63.76	53.71	-1.77	61.99	51.94	74.00	54.00	-2.06	AVG
2490.00	V	63.58	51.48	-1.44	62.14	50.04	74.00	54.00	-3.96	AVG
6500.00	V	55.14	50.37	2.85	57.99	53.22	74.00	54.00	-0.78	AVG
N/A										
1023.33	H	65.18	43.15	-7.92	57.26	35.23	74.00	54.00	-18.77	AVG
1320.00	H	62.25	42.70	-7.36	54.89	35.34	74.00	54.00	-18.66	AVG
1560.00	H	58.29	---	-6.46	51.83	---	74.00	54.00	-2.17	Peak
2253.33	H	59.38	43.27	-1.83	57.55	41.44	74.00	54.00	-12.56	AVG
6500.00	H	51.86	45.76	2.85	54.71	48.61	74.00	54.00	-5.39	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH High

Test Date: October 24, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	62.16	43.22	-7.92	54.24	35.30	74.00	54.00	-18.70	AVG
1320.00	V	61.44	42.79	-7.36	54.08	35.43	74.00	54.00	-18.57	AVG
1330.00	V	61.82	43.54	-7.35	54.47	36.19	74.00	54.00	-17.81	AVG
2313.33	V	64.53	52.66	-1.73	62.80	50.93	74.00	54.00	-3.07	AVG
2513.33	V	61.30	50.28	-1.39	59.90	48.89	74.00	54.00	-5.11	AVG
6541.67	V	55.25	50.00	2.96	58.21	52.96	74.00	54.00	-1.04	AVG
1023.33	H	62.85	42.54	-7.92	54.93	34.62	74.00	54.00	-19.38	AVG
1320.00	H	61.61	42.53	-7.36	54.25	35.17	74.00	54.00	-18.83	AVG
1560.00	H	57.30	---	-6.46	50.84	---	74.00	54.00	-3.16	Peak
2276.67	H	58.17	45.79	-1.79	56.38	44.00	74.00	54.00	-10.00	AVG
6541.67	H	51.78	45.55	2.96	54.74	48.51	74.00	54.00	-5.49	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Tx / IEEE 802.11a mode/ CH Low**Test Date:** October 25, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1043.33	V	57.74	---	-7.88	49.86	---	74.00	54.00	-4.14	Peak
1320.00	V	61.69	38.78	-7.36	54.33	31.42	74.00	54.00	-22.58	AVG
2653.33	V	51.56	---	-1.12	50.44	---	74.00	54.00	-3.56	Peak
N/A										
1020.00	H	62.20	38.45	-7.92	54.28	30.53	74.00	54.00	-23.47	AVG
1320.00	H	64.43	37.61	-7.36	57.07	30.25	74.00	54.00	-23.75	AVG
1560.00	H	61.44	37.95	-6.46	54.98	31.49	74.00	54.00	-22.51	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

**Operation Mode:** Tx / IEEE 802.11a mode/ CH Mid**Test Date:** October 25, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1020.00	V	62.74	36.45	-7.92	54.82	28.53	74.00	54.00	-25.47	AVG
1080.00	V	58.18	---	-7.81	50.37	---	74.00	54.00	-3.63	Peak
1196.67	V	59.04	---	-7.59	51.45	---	74.00	54.00	-2.55	Peak
1320.00	V	61.64	39.16	-7.36	54.28	31.80	74.00	54.00	-22.20	AVG
1560.00	V	56.21	---	-6.46	49.75	---	74.00	54.00	-4.25	Peak
2656.67	V	50.04	---	-1.11	48.93	---	74.00	54.00	-5.07	Peak
1023.33	H	58.12	---	-7.92	50.21	---	74.00	54.00	-3.79	Peak
1320.00	H	63.03	37.86	-7.36	55.67	30.50	74.00	54.00	-23.50	AVG
1560.00	H	54.15	---	-6.46	47.69	---	74.00	54.00	-6.31	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

**Operation Mode:** Tx / IEEE 802.11a mode/ CH High**Test Date:** October 25, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	62.10	38.55	-7.92	54.18	30.63	74.00	54.00	-23.37	AVG
1320.00	V	59.28	---	-7.36	51.91	---	74.00	54.00	-2.09	Peak
1560.00	V	54.70	---	-6.46	48.25	---	74.00	54.00	-5.75	Peak
1660.00	V	52.91	---	-5.50	47.41	---	74.00	54.00	-6.59	Peak
2663.33	V	55.64	35.10	-1.10	54.54	34.00	74.00	54.00	-20.00	AVG
5183.33	V	59.80	45.97	1.20	61.01	47.17	74.00	54.00	-6.83	AVG
1020.00	H	62.93	39.70	-7.92	55.01	31.78	74.00	54.00	-22.22	AVG
1320.00	H	61.41	37.66	-7.36	54.04	30.30	74.00	54.00	-23.70	AVG
1333.33	H	59.10	---	-7.34	51.76	---	74.00	54.00	-2.24	Peak
1560.00	H	61.31	37.11	-6.46	54.85	30.65	74.00	54.00	-23.35	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: October 25, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1020.00	V	62.39	37.72	-7.92	54.47	29.80	74.00	54.00	-24.20	AVG
1046.67	V	58.68	---	-7.87	50.81	---	74.00	54.00	-3.19	Peak
1330.00	V	62.32	37.85	-7.35	54.97	30.50	74.00	54.00	-23.50	AVG
1993.33	V	52.52	---	-2.31	50.21	---	74.00	54.00	-3.79	Peak
2666.67	V	55.35	36.46	-1.09	54.26	35.37	74.00	54.00	-18.63	AVG
11483.33	V	45.66	35.85	14.07	59.72	49.92	74.00	54.00	-4.08	AVG
1020.00	H	57.89	---	-7.92	49.96	---	74.00	54.00	-4.04	Peak
1116.67	H	56.85	---	-7.74	49.10	---	74.00	54.00	-4.90	Peak
1320.00	H	64.36	38.13	-7.36	56.99	30.77	74.00	54.00	-23.23	AVG
1560.00	H	57.92	---	-6.46	51.47	---	74.00	54.00	-2.53	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: October 25, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1020.00	V	59.20	---	-7.92	51.28	---	74.00	54.00	-2.72	Peak
1046.67	V	62.39	38.43	-7.87	54.52	30.56	74.00	54.00	-23.44	AVG
1333.33	V	62.24	39.19	-7.34	54.90	31.85	74.00	54.00	-22.15	AVG
2000.00	V	52.75	---	-2.25	50.50	---	74.00	54.00	-3.50	Peak
2660.00	V	52.59	---	-1.10	51.48	---	74.00	54.00	-2.52	Peak
N/A										
1020.00	H	59.31	---	-7.92	51.38	---	74.00	54.00	-2.62	Peak
1320.00	H	64.33	37.68	-7.36	56.97	30.32	74.00	54.00	-23.68	AVG
1560.00	H	60.46	36.95	-6.46	54.00	30.49	74.00	54.00	-23.51	AVG
1680.00	H	51.32	---	-5.31	46.01	---	74.00	54.00	-7.99	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: October 25, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1043.33	V	61.90	40.15	-7.88	54.02	32.27	74.00	54.00	-21.73	AVG
1320.00	V	59.01	---	-7.36	51.64	---	74.00	54.00	-2.36	Peak
1660.00	V	53.64	---	-5.50	48.14	---	74.00	54.00	-5.86	Peak
2656.67	V	52.81	---	-1.11	51.70	---	74.00	54.00	-2.30	Peak
N/A										
1020.00	H	56.19	---	-7.92	48.27	---	74.00	54.00	-5.73	Peak
1320.00	H	63.31	37.91	-7.36	55.94	30.55	74.00	54.00	-23.45	AVG
1560.00	H	61.14	37.42	-6.46	54.68	30.96	74.00	54.00	-23.04	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Low

Test Date: October 25, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	58.04	---	-7.92	50.13	---	74.00	54.00	-3.87	Peak
1330.00	V	61.69	39.61	-7.35	54.34	32.26	74.00	54.00	-21.74	AVG
1993.33	V	51.65	---	-2.31	49.33	---	74.00	54.00	-4.67	Peak
2656.67	V	55.12	36.25	-1.11	54.01	35.14	74.00	54.00	-18.86	AVG
N/A										
1023.33	H	57.77	---	-7.92	49.85	---	74.00	54.00	-4.15	Peak
1043.33	H	57.71	---	-7.88	49.83	---	74.00	54.00	-4.17	Peak
1320.00	H	63.89	37.46	-7.36	56.52	30.10	74.00	54.00	-23.90	AVG
1560.00	H	58.03	---	-6.46	51.57	---	74.00	54.00	-2.43	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH High

Test Date: October 25, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1023.33	V	58.44	---	-7.92	50.52	---	74.00	54.00	-3.48	Peak
1326.67	V	62.06	43.21	-7.35	54.71	35.86	74.00	54.00	-18.14	AVG
1660.00	V	53.75	---	-5.50	48.25	---	74.00	54.00	-5.75	Peak
1996.67	V	51.44	---	-2.28	49.15	---	74.00	54.00	-4.85	Peak
N/A										
1020.00	H	63.46	37.61	-7.92	55.54	29.69	74.00	54.00	-24.31	AVG
1320.00	H	63.68	37.68	-7.36	56.32	30.32	74.00	54.00	-23.68	AVG
1560.00	H	60.62	37.00	-6.46	54.16	30.54	74.00	54.00	-23.46	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** October 17, 2009
Temperature: 22°C **Tested by:** Mark Yang
Humidity: 45% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1600	42.88	34.08	0.12	43.00	34.20	65.46	55.46	-22.46	-21.26	L1
0.2200	42.91	36.51	0.09	43.00	36.60	62.82	52.82	-19.82	-16.22	L1
0.2750	38.82	32.82	0.08	38.90	32.90	60.97	50.97	-22.07	-18.07	L1
0.3300	35.62	30.22	0.08	35.70	30.30	59.45	49.45	-23.75	-19.15	L1
1.9500	42.04	35.64	0.06	42.10	35.70	56.00	46.00	-13.90	-10.30	L1
3.8450	45.44	33.24	0.06	45.50	33.30	56.00	46.00	-10.50	-12.70	L1
0.1650	48.47	41.47	0.13	48.60	41.60	65.21	55.21	-16.61	-13.61	L2
0.2100	34.40	19.10	0.10	34.50	19.20	63.21	53.21	-28.71	-34.01	L2
0.2400	33.20	11.80	0.10	33.30	11.90	62.10	52.10	-28.80	-40.20	L2
0.2700	31.40	19.70	0.10	31.50	19.80	61.12	51.12	-29.62	-31.32	L2
2.1200	42.42	35.62	0.08	42.50	35.70	56.00	46.00	-13.50	-10.30	L2
3.7400	48.71	36.01	0.09	48.80	36.10	56.00	46.00	-7.20	-9.90	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

Conducted emissions (Line 1)

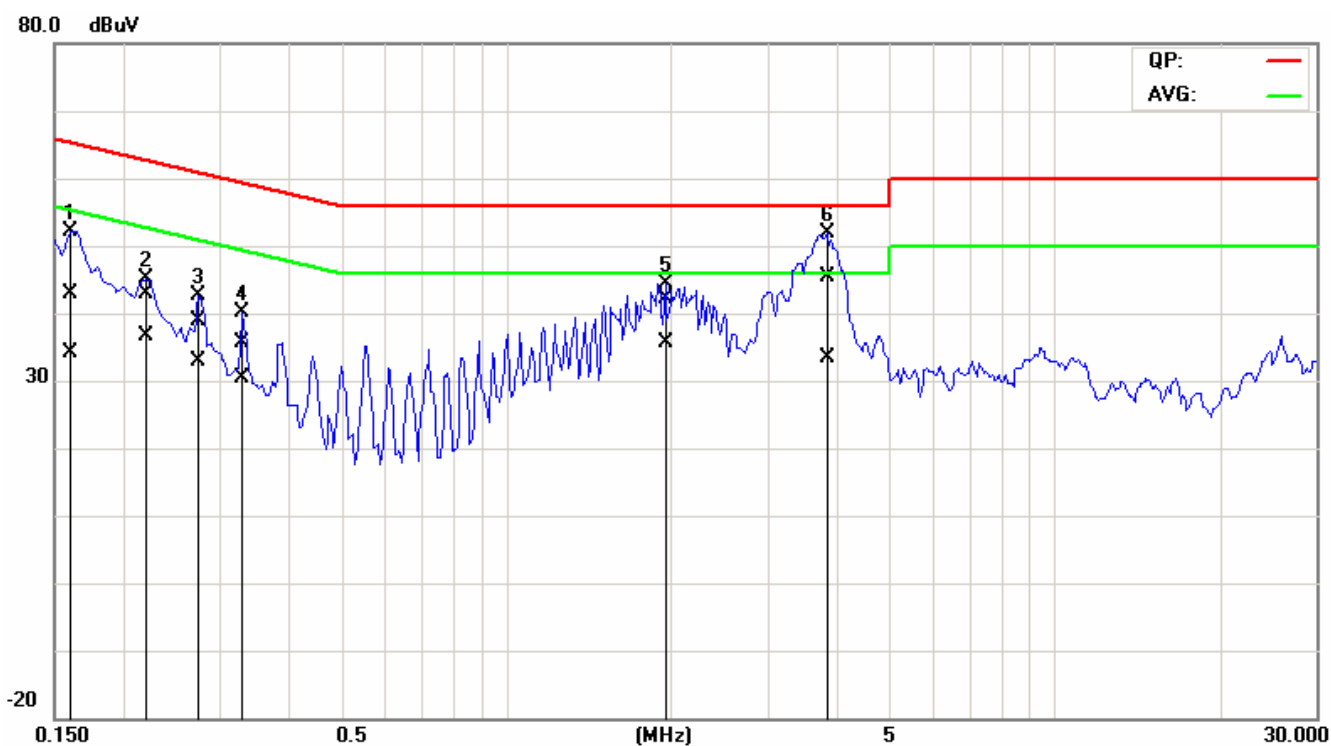

Conducted emissions (Line 2)

