

RFA-25-C2M2

Specifications


Frequency range	2400 MHz – 2500 MHz	4900 MHz -5875 MHz
Gain with cable loss	1.5 dBi	2 dBi
VSWR	2.0 : 1 Max.	2.0 : 1 Max.
Polarization	Linear, vertical	Linear, vertical
Cable Loss	0.5 dB	0.7dB
Impedance	50 Ω	50 Ω
Connector	Reverse SMA Plug with un-detachable cable	

Environmental & Mechanical Characteristics

Temperature	-10°C to +55°C
Humidity	95% @ 25°C
Radome color	Black



SWR

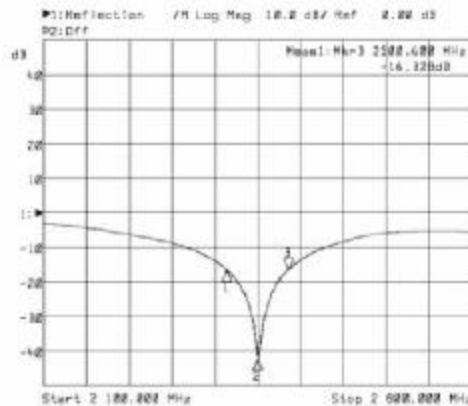

plane field patterns

