

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM150300125001 Page: 1 of 67

# FCC REPORT

Application No:	SZEM1503001250CR
Applicant:	WINNERS'SUN PLASTIC & ELECTRONIC (SHENZHEN) CO., LTD
Manufacturer/Factory:	WINNERS'SUN PLASTIC & ELECTRONIC (SHENZHEN) CO., LTD
Product Name:	One Monopod
Model No.(EUT):	WS-SQB916
Trade Mark:	Dispho
FCC ID:	UR9WS-SQB916
Standards: 47 CFR Part 15, Subpart C (2014)	
Date of Receipt: 2015-03-24	
Date of Test:	2015-03-30 to -2015-04-02
Date of Issue:	2015-04-15
Test Result:	PASS *

In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150300125001 Page: 2 of 67

# 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2015-04-15		Original

Authorized for issue by:		
Tested By	Chros Thong	2015-04-02
	(Chris Zhong) /Project Engineer	Date
Prepared By	Jade Chen	2015-04-15
	(Jade Chen) /Clerk	Date
Checked By	Emen-Li	2015-04-15
	(Emen Li) /Reviewer	Date

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 3 of 67

# 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009) PASS	

Remark:

Model No.:WS-SQB916

There are three kinds of color samples for the model. Only the sample in section 7.1 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above model. Only different on color.



Report No.: SZEM150300125001 Page: 4 of 67

# 4 Contents

Page
------

1	со	VER PAGE	1
2	VE	RSION	2
3	TE	ST SUMMARY	
4		NTENTS	
5		NERAL INFORMATION	
J			
	5.1 5.2	CLIENT INFORMATION GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	
6	TE	ST RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	
	6.2	CONDUCTED EMISSIONS	13
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	20DB OCCUPY BANDWIDTH	
	6.5	CARRIER FREQUENCIES SEPARATION	
	6.6	HOPPING CHANNEL NUMBER	
	6.7 6.8	DWELL TIME	
	6.9	SPURIOUS RF CONDUCTED EMISSIONS	
	6.10	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM.	
	6.11	RADIATED SPURIOUS EMISSION.	
	6.1	1.1 Radiated Emission below 1GHz	
	6.1	1.2 Transmitter Emission above 1GHz	
	6.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	59
7	PH	OTOGRAPHS - EUT TEST SETUP	65
	7.1	CONDUCTED EMISSION	65
	7.2		
	7.3	RADIATED SPURIOUS EMISSION	
8	PH	OTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	67
			S SGS S
			S WIT IN
			(瓜林州)人
			HE WE
			EN ZD



Report No.: SZEM150300125001 Page: 5 of 67

# 5 General Information

### 5.1 Client Information

Applicant:	WINNERS'SUN PLASTIC & ELECTRONIC (SHENZHEN) CO., LTD		
Address of Applicant:	Bld E, Dalang Yingtai Industrial Zone, Longhua Town, Bao'an Dist, Shenzhen, China		
Manufacturer:	WINNERS'SUN PLASTIC & ELECTRONIC (SHENZHEN) CO.,LTD		
Address of Manufacturer:	Bld E, Dalang Yingtai Industrial Zone, Longhua Town, Bao'an Dist, Shenzhen, China		
Factory:	WINNERS'SUN PLASTIC & ELECTRONIC (SHENZHEN) CO., LTD		
Address of Factory:	Bld E, Dalang Yingtai Industrial Zone, Longhua Town, Bao'an Dist, Shenzhen, China		

### 5.2 General Description of EUT

Product Name:	One Monopod
Model No.:	WS-SQB916
Trade Mark:	Dispho
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V3.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Test Power Grade:     0 (manufacturer declare )	
Test Software of EUT: Blue Tool (manufacturer declare )	
Antenna Type:	Integral
Antenna Gain:	-14.94dBi
Power Supply:	Model: 401120 Li - ion Polymer(charge by USB)
	3.7V 60mAh
USB Cable:	Unshielded 30cm

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 6 of 67

Operation F	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 7 of 67

### 5.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1000mbar

### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
RF test board	Supply by SGS	R0001

### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 8 of 67

### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### • Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

#### 5.7 Deviation from Standards

None.

### 5.8 Abnormalities from Standard Conditions

None.

### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150300125001 Page: 9 of 67

### 5.10Equipment List

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2016-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2016-05-13	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2016-05-13	
8	Coaxial Cable	SGS	N/A	SEL0025	2016-05-13	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 10 of 67

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2016-05-13
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2016-05-13

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 11 of 67

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2016-04-25
8	Band filter	amideon	82346	SEL0094	2016-05-13
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2016-04-25
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 12 of 67

# 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)		
responsible party shall be us antenna that uses a unique so that a broken antenna ca electrical connector is prohit 15.247(b) (4) requirement: The conducted output powe antennas with directional ga section, if transmitting anten power from the intentional ra	be designed to ensure that no antenna other than that furnished by the sed with the device. The use of a permanently attached antenna or of an coupling to the intentional radiator, the manufacturer may design the unit in be replaced by the user, but the use of a standard antenna jack or bited. r limit specified in paragraph (b) of this section is based on the use of ins that do not exceed 6 dBi. Except as shown in paragraph (c) of this inas of directional gain greater than 6 dBi are used, the conducted output adiator shall be reduced below the stated values in paragraphs (b)(1), tion, as appropriate, by the amount in dB that the directional gain of the		
EUT Antenna:			
-	The antenna is integrated on the main PCB and no consideration of replacement. The best case gain		
of the antenna is -14.94dBi.			



Report No.: SZEM150300125001 Page: 13 of 67

0.2 Conducted Emissi						
Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.10: 2009					
Test Frequency Range:	150kHz to 30MHz					
Limit:		Limit (c	IBuV)			
	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithm	n of the frequency.				
Test Procedure:	<ol> <li>The mains terminal distur- room.</li> <li>The EUT was connected to Impedance Stabilization N impedance. The power call connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded.</li> <li>The tabletop EUT was place ground reference plane. A placed on the horizontal gr 4) The test was performed wi of the EUT shall be 0.4 m vertical ground reference p reference plane. The LISN unit under test and bonded mounted on top of the grou between the closest points the EUT and associated ed</li> <li>In order to find the maximu equipment and all of the in ANSI C63.10: 2009 on cor</li> </ol>	b AC power source thro etwork) which provides bles of all other units of SN 2, which was bonde he way as the LISN 1 for the outlet strip was used ISN provided the rating ced upon a non-metalli- nd for floor-standing ar round reference plane, th a vertical ground ref from the vertical ground ref from the vertical ground ref a vertical ground ref from the vertical ground blane was bonded to th 1 was placed 0.8 m fro d to a ground reference and reference plane. The s of the LISN 1 and the quipment was at least ( an emission, the relative terface cables must be	bugh a LISN 1 (Line a $50\Omega/50\mu$ H + $5\Omega$ line if the EUT were d to the ground or the unit being d to connect multiple of the LISN was not c table 0.8m above the rangement, the EUT w erence plane. The read d reference plane of the read of	ear e was ar e ne		

### 6.2 Conducted Emissions



Report No.: SZEM150300125001 Page: 14 of 67

Test Setup:	Shielding Room			
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel. Transmitting mode.			
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			






Report No.: SZEM150300125001 Page: 15 of 67


#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

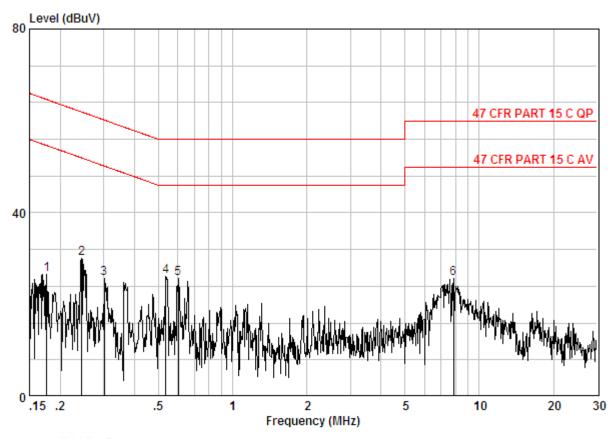



	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17584	0.02	9.70	16.98	26.70	64.68	-37.98	Peak
2	0.24422	0.02	9.70	20.27	29.98	61.95	-31.97	Peak
3	0.30188	0.01	9.70	16.03	25.75	60.19	-34.45	Peak
4 0	0.53498	0.01	9.80	16.35	26.17	56.00	-29.83	Peak
5	0.60112		9.80					
6	7.852	0.01	9.90	15.70	25.61	60.00	-34.39	Peak



Neutral line:

### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM150300125001 Page: 16 of 67

# Level (dBuV) 80 47 CFR PART 15 C QP 47 CFR PART 15 C AV 40 6 0 .15 .2 .5 1 2 5 10 30 20 Frequency (MHz)

Site : Shielding Room Condition : 47 CFR PART 15 C QP CE NEUTRAL Test mode : TX mode

	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 2 3 4 @ 5 6	0.17491 0.22437 0.28782 0.50203 0.63383 7.566	0.01 0.01 0.02	9.70 9.70 9.70 9.80 9.80 10.00	20.15 19.80 17.96 16.23	29.86 29.51 27.77 26.05	62.66 60.59 56.00 56.00	-32.79 -31.08 -28.23 -29.95	Peak Peak Peak Peak

#### Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM150300125001 Page: 17 of 67

#### **Test Requirement:** 47 CFR Part 15C Section 15.247 (b)(1) Test Method: ANSI C63.10:2009 Test Setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. Limit: 20dBm Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type Through Pre-scan, find the DH1 of data type is the worst case of GFSK Final Test Mode: modulation type. Instruments Used: Refer to section 5.10 for details **Test Results:** Pass

#### 6.3 Conducted Peak Output Power




Report No.: SZEM150300125001 Page: 18 of 67

#### **Measurement Data**

	GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-3.26	20.00	Pass			
Middle	-3.82	20.00	Pass			
Highest	-3.98	20.00	Pass			




Report No.: SZEM150300125001 Page: 19 of 67

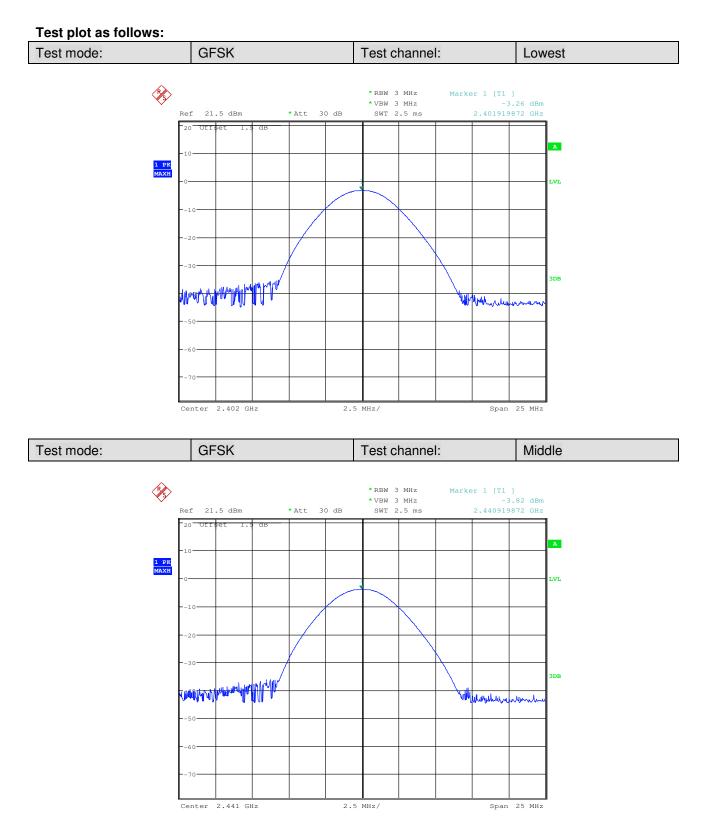



Report No.: SZEM150300125001 Page: 20 of 67

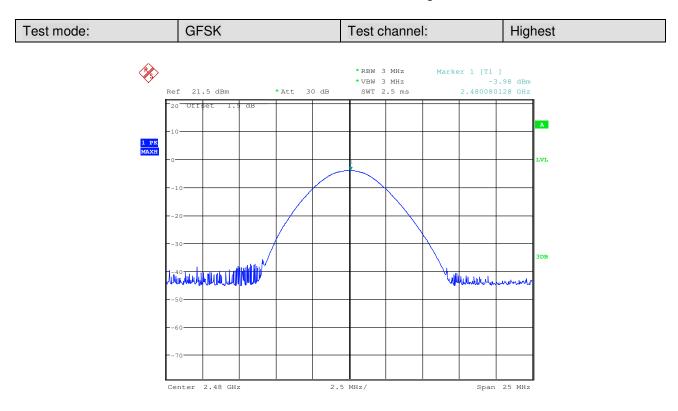



Report No.: SZEM150300125001 Page: 21 of 67

### 6.4 20dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Limit:	NA			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			


#### Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)
rest channel	GFSK
Lowest	1048.077
Middle	1043.269
Highest	1043.269

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150300125001 Page: 22 of 67

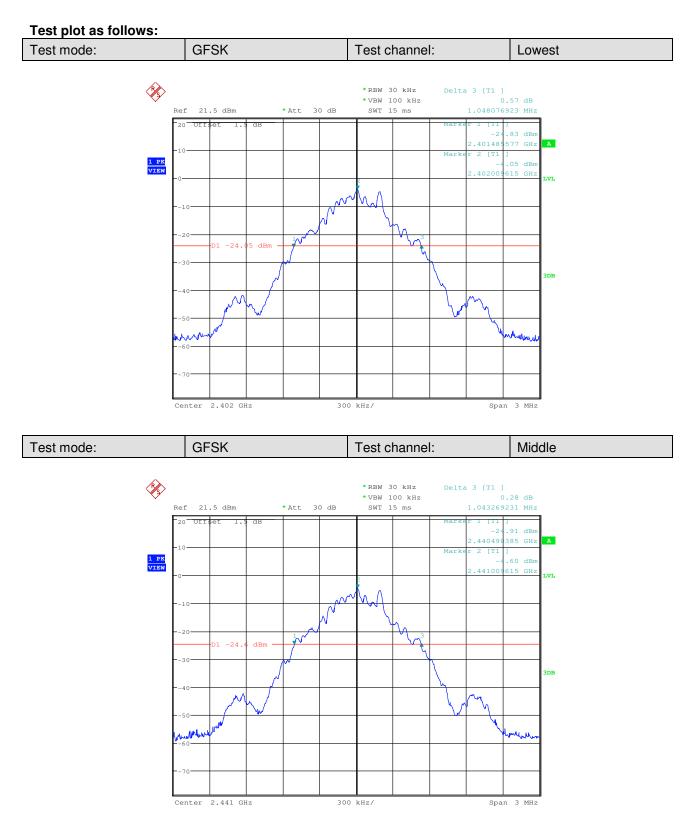



Report No.: SZEM150300125001 Page: 23 of 67

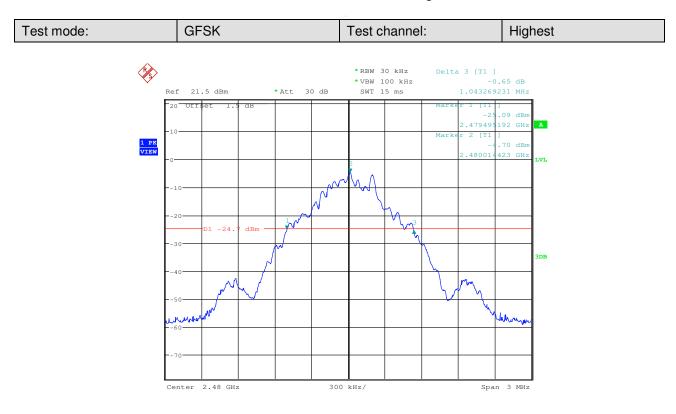



Report No.: SZEM150300125001 Page: 24 of 67

### 6.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Ground Reference Flane			
Limit:	2/3 of the 20dB bandwidth			
	Remark: the transmission power is less than 0.125W.			
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			





Report No.: SZEM150300125001 Page: 25 of 67

#### **Measurement Data**


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	≥698.718	Pass
Middle	1002	≥698.718	Pass
Highest	1002	≥698.718	Pass

#### Note: According to section 6.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1048.077	698.718




Report No.: SZEM150300125001 Page: 26 of 67

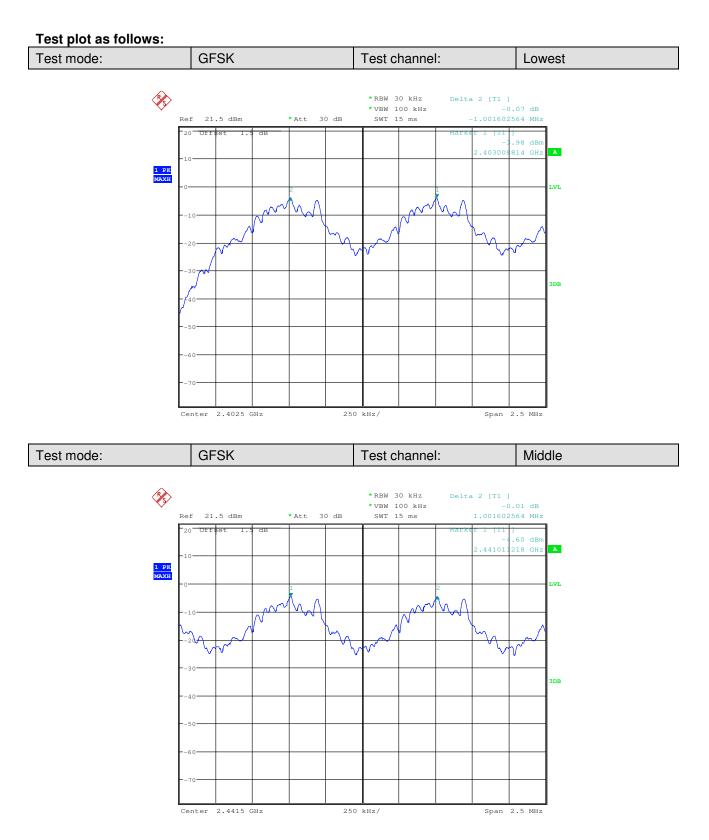



Report No.: SZEM150300125001 Page: 27 of 67

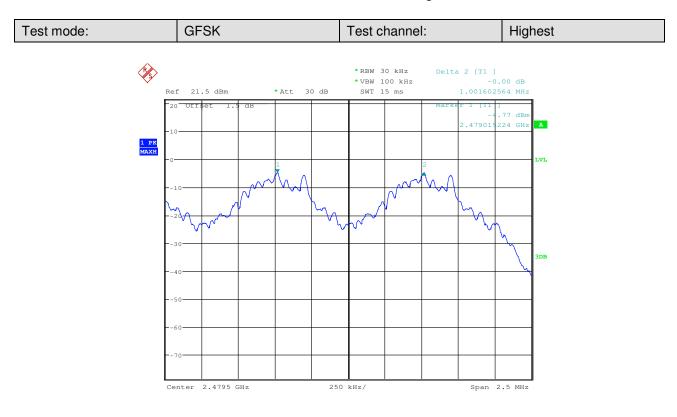



Report No.: SZEM150300125001 Page: 28 of 67

### 6.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Test Setup:	ANSI Cost 10.2009         Spectrum Analyzer         Image: Cost 10.2009         Image: Cost 10.2009 </th	
Limit:	At least 15 channels	
Test Mode:	Hopping transmitting with all kind of modulation	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	


#### **Measurement Data**

Mode	Hopping channel numbers	Limit
GFSK	79	≥15

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 29 of 67

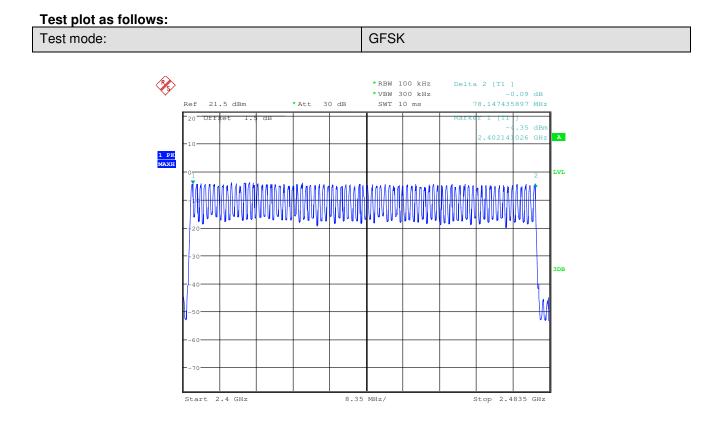



Report No.: SZEM150300125001 Page: 30 of 67

### 6.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
Instruments Used:	Refer to section 5.10 for details		
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.		
Limit:	0.4 Second		
Test Results:	Pass		

#### **Measurement Data**

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.137	0.4
	DH3	0.304	0.4
	DH5	0.293	0.4

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 31 of 67

#### **Remark:**


The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s On (ms)\*total number=dwell time (ms) The middle channel (2441MHz), as below: DH1 time slot=0.429(ms)\*total number=137.28 (ms)

DH3 time slot=1.687(ms)\* total number =303.66 (ms)

DH5 time slot=2.925(ms)\* total number =292.5 (ms)




Report No.: SZEM150300125001 Page: 32 of 67

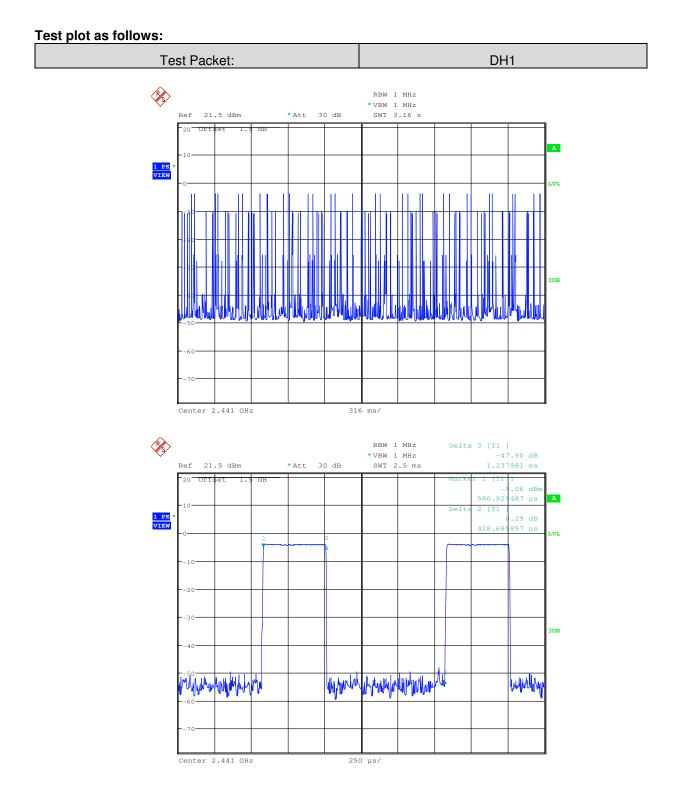

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150300125001 Page: 33 of 67

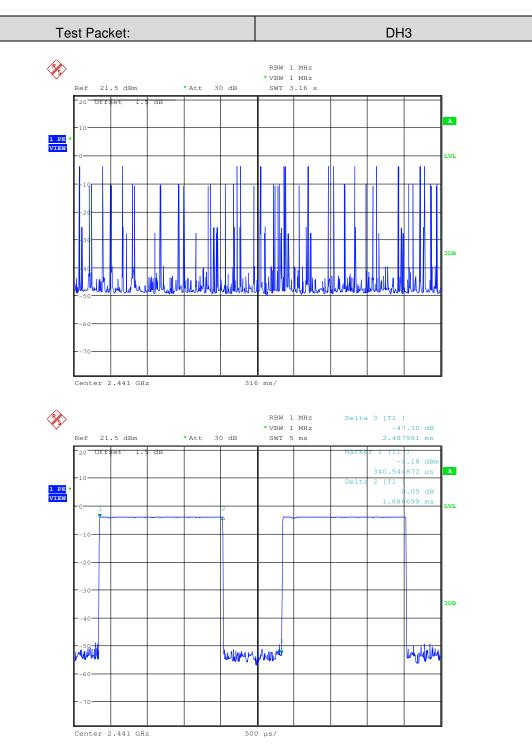



Report No.: SZEM150300125001 Page: 34 of 67

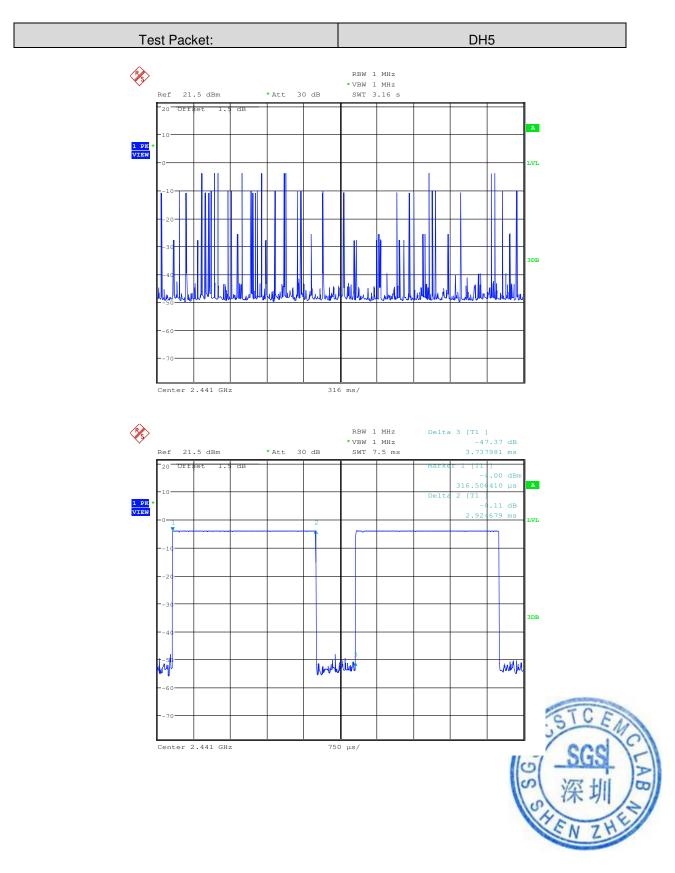




Report No.: SZEM150300125001 Page: 35 of 67

#### **Test Requirement:** 47 CFR Part 15C Section 15.247 (d) Test Method: ANSI C63.10:2009 Test Setup: Spectrum Analyzer E.U.T G Non-Conducted Table **Ground Reference Plane** Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Exploratory Test Mode: Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type. Instruments Used: Refer to section 5.10 for details Test Results: Pass

#### 6.8 Band-edge for RF Conducted Emissions




Report No.: SZEM150300125001 Page: 36 of 67

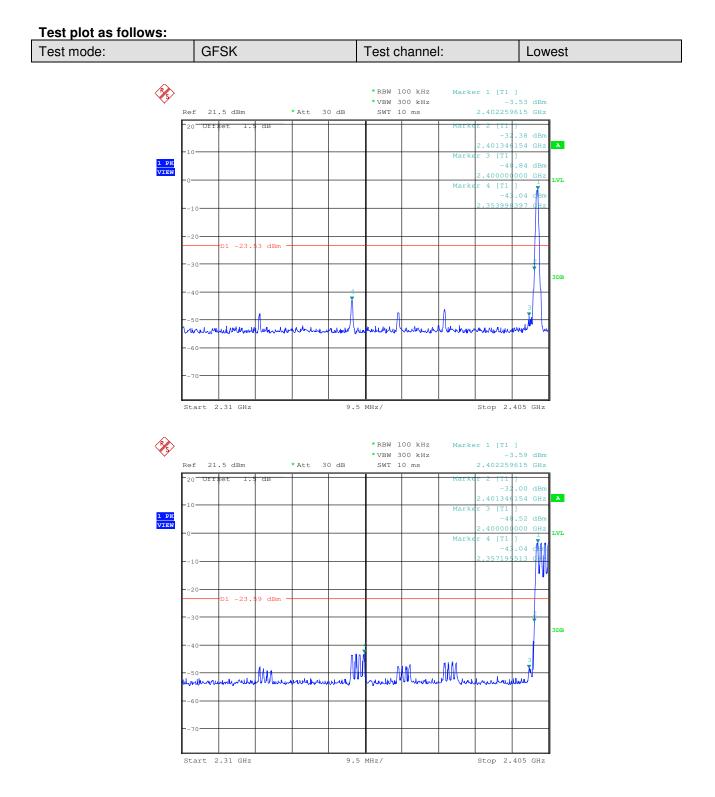

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 37 of 67

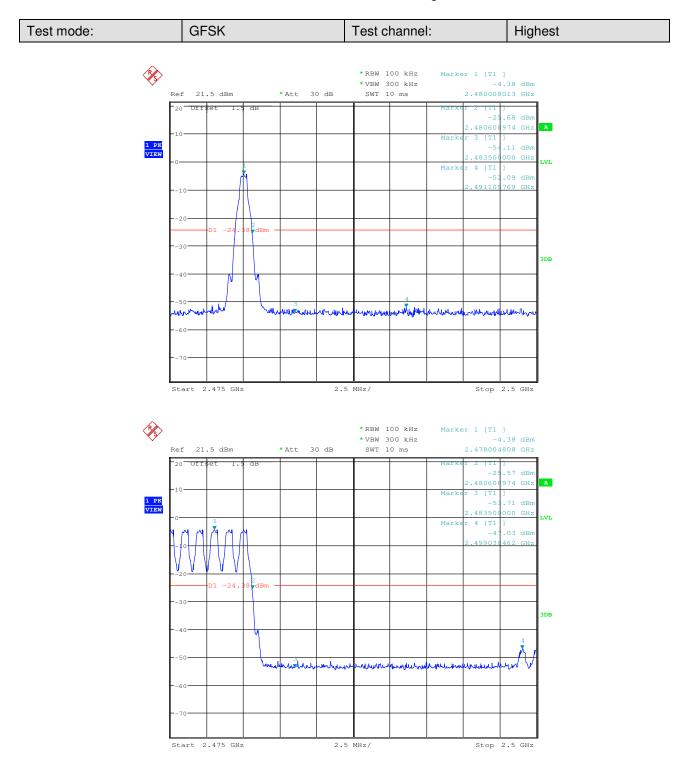



Report No.: SZEM150300125001 Page: 38 of 67


#### 6.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009						
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table						
	Ground Reference Plane						
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type						
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type.						
Instruments Used:	Refer to section 5.10 for details						
Test Results:	Pass						

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150300125001 Page: 39 of 67

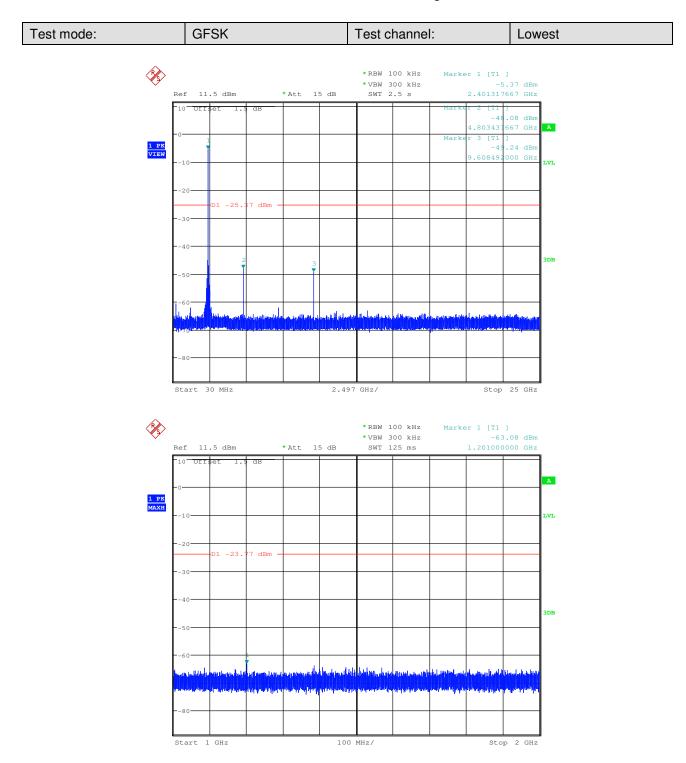



Report No.: SZEM150300125001 Page: 40 of 67

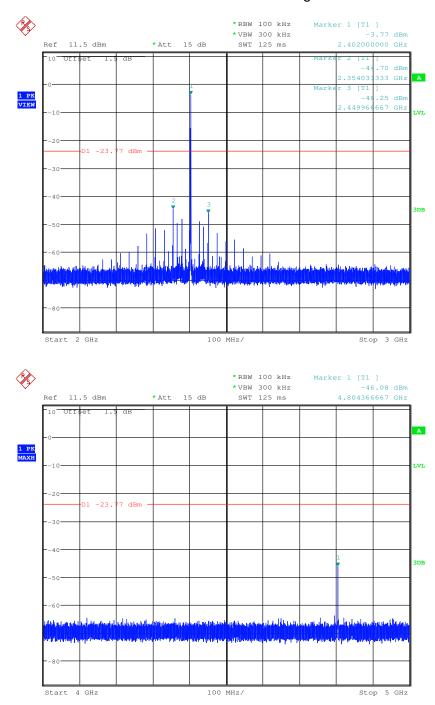




Report No.: SZEM150300125001 41 of 67 Page: × \* RBW 100 kHz Marker 1 [T1 ] \*VBW 300 kHz -60.74 dBm SWT 125 ms Ref 11.5 dBm \* Att 15 dB 7.205500000 GHz 10 Offset dE А 1 PK MAXH 01 -23 7 dBm Start 7 GHz 100 MHz/ Stop 8 GHz ×, \* RBW 100 kHz Marker 1 [T1 ] \*VBW 300 kHz -48.35 dBm 15 dB SWT 125 ms 9.608766667 GHz Ref 11.5 dBm \* Att 10 Offset dB 1 PK MAXH 7 dBm 10 GHz Start 9 GHz 100 MHz/ Stop



Report No.: SZEM150300125001 Page: 42 of 67

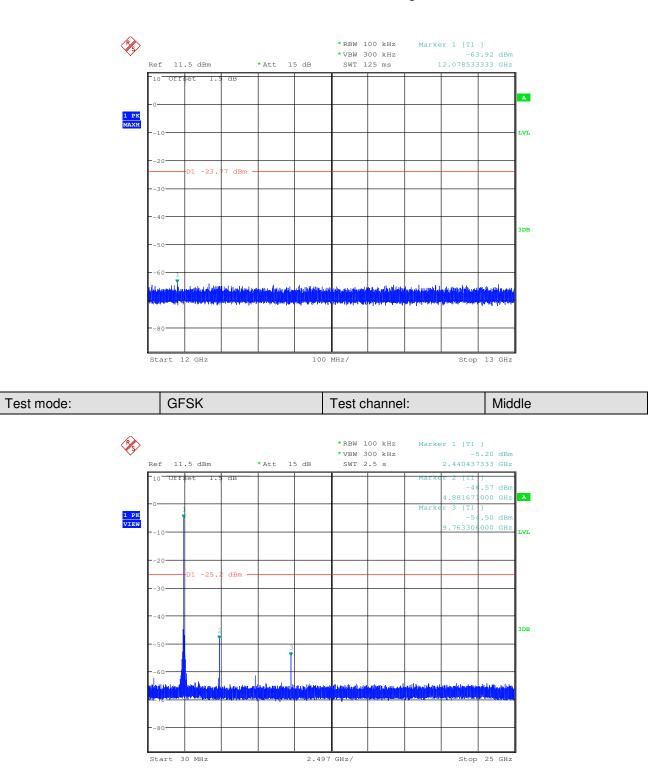



Report No.: SZEM150300125001 43 of 67 Page: × \* RBW 100 kHz Marker 1 [T1 ] \*VBW 300 kHz -64.44 dBm Ref 11.5 dBm \* Att 15 dB SWT 125 ms 1.069100000 GHz 10 Offset dE А 1 PK MAXH 01 -24 3 dBm Start 1 GHz 100 MHz/ Stop 2 GHz × \* RBW 100 kHz Marker 1 [T1 ] \* VBW 300 kHz -4.93 dBm 2.441066667 GHz Ref 11.5 dBm \* Att 15 dB SWT 125 ms 10 Offset 171 dB .68 dB -4 333 GH: 1 PK VIEW .25 dBr - 4 67 GH: 8916 01 -24 3 dBm Start 2 GHz 100 MHz/ Stop 3 GHz



×

Ref

10 Offset

11.5 dBm

\* Att

15 dB

### SGS-CSTC Standards Technical Services Ltd.


 Report No.: SZEM150300125001

 Page:
 44 of 67

 \* REW 100 kHz
 Marker 1 [T1 ]

 \* VEW 300 kHz
 -46.08 dBm

 SWT 125 ms
 4.88200000 GHz

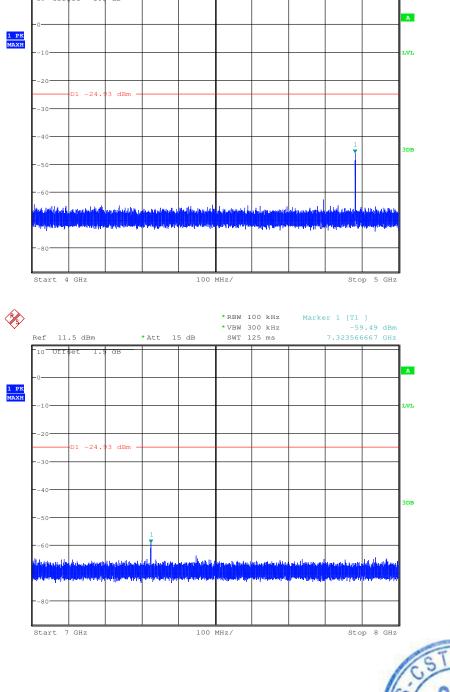






Report No.: SZEM150300125001 45 of 67 Page: × \* RBW 100 kHz Marker 1 [T1 ] \*VBW 300 kHz -51.35 dBm Ref 11.5 dBm \* Att 15 dB SWT 125 ms 9.764766667 GHz 10 Offset dE А 1 PK MAXH 01 -24 3 dBm Start 9 GHz 100 MHz/ Stop 10 GHz ×, \* RBW 100 kHz Marker 1 [T1 ] \*VBW 300 kHz -64.56 dBm 15 dB SWT 125 ms 12.342633333 GHz Ref 11.5 dBm \* Att Offset 10 dB 1 PK MAXH 01 -24 3 dBm 12 GHz 13 GHz Start 100 MHz/ Stop




Report No.: SZEM150300125001 Page: 46 of 67

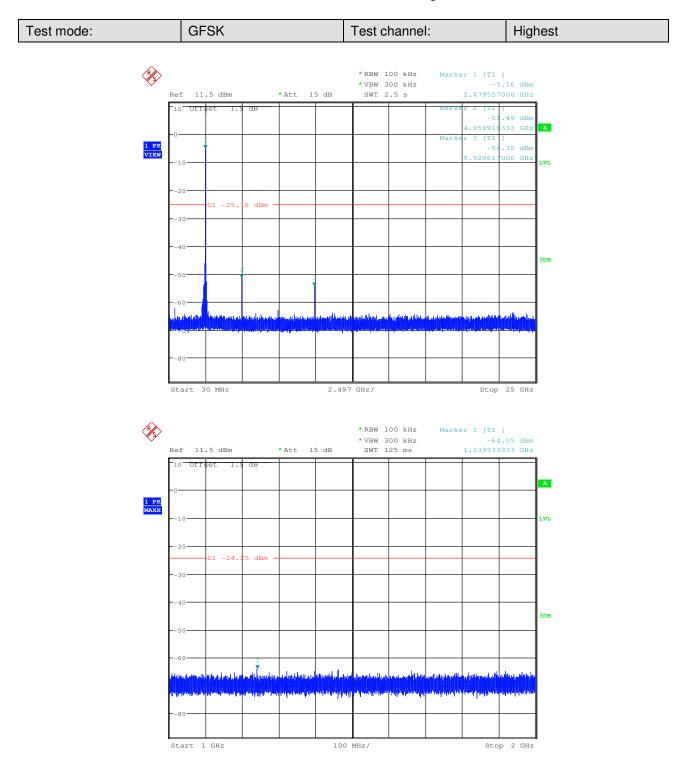




Report No.: SZEM150300125001 Page: 47 of 67

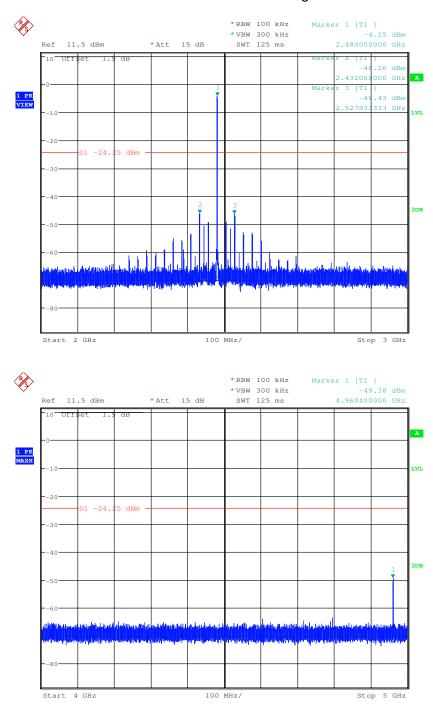



Report No.: SZEM150300125001 48 of 67 Page: × \* RBW 100 kHz Marker 1 [T1 ] \*VBW 300 kHz -61.61 dBm 7.439500000 GHz Ref 11.5 dBm \* Att 15 dB SWT 125 ms 10 Offset dB 1. А 1 PK MAXH 01 -24 5 dBm Start 7 GHz 100 MHz/ Stop 8 GHz Ś Marker 1 [T1 ] -51.26 dBm \* RBW 100 kHz \*VBW 300 kHz 11.5 dBm \* Att 15 dB SWT 125 ms 9.920800000 GHz Ref Off 10 A 1 PK MAXH D1 -24. 25 dBm Start 9 GHz 100 MHz/ Stop 10 GHz



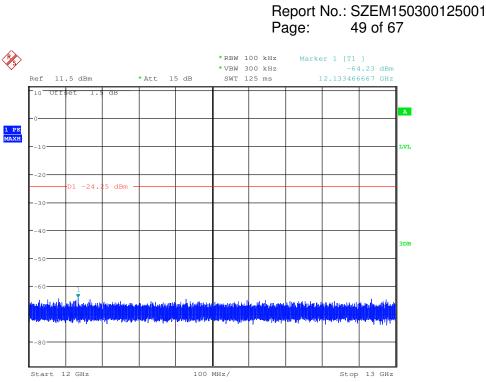

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM150300125001 Page: 50 of 67

#### 6.10Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
rate from a Pseudorandom on the average by each trans	nnel frequencies that are selected at the system hopping ordered list of hopping frequencies. Each frequency must be used equally smitter. The system receivers shall have input bandwidths that match the s of their corresponding transmitters and shall shift frequencies in asmitted signals.
channels during each transn receiver, must be designed t transmitter be presented wit employing short transmissio	spectrum systems are not required to employ all available hopping nission. However, the system, consisting of both the transmitter and the to comply with all of the regulations in this section should the h a continuous data (or information) stream. In addition, a system n bursts must comply with the definition of a frequency hopping system missions over the minimum number of hopping channels specified in
the system to recognize othe independently chooses and The coordination of frequence	ence within a frequency hopping spread spectrum system that permits er users within the spectrum band so that it individually and adapts its hopsets to avoid hopping on occupied channels is permitted. cy hopping systems in any other manner for the express purpose of ccupancy of individual hopping frequencies by multiple transmitters is
Compliance for section 15	.247(a)(1)
stage shift register whose 5t outputs are added in a modu	alo-two addition stage. And the result is fed back to the input of the first with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized ages: 9 sequence: $2^9 - 1 = 511$ bits
Linear Feedback S	hift Register for Generation of the PRBS sequence
	m Frequency Hopping Sequence as follow:
	y on the average by each transmitter.
bandwidths that match the	e Specification, Bluetooth receivers are designed to have input and IF hopping channel bandwidths of any Bluetooth transmitters and shift on with the transmitted signals.



Report No.: SZEM150300125001 Page: 51 of 67

#### Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

#### Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 52 of 67


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz		Peak	10kHz	z 30kHz	Peak		
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average		
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak		
	0.110MHz-0.490MH	z	Average	10kHz	z 30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak		
			Peak	1MHz	z 3MHz	Peak		
	Above 1GHz		Peak	1MHz	z 10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30		
	1.705MHz-30MHz		30	-	-	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak	3		
	960MHz-1GHz		500	54.0	Quasi-peak	3		
	Above 1GHz		500	54.0	Average	3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							

#### 6.11 Radiated Spurious Emission

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 53 of 67

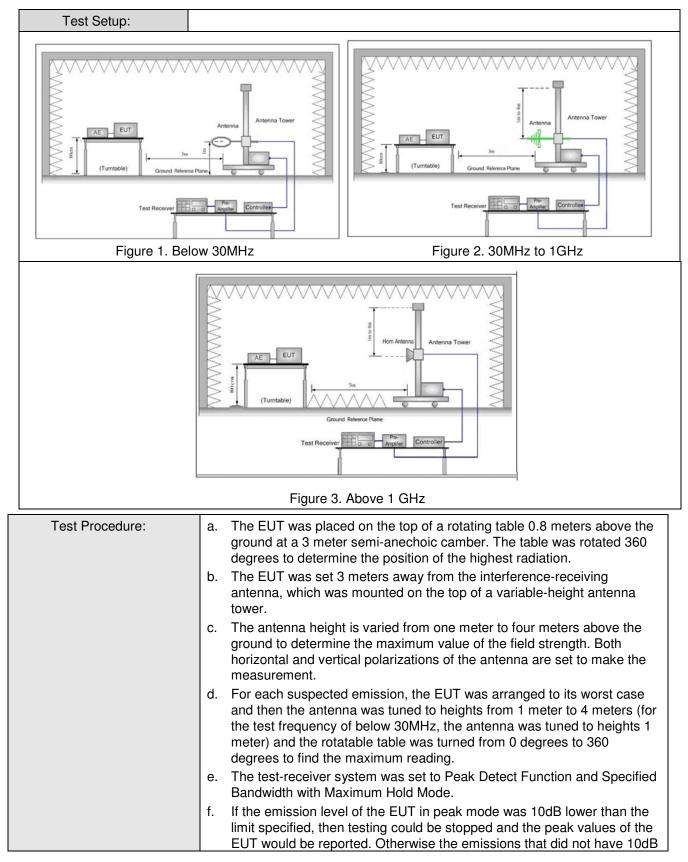



Report No.: SZEM150300125001 Page: 54 of 67

	<ul><li>margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)</li></ul>						
	<ul> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</li> </ul>						
	i. Repeat above procedures until all frequencies measured was complete.						
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of						
	data type .						
	Transmitting mode.						
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case.						
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.						
	Only the worst case is recorded in the report.						
Instruments Used:	Refer to section 5.10 for details						
Test Results:	Pass						






Report No.: SZEM150300125001 Page: 55 of 67

#### 6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

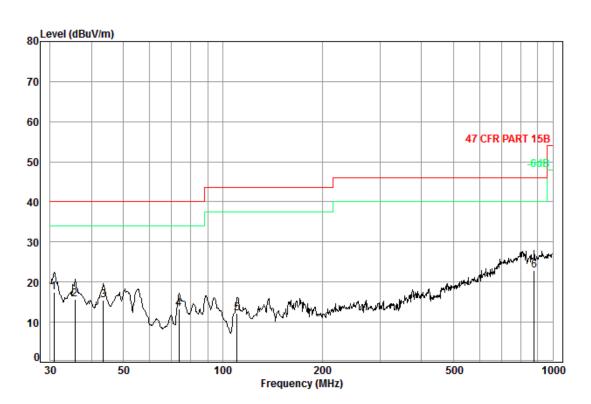


Condition: 47 CFR PART 15B 3m Vertical Job No. : 1250CR Test mode: TX mode

est	moue. IX	liloue						
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.75	0.60	18.28	27.35	25.90	17.43	40.00	-22.57
2	35.62	0.60	15.55	27.33	26.96	15.78	40.00	-24.22
3	43.51	0.68	11.56	27.31	30.63	15.56	40.00	-24.44
4	73.62	0.91	7.19	27.24	32.36	13.22	40.00	-26.78
5	110.57	1.23	8.56	27.13	29.51	12.17	43.50	-31.33
6	878.32	3.52	23.03	26.89	23.26	22.92	46.00	-23.08



Report No.: SZEM150300125001 Page: 56 of 67

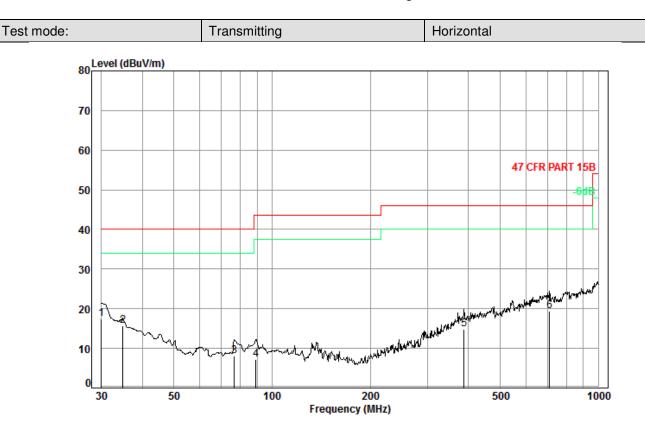

Condition: 47 CFR PART 15B 3m HORIZONTAL Job No. : 1250CR

Test mode	e: TX	mode
-----------	-------	------

	Freq	Cable Loss		Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	0.60	18.70	27.36	25.51	17.45	40.00	-22.55
2	34.88	0.60	15.97	27.34	26.36	15.59	40.00	-24.41
3	76.51	1.00	7.42	27.23	26.95	8.14	40.00	-31.86
4	89.28	1.10	8.63	27.22	24.69	7.20	43.50	-36.30
5	387.99	2.17	16.16	27.05	23.63	14.91	46.00	-31.09
6	709.18	2.93	21.60	27.40	22.27	19.40	46.00	-26.60



Report No.: SZEM150300125001 Page: 57 of 67

Worse case	mode:	GFSK(DH1)	Test	channel:	Lowest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1663.803	2.75	29.50	38.39	49.43	43.29	74	-30.71	Vertical
3525.555	4.01	32.92	38.75	45.25	43.43	74	-30.57	Vertical
4804.000	4.29	34.70	39.24	45.70	45.45	74	-28.55	Vertical
7206.000	5.30	35.63	39.07	43.89	45.75	74	-28.25	Vertical
9608.000	6.52	37.33	37.93	42.93	48.85	74	-25.15	Vertical
11994.380	7.21	38.69	38.70	43.96	51.16	74	-22.84	Vertical
1923.606	2.96	31.11	38.42	44.61	40.26	74	-33.74	Horizontal
3525.555	4.01	32.92	38.75	45.25	43.43	74	-30.57	Horizontal
4804.000	4.29	34.70	39.24	44.03	43.78	74	-30.22	Horizontal
7206.000	5.30	35.63	39.07	43.61	45.47	74	-28.53	Horizontal
9608.000	6.52	37.33	37.93	43.65	49.57	74	-24.43	Horizontal
11692.920	7.39	38.39	38.56	41.88	49.10	74	-24.90	Horizontal

#### 6.11.2 Transmitter Emission above 1GHz

Worse case i	mode:	GFSK(DH1)	) Te	st channel:	Middle	Rem	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1655.354	2.74	29.46	38.39	48.73	42.54	74	-31.46	Vertical
3728.625	4.05	33.10	38.84	45.60	43.91	74	-30.09	Vertical
4882.000	4.36	34.78	39.26	44.75	44.63	74	-29.37	Vertical
7323.000	5.20	35.50	39.06	43.70	45.34	74	-28.66	Vertical
9764.000	6.49	37.81	37.84	41.54	48.00	74	-26.00	Vertical
11574.460	7.50	38.28	38.50	43.06	50.34	74	-23.66	Vertical
1638.585	2.72	29.38	38.39	44.83	38.54	74	-35.46	Horizontal
3653.463	4.12	33.04	38.81	45.45	43.80	74	-30.20	Horizontal
4882.000	4.36	34.78	39.26	44.38	44.26	74	-29.74	Horizontal
7323.000	5.20	35.50	39.06	43.31	44.95	74	-29.05	Horizontal
9764.000	6.49	37.81	37.84	42.20	48.66	74	-25.34	Horizontal
12055.600	7.12	38.77	38.75	43.56	50.70	74	-23.30	Horizontal



Report No.: SZEM150300125001 Page: 58 of 67

Worse case	mode:	GFSK(DH1	)	Test	channel:	Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Prea Fact (dB	tor	Read Level (dBuV)	Level (dBuV/m)	Limit (dBu\		Over Limit (dB)	Polarization
1823.477	2.90	30.30	38.4	41	45.90	40.69	74	ŀ	-33.31	Vertical
3598.087	4.17	33.00	38.7	78	45.67	44.06	74	ŀ	-29.94	Vertical
4960.000	4.43	34.86	39.2	29	45.69	45.69	74	ŀ	-28.31	Vertical
7440.000	5.15	35.43	39.0	)5	44.55	46.08	74	ŀ	-27.92	Vertical
9920.000	6.83	38.27	37.7	75	41.64	48.99	74	ŀ	-25.01	Vertical
11692.920	7.39	38.39	38.5	56	42.90	50.12	74	ŀ	-23.88	Vertical
1943.292	2.97	31.26	38.4	12	48.23	44.04	74	ŀ	-29.96	Horizontal
3690.853	4.08	33.07	38.8	32	45.84	44.17	74	ŀ	-29.83	Horizontal
4960.000	4.43	34.86	39.2	29	47.68	47.68	74	ŀ	-26.32	Horizontal
7440.000	5.15	35.43	39.0	)5	44.62	46.15	74	ŀ	-27.85	Horizontal
9920.000	6.83	38.27	37.7	75	42.44	49.79	74	ŀ	-24.21	Horizontal
12055.600	7.12	38.77	38.7	75	43.64	50.78	74	ŀ	-23.22	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150300125001 Page: 59 of 67

#### 6.12Restricted bands around fundamental frequency

47 CFR Part 15C Section 15.209 and 15.205									
ANSI C63.10: 2009									
Measurement Distance: 3r	n (Semi-Anechoic Chambe	r)							
Frequency	Limit (dBuV/m @3m)	Remark							
30MHz-88MHz	40.0	Quasi-peak Value							
88MHz-216MHz	43.5	Quasi-peak Value							
216MHz-960MHz	46.0	Quasi-peak Value							
960MHz-1GHz	54.0	Quasi-peak Value							
	54.0	Average Value							
	74.0	Peak Value							
Antenna Tower	AE EUT (Turntable) Ground Reference Pit								
Amplifer Controller	Test Receiver	Amptier Controller							
	ANSI C63.10: 2009 Measurement Distance: 3r Frequency 30MHz-88MHz 88MHz-216MHz 216MHz-960MHz 960MHz-1GHz Above 1GHz	ANSI C63.10: 2009 Measurement Distance: 3m (Semi-Anechoic Chamber Frequency Limit (dBuV/m @3m) 30MHz-88MHz 40.0 88MHz-216MHz 43.5 216MHz-960MHz 46.0 960MHz-1GHz 54.0 Above 1GHz 74.0							




Report No.: SZEM150300125001 Page: 60 of 67

Test Procedure:	<ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</li> </ul>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type.
	Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case.
	Transmitting mode.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150300125001 Page: 61 of 67

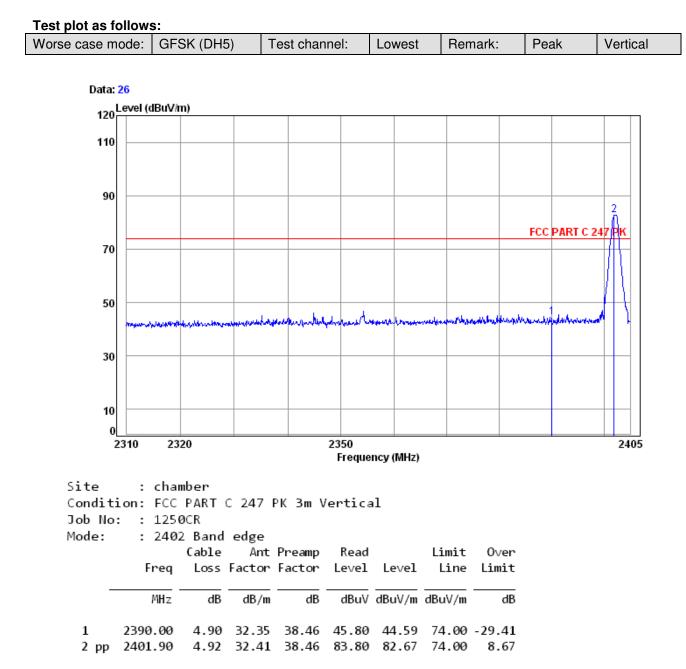




Report No.: SZEM150300125001 Page: 62 of 67

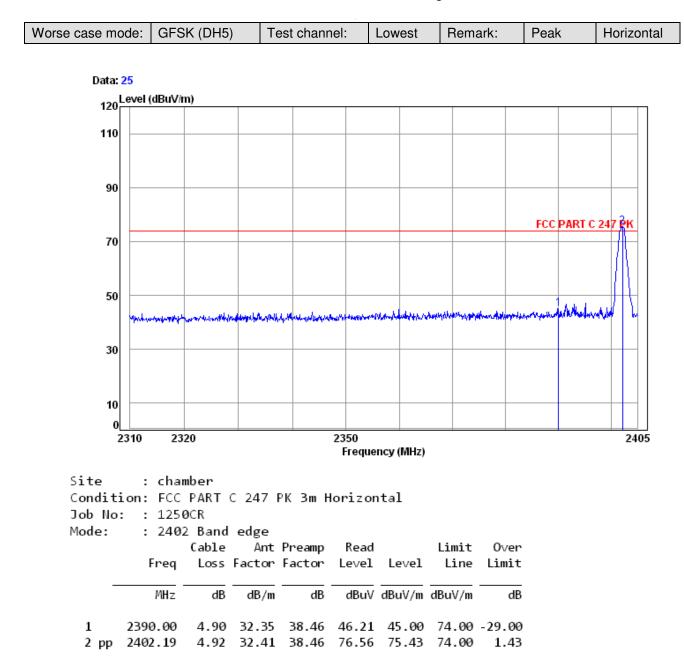




Report No.: SZEM150300125001 Page: 63 of 67

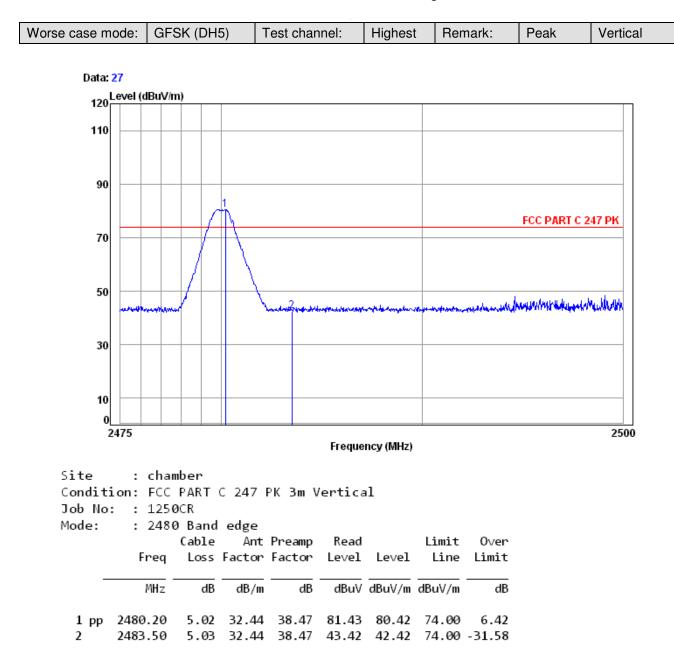



Report No.: SZEM150300125001 Page: 64 of 67

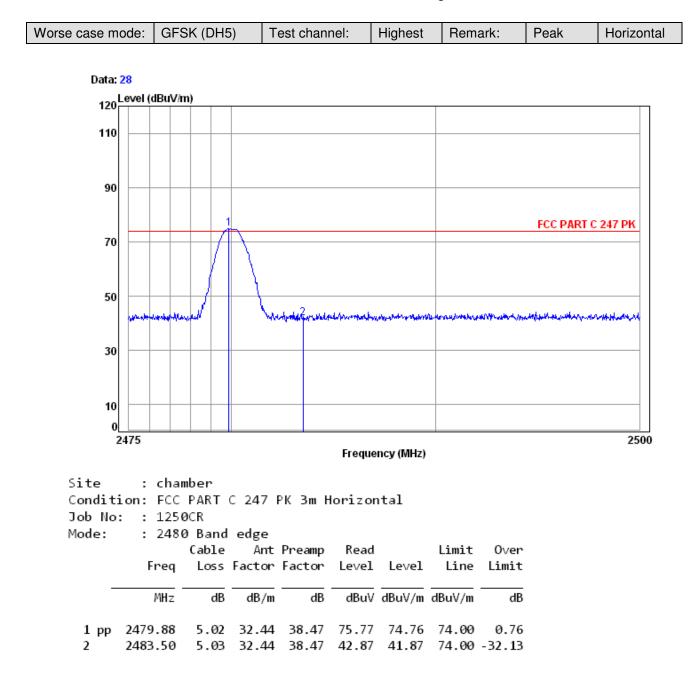

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM150300125001 Page: 65 of 67

# 7 Photographs - EUT Test Setup

#### 7.1 Conducted Emission



#### 7.2 Radiated Emission





Report No.: SZEM150300125001 Page: 66 of 67

#### 7.3 Radiated Spurious Emission





Report No.: SZEM150300125001 Page: 67 of 67

# 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1503001250CR.