



## Test Report

Product Name : 800MHz Dual Band Selective Repeater

Model No : L800RDBS-A

Applicant : Longent, LLC

Address : 2112 Duskywing Drive Raleigh, NC 27613

Date of Receipt : 2007/02/26

Issued Date : 2007/03/15

Report No. : 073L006-HPUSP04V01

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government.

# Test Report Certification

Issued Date: 2007/03/15

Report No.:073L006-HPUSP04V01

**Accredited by NIST (NVLAP)**

NVLAP Lab Code: 200533-0

Product Name : 800MHz Dual Band Selective Repeater  
Applicant : Longent, LLC  
Address : 2112 Duskywing Drive Raleigh, NC 27613  
Manufacturer : Longent, LLC  
Model No. : L800RDBS-A  
Rated Voltage : AC 120V/60Hz  
Trade Name : Longent  
Measurement Standard : FCC CFR Title 47 Part2 22  
Measurement Reference : TIA/EIA 603-A  
Test Result : Complied

Test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuietTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government.

Documented By : Eva Huang  
(Engineering Adm.  
Assistant / Eva Huang)

Tested By : Shine Hsu  
(Senior Engineer /  
Shine Hsu)

Approved By : Gene Chang  
(President / Gene Chang)

# TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION .....	4
1.1. EUT Description .....	4
1.2. Operational Description.....	5
1.3. Configuration of tested System .....	6
1.4. EUT Setup Procedures .....	6
1.5. Test Facility .....	7
1.6. Type of Emission .....	7
2. RF Power Output .....	8
2.1. Test Equipment.....	8
2.2. Test Setup .....	8
2.3. Limits .....	9
2.4. Test Procedure.....	9
2.5. Test Specification .....	9
2.6. Test Result of RF Power Output.....	10
3. Occupied Bandwidth.....	12
3.1. Test Equipment.....	12
3.2. Test Setup .....	12
3.3. Test Procedure.....	13
3.4. Test Specification .....	13
3.5. Test Result of Occupied Bandwidth .....	14
4. Spurious Emission At Antenna Terminals .....	16
4.1. Test Equipment.....	16
4.2. Setup .....	16
4.3. Limits .....	17
4.4. Test Procedure.....	17
4.5. Test Specification .....	17
4.6. Spurious Emission At Antenna Terminals .....	18
5. Spurious Emission .....	25
5.1. Test Equipment.....	25
5.2. Test Setup .....	25
5.3. Limits .....	26
5.4. Test Procedure.....	26
5.5. Test Specification .....	26
5.6. Test Result of Spurious Emission .....	27
6. EMI Reduction Method During Compliance Testing .....	28
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	: 800MHz Dual Band Selective Repeater
Trade Name	: Longent
Model No.	: L800RDBS-A
FCC ID.	: URFL800RDBS-A
TX Frequency	: 824.73MHz ~ 848.19MHz(CDMA)
RX Frequency	: 869.73MHz ~ 893.19MHz(CDMA)
Antenna Type	: Fixed
Rated Voltage	: AC 120V/60Hz

## 1.2. Operational Description

The information contained within this report is intended to show verification of compliance of the CDMA 800MHz Repeater to the requirements of 47CFR2 and CFR 22.

The signal from the base station is received via the repeater donor (BS) antenna and is then forwarded through a directional coupler (DC). The signal passes a duplex filter (DPX), is amplified in a low noise amplifier (LNA), and enters the band selective amplifier (BSA), which has two parallel bands.

The first mixer stage on the BSA amplifier, which is controlled by a synthesizer, converts the received frequency down to the IF frequency. The signal is then filtered by a SAW band pass filter and amplified before it is fed to the second mixer stage, controlled by the same synthesizer as the previous one, for converting back to the original frequency. The SAW filter can be adjustable for each BSA has adjustable bandwidth.

A detector on the PA measures continuously the output level. The signal from this detector is used by the automatic level control, ALC, to supervise and, if necessary, reduce the output power to keep it under a setting level.

The output signal passes duplex filter (DPX) and fed to the repeater service (MS) antenna.

The uplink signal path, i.e. from the mobile station through the repeater to the base station, is identical to the downlink path the other way round. Only some levels and component values differ.


LNA Gain:50dB  
 PA Gain:41dB  
 SWA filter frequency Range:  
 Down Link 869~894MHz  
 Up Link 824~849MHz

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Test Mode:	CDMA2000 (800MHz)
------------	-------------------

### 1.3. Configuration of Signal System

#### (a) Block Diagram

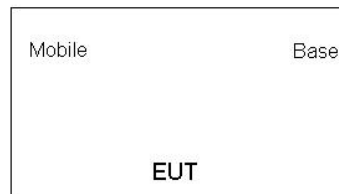

#### (b) Configuration of measurement

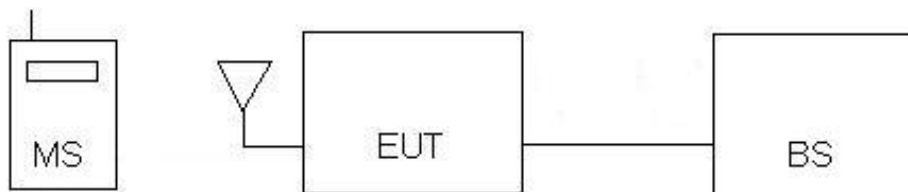

### 1.4. EUT Setup Procedures

- (1) Setup the EUT and simulators as shown on 1.3
- (2) Turn on the power of all equipments.
- (3) The EUT was set to communicate with BS and MS.
- (4) Repeat the above procedure (3).

## 1.5. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: June 22, 2001 File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Reference 31040/SIT1300F2

July 03, 2001 Accreditation on NVLAP  
NVLAP Lab Code: 200533-0

Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,  
Lin-Kou Shiang, Taipei,  
Taiwan, R.O.C.  
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
E-Mail : [service@quietek.com](mailto:service@quietek.com)

## 1.6. Type of Emission

1M25F9W

## 2. RF Power Output

### 2.1. Test Equipment


The following test equipments are used during the RF power output tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	Advantest	R3182 / 100803470	May, 2006
Universal Radio Communication Tester	R & S	CMU200 / 104846	May, 2006
Directional coupler	Agilent	87300C/3239A01864	N/A
Directional coupler	Agilent	778D-012/50550	N/A


Note: All equipments upon which need to be calibrated are with calibration period of 1 year.

### 2.2. Test Setup

#### UPLINK

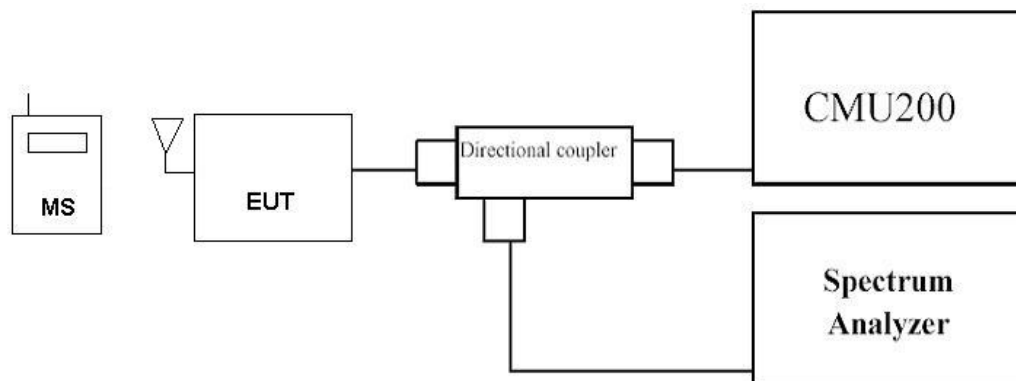

#### DOWNLINK

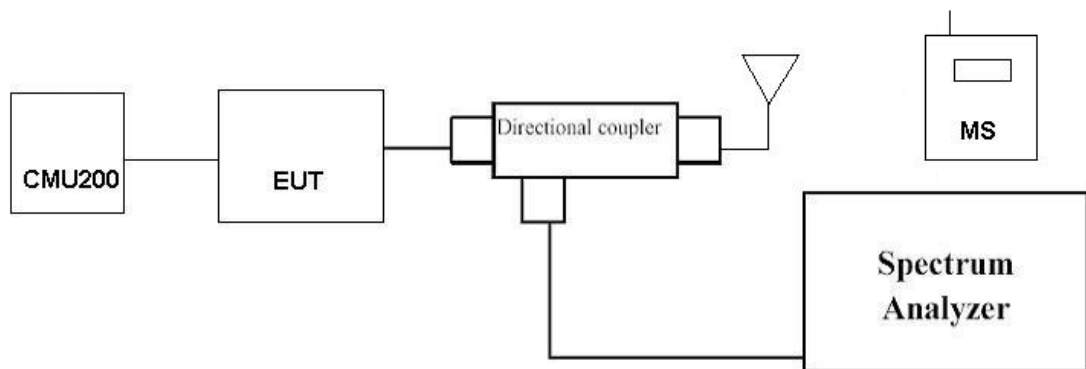



### 2.3. Limits

Limit	< 500 W ERP
-------	-------------

### 2.4. Test Procedure

As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer. This test was performed with carrier modulated by a CDMA, modulated signal.

The spectrum analyser RBW and VBW were set to 3MHz and the path loss measured and entered as a reference level offset.

Plots of the RF output Power level of the Digitally modulated carrier, as measured at the RF output of the signal generator and at the RF output terminals of the EUT appear on the following pages.


### 2.5. Test Specification

According to Part 2.1046, 22.913(a).


## 2.6. Test Result of RF Power Output

Product	800MHz Dual Band Selective Repeater		
Test Mode	RF Output Power		
Date of Test	2007/03/06	Test Site	CB4
Test Condition	CDMA2000-EVDO (800MHz)		

### UPLINK

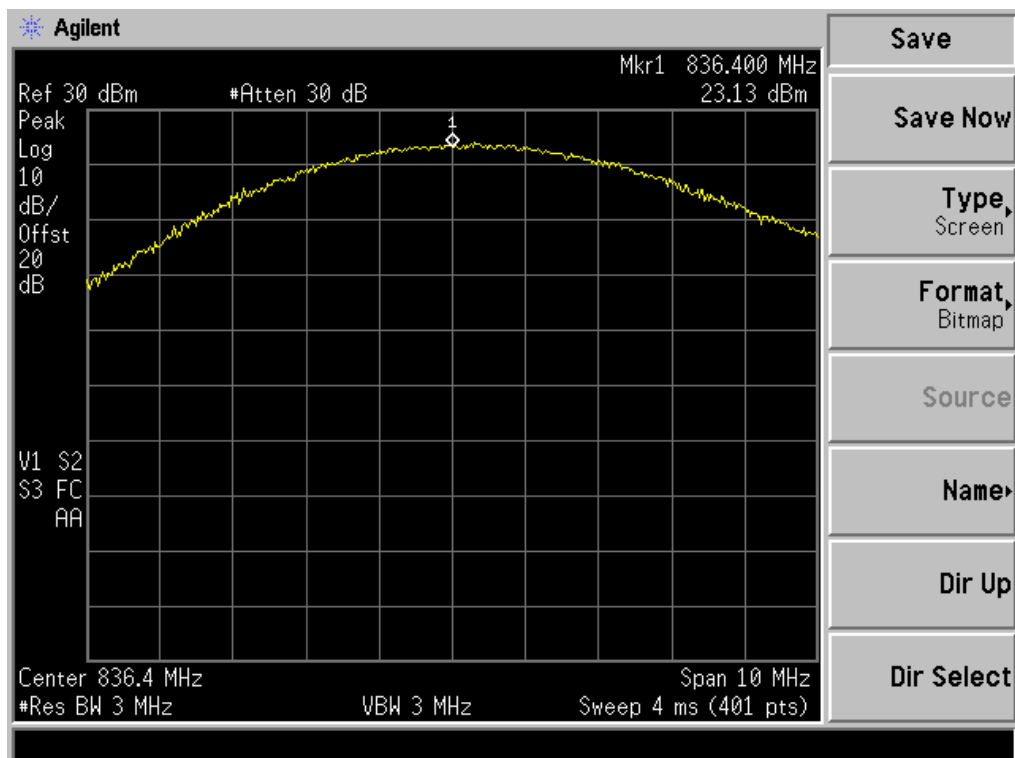

## DOWNLINK

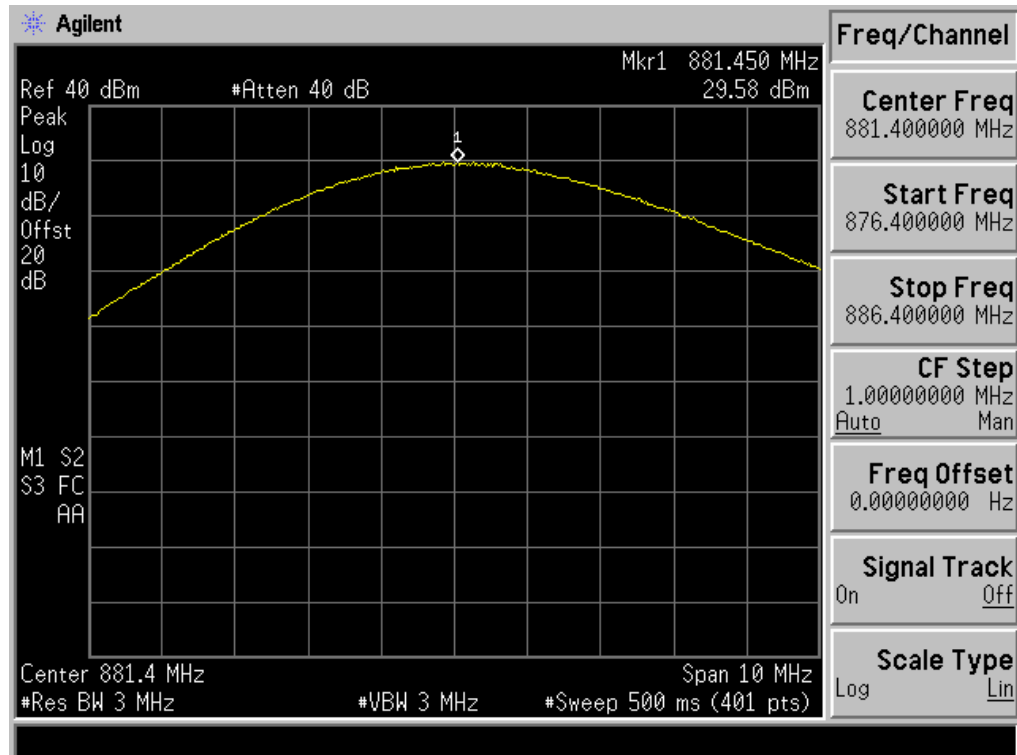

### 3. Occupied Bandwidth

#### 3.1. Test Equipment


The following test equipments are used during the occupied bandwidth tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	Advantest	R3182 / 100803470	May, 2006
Universal Radio Communication Tester	R & S	CMU200 / 104846	May, 2006
Directional coupler	Agilent	87300C/3239A01864	N/A
Directional coupler	Agilent	778D-012/50550	N/A


Note: All equipments upon which need to be calibrated are with calibration period of 1 year.

#### 3.2. Test Setup

##### UPLINK

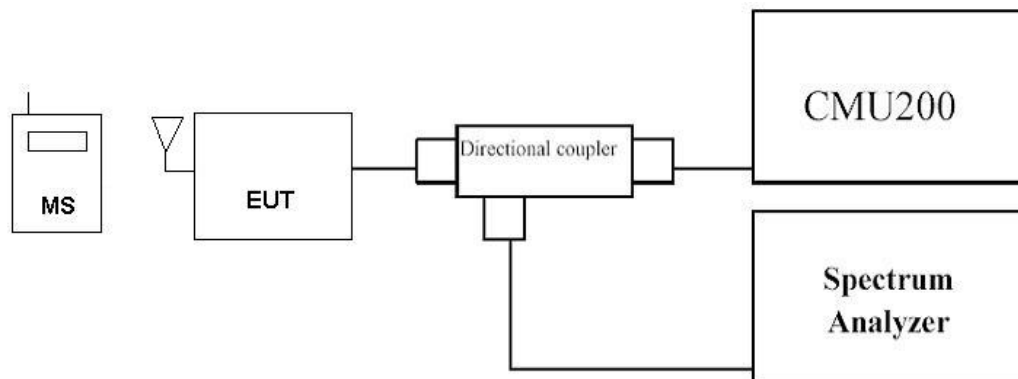

##### DOWNLINK

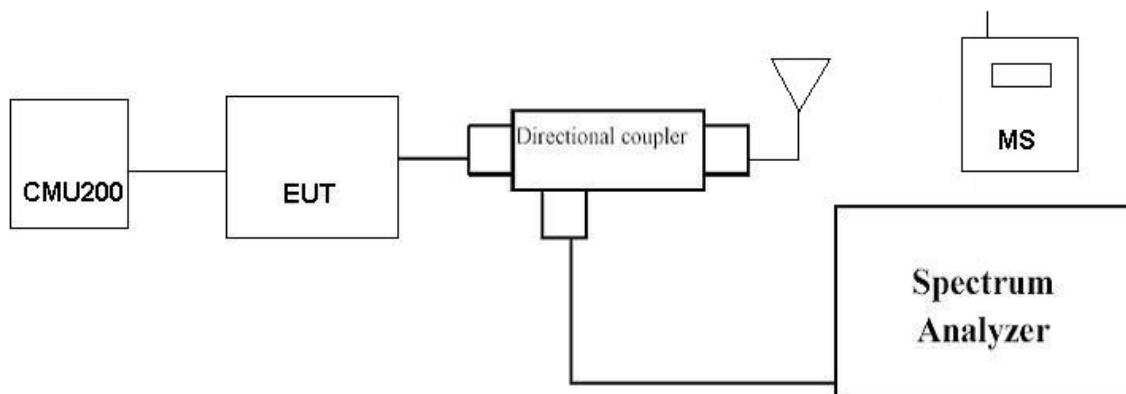

### 3.3. Test Procedure

#### ➤CDMA2000

The EUT was set to transmit on maximum power, using a resolution bandwidth of 100kHz and a video bandwidth of 300kHz, the -26dBc points were established and the emission bandwidth determined.

The plots below show the resultant display from the Spectrum Analyser.


### 3.4. Test Specification

According to Part 2.1049, 22.917.


### 3.5. Test Result of Occupied Bandwidth

Product	800MHz Dual Band Selective Repeater		
Test Mode	Occupied Bandwidth		
Date of Test	2007/03/06	Test Site	CB4
Test Condition	CDMA2000 (800MHz)		


#### Uplink Input

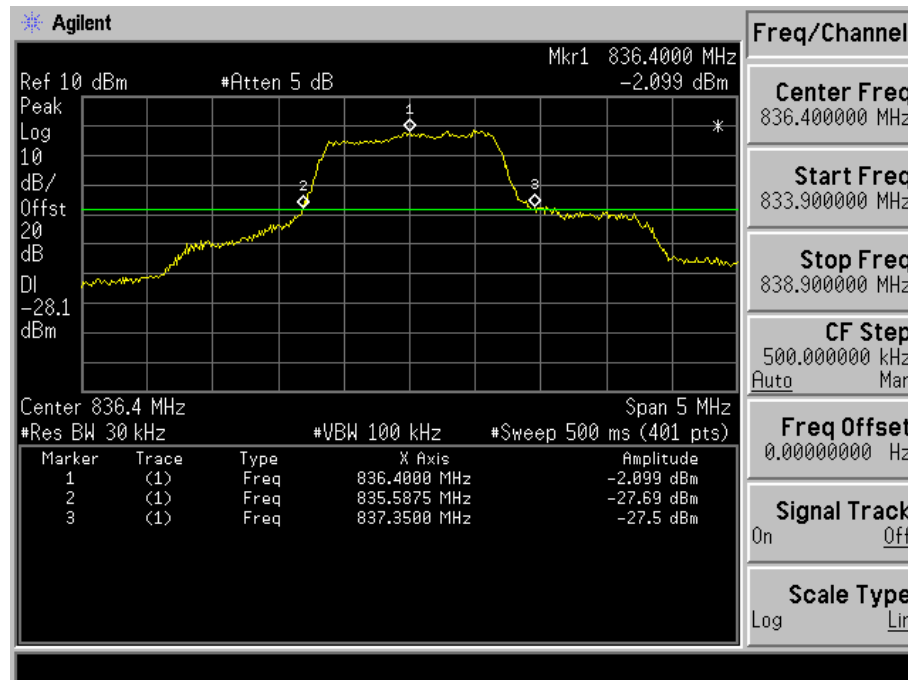


#### Uplink Output

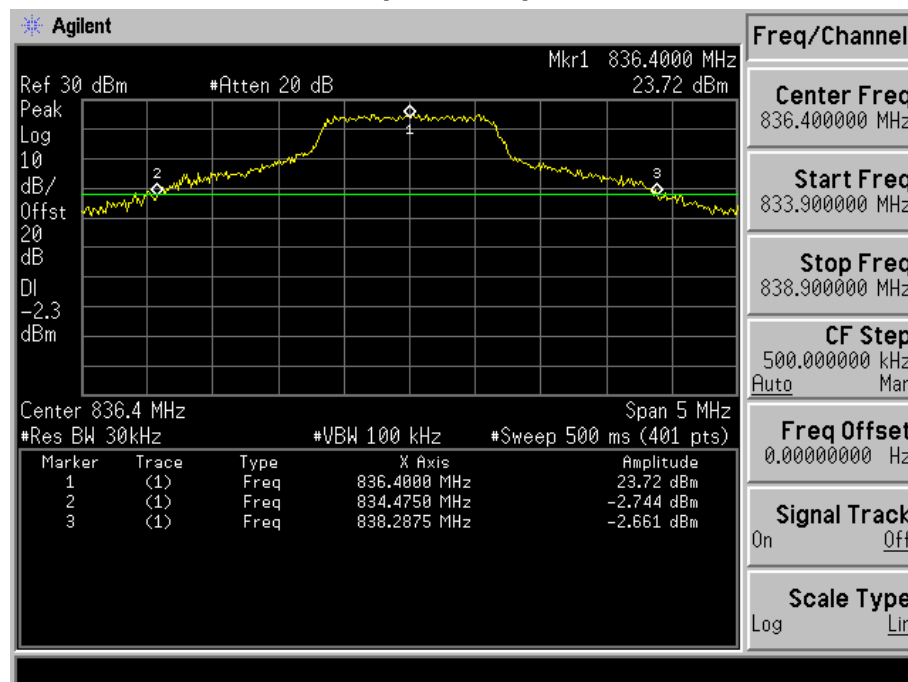

### Downlink Input

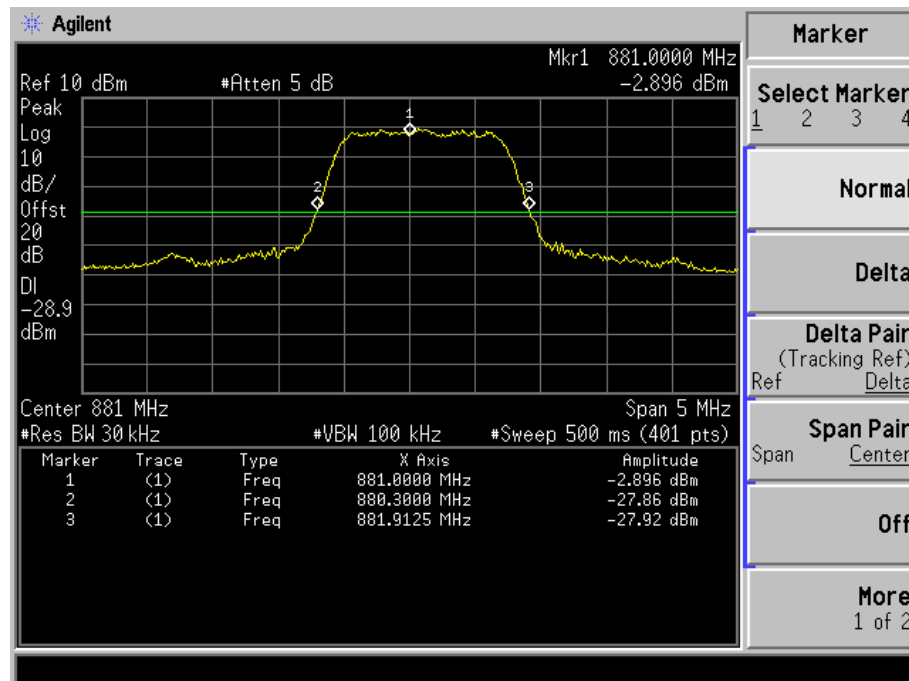

### Downlink Output

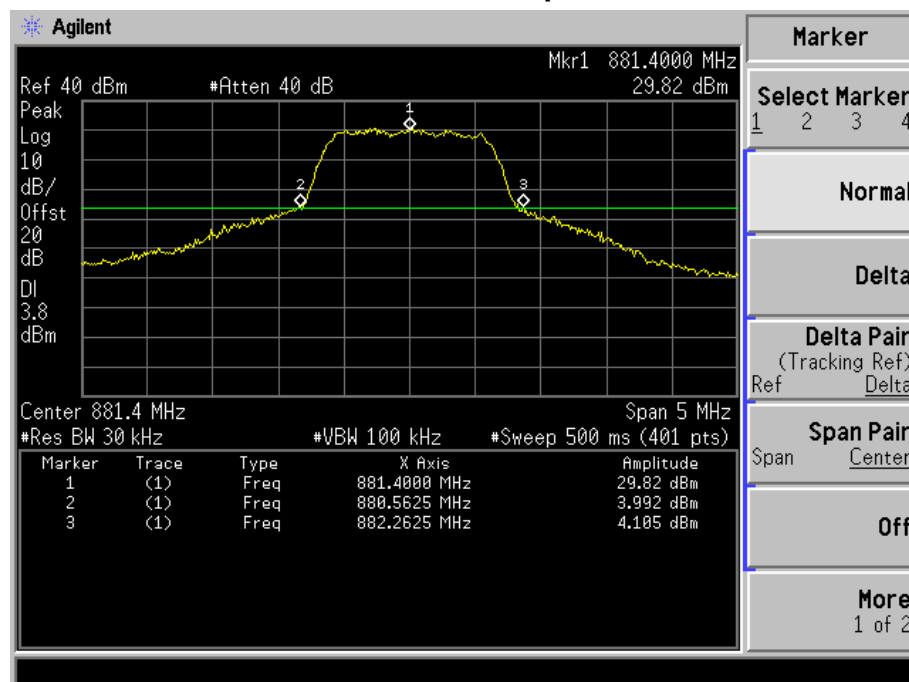

## 4. Spurious Emission At Antenna Terminals

### 4.1. Test Equipment


The following test equipments are used during the spurious emission test

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	Advantest	R3182 / 100803470	May, 2006
Universal Radio Communication Tester	R & S	CMU200 / 104846	May, 2006
Directional coupler	Agilent	87300C/3239A01864	N/A
Directional coupler	Agilent	778D-012/50550	N/A


Note: All equipments upon which need to be calibrated are with calibration period of 1 year.

### 4.2. Setup

#### UPLINK

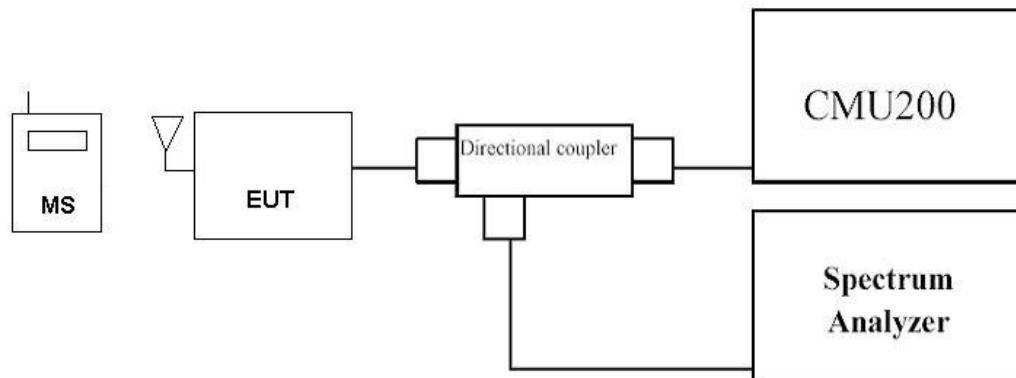

#### DOWNLINK

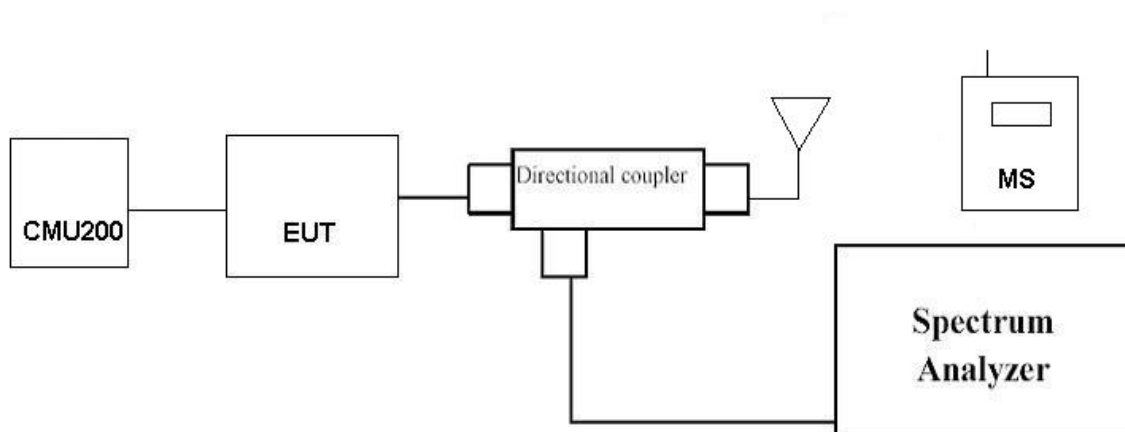



#### **4.3. Limits**

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least  $43 + 10 \log P$ . This is equivalent to -13 dBm absolute power.

#### **4.4. Test Procedure**

As required by 47 CFR 2.1051, spurious emissions at antenna terminal measurements were made at the RF output terminals using an attenuator and spectrum analyzer set for a 30 kHz bandwidth. This test was performed with Digitally modulated carrier signals. The Digital signal generator was adjusted for continuous transmit on frequencies in both the uplink and downlink frequency bands. The frequency spectrum was investigated from 9.0 KHz to 9.0 GHz. For measuring emissions above 2 GHz, a high-pass filter was used to eliminate the fundamental transmit frequency to prevent possible saturation effects on the front end of the spectrum analyzer.

#### **4.5. Test Specification**

According to Part 2.1051, 22.917(e).