



TEST REPORT

Report Number: 102017567MIN-004I
Project Number: G102017567

Testing performed on the
355-110-US, Class II Permissive Changes

FCC ID: USE355110
Industry Canada ID: 10217A-355110

to
47 CFR Part 15:2015, §15.209 and §15.215
RSS-210, Issue 8, 2010 +Amendment 1, 2015
RSS- Gen, Issue 4, 2014

For
Paxton Access Ltd

Test Performed by:
Intertek Testing Services NA, Inc.
7250 Hudson Blvd., Suite 100
Oakdale, MN 55128 USA

Test Authorized by:
Paxton Access Ltd
Paxton House
Home Farm Road
Brighton E. SUSX BN1 9HU UK

Prepared by: Richard Blonigen
Richard Blonigen

Reviewed by: Norman Shpilsher
Norman Shpilsher

Date of issue: May 11, 2016

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



TABLE OF CONTENTS

- 1.0 DESCRIPTION OF THE SAMPLE (EUT)..... 3**
 - 1.1 Product Description; Test Facility 4
 - 1.3 Environmental conditions 5
 - 1.4 Measurement uncertainty..... 6
 - 1.5 Field Strength Calculation 6
- 2.0 TEST SUMMARY..... 7**
- 3.0 TEST CONDITIONS AND RESULTS..... 8**
 - 3.1 Field Strength of Fundamental and Spurious Emissions 8
- 4.0 TEST EQUIPMENT..... 11**
- 5.0 REVISION HISTORY..... 12**



1.0 DESCRIPTION OF THE SAMPLE (EUT)

Model:	355-110-US, KP50
Type of EUT:	Security door access reader
Serial Number:	3983545
FCC ID:	USE355110
Industry Canada ID:	10217A-355110
Related Submittal(s) Grants:	Class II Permissive Changes
Company:	Paxton Access Ltd
Customer:	Mr. Kevin Feeney
Address:	Paxton House Home Farm Road Brighton E. SUSX BN1 9HU UK
Phone:	+44 (0)1273 811044
e-mail:	Kevin.Feeney@paxton-access.co.uk
Test Standards:	<input checked="" type="checkbox"/> 47 CFR, Part 15:2015, §15.209, §15.215 <input checked="" type="checkbox"/> RSS-210, Issue 8, 2010 +Amendment 1, 2015 <input checked="" type="checkbox"/> RSS-Gen, Issue 4, 2014
Type of radio:	<input type="checkbox"/> Stand -alone <input type="checkbox"/> Module <input type="checkbox"/> Hybrid
Date Sample Submitted:	April 25, 2016
Test Work Started:	May 5, 2016
Test Work Completed:	May 10, 2016
Test Sample Conditions:	<input type="checkbox"/> Damaged <input type="checkbox"/> Poor (Usable) <input checked="" type="checkbox"/> Good <input type="checkbox"/> Prototype <input checked="" type="checkbox"/> Production <input type="checkbox"/> Used



1.1 Product Description; Test Facility

Product Description:	Transmitter
Operating Frequency	125 kHz
Modulation:	ASK
Emission Designator:	30K7K1D
Antenna(s) Info:	Integral antenna
Antenna Installation:	<input type="checkbox"/> User <input type="checkbox"/> Professional <input checked="" type="checkbox"/> Factory
Transmitter power configuration:	<input type="checkbox"/> Internal battery <input checked="" type="checkbox"/> External power source <input type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> 400VAC <input checked="" type="checkbox"/> 13.8 VDC <input type="checkbox"/> Other: Amp. <input type="checkbox"/> 50Hz <input type="checkbox"/> 60Hz
Special Test Arrangement:	The transmitter was tested while connected to and powered through the Net 2 Plus Controller.
Test Facility Accreditation:	A2LA (Certificate No. 1427.01)
Test Methodology:	Measurements performed according to the procedures in ANSI C63.10-2013



1.2 EUT Configuration

The equipment under test was operated during the measurement under the following conditions:

- Standby
- Continuous
- Continuous un-modulated
- Test program (customer specific)
- Below

Operating modes of the EUT:

No.	Description
1	The transmitter was set to transmit continuously.

Cables:

No.	Type	Length	Designation	Note
1	Communication cable	>1m	Reader cable, not shielded	

Support equipment/Services:

No.	Item	Description
1	Paxton Access Net 2 plus	Door access control unit

General notes: The EUT is transmitter only, and has no receiver portion.

1.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal

Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa



1.4 Measurement uncertainty

The expanded uncertainty ($k = 2$) for radiated emissions from 30 to 1000 MHz has been determined to be: ± 4 dB at 10m and ± 5.4 dB at 3m

The expanded uncertainty ($k = 2$) for conducted emissions from 150 kHz to 30 MHz has been determined to be:
 ± 2.6 dB

1.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured emissions reading on the EMI Receiver.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(m^{-1})

AG = Amplifier Gain in dB

Assume a receiver reading of 48.1 dB(μ V) is obtained. The antenna factor of 7.4 dB(m^{-1}) and cable factor of 1.6 dB is added and amplifier gain of 16.0 dB is subtracted giving field strength of 41.1 dB(μ V/m).

$$RA = 48.1 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(m^{-1})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 16.0 \text{ dB}$$

$$FS = RA + AF + CF - AG$$

$$FS = 48.1 + 7.4 + 1.6 - 16.0$$

$$FS = 41.1 \text{ dB}(\mu\text{V}/\text{m})$$



2.0 TEST SUMMARY

Referring to the performance criteria and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards.

TEST SPECIFICATION	TEST PARAMETERS	RESULT
15.209, 15.215(b) / RSS-Gen 4.11	Field Strength of Fundamental and Spurious Emissions	Pass
15.215(c) / RSS-Gen 4.6.3	Bandwidth of the emission	N/A
15.207/RSS-Gen 7.2.4	Transmitter Power Line conducted emissions	N/A
15.109/ICES-003/ RSS-Gen 4.10	Receiver/digital device radiated emissions	N/A
15.107/ ICES-003	Digital device conducted emissions	N/A

Notes: For a new crystal oscillator and new microcontroller Field Strength of Fundamental and Spurious Emissions performed only for Class II Permissive changes.



3.0 TEST CONDITIONS AND RESULTS

3.1 Field Strength of Fundamental and Spurious Emissions

Test location: OATS Anechoic Chamber Other

Test distance: 10 meters 3 meters

Test result: **Pass**

Max. Emissions margin at fundamental: 32.6 dB below the limits

Max. margin of harmonics and spurious emissions: 43.2 dB below the limits


- Notes:**
1. The Emissions pre-scan was performed in the Anechoic chamber at 3m measurement distance (Graphs 3.1.1); final measurements were performed in the Open Area Test Site at 10m measurement distance (see Tables 3.1.1).
 2. Field Strength of Fundamental and Spurious Emissions measurements were made at Fundamental frequency of 125kHz; Spurious Emissions were tested up to 30MHz.
 3. Measurements were taken using Peak detector with RBW=200Hz (below 150kHz), RBW=9kHz (above 150kHz).
-




Date:	May 5-10, 2016	Result: Pass
Standard:	FCC 15.209 / RSS-210 A1.1.2	
Tested by:	Richard Blonigen	
Test Point:	Enclosure with antenna	
Operation mode:	See Page 5	
Note:	None	

Table 3.1.1

Frequency MHz	Antenna Orient.	Ant. CF dB1/m	Cable loss dB	Pre-amp Gain (dB)	Reading dB μ V	Total @ 10m dB μ V/m	15.209 Limit dB μ V/m	Distance Factor (dB)	Margin dB	Comments
0.125	Front	63.5	0.1	28.8	17.3	52.1	25.7	59.1	-32.6	
0.125	Side	63.5	0.1	28.8	5.2	40.0	25.7	59.1	-44.7	
0.010	Front	83.7	0.0	27.8	6.9	62.9	47.6	59.1	-43.8	
0.012	Front	82.9	0.0	28.0	6.7	61.7	46.0	59.1	-43.4	
0.013	Front	82.5	0.0	28.1	6.8	61.3	45.3	59.1	-43.2	
0.010	Side	83.7	0.0	27.8	6.6	62.6	47.6	59.1	-44.1	
0.011	Side	83.3	0.0	27.9	6.7	62.2	46.8	59.1	-43.7	
0.013	Side	82.5	0.0	28.1	6.3	60.8	45.3	59.1	-43.7	

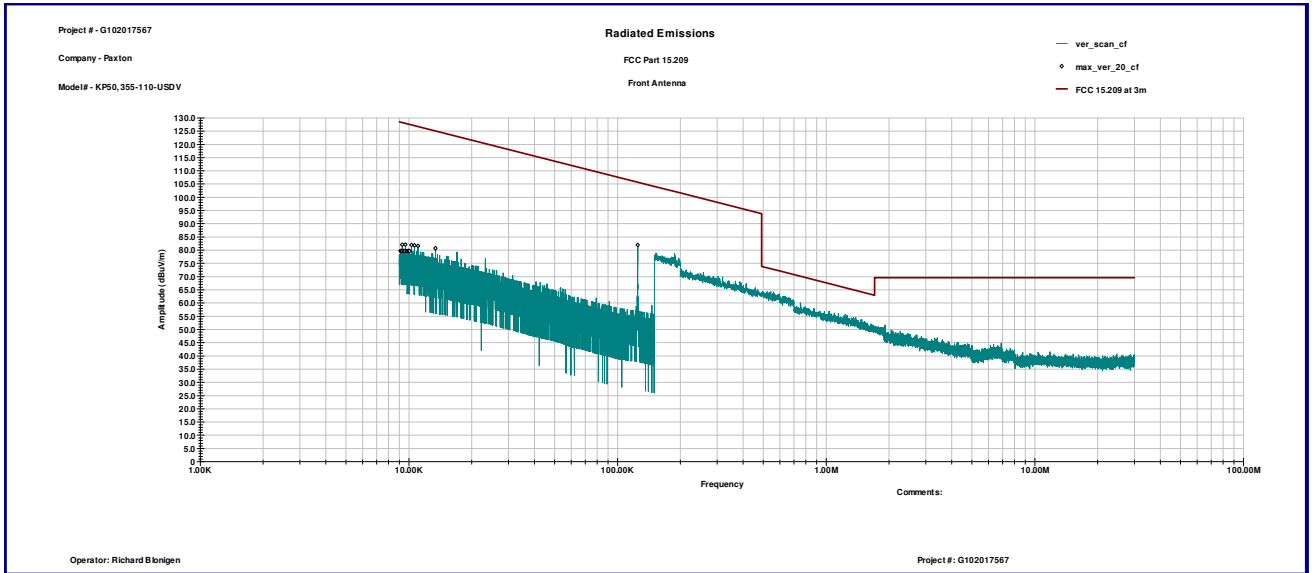

Graph 3.1.1

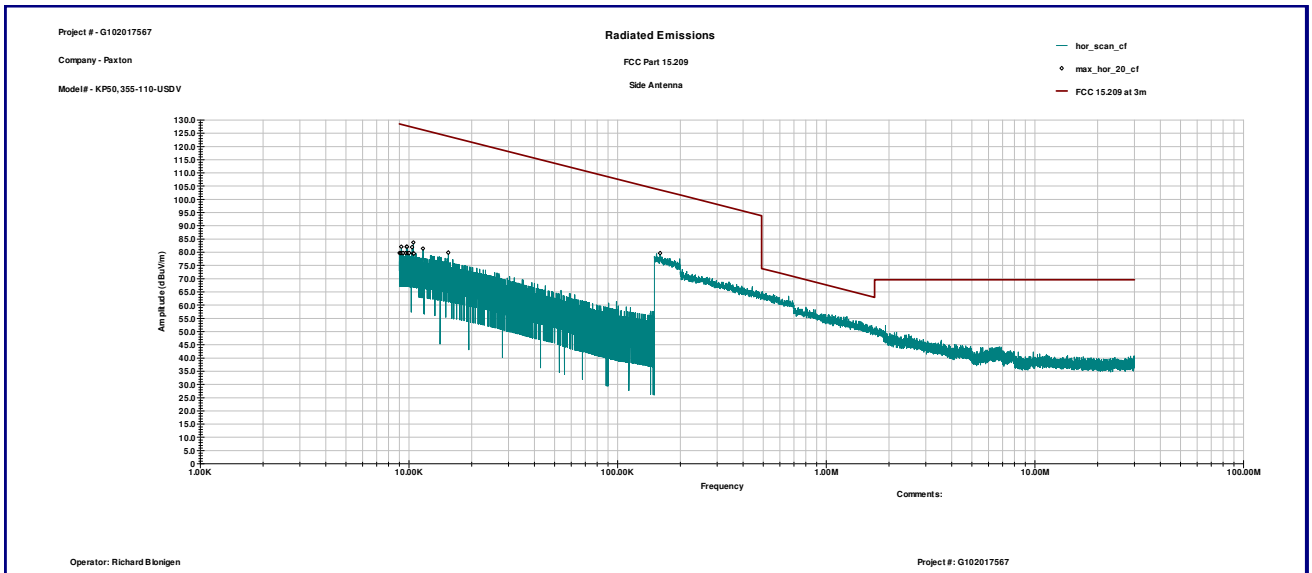

Graph 3.1.2



4.0 TEST EQUIPMENT

DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	INTERTEK ID	CAL DUE	USED
Spectrum Analyzer	R & S	ESCI	100358	12909	10/20/2016	<input checked="" type="checkbox"/>
Loop Antenna	ETS	6512	00060486	19942	12/28/2016	<input checked="" type="checkbox"/>
System	Quantum Change	TILE! Instrument Control	Ver. 3.4.K.29	15259	VBU	<input checked="" type="checkbox"/>



5.0 Revision History

REVISION LEVEL	DATE	REPORT NUMBER	PREPARED	REVIEWED	NOTES
0	5-11-2016	102017567MIN-004I	RB	NS	Original Issue
1	5-31-2016	102017567MIN-004I	RB <i>Richard Blay</i>	NS <i>Nav Helfst</i>	Change typo on page 8 from RBW=200kHz to RBW=200Hz.