



FCC LISTED, REGISTRATION  
 NUMBER: 2764.01

ISED LISTED REGISTRATION  
 NUMBER: 23595-1

Test report No:  
 2278ERM.004

## Test report

**USA FCC Part 15.247, 15.209, 15.207  
 CANADA RSS-247, RSS-Gen  
 Radio Frequency Devices. Operation within the bands 902 - 928 MHz,  
 2400 -2483.5 MHz, and 5725 - 5850 MHz.  
 Digital Transmission Systems (DTSs), Frequency Hopping Systems  
 (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.**

Identification of item tested	Electrical Tooth Brush
Trademark	Oral B
Model and /or type reference	3771
Other identification of the product	FCC ID: USQ3771 / IC ID: 6856A-3771
Features	Bluetooth 4.2
Manufacturer	BRAUN GMBH Frankfurter Strasse 145, 61476 Kronberg, Germany
Test method requested, standard	USA FCC Part 15.247, 10-1-17 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209, 10-1-17 Edition: Radiated emission limit general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 4 (November 2014). Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	10-18-2018
Report template No	FDT08_21

## Index

Competences and guarantees .....	3
General conditions .....	3
Uncertainty .....	3
Data provided by the client.....	4
Usage of samples .....	4
Test sample description .....	5
Identification of the client.....	6
Testing period and place.....	6
Document history .....	6
Environmental conditions .....	7
Remarks and comments .....	7
Testing verdicts.....	8
Summary .....	8
List of equipment used during the test.....	9
Appendix A: Test results .....	10

## Competences and guarantees

---

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Certification internal document PODT000.

Frequency (MHz)	U(k=2)	Units
30-180	3.82	dB
180-1000	2.61	dB
1000-18000	2.92	dB
18000-40000	2.15	dB

## Data provided by the client

---

Bluetooth 4.2

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

---

Samples undergoing test have been selected by: The client.

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
2278.01	Electric Tooth Brush with Conducted Port	D706	----	09/19/2018

---

1. Sample S/01 has undergone following test(s):

All conducted tests indicated in appendix A.

Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
2278.04	Electric Tooth Brush Radiated sample	D706	-----	09/19/2018

---

1. Sample S/02 has undergone following test(s):

All radiated tests indicated in appendix A..

## Test sample description

Ports..... :	Port name and description		Cable				
			Specified length [m]	Attached during test	Shielded		
	<i>Not provided data</i>			<input type="checkbox"/>	<input type="checkbox"/>		
				<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>			
Supplementary information to the ports..... :	<i>Not provided data</i>						
Rated power supply .....	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: Lithium Ion Battery 3,3V ... 4,05V					
<input checked="" type="checkbox"/>	DC: 3.3V						
Rated Power .....	<i>Charger: 0,9W</i>						
Clock frequencies .....	<i>32,768 kHz; 24MHz</i>						
Other parameters..... :	<i>Not provided data</i>						
Software version .....	V2.0						
Hardware version..... :	G004						
Dimensions in cm (L x W x D) .....	<i>Not provided data</i>						
Mounting position..... :	<input type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input checked="" type="checkbox"/>	Hand-held equipment					
	<input type="checkbox"/>	Other:					
Modules/parts .....	Module/parts of test item		Type	Manufacturer			
Accessories (not part of the test item) .....	Description		Type	Manufacturer			
	<i>Not provided data</i>						
Documents as provided by the applicant..... :	Description		File name	Issue date			
	<i>Not provided data</i>						

Copy of marking plate:



## Identification of the client

PROTER & GAMBLE SERVICE GMBH  
 Sulzbacher Strasse 40, 65824 Schwalbach, Taunus, Germany

## Testing period and place

Test Location	DEKRA Certification Inc.
Date (start)	09-19-2018
Date (finish)	09-28-2018

## Document history

Report number	Date	Description
2278ERM.004	10-30-2018	First release

## Environmental conditions

---

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 60 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar

## Remarks and comments

The tests have been performed by the technical personnel: Divya Adusumilli and Koji Nishimoto.

## Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

## Summary

FCC PART 15 PARAGRAPH / RSS-247 (Bluetooth Low Energy)					
Section	15.247 Spec Clause	RSS Spec Clause	Test Description	Verdict	Remark
A.1		RSS-Gen 6.7	99% Emission Bandwidth	P	N/A
A.2	§ 15.247 (a) (2)	RSS-247 5.2. (a)	Occupied Bandwidth	P	N/A
A.3	§ 15.247 (b) (3)	RSS-247 5.4. (d)	Maximum peak conducted output power and antenna gain	P	N/A
A.4	§ 15.247 (d)	RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	P	N/A
A.5	§ 15.247 (e)	RSS-247 5.2. (b)	Power spectral density	P	N/A
A.6	§ 15.247 (d)	RSS-Gen 8.9 & 8.10.	Emission limitations radiated (Transmitter)	P	N/A
A.7	§15.207 (a)	RSS Gen 8.8	Conducted Emission Limits	N/A	Refer Note 1
<b>Supplementary information and remarks:</b>					
1. The device does not transmit while charging					



## List of equipment used during the test

### Conducted Measurements

Test system Rohde & Schwarz TS 8997:

CONTROL NUMBER	DESCRIPTION	LAST CALIBRATION	NEXT CALIBRATION
1039	Signal analyzer Rohde & Schwarz FSV40	2017/03	2019/03
1040	Switch unit Rohde & Schwarz with power detector OSP120 / OSP-B157	2017/03	2019/03
1041	RF generator Rohde & Schwarz SMB100A	2017/04	2019/04
1042	RF generator Rohde & Schwarz SMBV100A	2018/01	2019/01
101	Climatic chamber Espec	2017/12	2018/12

### Radiated Measurements

CONTROL NUMBER	DESCRIPTION	LAST CALIBRATION	NEXT CALIBRATION
1179	Semi anechoic Absorber Lined Chamber Frankonia SAC 3 plus "L"	N/A	N/A
1065	BiconicalLog antenna ETS LINDGREN 3142E	2017/03	2020/03
1058	Double-ridge Waveguide Horn antenna 1-18 GHz	2017/03	2019/03
1014	Spectrum analyzer Rohde & Schwarz FSV40	2017/03	2019/03
0980	RF pre-amplifier 30 MHz-6 GHz Bonn Elektronik BLMA 0360-01N	2017/05	2019/05
0981	RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-2A	2017/05	2019/05
1015, 1017, 1019, 1020	Rohde & Schwarz EMC32 software	N/A	N/A

## Appendix A: Test results

## Appendix A Content

PRODUCT INFORMATION .....	12
DESCRIPTION OF TEST CONDITIONS .....	13
TEST A.1: 99% EMISSION BANDWIDTH .....	14
TEST A.2: OCCUPIED BANDWIDTH .....	17
TEST A.3: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN.....	22
TEST A.4: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER).....	25
TEST A.5: POWER SPECTRAL DENSITY .....	30
TEST A.6: EMISSION LIMITATIONS RADIATED (TRANSMITTER).....	35

## PRODUCT INFORMATION

The following information is provided by the client

Information	Description
Modulation	Other than FHSS
Adaptive	Non-Adaptive Equipment
Operation mode 1: Single Antenna Equipment	Equipment with only one antenna
- Operating Frequency Range	2402 – 2480 MHz
- Nominal Channel Bandwidth	0.25 MHz
Extreme operating conditions	
- Temperature range	0 °C to +50 °C
Antenna type	Integral antenna
Antenna gain	0 dBi
Nominal Voltage	
- Supply Voltage	3.6 Vdc
- Type of power source	DC voltage from battery
Equipment type	Bluetooth Low Energy
Geo-location capability	No

Test modes available:

- Continuous modulated carrier at 2402 MHz, 2440 MHz and 2480 MHz
- Continuous reception at 2402 MHz, 2440 MHz and 2480 MHz

## DESCRIPTION OF TEST CONDITIONS

TEST CONDITIONS	DESCRIPTION
TC#01	<p><u>Power supply (V):</u>  <math>V_{\text{nominal}} = 3.6 \text{ Vdc}</math></p> <p><u>Type of power supply:</u>            DC voltage from internal rechargeable battery.</p> <p><u>Temperature (°C):</u>  <math>T_{\text{nom}} = +15 \text{ to } +35</math>  <math>T_{\text{min}} = 0 (*)</math>  <math>T_{\text{max}} = +50 (*)</math></p> <p>The subscript nom indicates normal test conditions.            The subscripts min and max indicate extreme test conditions (minimum and maximum respectively).            N/A: Not Applicable.            (*) Declared by applicant.</p> <p><u>Test Frequencies for Conducted tests:</u>            Lowest channel: 2402 MHz            Middle channel: 2440 MHz            Highest channel: 2480 MHz</p> <p><u>Test Frequencies for Radiated tests:</u>            Lowest range: 2402 MHz            Highest range: 2480 MHz</p>


## TEST A.1: 99% EMISSION BANDWIDTH

<b>LIMITS:</b>	Product standard:	RSS-Gen
	Test standard:	RSS-Gen 6.7

### LIMITS

The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs

### TEST SETUP

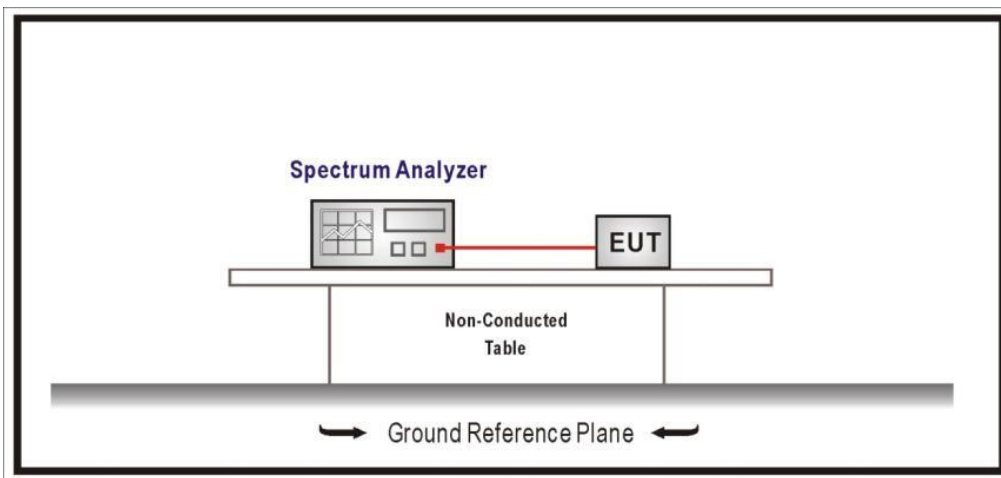


<b>TESTED SAMPLES:</b>	S/01
<b>TESTED CONDITIONS MODES:</b>	TC#01
<b>TEST RESULTS:</b>	PASS


	Lowest frequency	Middle frequency	Highest frequency
	2402 MHz	2440 MHz	2480 MHz
99% bandwidth (MHz)	1.027	1.040	1.040
Measurement uncertainty (kHz)	<± 8.33		

**TEST RESULTS (Cont.):**


**Lowest Channel**

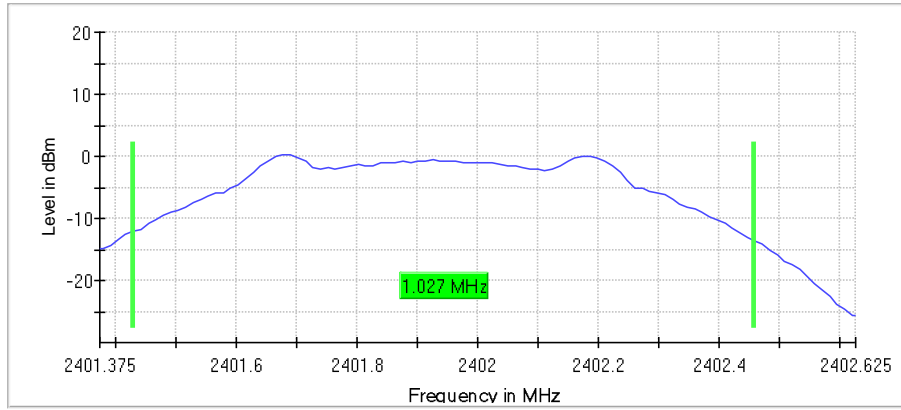

**Middle Channel**

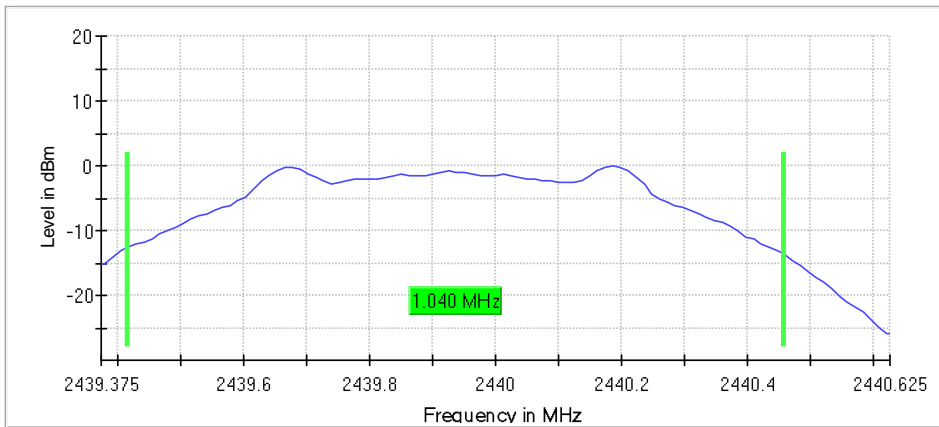

**Highest Channel**

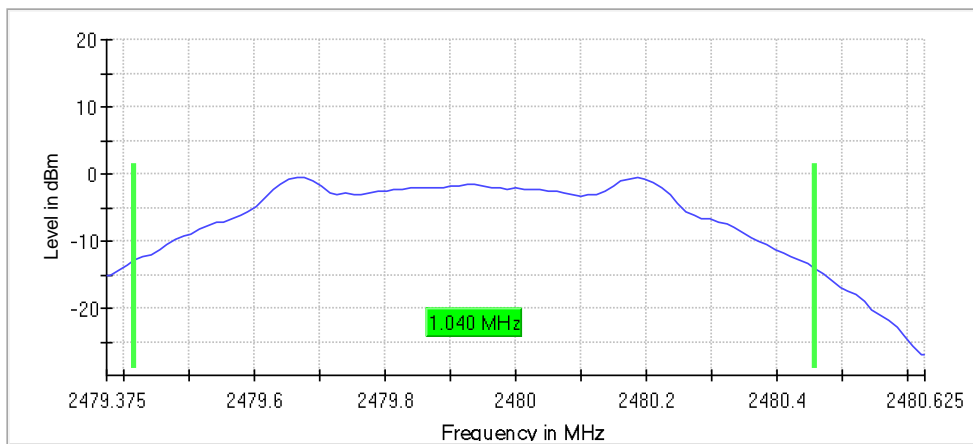

**TEST RESULTS (Cont.):**

**Measurement**

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40138 GHz	2.43938 GHz	2.47938 GHz
Stop Frequency	2.40263 GHz	2.44063 GHz	2.48063 GHz
Span	1.250 MHz	1.250 MHz	1.250 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
SweepPoints	101	101	101
Sweeptime	18.938 $\mu$ s	18.938 $\mu$ s	18.938 $\mu$ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
SweepCount	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweeptype	FFT	FFT	FFT
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.50 dB	0.50 dB	0.50 dB
Run	10 / max. 150	15 / max. 150	9 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.19 dB	0.00 dB	0.30 dB




## TEST A.2: 6DB BANDWIDTH

<b>LIMITS:</b>	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(a)(2) and RSS-247 5.2(a)

### LIMITS

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### TEST SETUP


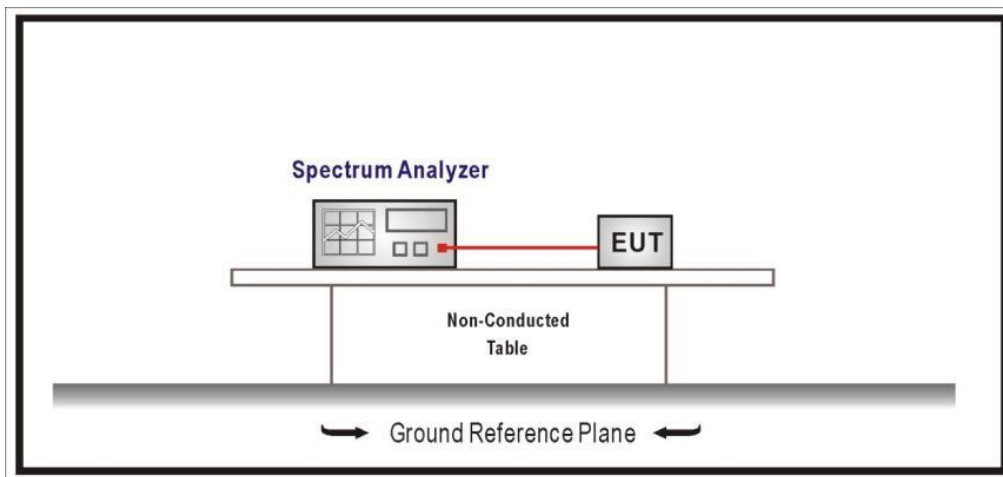


<b>TESTED SAMPLES:</b>	S/01
<b>TESTED CONDITIONS MODES:</b>	TC#01
<b>TEST RESULTS:</b>	PASS

	Lowest frequency	Middle frequency	Highest frequency
	2402 MHz	2440 MHz	2480 MHz
6 dB Spectrum bandwidth (kHz)	717.821	742.575	742.575
Measurement uncertainty (kHz)	<±20.0		



TEST RESULTS (Cont.):

Lowest Channel

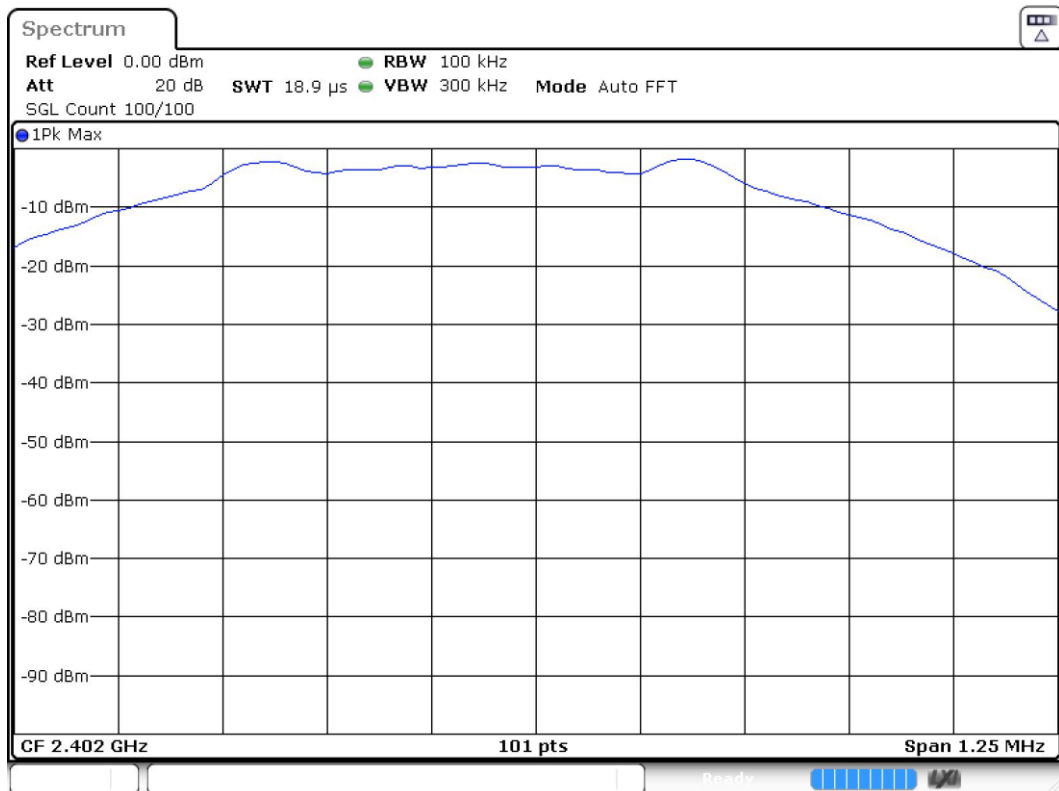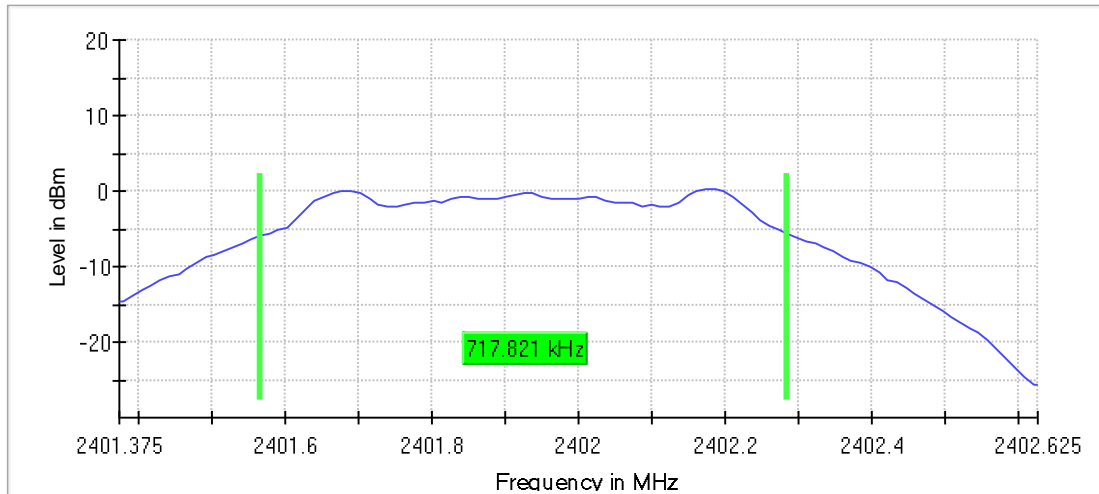



TEST RESULTS (Cont.):

Middle Channel

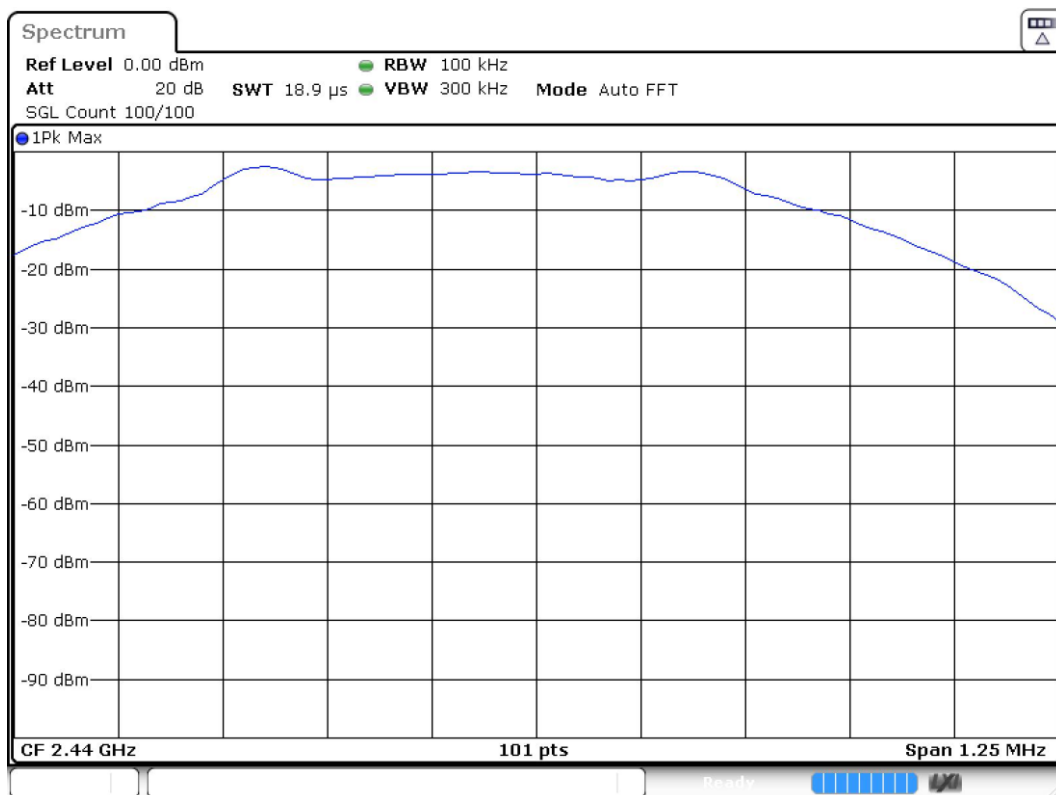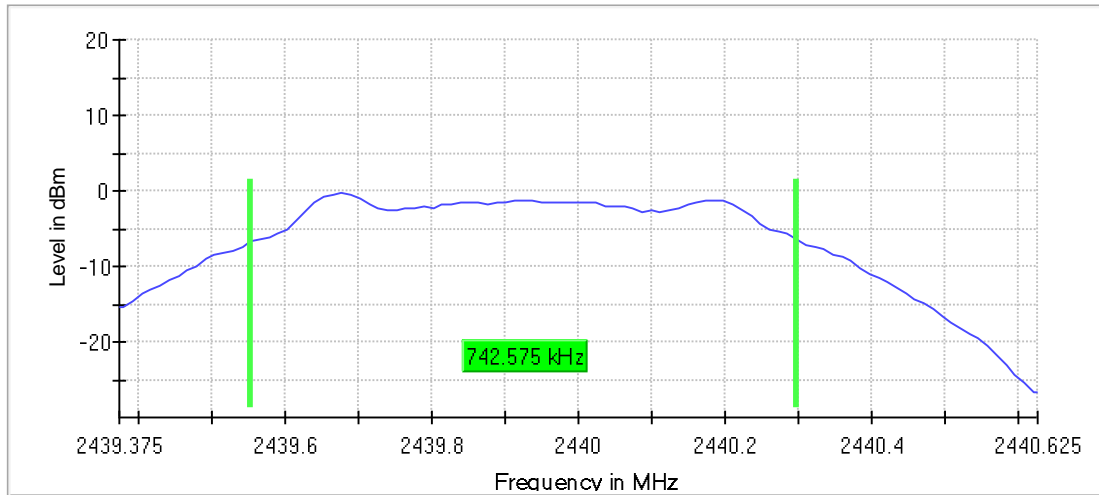

TEST RESULTS (Cont.):

Highest Channel

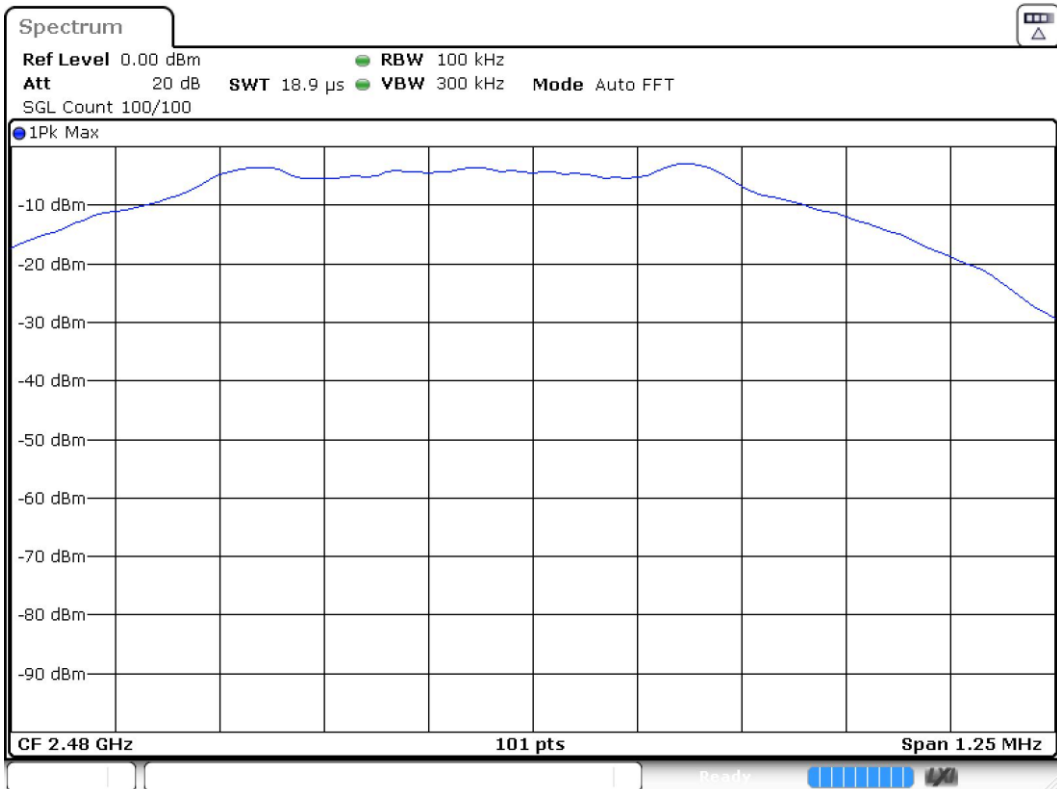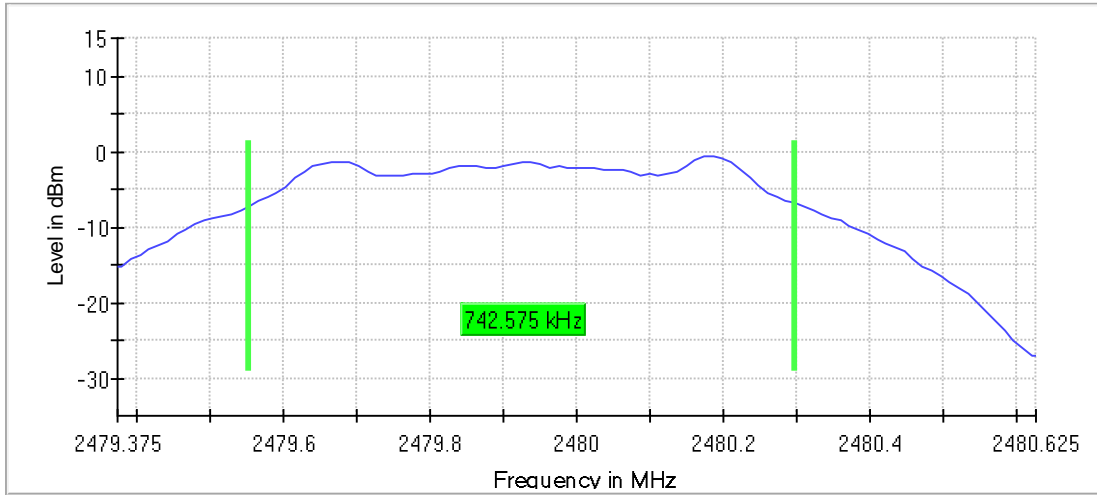

**TEST RESULTS (Cont.):**

**Measurement**

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40138 GHz	2.43938 GHz	2.47938 GHz
Stop Frequency	2.40263 GHz	2.44063 GHz	2.48063 GHz
Span	1.250 MHz	1.250 MHz	1.250 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
SweepPoints	101	101	101
Sweeptime	18.938 $\mu$ s	18.938 $\mu$ s	18.938 $\mu$ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
SweepCount	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweeptype	FFT	FFT	FFT
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.50 dB	0.50 dB	0.50 dB
Run	11 / max. 150	8 / max. 150	10 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.32 dB	0.09 dB	0.06 dB

### TEST A.3: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN

<b>LIMITS:</b>	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(b)(3) and RSS-247 5.4(d)

LIMITS


§15.247(b)(3) and RSS-247 5.4(d): For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).

RSS-247 5.4(d): The e.i.r.p. shall not exceed 4 W (36 dBm)

#### TEST SETUP

The maximum peak conducted output power was measured using the method according to point 9.1.1. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power

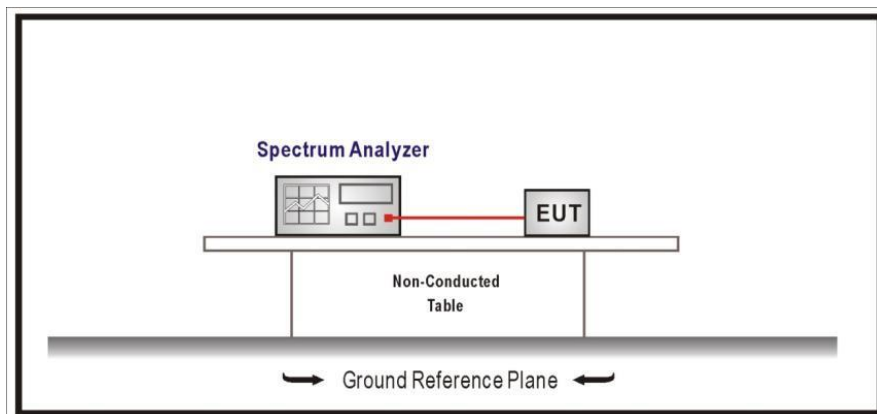

<b>TESTED SAMPLES:</b>	S/01
<b>TESTED CONDITIONS MODES:</b>	TC#01
<b>TEST RESULTS:</b>	PASS

	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	0.6	0.0	-0.4
Maximum EIRP power (dBm)	0.6	0.0	-0.4
Measurement uncertainty (dB)	<±0.78		

Maximum declared antenna gain: 0 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

TEST RESULTS (Cont.):	CONDUCTED PEAK POWER
<b>Lowest Channel</b>	
<p>— Connector 1    × Peak Connector 1</p>	
<b>Middle Channel</b>	
<p>— Connector 1    × Peak Connector 1</p>	
<b>Highest Channel</b>	
<p>— Connector 1    × Peak Connector 1</p>	

**TEST RESULTS (Cont.):**

**Measurement**

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40050 GHz	2.43850 GHz	2.47850 GHz
Stop Frequency	2.40350 GHz	2.44150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz	3.000 MHz
RBW	1.000 MHz	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz	3.000 MHz
SweepPoints	101	101	101
Sweeptime	1.907 $\mu$ s	1.907 $\mu$ s	1.907 $\mu$ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
SweepCount	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweeptype	FFT	FFT	FFT
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.50 dB	0.50 dB	0.50 dB
Run	4 / max. 150	4 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.10 dB	0.01 dB	0.01 dB




### TEST A.4: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER)

<b>LIMITS:</b>	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5

LIMITS

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

#### TEST SETUP

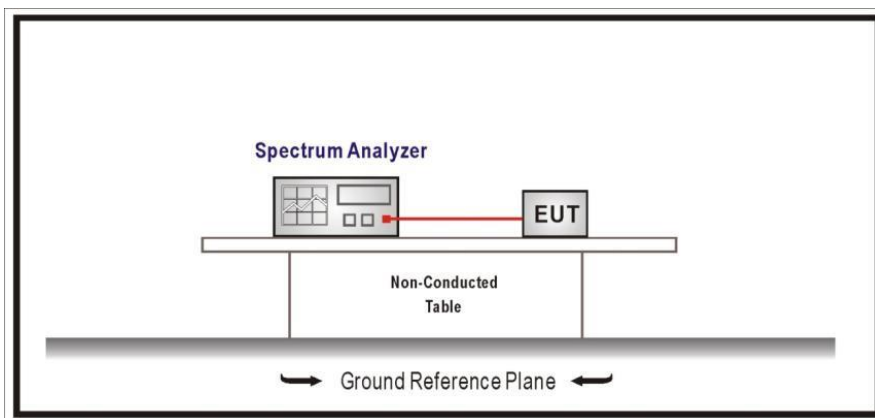


<b>TESTED SAMPLES:</b>	S/01
<b>TESTED CONDITIONS MODES:</b>	TC#01
<b>TEST RESULTS:</b>	PASS


Note: Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

TEST RESULTS (Cont.):

Lowest Channel

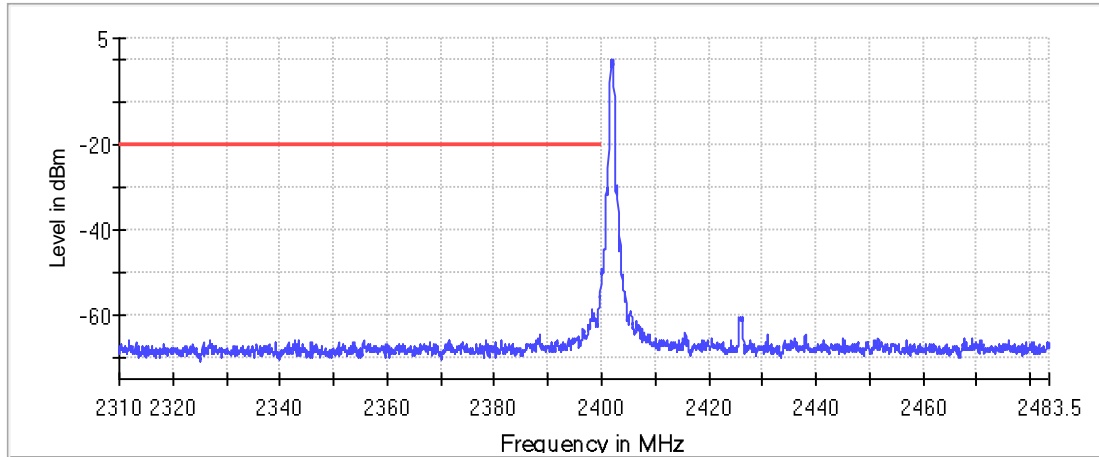


— Limit    — Sum Level    × Fail

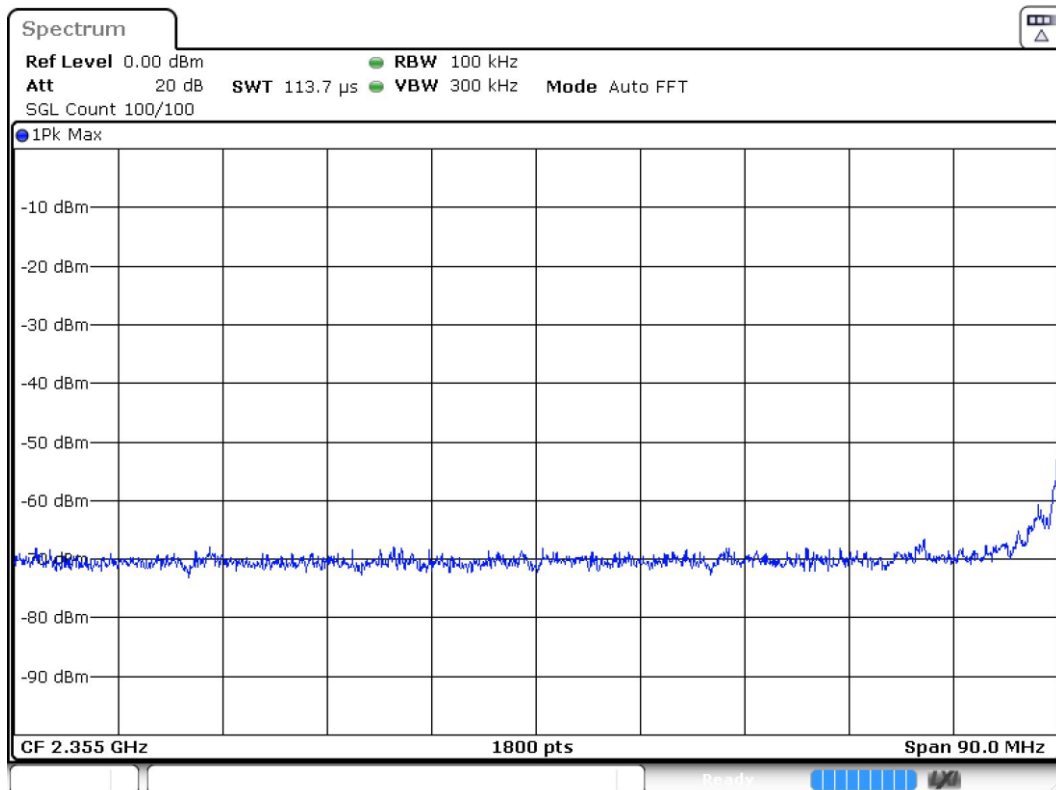

**TEST RESULTS (Cont.):**

**Lowest Channel**

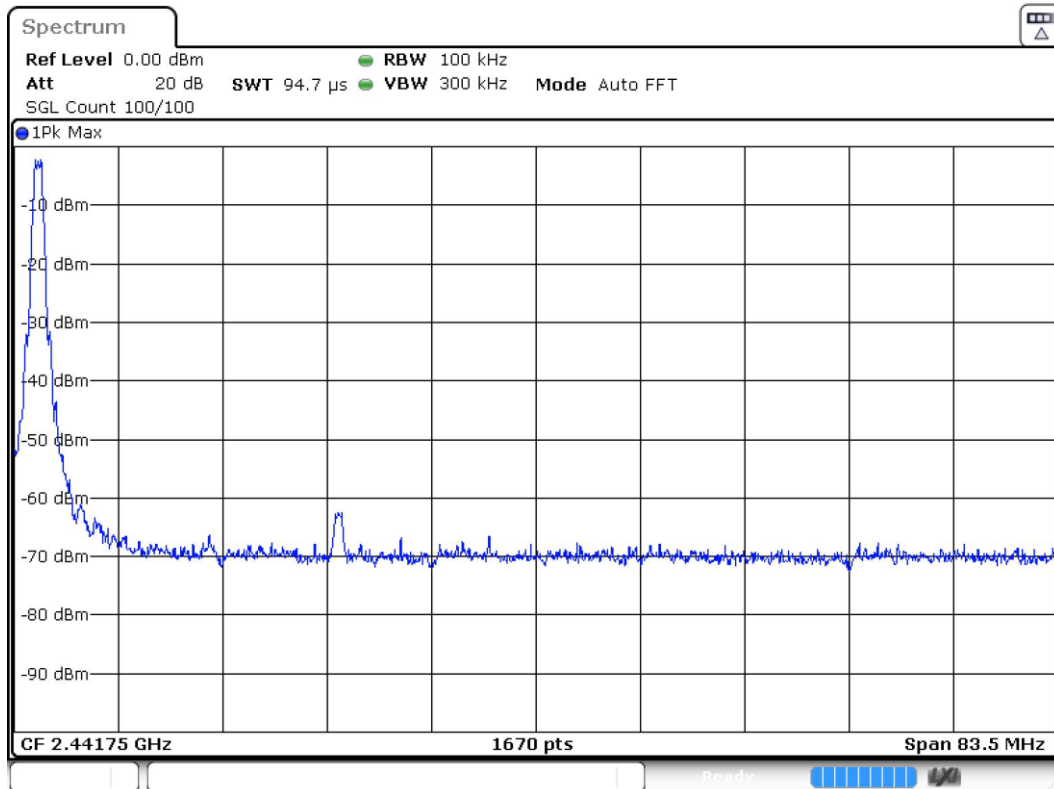


**Measurement**


Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
SweepPoints	1800	1670
Sweptime	113.672 $\mu$ s	94.727 $\mu$ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	8 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.45 dB

TEST RESULTS (Cont.):

Highest Channel

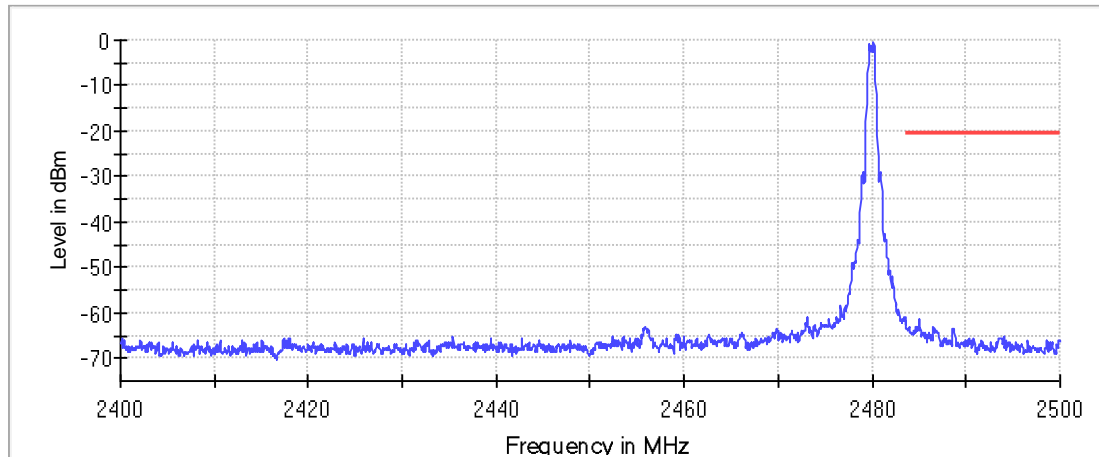


— Limit    — Sum Level    × Fail

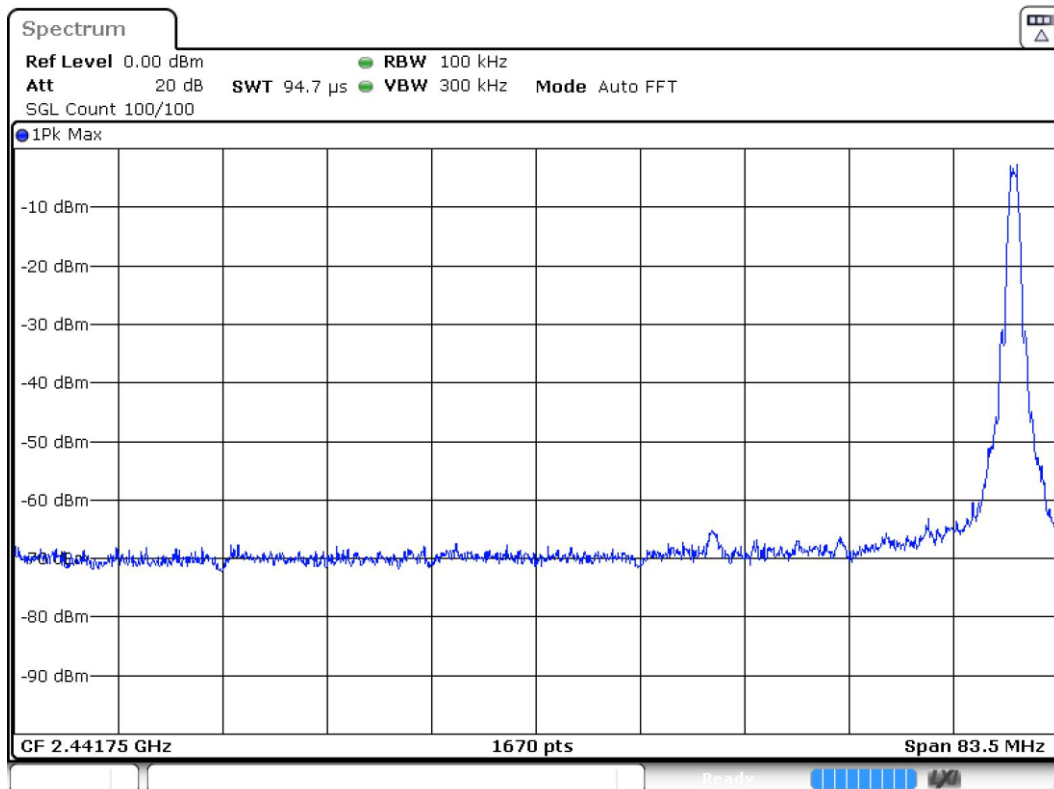

**TEST RESULTS (Cont.):**

**Highest Channel**

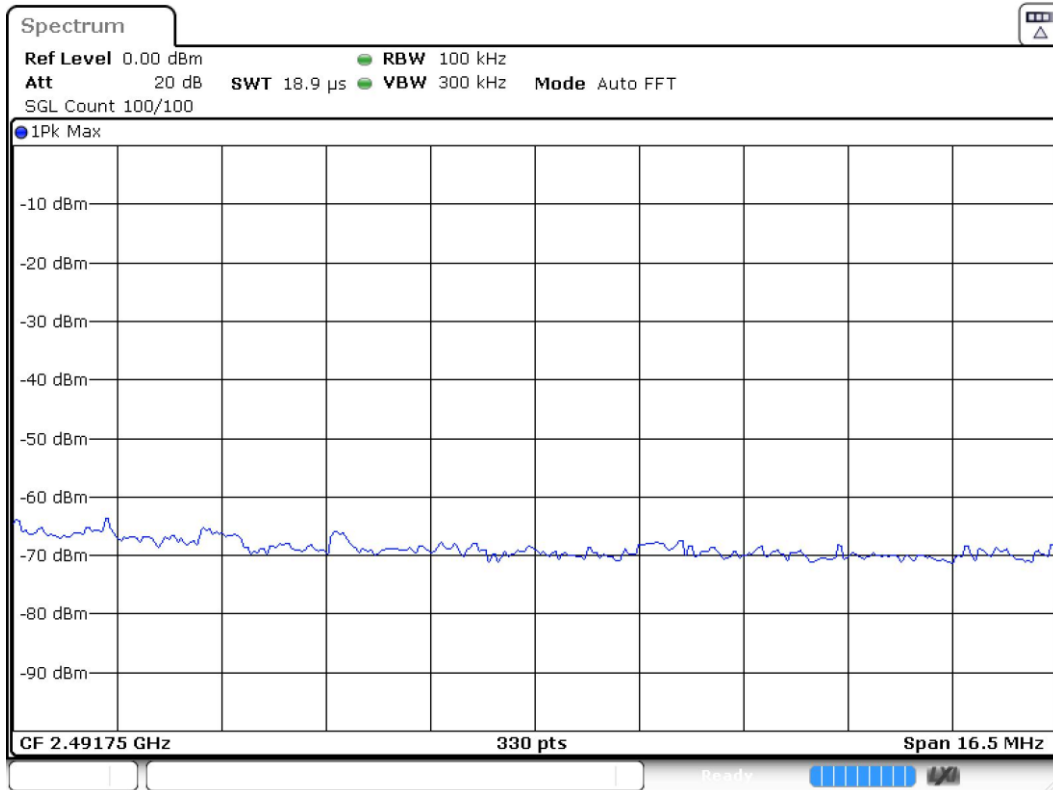

**Measurement**

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
SweepPoints	1670	330
Sweeptime	94.727 $\mu$ s	18.945 $\mu$ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.20 dB	0.00 dB

## TEST A.5: POWER SPECTRAL DENSITY


<b>LIMITS:</b>	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(e) and RSS-247 5.2 (b)

### LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST SETUP

The maximum power spectral density level in the fundamental emission was measured using the method PKPSD (Peak PSD) according to point 10.2. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

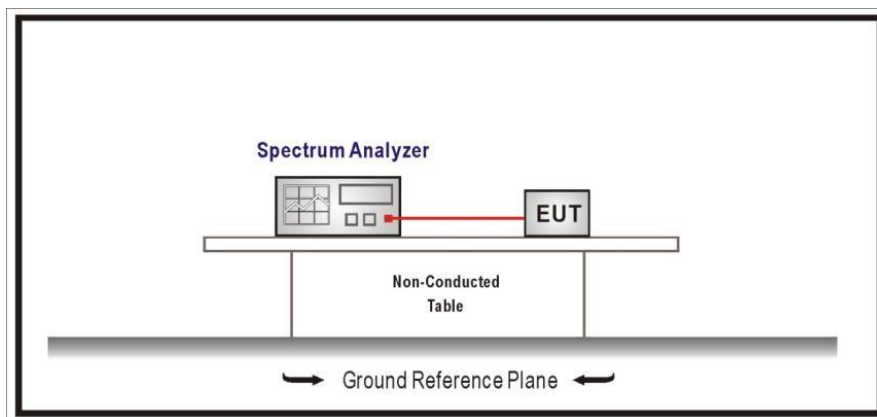


<b>TESTED SAMPLES:</b>	S/01
<b>TESTED CONDITIONS MODES:</b>	TC#01
<b>TEST RESULTS:</b>	PASS


	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
Power spectral density (dBm)	-5.017	-6.998	-8.115
Measurement uncertainty (dB)	<±0.78		

TEST RESULTS (Cont.):

Lowest Channel

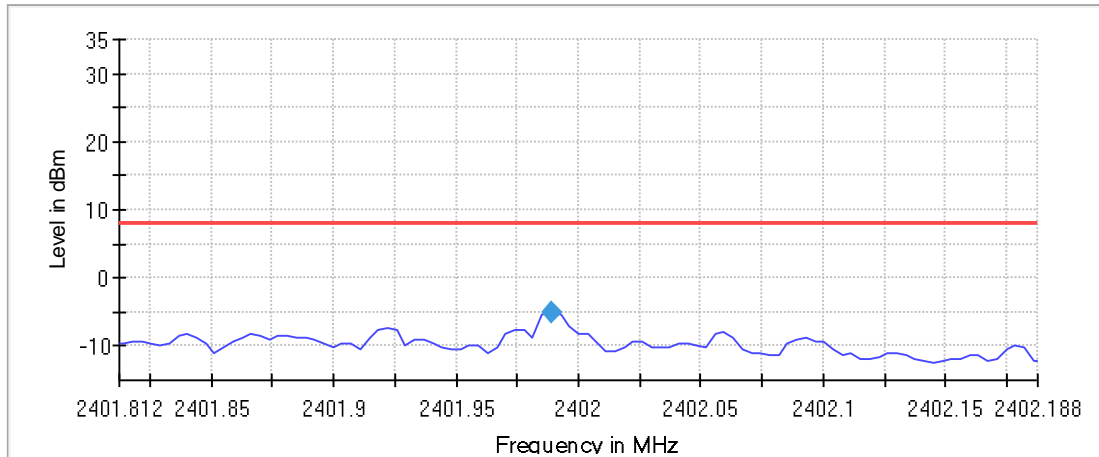


— Limit    — Sum Level    ◆ PSD

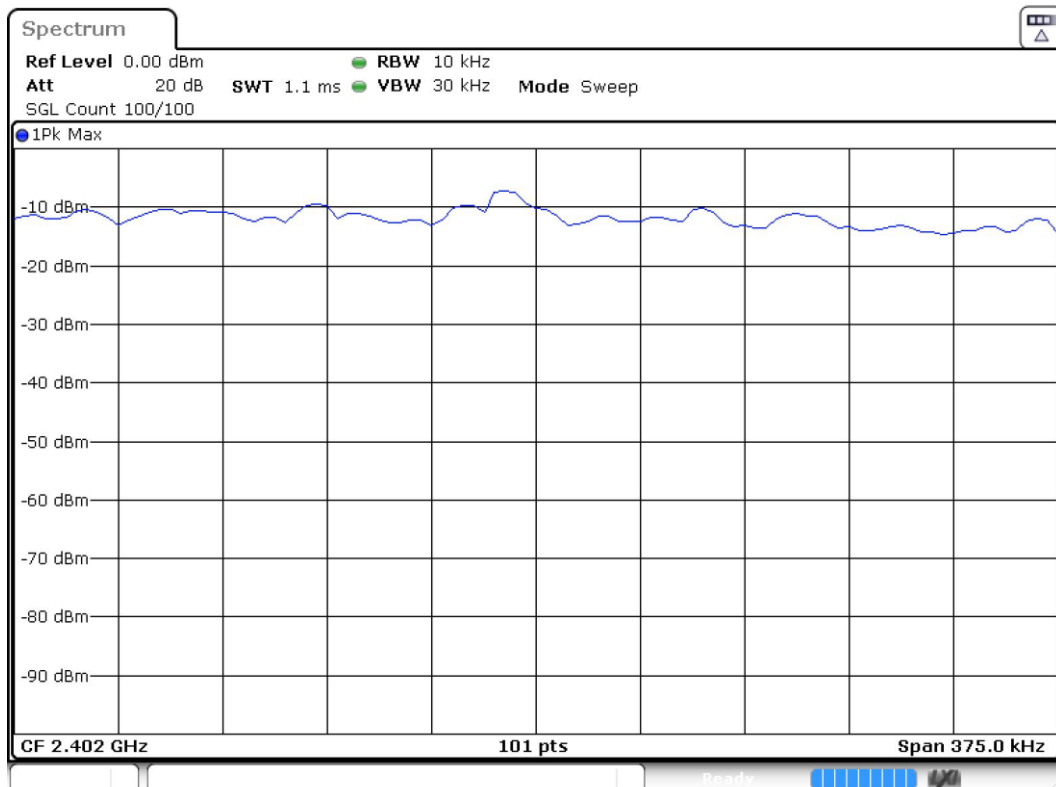


TEST RESULTS (Cont.):

Middle Channel

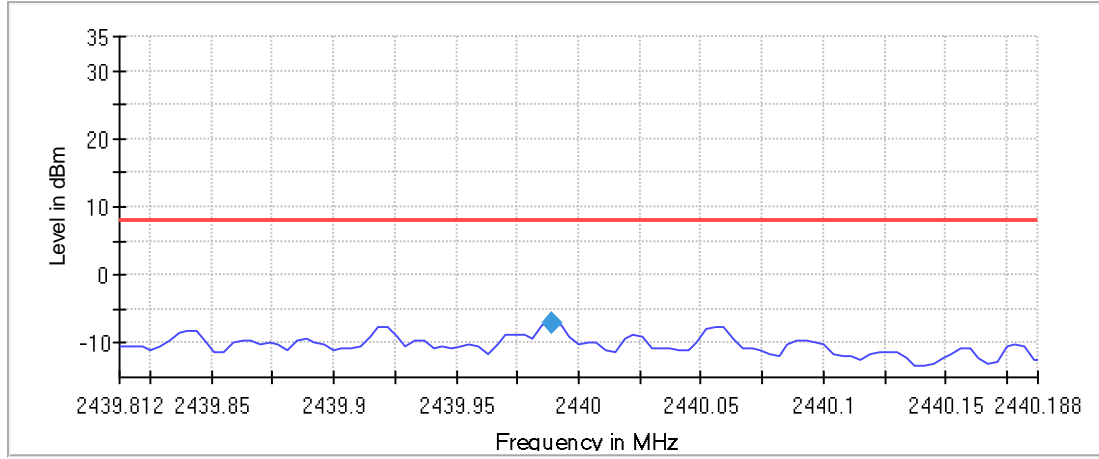


— Limit    — Sum Level    ◆ PSD

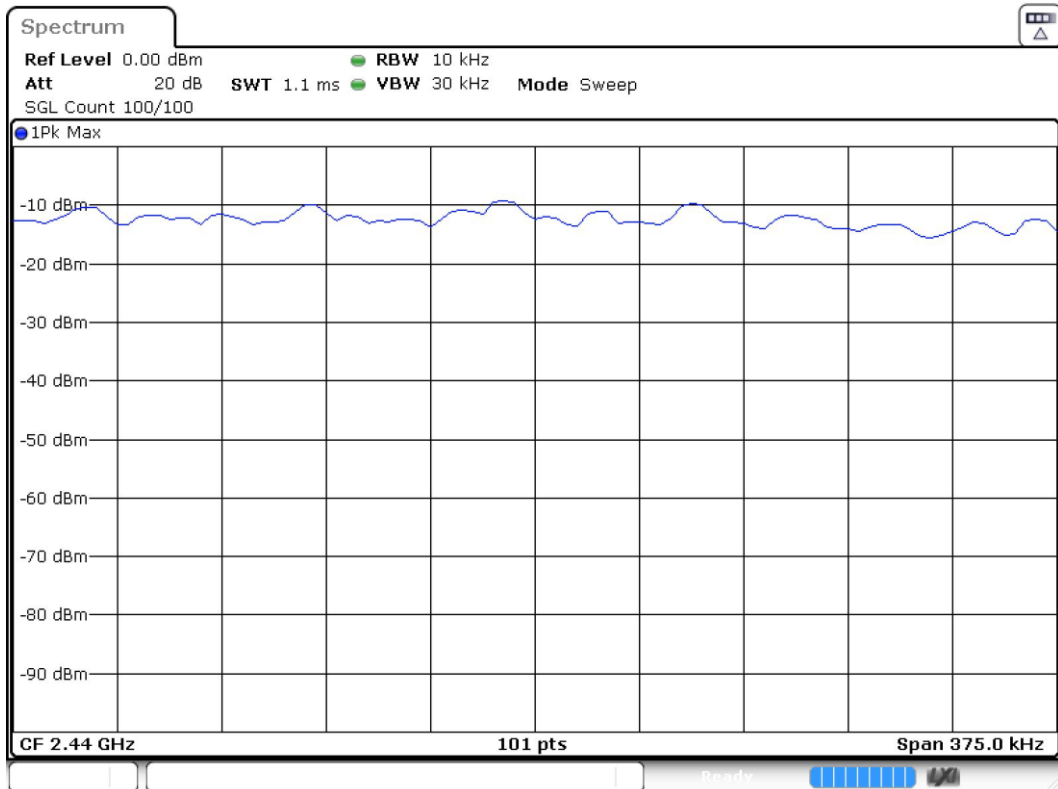




TEST RESULTS (Cont.):

Highest Channel

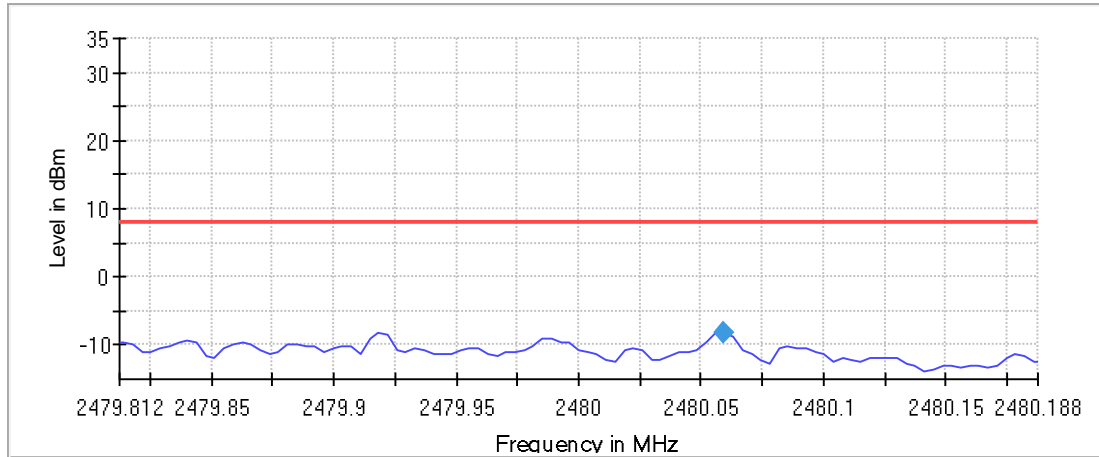

— Limit    — Sum Level    ◆ PSD

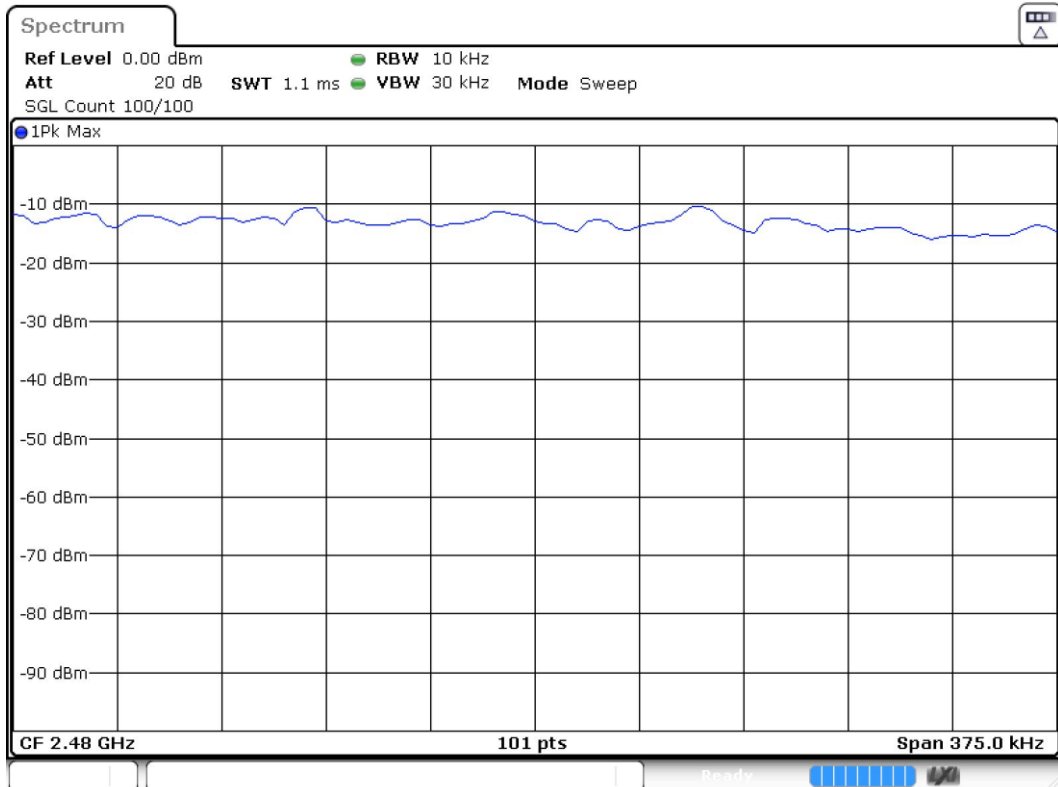

**TEST RESULTS (Cont.):**

**Measurement**

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40181 GHz	2.43981 GHz	2.47981 GHz
Stop Frequency	2.40219 GHz	2.44019 GHz	2.48019 GHz
Span	375.000 kHz	375.000 kHz	375.000 kHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
SweepPoints	101	101	101
Sweeptime	1.070 ms	1.070 ms	1.070 ms
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
SweepCount	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweeptype	Sweep	Sweep	Sweep
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.50 dB	0.50 dB	0.50 dB
Run	3 / max. 150	3 / max. 150	3 / max. 150
Stable	2 / 2	2 / 2	2 / 2
Max Stable Difference	0.00 dB	0.00 dB	0.00 dB

## TEST A.6: EMISSION LIMITATIONS RADIATED (TRANSMITTER)

<b>LIMITS:</b>	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-Gen 8.9 and 8.10

### LIMITS

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required

### TEST SETUP

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30-1000 MHz (Bilog antenna) and at a distance of 1m for the frequency range 1-40 GHz (1 GHz-18 GHz and 18 GHz-40 GHz Double ridge horn antennas).

For radiated emissions in the range 1-40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

**TEST SETUP (CONT.)**

**Radiated measurements Setup  $f < 1$  GHz**

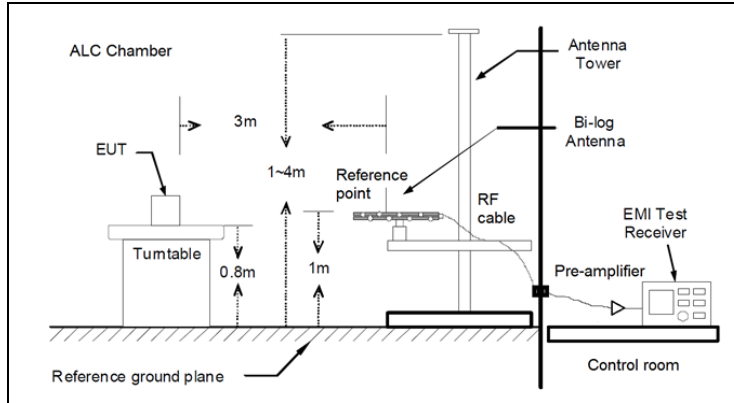

**Radiated measurements setup  $f > 1$  GHz**

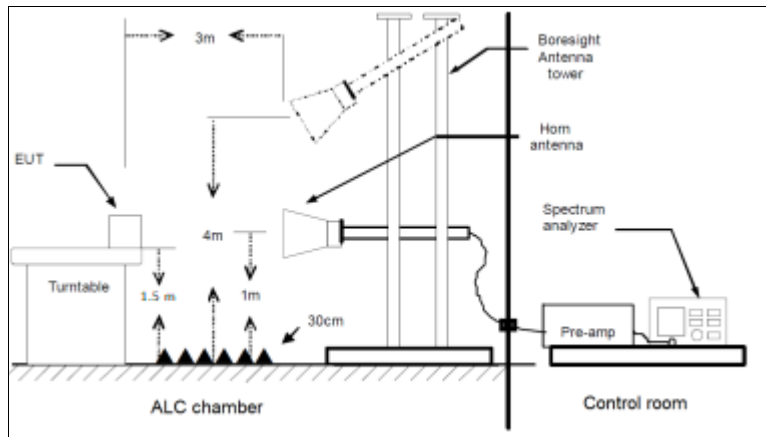

<b>TESTED SAMPLES:</b>	S/02
<b>TESTED CONDITIONS MODES:</b>	TC#01
<b>TEST RESULTS:</b>	PASS

**Frequency range 30 MHz – 1000 MHz**

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT. No radiated spurious signals were detected at less than 20 dB respect to the limit for the lowest, middle and highest operating channels.


**Frequency range 1 GHz – 25 GHz**

The spurious emissions above 1 GHz do not depend on the operating channel selected in the EUT. No radiated spurious signals were detected at less than 20 dB respect to the limit for the lowest, middle and highest operating channels.

**TEST RESULTS (Cont.):**

**30-1000 MHz (Lowest Channel)**

30MHz\_1GHz\_HP & VP\_CH Low

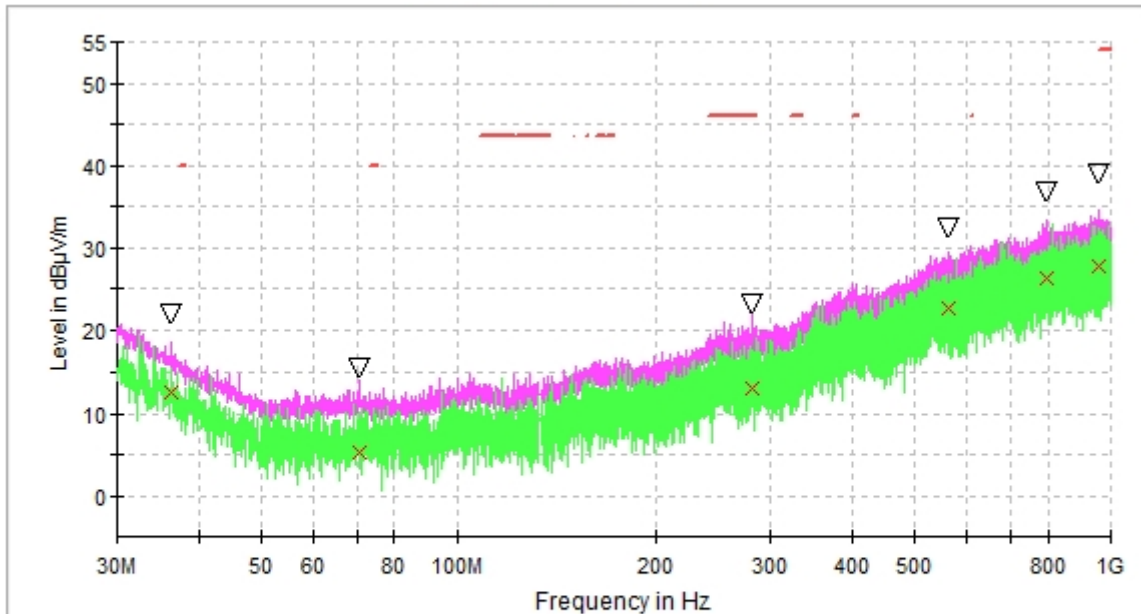

- PK+ \_MAXH
- PK+ \_CLRWR
- TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)


**Maximizations**

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol
36.402000	21.8	12.4	H
70.594500	15.6	5.3	H
280.502500	23.2	13.1	H
563.112000	32.3	22.7	H
799.210000	36.7	26.1	H
958.532500	39.0	27.7	H

TEST RESULTS (Cont.):

30-1000 MHz (Middle Channel)

30MHz\_1GHz\_HP & VP\_CH Mid

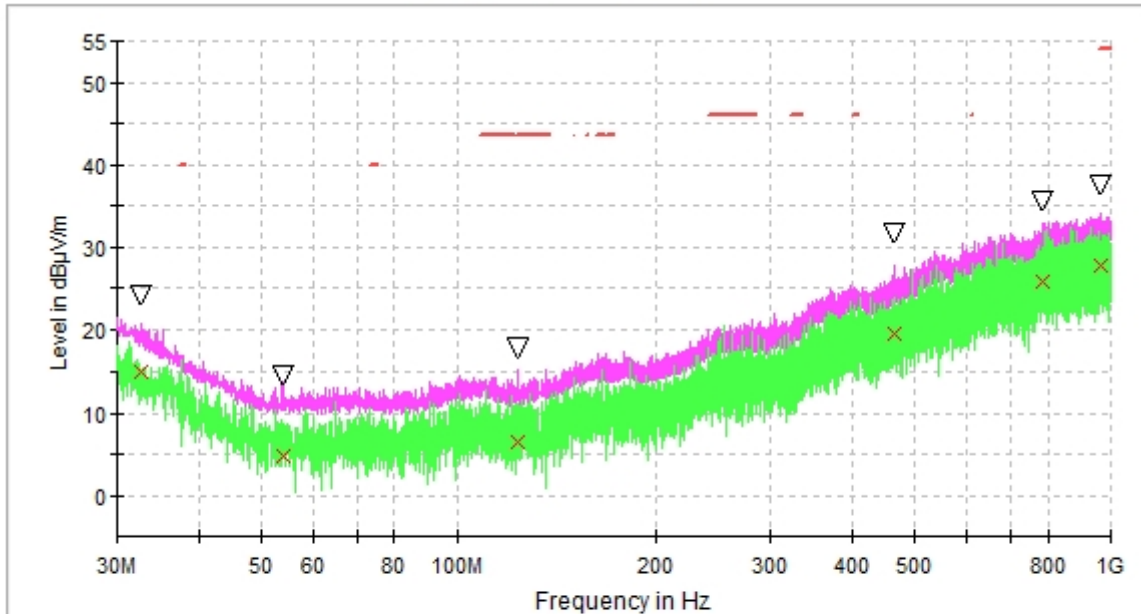

- PK+\_MAXH
- PK+\_CLRWR
- TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)


### Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol
32.619000	24.0	15.0	V
54.056000	14.5	4.7	V
123.799000	17.6	6.5	V
785.969500	35.4	25.6	V
962.897500	37.5	27.6	V
466.112000	31.5	19.4	V

**TEST RESULTS (Cont.):**

**30-1000 MHz (Highest Channel)**

30MHz\_1GHz\_HP & VP\_CH High

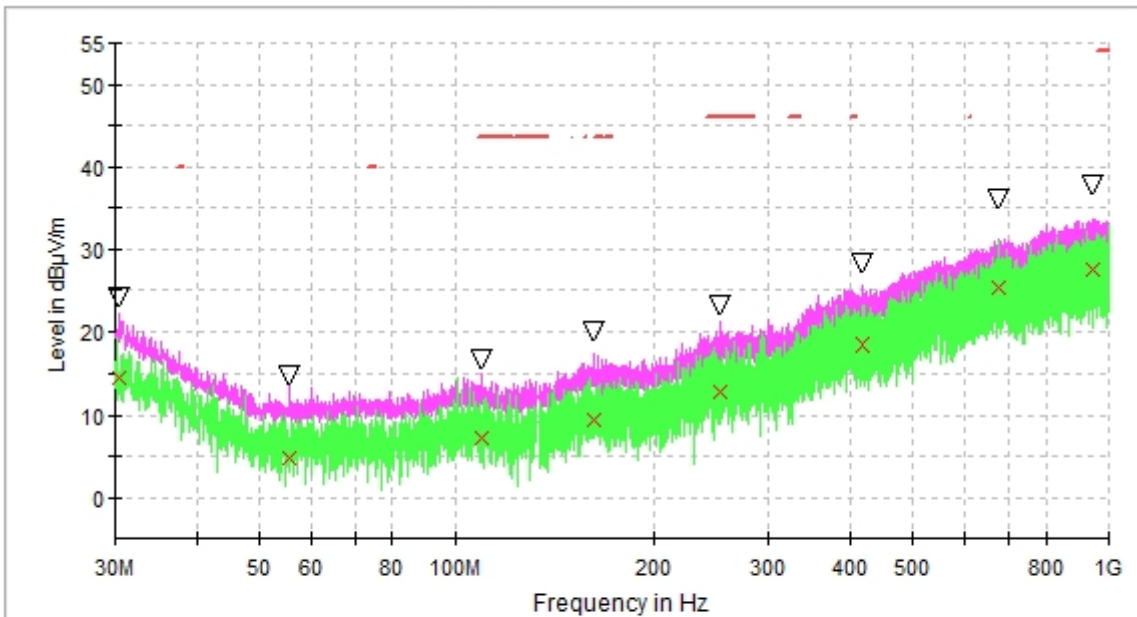

- PK+ MAXH
- PK+ CLRWR
- - - TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)


**Maximizations**

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol
30.436500	24.1	14.4	H
55.511000	14.7	4.7	H
109.443000	16.8	7.1	H
162.017000	19.8	9.3	H
253.148500	23.0	12.8	H
418.339500	28.2	18.3	H
677.475000	36.0	25.4	H
947.765500	37.6	27.5	H

TEST RESULTS (Cont.):

1-18 GHz (Lowest Channel)

1GHz\_18GHz\_HP & VP\_CH Low

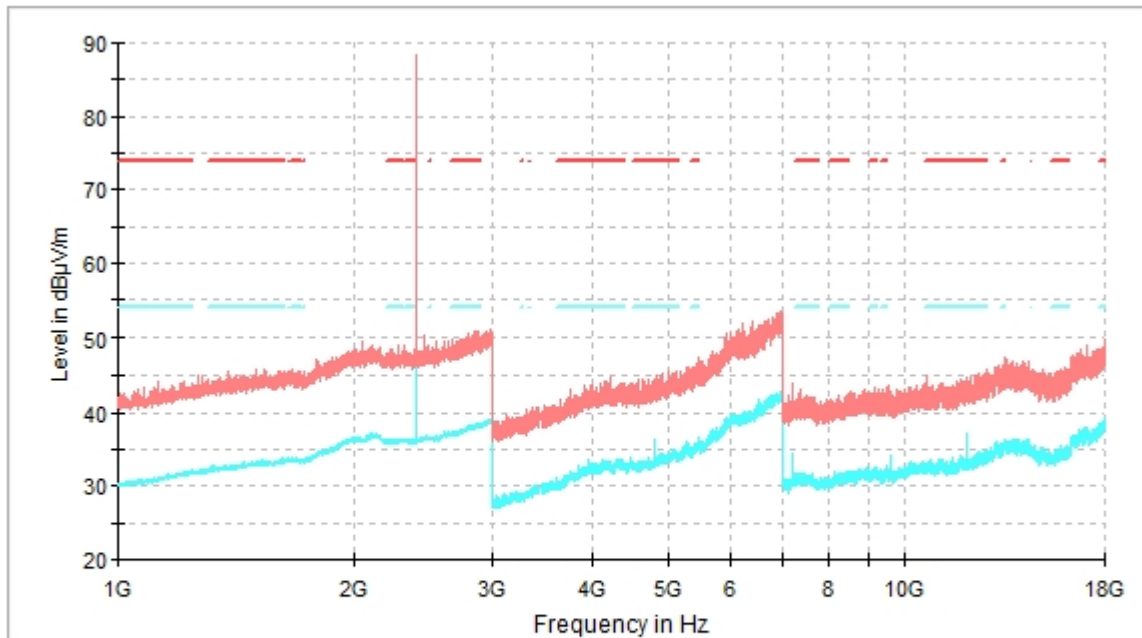

- AVG\_MAXH
- PK+\_MAXH
- - - TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

### Maximizations


Frequency (MHz)	PK+ MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Azimuth (deg)	Comment
2402.000000	88.27	87.47	V	-74.0	Fundamental
4804.000000	44.50	36.00	V	-75.0	
7205.000000	42.65	34.41	H	-18.0	
9608.500000	41.81	34.15	H	-154.0	
12008.500000	44.75	37.21	H	5.0	
17999.500000	49.09	39.34	V	14.0	



**TEST RESULTS (Cont.):**

**1-18 GHz (Middle Channel)**

1GHz\_18GHz\_HP & VP\_CH Mid

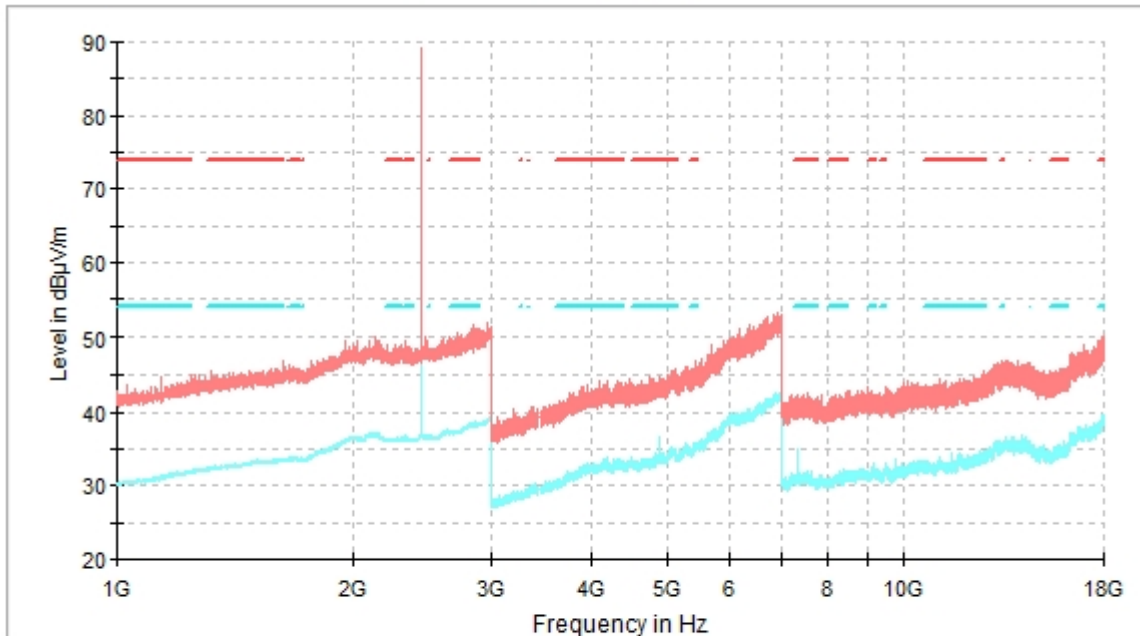

- AVG\_MAXH
- PK+\_MAXH
- - - TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


**Maximizations**

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Azimuth (deg)	Comment
2440.000000	89.13	88.39	V	-60.0	Fundamental
4879.500000	43.90	36.55	V	-47.0	
7320.000000	41.98	34.18	H	-27.0	
9760.500000	42.63	33.74	V	-132.0	
17936.000000	47.96	39.54	V	-115.0	

TEST RESULTS (Cont.):

1-18 GHz (Highest Channel)

1GHz\_18GHz\_HP & VP\_CH High

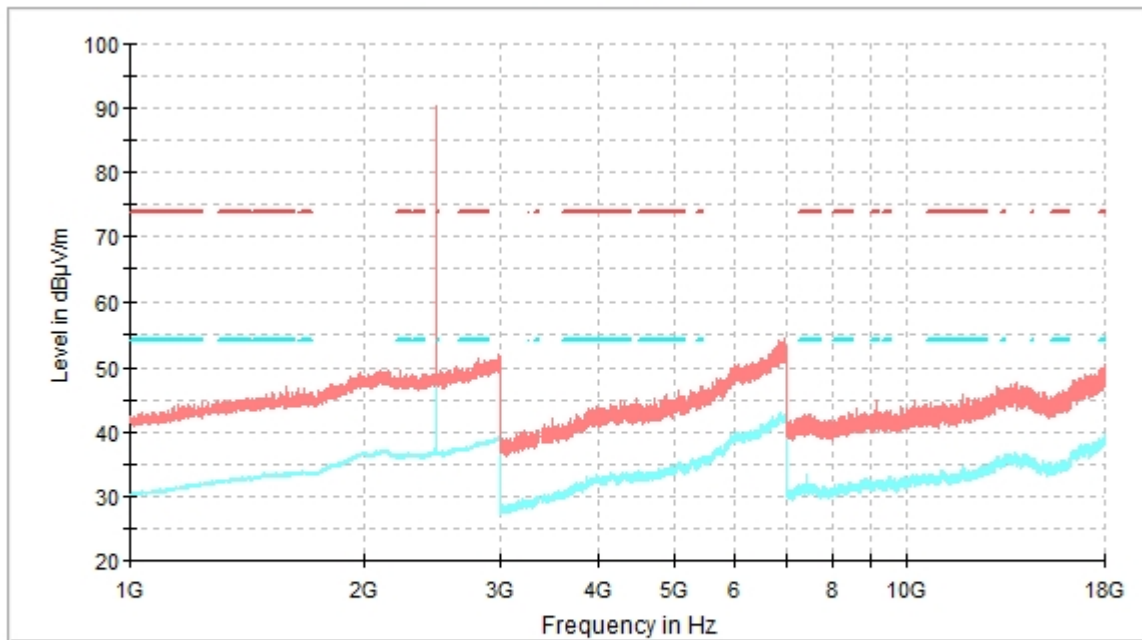

- AVG\_MAXH
- PK+\_MAXH
- - - TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


### Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Azimuth (deg)	Comment
2480.00000	90.36	89.59	V	-80.0	Fundamental
6941.50000	54.13	42.16	H	-150.0	
11782.50000	45.72	34.01	V	180.0	
13814.50000	47.71	35.54	V	180.0	
17958.50000	50.41	38.82	V	180.0	

TEST RESULTS (Cont.):

18-26 GHz (Lowest Channel)

18GHz\_26GHz\_HP & VP\_CH Low

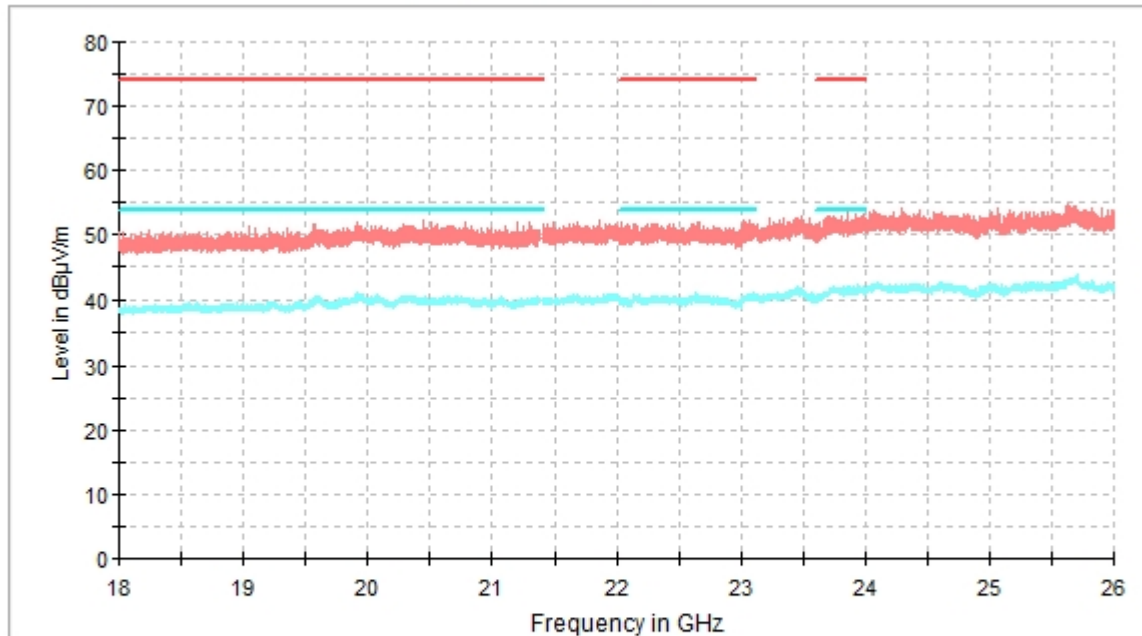


- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.):

18-26 GHz (Middle Channel)

18GHz\_26GHz\_HP & VP\_CH Mid

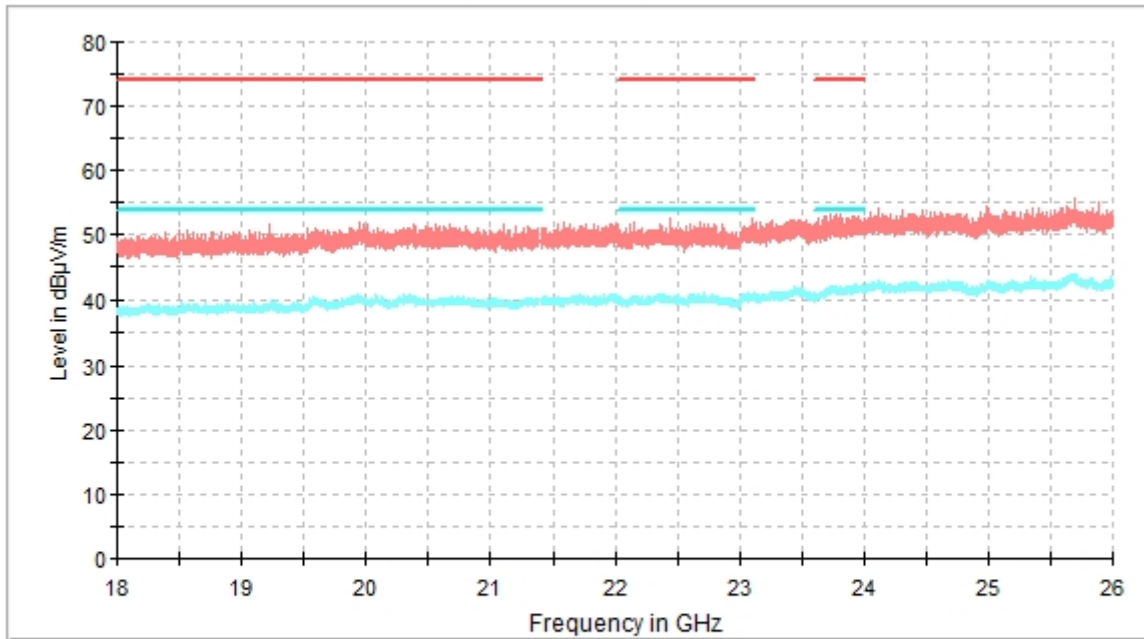


- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.):

18-26 GHz (Highest Channel)

18GHz\_26GHz\_HP & VP\_CH High

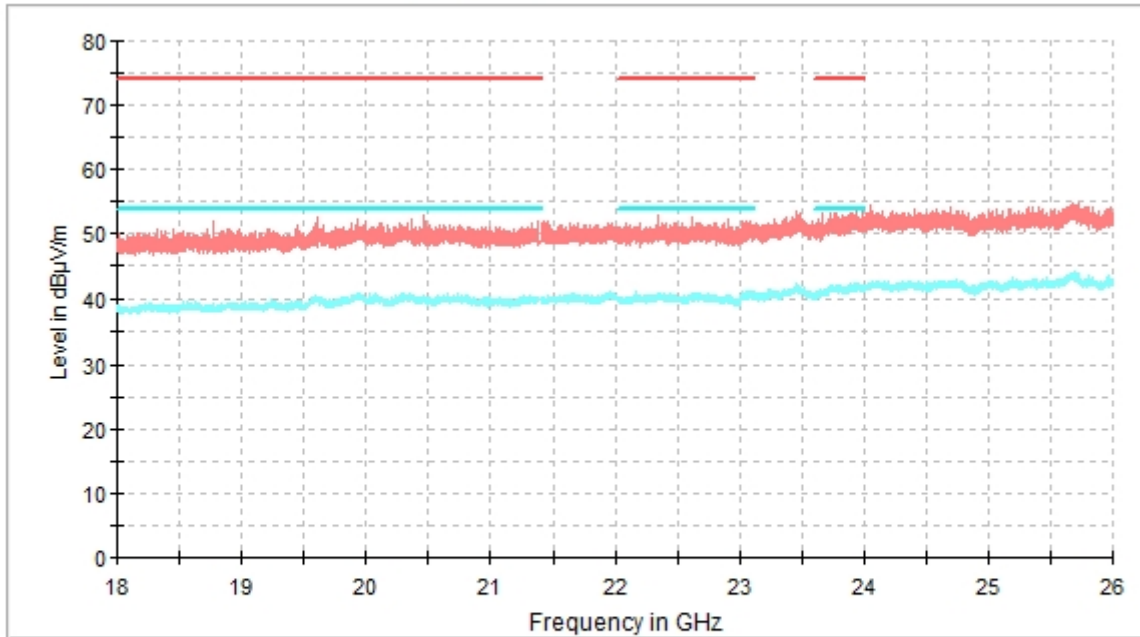


- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

**TEST RESULTS (Cont.):**


**RESTRICTED BAND (2.31 GHz to 2.39 GHz)**

**CHANNEL: Lowest (2402 MHz).**

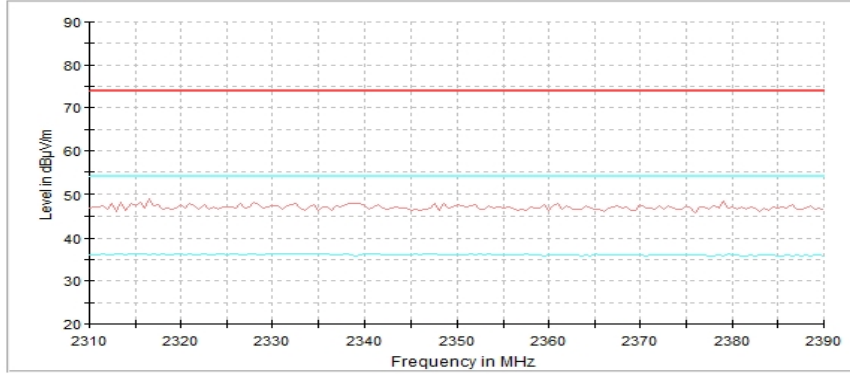


- AVG\_MAXH
- PK+ \_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

**CHANNEL: Middle (2440 MHz).**

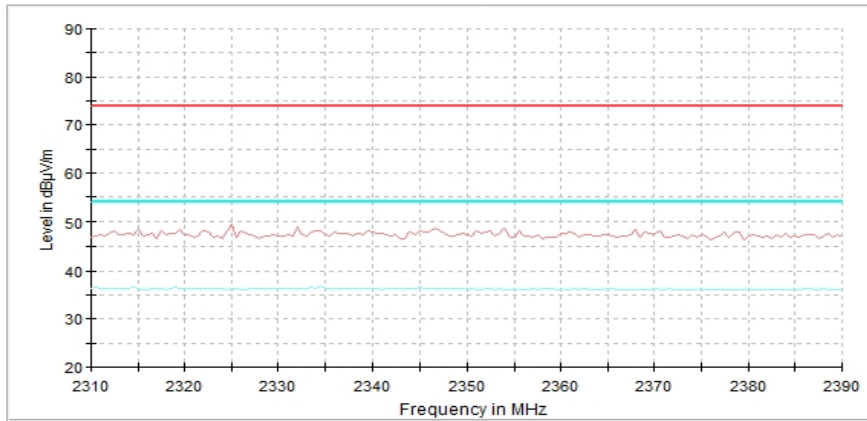

- AVG\_MAXH
- PK+ \_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

**CHANNEL: Highest (2480 MHz).**

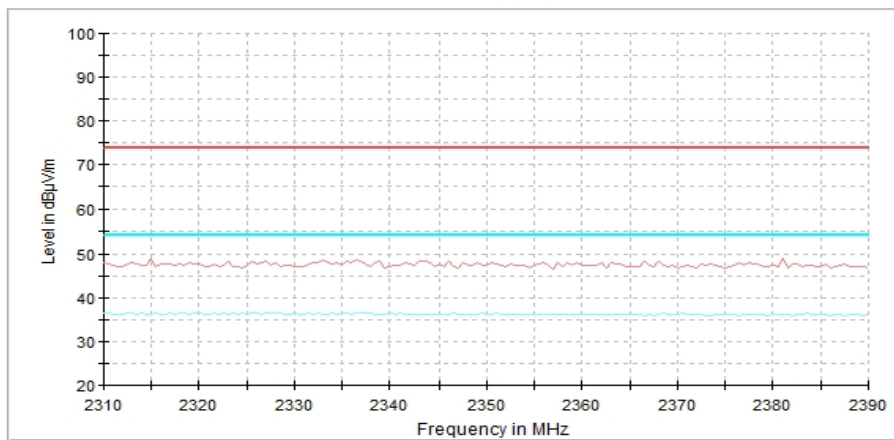


- AVG\_MAXH
- PK+ \_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

**TEST RESULTS (Cont.):**


**RESTRICTED BAND (2.4835 GHz to 2.5 GHz)**

**CHANNEL: Lowest (2402 MHz).**

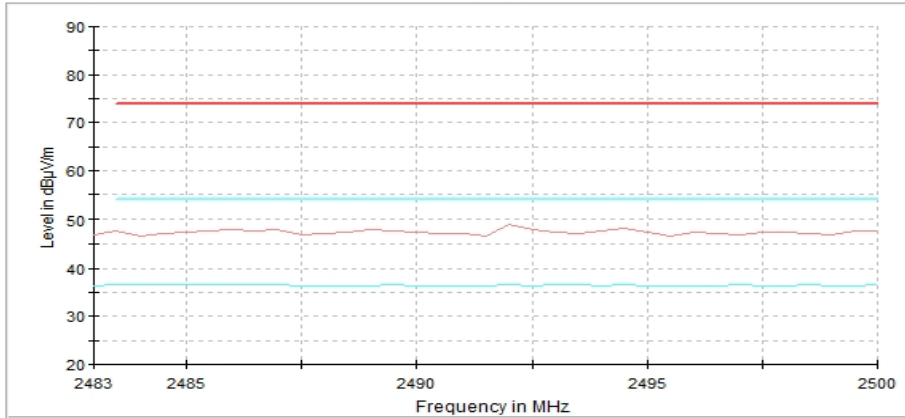


- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

**CHANNEL: Middle (2440 MHz).**

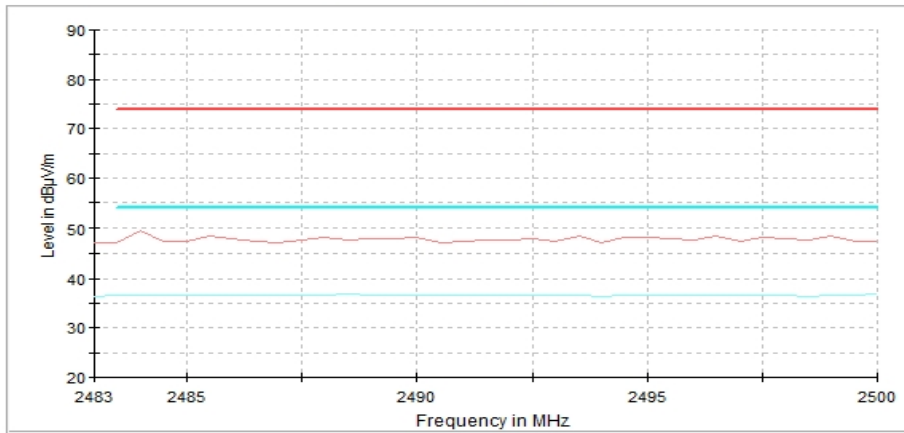

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

**CHANNEL: Highest (2480 MHz).**

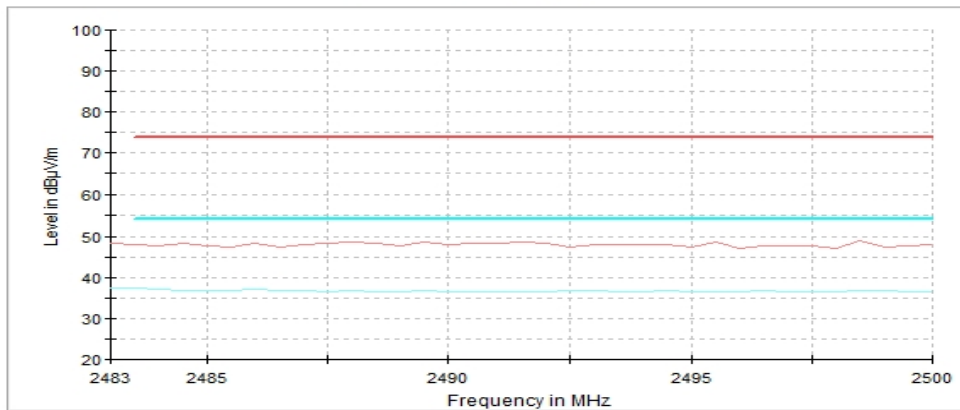

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit