



Solutions

# TEST REPORT

**Test Report No. : UL-RPT-RP-15478060-116A**

**Applicant:** Braun GmbH

**Model Number:** 3795

**FCC ID:** USQ3795

**Test Standard(s):** Antenna Gain Measurement  
(Derived from FCC Part 15.247(b)(3))

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.

2. The results in this report apply only to the sample tested.

3. Test Report Version 1.1 supersedes Version 1.0 with immediate effect

Test Report No. UL-RPT-RP-15478060-116A Version 1.1, Issue Date 14 November 2024 replaces Test Report No. UL-RPT-RP-15478060-116A Version 1.0, Issue Date 11 November 2024, which is no longer valid.

*Yixiang Li*

---

Prepared by: Yixiang Li  
Title: Project Engineer  
Date: 14 November 2024

*Faiq*

---

Approved by: Muhammad Faiq, Khan  
Title: Project Engineer  
Date: 14 November 2024



Deutsche  
Akkreditierungsstelle  
D-PL-19381-02-00

This laboratory is accredited by DAkkS.  
The tests reported herein have been performed in accordance with its' terms of accreditation.

**UL INTERNATIONAL GERMANY GMBH**

Hedelfinger Str. 61  
70327 Stuttgart, Germany  
STU.CTECHLab@ul.com

This page has been left intentionally blank.

## **Table of Contents**

|  |           |
|--|-----------|
| <b>1. Customer Information.....</b>                                | <b>4</b>  |
| 1.1. Applicant Information   | 4         |
| 1.2. Manufacturer Information                                      | 4         |
| <b>2. Summary of Testing.....</b>                                  | <b>5</b>  |
| 2.1. General Information   | 5         |
| Location   | 5         |
| Date information   | 5         |
| 2.2. Summary of Test Results                                       | 6         |
| 2.3. Methods and Procedures  | 6         |
| 2.4. Deviations from the Test Specification                        | 6         |
| <b>3. Equipment Under Test (EUT) .....</b>                         | <b>7</b>  |
| 3.1. Identification of Equipment Under Test (EUT)                  | 7         |
| 3.2. Description of EUT  | 7         |
| 3.3. Modifications Incorporated in the EUT                         | 7         |
| 3.4. Additional Information Related to Testing                     | 8         |
| 3.5. Description of Available Antenna                              | 8         |
| 3.6. Support Equipment   | 8         |
| A. Support Equipment (In-house)                                    | 8         |
| B. Support Equipment (Manufacturer supplied)                       | 8         |
| <b>4. Operation and Monitoring of the EUT during Testing .....</b> | <b>9</b>  |
| 4.1. Operating Modes   | 9         |
| 4.2. Configuration and Peripherals                                 | 9         |
| <b>5. Measurements, Examinations and Derived Results .....</b>     | <b>10</b> |
| 5.1. General Comments  | 10        |
| 5.2. Test Results  | 11        |
| 5.2.1. Transmitter Maximum (Peak) Output Power                     | 11        |
| 5.2.2. Transmitter Radiated Output Power                           | 13        |
| <b>6. Measurement Uncertainty .....</b>                            | <b>24</b> |
| <b>7. Used equipment .....</b>                                     | <b>25</b> |
| <b>8. Used equipment .....</b>                                     | <b>26</b> |
| <b>9. Report Revision History .....</b>                            | <b>28</b> |

## **1. Customer Information**

### **1.1.Applicant Information**

|                                |   |
|--------------------------------|---|
| <b>Company Name:</b>           | Braun GmbH  |
| <b>Company Address:</b>        | Frankfurter Straße 145, 61476 Kronberg/Taunus Germany |
| <b>Contact Person:</b>         | Aida Ayoubzadeh                                       |
| <b>Contact E-Mail Address:</b> | Ayoubzadeh.a.4@pg.com                                 |
| <b>Contact Phone No.:</b>      | +496173305403   |

### **1.2.Manufacturer Information**

|                                |   |
|--------------------------------|---|
| <b>Company Name:</b>           | Braun GmbH  |
| <b>Company Address:</b>        | Frankfurter Straße 145, 61476 Kronberg/Taunus Germany |
| <b>Contact Person:</b>         | Aida Ayoubzadeh                                       |
| <b>Contact E-Mail Address:</b> | Ayoubzadeh.a.4@pg.com                                 |
| <b>Contact Phone No.:</b>      | +496173305403   |

## **2. Summary of Testing**

### **2.1. General Information**

#### **Applied Standards**

|                                 |  |
|---------------------------------|--|
| <b>Specification Reference:</b> | 47CFR15.247  |
| <b>Specification Title:</b>     | Code of Federal Regulations Volume 47 (Telecommunications):<br>Part 15 Subpart C (Intentional Radiators) – Sections 15.247 |

#### **Location**

|                                |  |
|--------------------------------|--|
| <b>Location of Testing:</b>    | UL International Germany GmbH<br>Hedelfinger Str. 61<br>70327 Stuttgart<br>Germany |
| <b>Test Firm Registration:</b> | 399704   |

#### **Date information**

|                      |                                  |
|----------------------|----------------------------------|
| <b>Order Date:</b>   | 04 January 2024                  |
| <b>EUT arrived:</b>  | 06 February 2024                 |
| <b>Test Dates:</b>   | 12 March 2024 to 22 October 2024 |
| <b>EUT returned:</b> | -/-                              |

## 2.2. Summary of Test Results

| Clause                                     | Measurement             |
|--|-------------------------|
| Part 15.247(b)(3) /<br>ANSI C63.10 Annex G | Antenna Gain Masurement |

### Results:

| Frequency (MHz) | Conducted Output Power (dBm) | Max. EIRP (dBm) | Antenna Gain (dBi) |
|-----------------|------------------------------|-----------------|--------------------|
| 2402            | -1.69                        | -2.52           | -0.83              |
| 2440            | -1.88                        | -1.87           | 0.01               |
| 2480            | -1.93                        | -1.64           | 0.29               |

### Notes:

1. Antenna Gain in dBi was calculated in accordance with ANSI C63.10 G.3:

$$\text{ERP/EIRP} = P_T + G_T - L_c$$

Rearranged:

$$G_T = \text{ERP/EIRP} - P_T + L_c$$

$L_c$  is ignored since there is no cable connected between transmitter and antenna.

2. The calculated Antenna Gain is in dBi, since the correction factors used in the measurement of Radiated output power were also calculated by considering the Antenna dBi values.

## 2.3. Methods and Procedures

|                   |  |
|-------------------|--|
| <b>Reference:</b> | ANSI C63.10-2013   |
| <b>Title:</b>     | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices   |
| <b>Reference:</b> | KDB 558074 D01 DTS Meas Guidance v05r02 April 2, 2019  |
| <b>Title:</b>     | Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC rules |

## 2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

|                                   |                                 |
|-----------------------------------|---------------------------------|
| <b>Brand Name:</b>                | BRAUN                           |
| <b>Model Name:</b>                | 3795                            |
| <b>Test Sample Serial Number:</b> | eM6-0644 (Radiated Test Sample) |
| <b>Hardware Version Number:</b>   | 3795                            |
| <b>Firmware Version Number:</b>   | N/A                             |
| <b>FCC ID:</b>                    | USQ3795                         |

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| <b>Brand Name:</b>                | BRAUN                               |
| <b>Model Name:</b>                | 3795                                |
| <b>Test Sample Serial Number:</b> | eM6-0582 (RF Conducted Test Sample) |
| <b>Hardware Version Number:</b>   | 3795                                |
| <b>Firmware Version Number:</b>   | N/A                                 |
| <b>FCC ID:</b>                    | USQ3795                             |

#### **3.2. Description of EUT**

The equipment under test was a Wireless Toothbrush, Model: 3795, supporting Bluetooth LE technology.

#### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

### **3.4. Additional Information Related to Testing**

|                                     |                      |                                 |                        |  |  |
|-------------------------------------|----------------------|---------------------------------|------------------------|--|--|
| <b>Technology Tested:</b>           | Bluetooth Low Energy |                                 |                        |  |  |
| <b>Type of Radio Device:</b>        | Transceiver          |                                 |                        |  |  |
| <b>Power Supply Requirement(s):</b> | Nominal              | 3.6 V DC Li-Ion Battery Powered |                        |  |  |
| <b>Tested Data rate:</b>            | 1 Mbps               |                                 |                        |  |  |
| <b>Nominal Channel Bandwidth:</b>   | 1 MHz                |                                 |                        |  |  |
| <b>Antenna Type:</b>                | Inverted F antenna   |                                 |                        |  |  |
| <b>Antenna Details:</b>             | Integral Antenna     |                                 |                        |  |  |
| <b>Transmit Frequency Range:</b>    | 2402 MHz to 2480 MHz |                                 |                        |  |  |
| <b>Transmit Channels Tested:</b>    | <b>Channel ID</b>    | <b>Channel Number</b>           | <b>Frequency (MHz)</b> |  |  |
|                                     | Bottom               | 37                              | 2402                   |  |  |
|                                     | Middle               | 17                              | 2440                   |  |  |
|                                     | Top                  | 39                              | 2480                   |  |  |

### **3.5. Description of Available Antenna**

The radio utilizes an Integrated, inverted F antenna with maximum measured gain stated below. The measured conducted peak output power was subtracted from the measured radiated peak EIRP to obtain the antenna gain in dBi.

| <b>Antenna Details</b> | <b>Antenna Type</b> | <b>Frequency (MHz)</b> | <b>Antenna Gain (dBi)</b> |
|------------------------|---------------------|------------------------|---------------------------|
| Integral Antenna       | Inverted F Antenna  | 2402                   | -0.83                     |
|                        |                     | 2440                   | 0.01                      |
|                        |                     | 2480                   | 0.29                      |

### **3.6. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

#### **A. Support Equipment (In-house)**

| <b>Item</b> | <b>Description</b> | <b>Brand Name</b> | <b>Model Name or Number</b> | <b>Serial Number</b> |
|-------------|--------------------|-------------------|-----------------------------|----------------------|
| 1           | -/-                | -/-               | -/-                         | -/-                  |

#### **B. Support Equipment (Manufacturer supplied)**

| <b>Item</b> | <b>Description</b> | <b>Brand Name</b> | <b>Model Name or Number</b> | <b>Serial Number</b> |
|-------------|--------------------|-------------------|-----------------------------|----------------------|
| 1           | -/-                | -/-               | -/-                         | -/-                  |

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

Transmitter / Modulated Carrier Continuous Transmissions Mode Bluetooth Low Energy,  
• BTLE: 1 Mbps | Bottom / Middle / Top Channel | MAX PWR

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

#### **EUT Power Supply:**

- The EUT was powered by internal 3.6V DC Li-Ion Battery.

#### **Test Mode Activation:**

- The EUT was prepared by customer to Transmit continuously on the different channels when powered on. The channels can be switched using the button on the EUT.

#### **Conducted Measurements:**

- All conducted measurements were carried out by using the EUT RF sample with SMA connector. The RF port on the EUT was connected to the spectrum analyser using suitable attenuation and RF cable. The measured values takes into consideration the external attenuation correction factors. The RF cable attenuation maximum 0.9 dB@2.4GHz from the EUT to Analyzer.

#### **Radiated Measurements:**

- All radiated measurements were carried out by using the EUT Radiated sample.
- The EUT with its Integral antenna is positioned on xy, yz, xz planes, and measuring radiated power with the vertical and Horizontal antenna polarisation.
- The EUT and Antenna both were placed at a fixed height of 1.5m from the ground plane, the turn table was rotated 360° in 5° steps and the worst-case emissions at every axis of EUT and Antenna polarisation was measured and recorded.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

## 5.2. Test Results

### 5.2.1. Transmitter Maximum (Peak) Output Power

#### Test Summary:

|                            |                                     |            |               |
|----------------------------|-------------------------------------|------------|---------------|
| Test Engineer:             | Abbas Al-Hussainy                   | Test Date: | 12 March 2024 |
| Test Sample Serial Number: | eM6-0582 (RF Conducted Test Sample) |            |               |
| Test Site Identification   | SR 9                                |            |               |

|                   |  |
|-------------------|--|
| FCC Reference:    | Part 15.247(b)(3)  |
| Test Method Used: | FCC KDB 558074 Section 8.3.1.1 referencing ANSI C63.10 Sections 11.9.1.1 |


#### Environmental Conditions:

|                        |      |
|------------------------|------|
| Temperature (°C):      | 24.2 |
| Relative Humidity (%): | 37.4 |

#### Notes:




1. Final measurements were performed using the below configurations on the bottom, middle and top channels.
2. •BTLE: 1 Mbps | Bottom / Middle / Top Channel | MAX PWR
3. The EUT was transmitting at 100% duty cycle and testing was performed in accordance with ANSI C63.10 Section 11.9.1.1.
4. The RF port on the EUT was connected to the spectrum analyser using suitable attenuation and RF cable. The measured values takes into consideration the external attenuation correction factors. The RF cable attenuation maximum 0.9 dB@2.4GHz from the EUT to Analyzer
5. Therefore, total a reference level offset 0.9 dB was added to each of the at the tested frequencies conducted plots.

#### Test Setup:

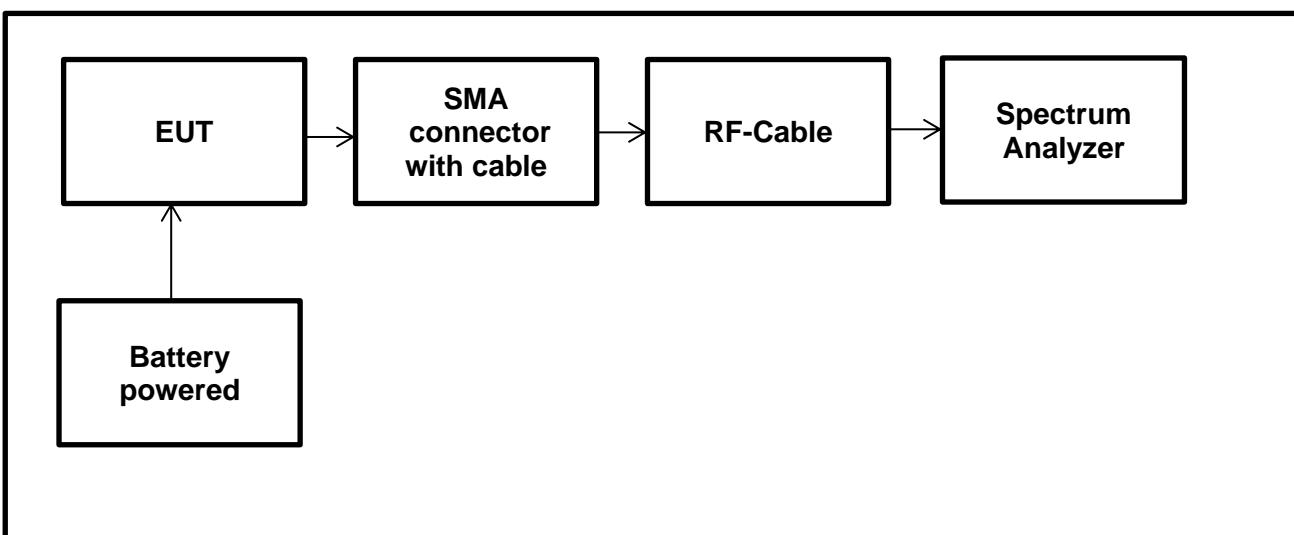

**Transmitter Maximum (Peak) Output Power (continued)****Results :**

| Channel | Conducted Peak Power (dBm) |
|---------|----------------------------|
| Bottom  | -1.69                      |
| Middle  | -1.88                      |
| Top     | -1.93                      |

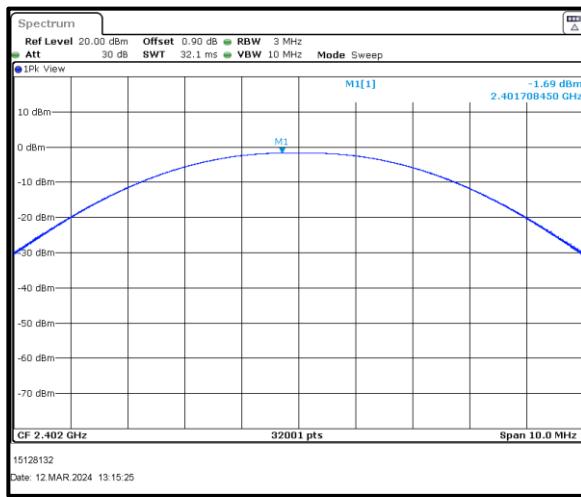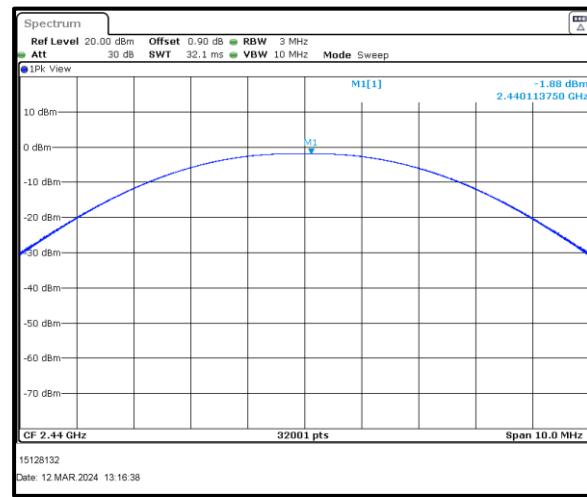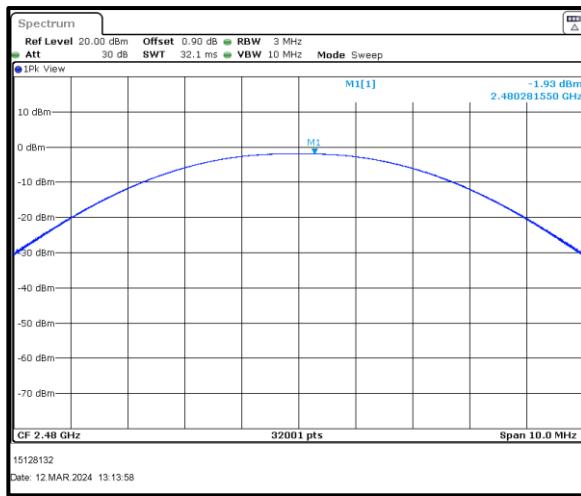**Plots :****Bottom Channel****Middle Channel****Top Channel**

## 5.2.2. Transmitter Radiated Output Power

### Test Summary:

|                            |                                    |            |                 |
|----------------------------|------------------------------------|------------|-----------------|
| Test Engineer:             | Abbas Al-Hussainy                  | Test Date: | 22 October 2024 |
| Test Sample Serial Number: | eM6-0644 (RF Radiated Test Sample) |            |                 |
| Test Site Identification   | SR 1/2                             |            |                 |

|                   |                     |
|-------------------|---------------------|
| FCC Reference:    | Part 15.247(b)(3)   |
| Test Method Used: | ANSI C63.10 Annex G |


### Environmental Conditions:

|                        |      |
|------------------------|------|
| Temperature (°C):      | 22.1 |
| Relative Humidity (%): | 52.3 |

### Notes:

1. The spectrum analyser resolution bandwidth was set to 1 MHz and video bandwidth of 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 10 MHz. A marker was placed at the peak of the signal and the results recorded in the table below.
2. The correction factors (offset) used in the measurement of Radiated output power were calculated by considering the Antenna dBi values.

### Test Setup:

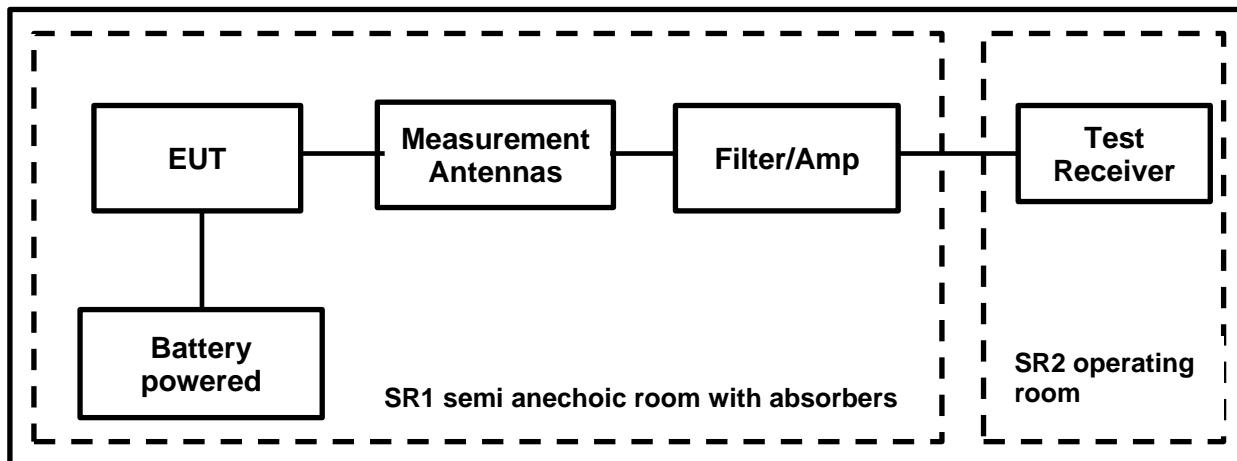

**Transmitter Radiated Output Power (continued)****Results:**

| Frequency (MHz) | Conducted Output Power (dBm) | Max. EIRP (dBm) | Antenna Polarisation | Calculated Gain (dBi) |
|-----------------|------------------------------|-----------------|----------------------|-----------------------|
| Bottom          | -1.69                        | -2.52           | Horizontal           | -0.83                 |
| Middle          | -1.88                        | -1.87           | Horizontal           | 0.01                  |
| Top             | -1.93                        | -1.64           | Horizontal           | 0.29                  |

**Notes:**

1. Antenna Gain in dBi was calculated in accordance with ANSI C63.10 G.3:

$$\text{ERP/EIRP} = P_T + G_T - L_c$$

Rearranged:


$$G_T = \text{ERP/EIRP} - P_T + L_c$$



$L_c$  is ignored since there is no cable connected between transmitter and antenna.

**Plots :****Bottom Channel**

Vertical

Normalized Antenna Gain Plot


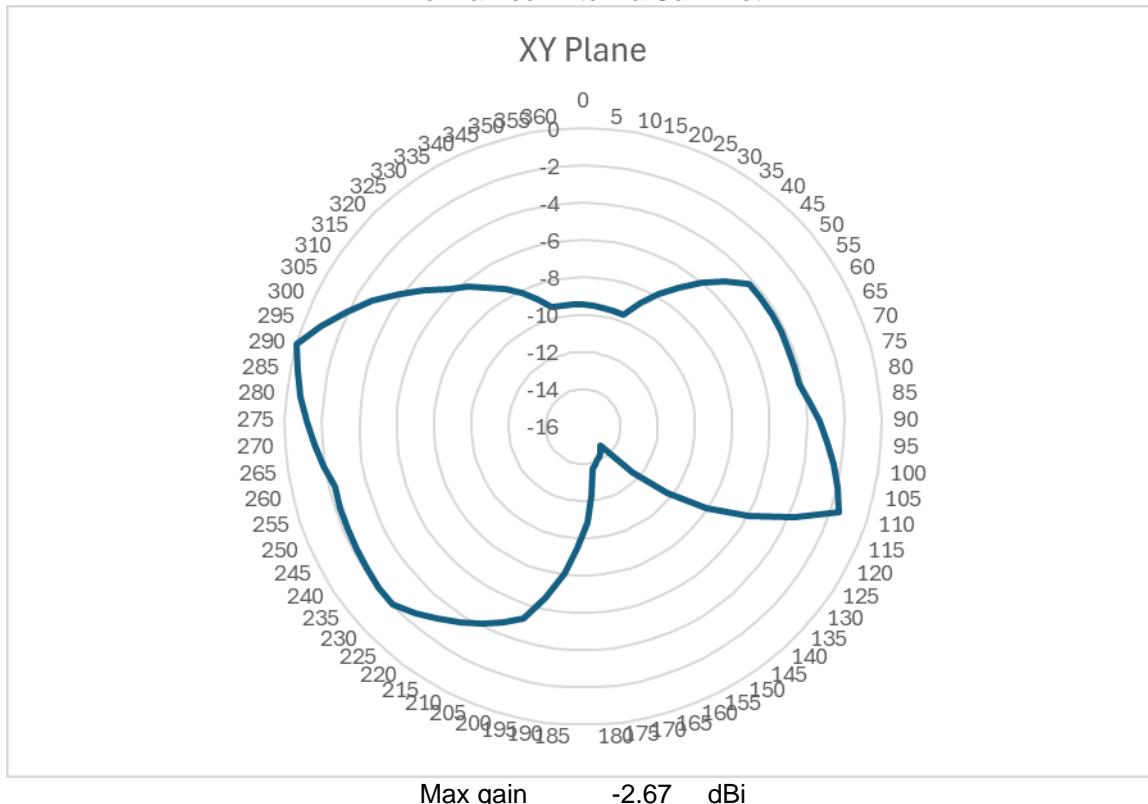


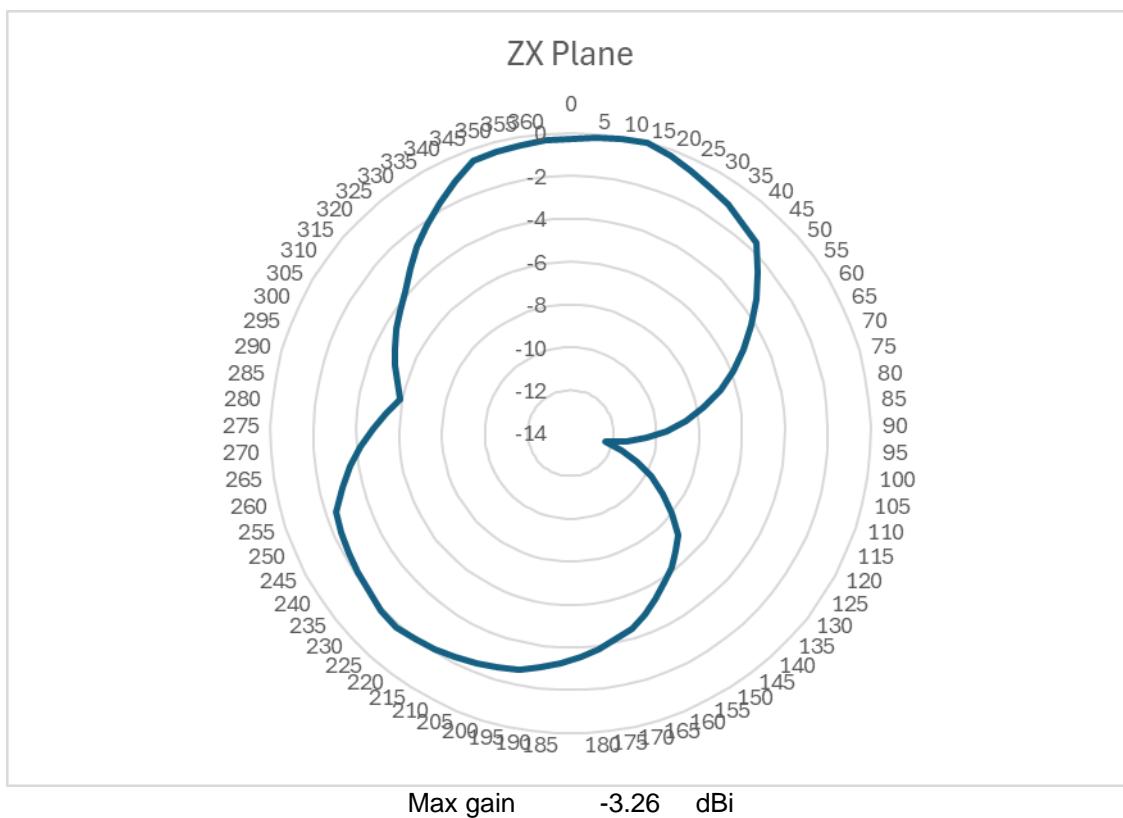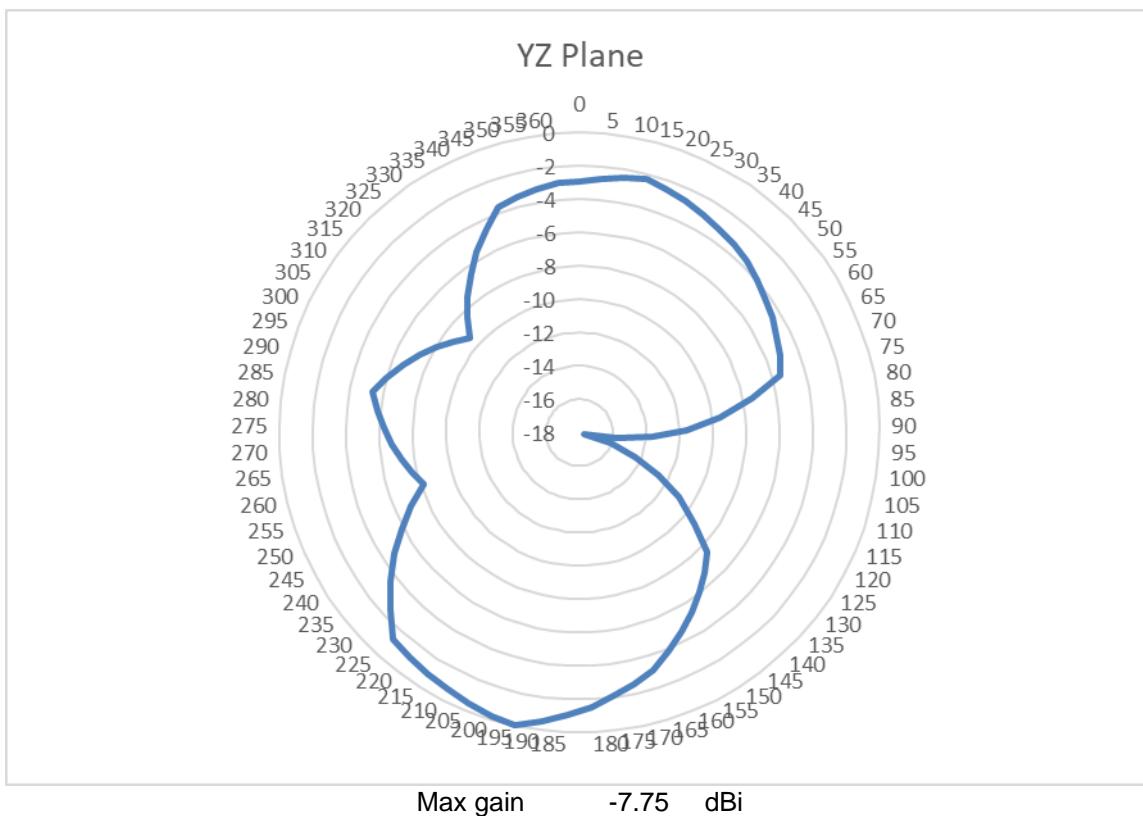


**Bottom Channel**

Horizontal


Normalized Antenna Gain Plot

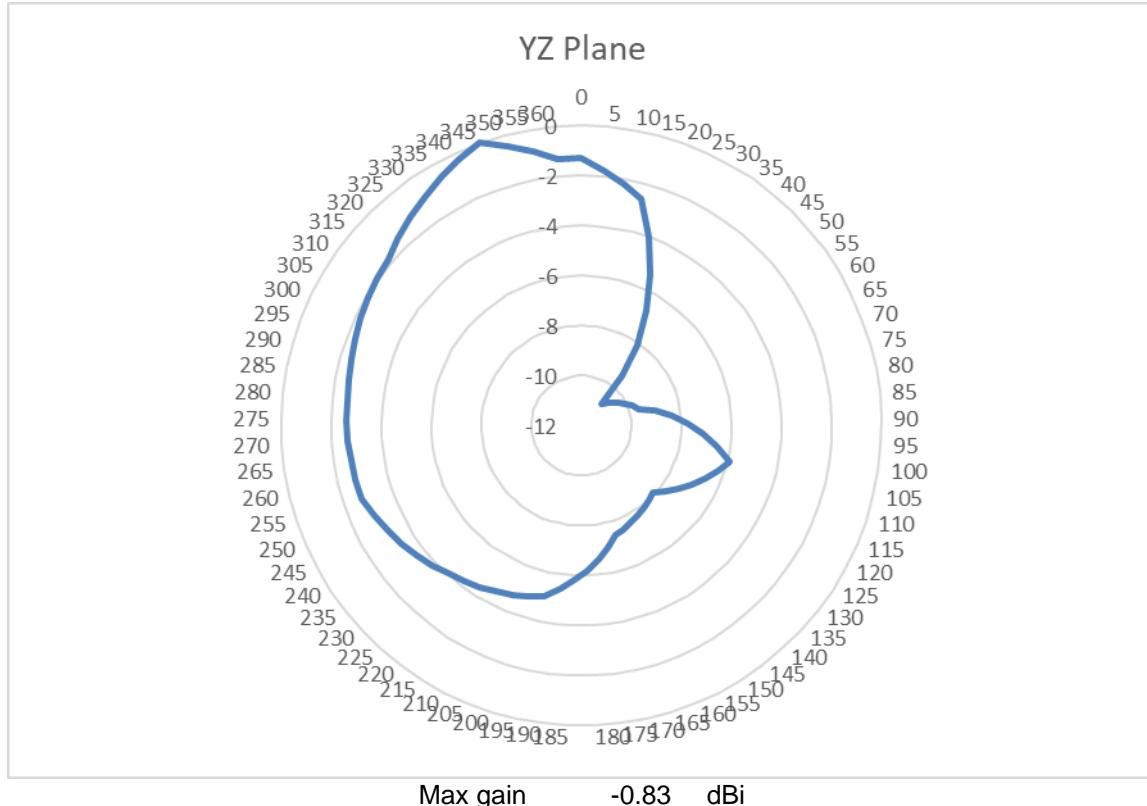
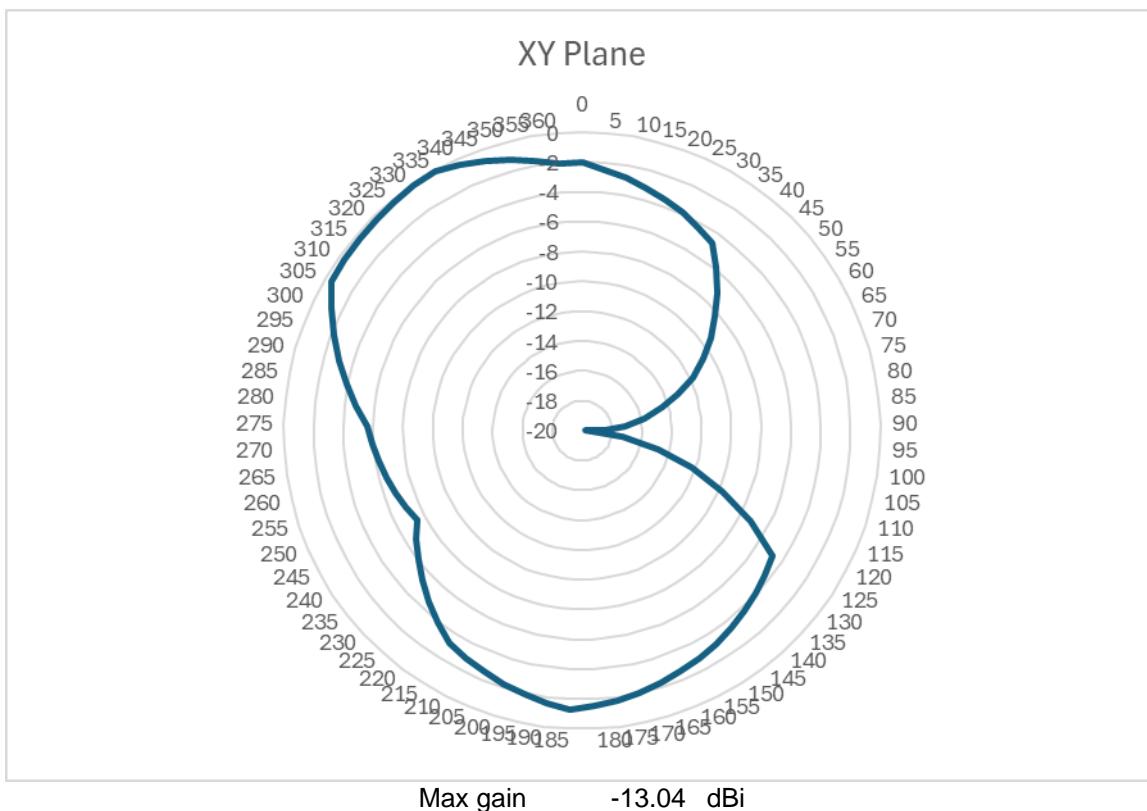


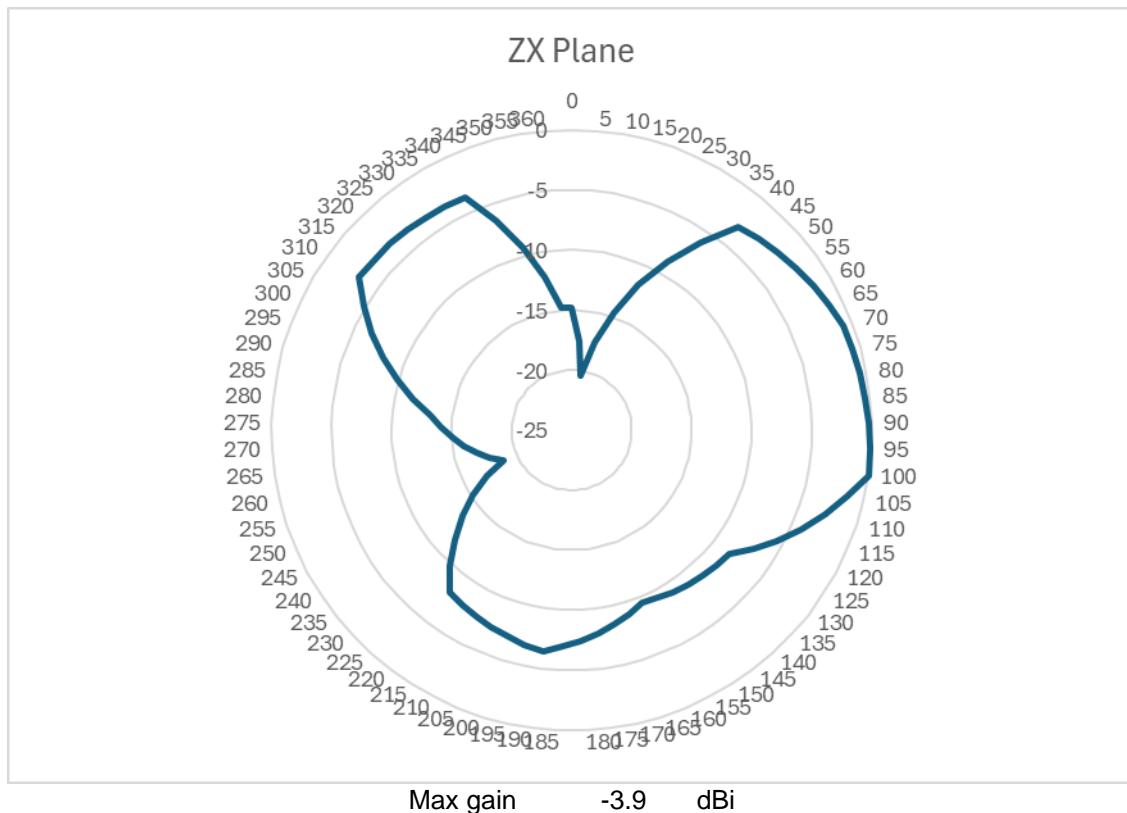

**Middle Channel**  
Vertical

Normalized Antenna Gain Plot


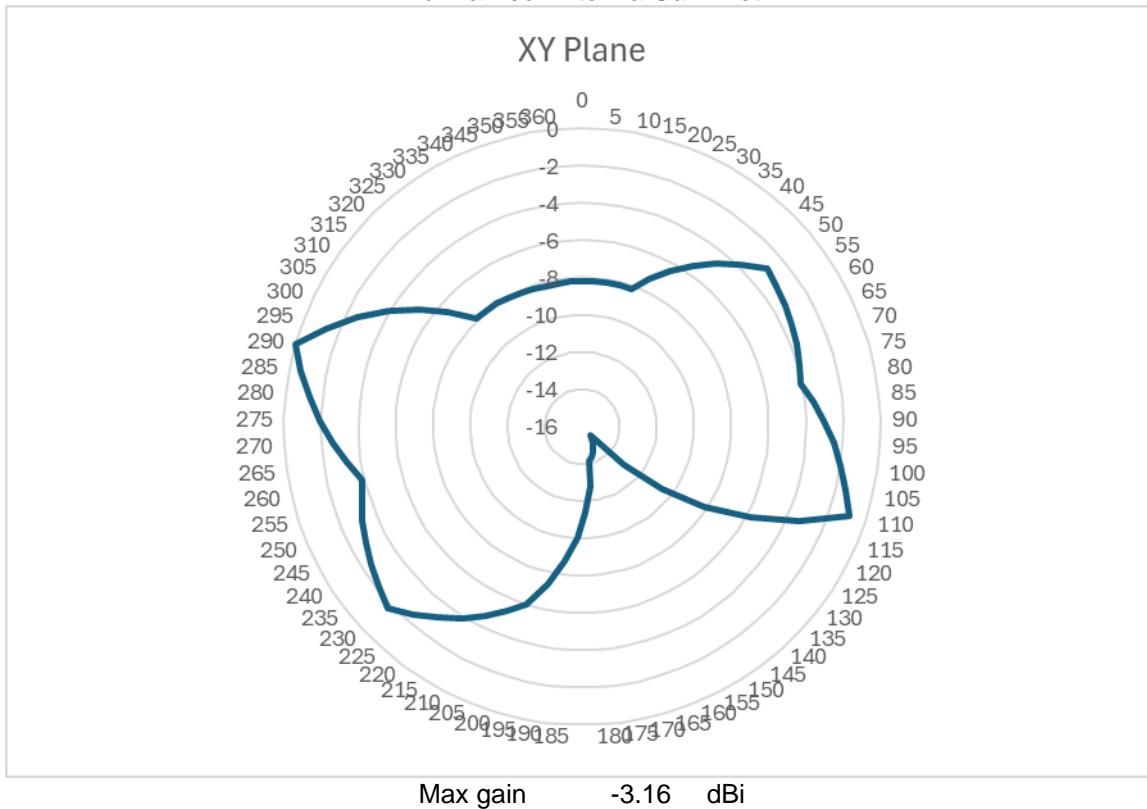


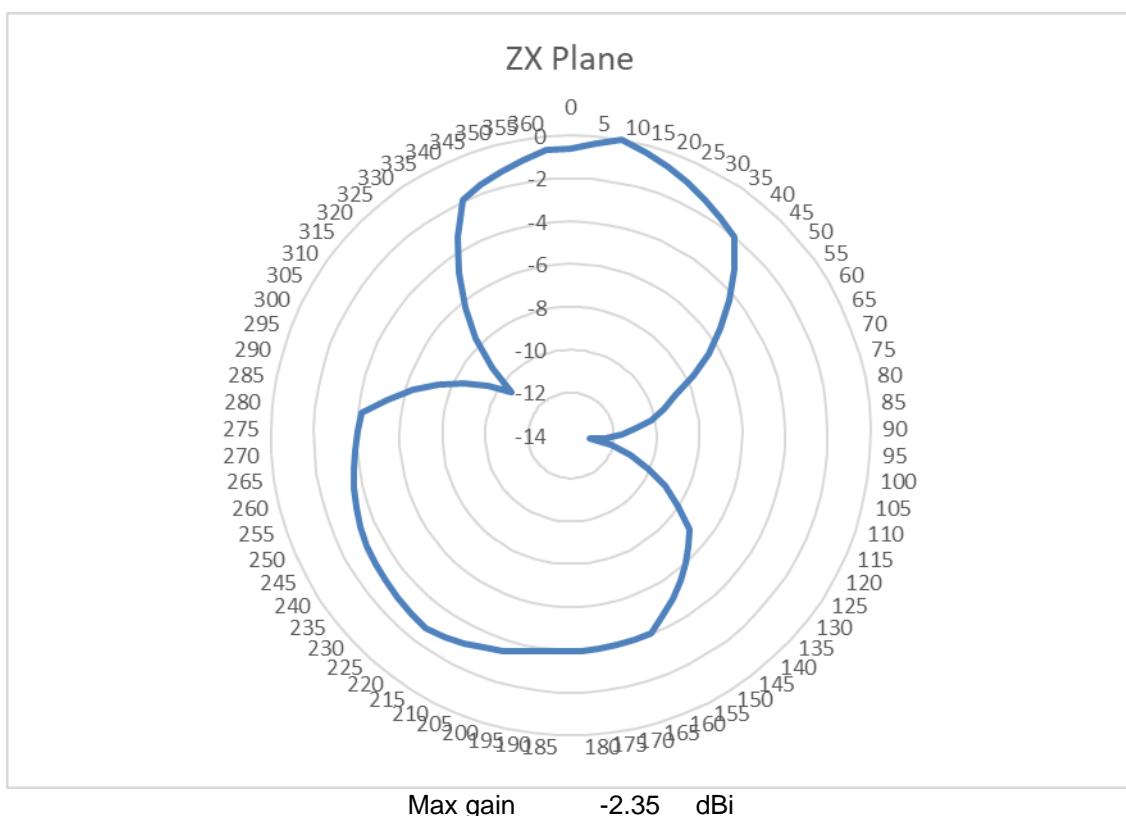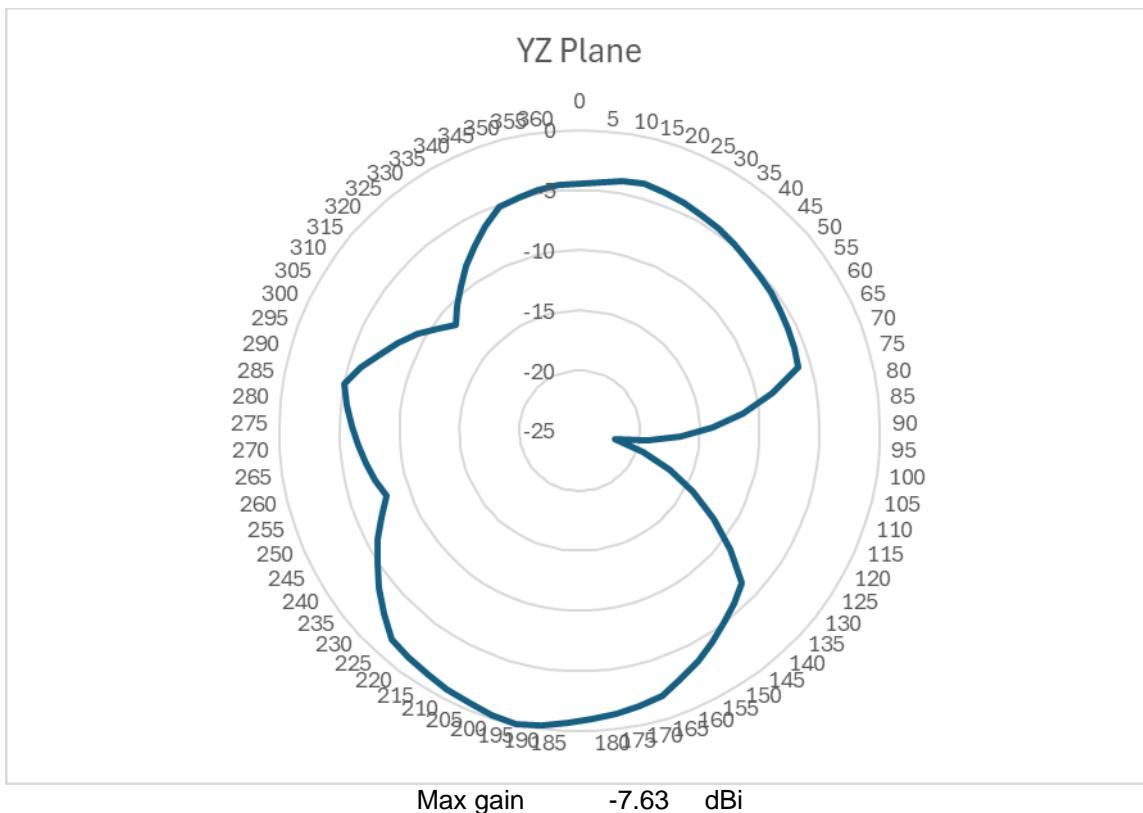


**Middle Channel**

Horizontal


Normalized Antenna Gain Plot

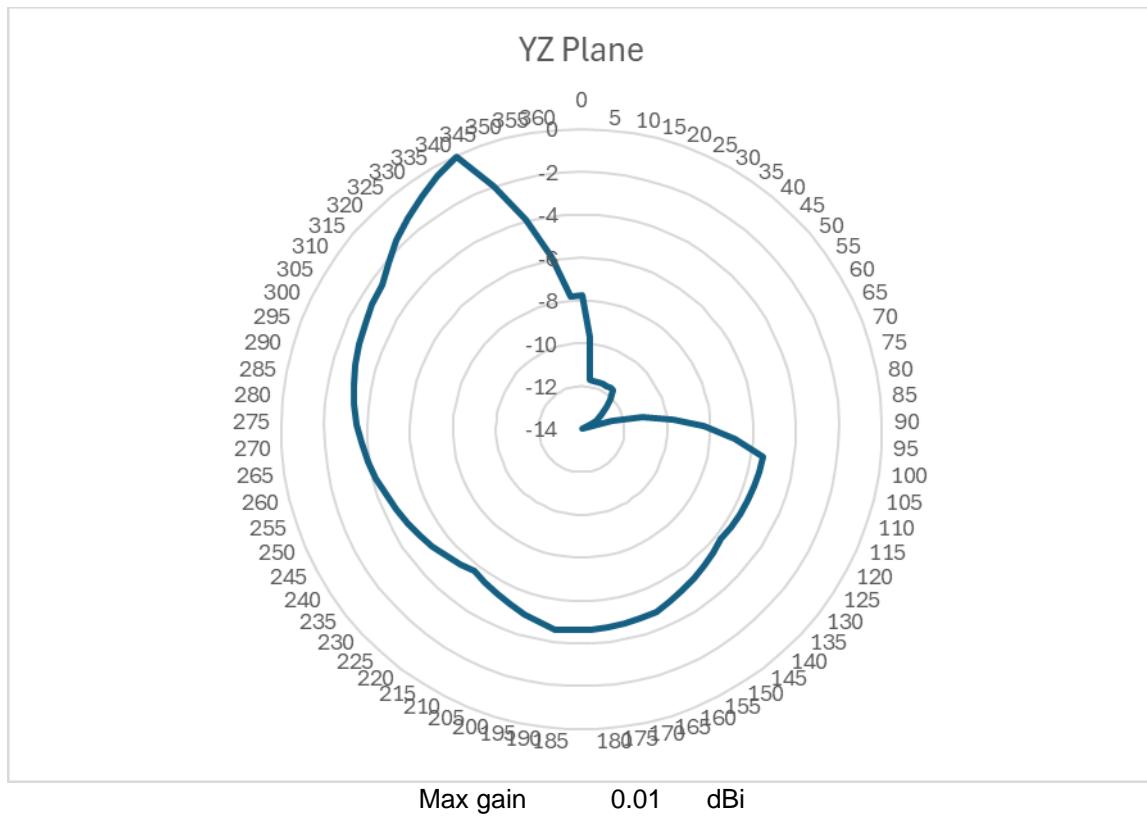
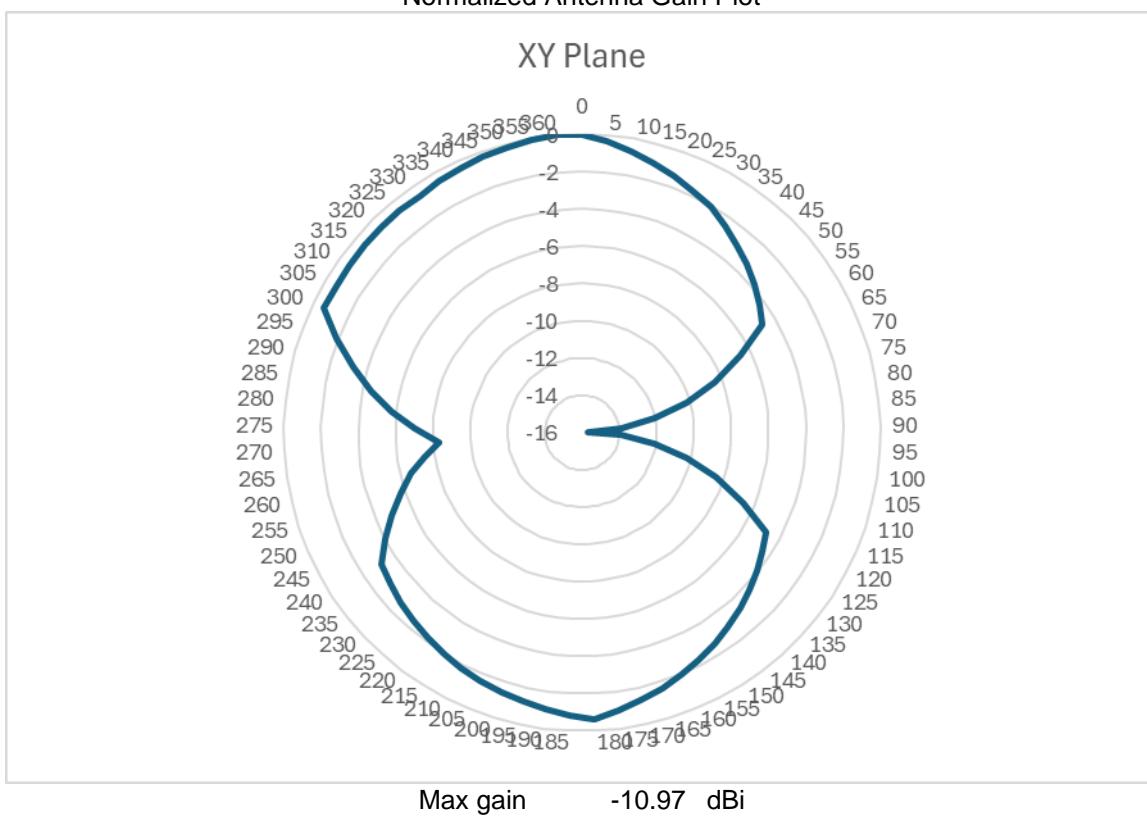


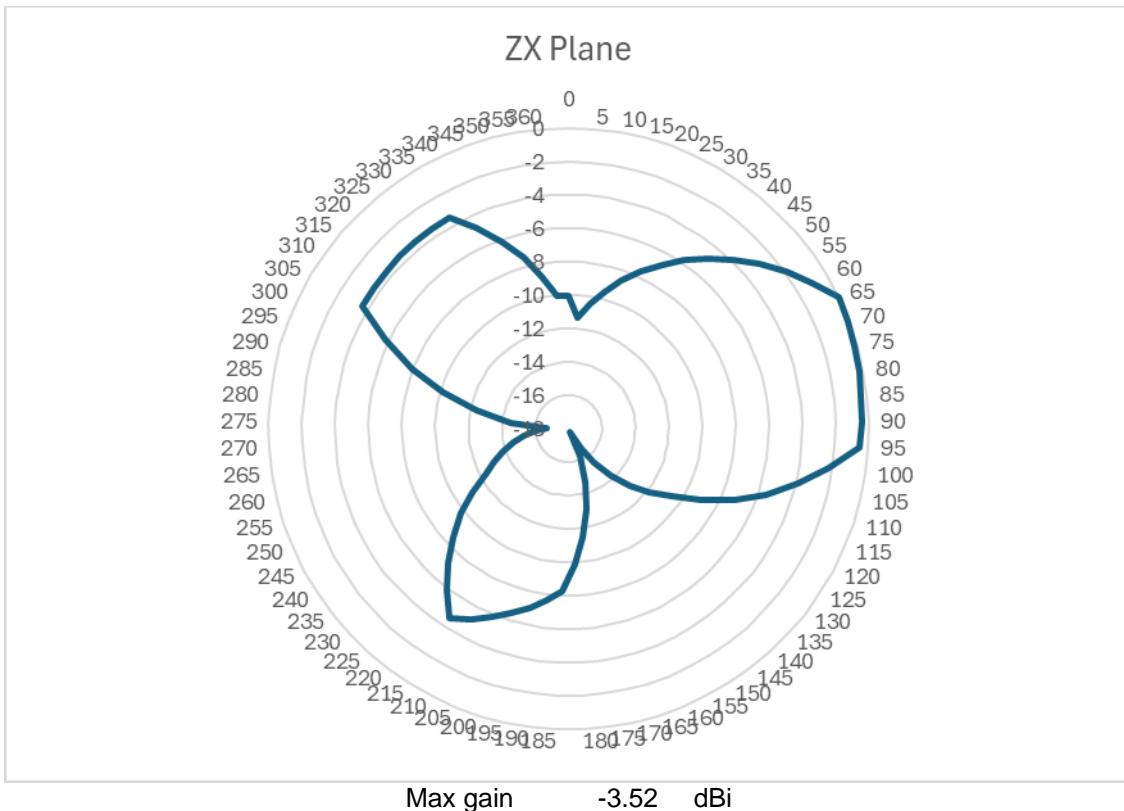

**Top Channel**  
Vertical



Normalized Antenna Gain Plot

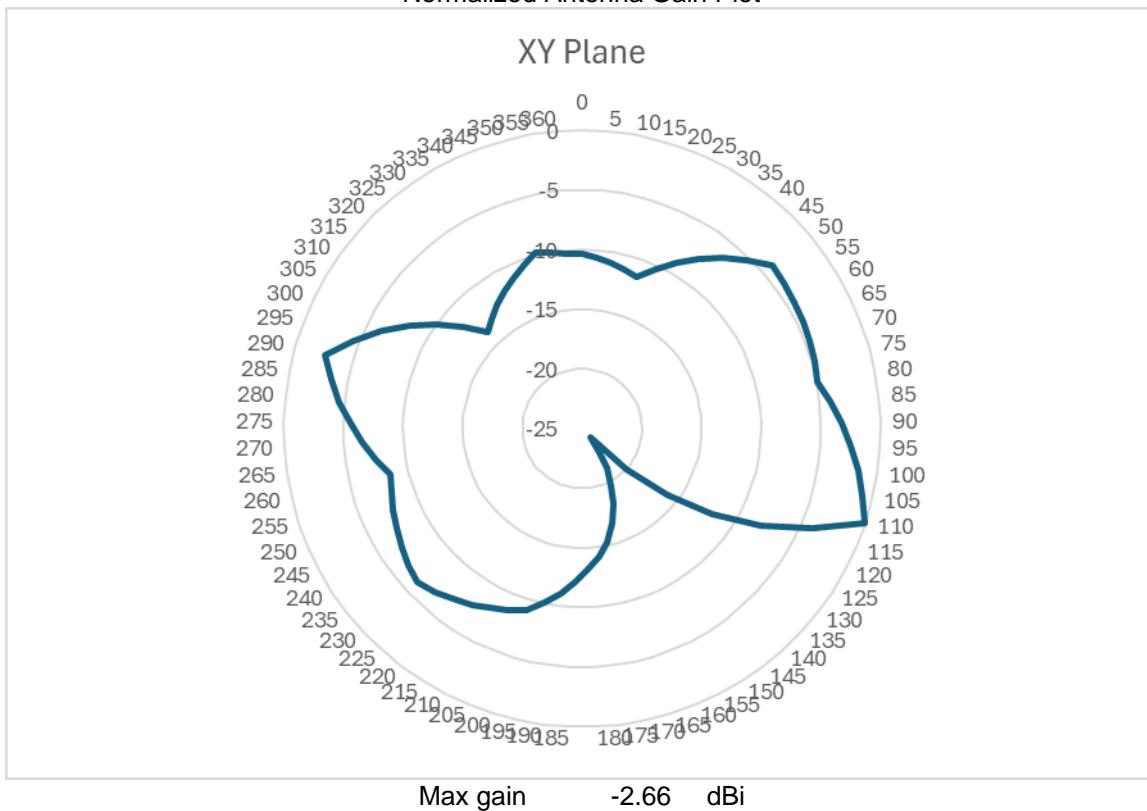


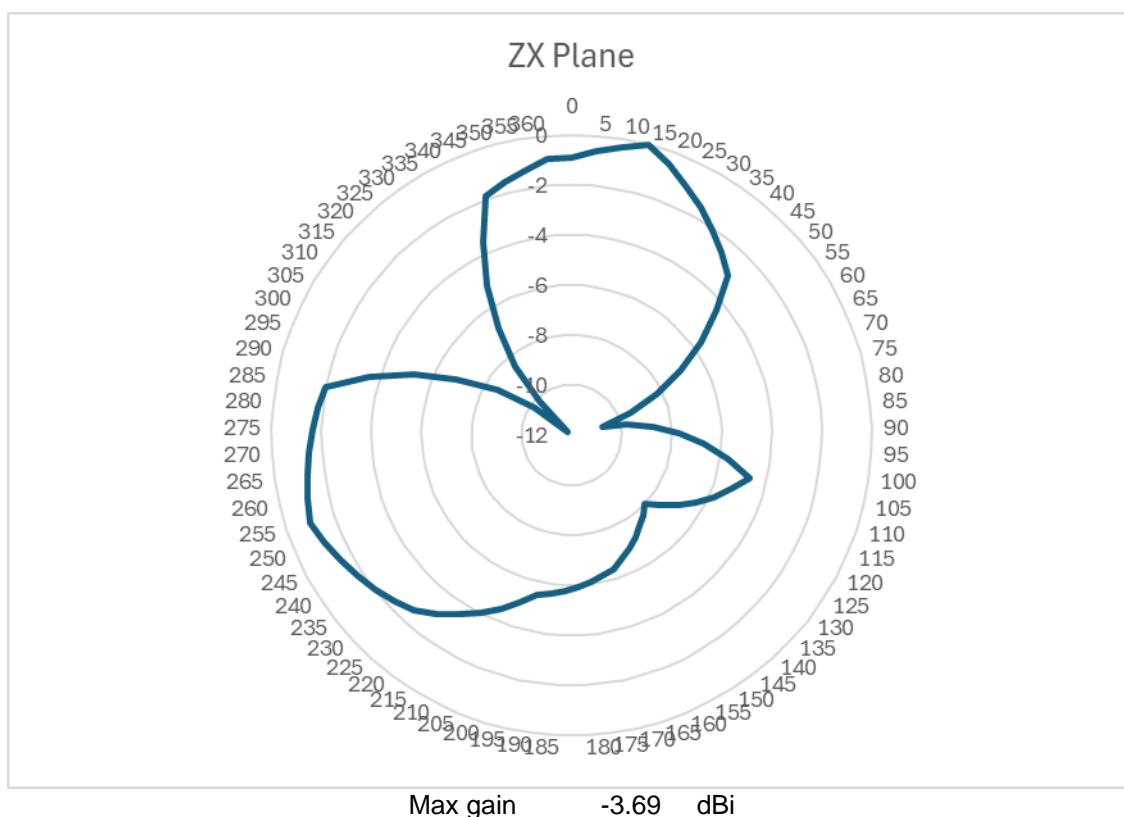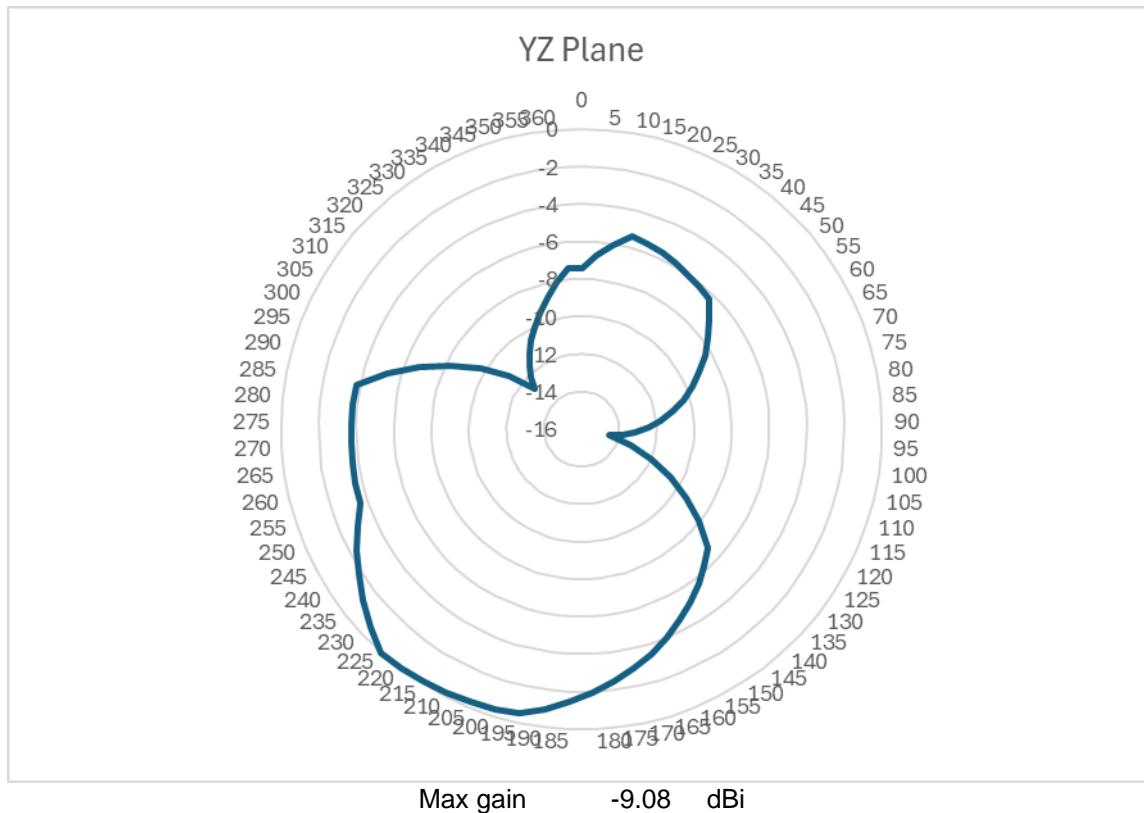

Horizontal

## Normalized Antenna Gain Plot

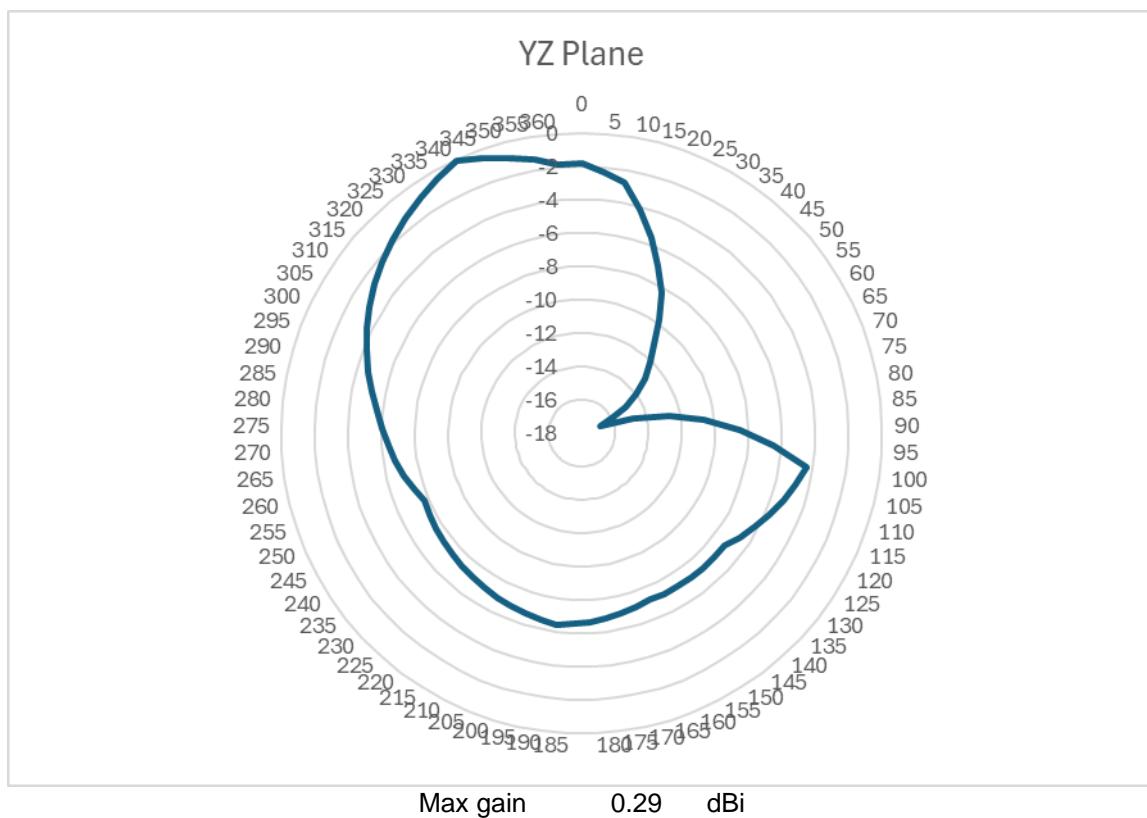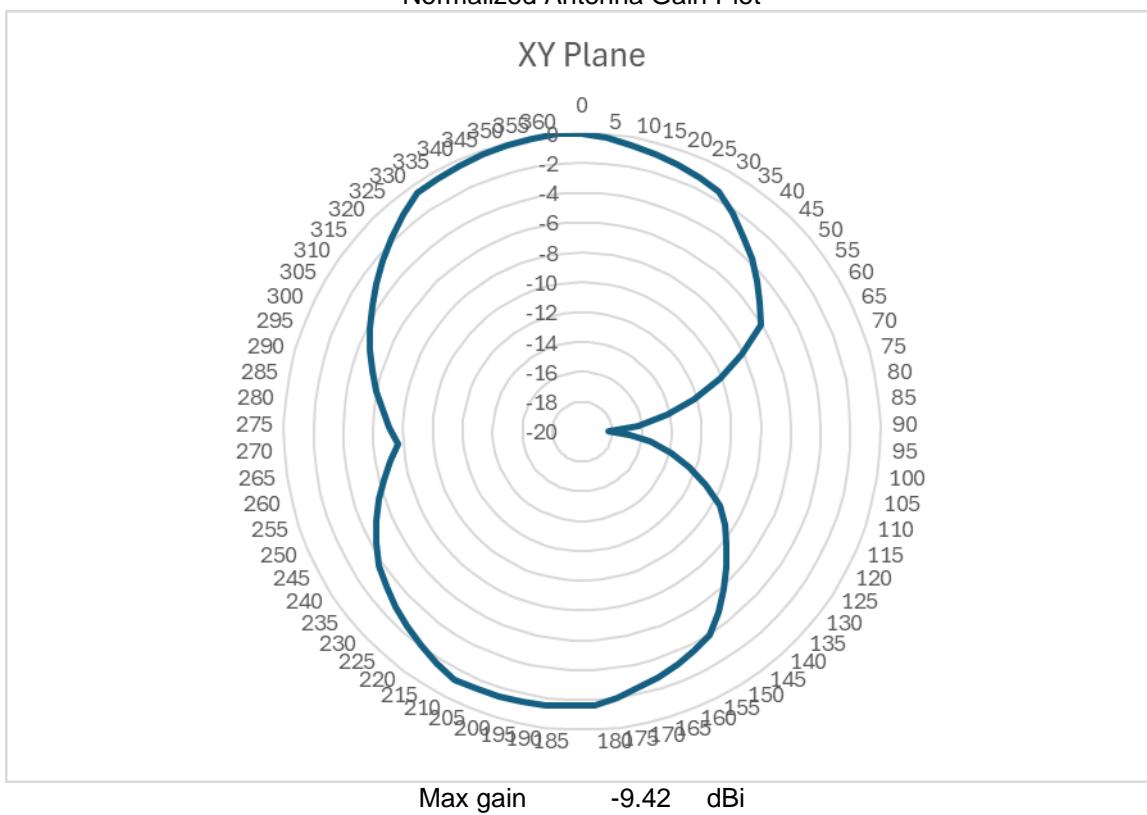

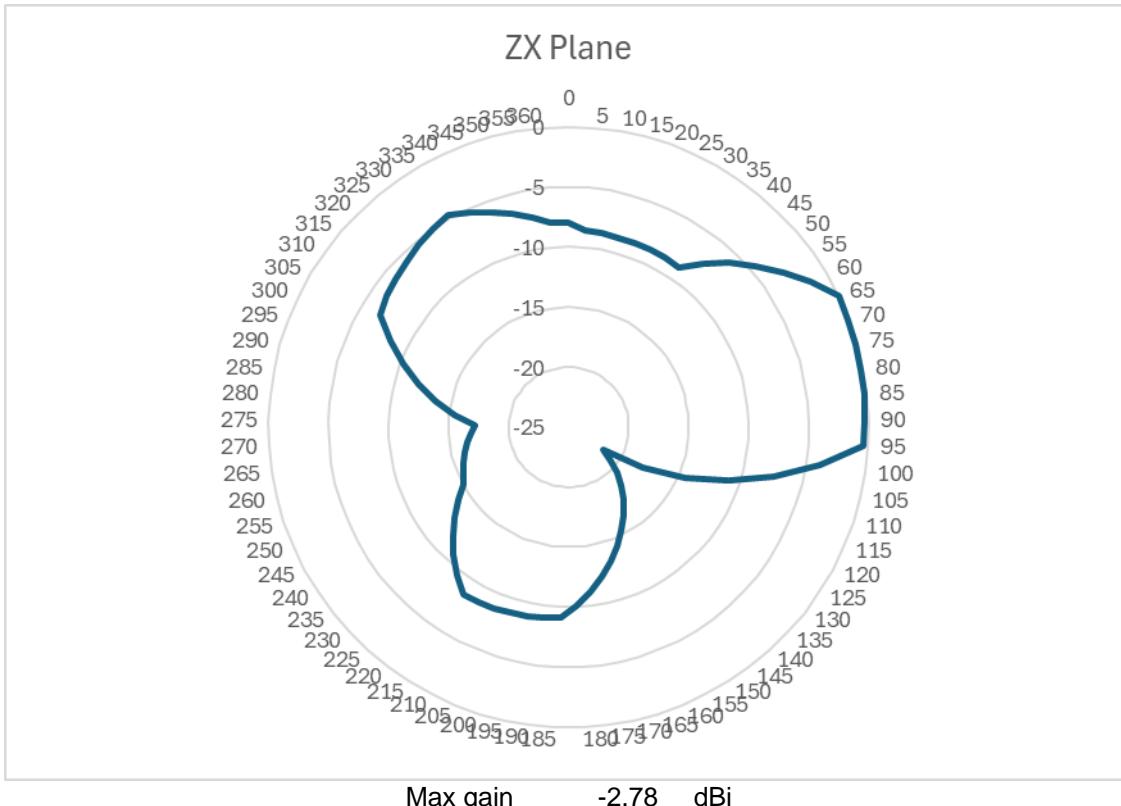

## **6. Measurement Uncertainty**

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

| Measurement Type                    | Confidence Level (%) | Calculated Uncertainty |
|-------------------------------------|----------------------|------------------------|
| Conducted Maximum Peak Output Power | 95%                  | ±0.59 dB               |
| Radiated Spurious Emissions         | 95%                  | ±3.10 dB               |

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## 7. Used equipment

### Test site: SR 1/2

| ID      | Manufacturer                  | Type                            | Model        | Serial            | Calibration Date | Cal. Cycle (months) |
|---------|-------------------------------|---------------------------------|--------------|-------------------|------------------|---------------------|
| 1       | Rohde & Schwarz               | Antenna, Loop                   | HFH2-Z2      | 831247/012        | 18/07/2023       | 36                  |
| 377     | BONN Elektronik               | Amplifier, Low Noise Pre        | BLMA 0118-1A | 025294B           | 18/07/2023       | 18                  |
| 460     | Deisel                        | Turntable                       | DT 4250 S    | n/a               | n/a              | n/a                 |
| 465     | Schwarzbeck                   | Antenna, Trilog Broadband       | VULB 9163    | 01691             | 30/11/2023       | 36                  |
| 496     | Rohde & Schwarz               | Antenna, log. - periodical      | HL050        | 100297            | 22/08/2022       | 36                  |
| 588     | Maturo                        | Controller                      | NCD          | 029/7180311       | n/a              | n/a                 |
| 669     | Rohde & Schwarz               | EMI Test Receiver               | ESW 44       | 103087            | 13/07/2023       | 18                  |
| 694     | Rohde & Schwarz               | Signal Analyzer                 | FSW 50       | 101847            | 09/05/2023       | 12                  |
| 608     | Rohde & Schwarz               | Switch Matrix                   | OSP 120      | 101227            | lab verification | n/a                 |
| 628     | Maturo                        | Antenna mast                    | CAM 4.0-P    | 224/19590716      | n/a              | n/a                 |
| 629     | Maturo                        | Kippeinrichtung                 | KE 2.5-R-M   | MAT002            | n/a              | n/a                 |
| -/-     | Testo                         | Thermo-Hygrometer               | 608-H1       | 01                | lab verification | n/a                 |
| 328     | SPS                           | AC/DC power distribution system | PAS 5000     | A2464 00/2 0200   | lab verification | n/a                 |
| 1603665 | Siemens Matsushita Components | semi-anechoic chamber SR1/ 2    | -/-          | B83117-A1421-T161 | n/a              | n/a                 |
| 681     | Maturo                        | Antenna mast, tilting           | BAM4.5-P     | 402/0718.1        | n/a              | n/a                 |

### Test site: SR 9

| ID      | Manufacturer                  | Type                  | Model              | Serial            | Calibration Date | Cal. Cycle (months) |
|---------|-------------------------------|-----------------------|--------------------|-------------------|------------------|---------------------|
| 637     | Rohde & Schwarz               | Spectrum Analyzer     | FSV40              | 101587            | 14/07/2023       | 18                  |
| -/-     | Huber+Suhner                  | RF Cable -OSP120-DUT1 | ST18/SMAm/S MAm/72 | 605505            | lab verification | n/a                 |
| -/-     | Testo                         | Thermo-Hygrometer     | 608-H1             | 07                | lab verification | n/a                 |
| 1603668 | Siemens Matsushita Components | shielded room         | --                 | B83117-B1422-T161 | n/a              | n/a                 |

## 8. Internal Photos

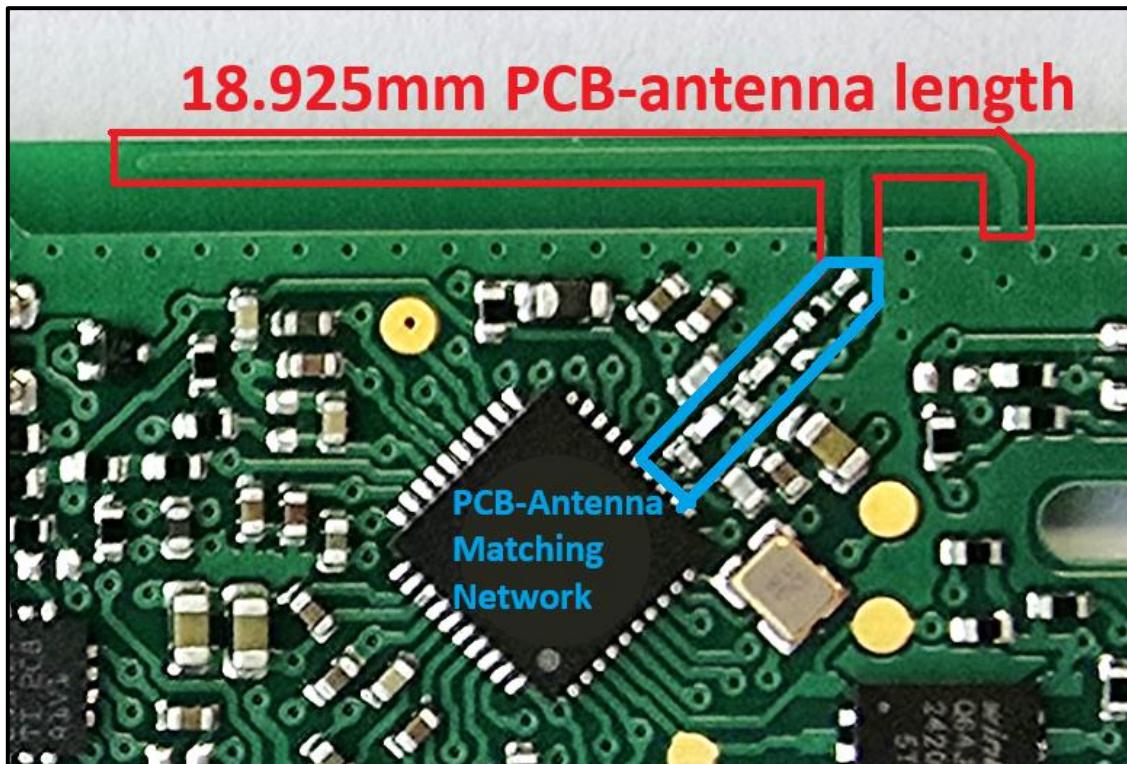


Photo 1

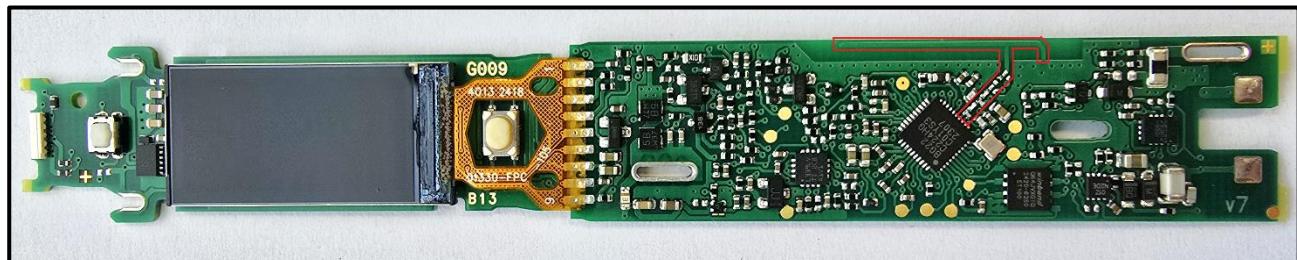


Photo 2

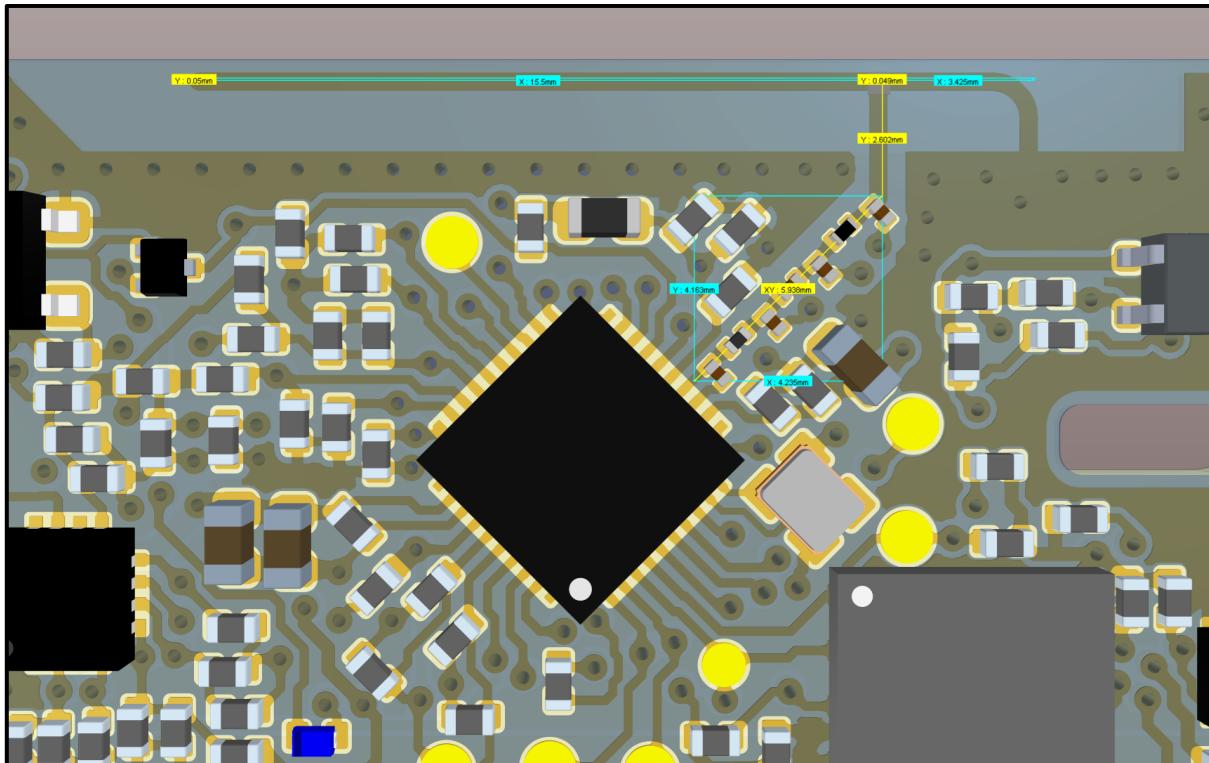


Photo 3

## 9. Report Revision History

| Version Number   | Revision Details |        |                        |
|--|------------------|--------|------------------------|
|  | Page No(s)       | Clause | Details                |
| 1.0  | -                | -      | Initial Version        |
| <b>Test Report Version 1.1 supersedes Version 1.0 with immediate effect</b>  |                  |        |                        |
| Test Report No. UL-RPT-RP-15478060-116A Version 1.1, Issue Date 14 November 2024 replaces<br>Test Report No. UL-RPT-RP-15478060-116A Version 1.0, Issue Date 11 November 2024, which is no longer valid. |                  |        |                        |
| 1.1  | Page No(s)       | Clause | Details                |
|  | 25               | 7      | Equipment list updated |

--- END OF REPORT ---