

RF TEST REPORT



Report No.: 17070225-FCC-R5

Supersede Report No.: N/A

Applicant	Shenzhen Konka Telecommunications Technology Co., Ltd.	
Product Name	Smart Phone	
Model No.	ADR9	
Serial No.	N/A	
Test Standard	FCC Part 27: 2016; ANSI/TIA-603-D: 2010	
Test Date	March 29 to April 16, 2017	
Issue Date	April 17, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Loren Luo</i>	<i>David Huang</i>	
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070225-FCC-R5
Page	3 of 72

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	10
6.1 RF EXPOSURE (SAR)	10
6.2 RF OUTPUT POWER.....	11
6.3 PEAK-AVERAGE RATIO.....	24
6.4 OCCUPIED BANDWIDTH	27
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	36
6.6 SPURIOUS RADIATED EMISSIONS.....	38
6.7 BAND EDGE	41
6.8 BAND EDGE 27.53(M)	49
6.9 FREQUENCY STABILITY.....	50
ANNEX A. TEST INSTRUMENT.....	53
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	55
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	68
ANNEX C.II. EUT OPERATING CONKITIONS	70
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	71
ANNEX E. DECLARATION OF SIMILARITY	72

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070225-FCC-R5	NONE	Original	April 17, 2017

2. Customer information

Applicant Name	Shenzhen Konka Telecommunications Technology Co., Ltd.
Applicant Add	No.9008 Shennan Road,Overseas Chinese Town, ShenZhen, Guangdong,China
Manufacturer	Shenzhen Konka Telecommunications Technology Co., Ltd.
Manufacturer Add	No.9008 Shennan Road,Overseas Chinese Town, ShenZhen, Guangdong,China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Smart Phone
Main Model:	ADR9
Serial Model:	N/A
Date EUT received:	March 28, 2017
Test Date(s):	March 29 to April 16, 2017
Equipment Category :	PCE
Antenna Gain:	GSM850: -0.43dBi PCS1900: 0.79dBi UMTS-FDD Band V: -0.43dBi UMTS-FDD Band II: 0.79dBi LTE Band IV: 0.89 dBi Bluetooth/BLE/WiFi: -0.56dBi GPS: 0.79dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK LTE Band: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz LTE Band IV TX: 1710.7 ~ 1754.3 MHz; RX : 2110.7 ~ 2154.3 MHz WIFI: 802.11b/g/n(20M): 2412-2462 MHz

WIFI: 802.11n(40M): 2422-2452 MHz
 Bluetooth& BLE: 2402-2480 MHz
 GPS: 1575.42 MHz

Number of Channels:

GSM 850: 124CH
 PCS1900: 299CH
 UMTS-FDD Band V: 102CH
 UMTS-FDD Band II: 277CH
 WIFI :802.11b/g/n(20M): 11CH
 WIFI :802.11n(40M): 7CH
 Bluetooth: 79CH
 BLE: 40CH
 GPS:1CH

Maximum Conducted
 AV Power to Antenna:

LTE Band IV: 23.91 dBm

ERP/EIRP:

LTE Band IV: 24.8 dBm / EIRP

Port:

USB Port, Earphone Port

Input Power:

Adapter:
 Model: HJ-050100-AR
 Input: AC100-240V~50/60Hz,0.15A
 Output: DC 5.0V,1.0A
 Battery:
 Model: KLB250P373
 Spec : 3.8V,2500mAh,9.5Wh
 Maximum chargeable voltage: 4.35V

Trade Name :

ADMIRAL

GPRS/EGPRS Multi-slot class

8/10/12

FCC ID:

UT3ADR9

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046;§ 27.50(c.10); § 27.50(d.4)	RF Output Power	Compliance
§ 27.50(d)	Peak-Average Ratio	Compliance
§ 2.1047	Modulation Characteristics	N/A
§ 2.1049; § 27.53(a.5)	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 27.53(h)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053;§ 27.53(h)	Field Strength of Spurious Radiation	Compliance
§ 27.53(h)	Out of band emission, Band Edge	Compliance
§ 27.53(m)	Band Edge 27.53(m)	N/A
§ 2.1055; § 27.5(h); § 27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Parameter	Uncertainty
AC Power Line Conducted Emissions (150kHz~30MHz)	$\pm 3.71\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.12\text{dB}$
Radiated Emission(1GHz~6GHz)	$\pm 5.34\text{dB}$

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass

The EUT is a portable device, thus requires SAR evaluation;


Please refer to RF Exposure Evaluation Report: 17070225-FCC-H.

6.2 RF Output Power

Temperature	25 °C
Relative Humidity	58%
Atmospheric Pressure	1016mbar
Test date :	April 16, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§27.50 (c)	c)	EIRP: 30dBm	<input checked="" type="checkbox"/>

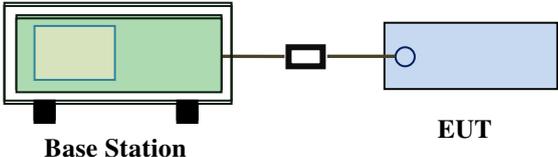Test Setup	 <p style="text-align: center;"> Base Station EUT </p>
------------	--

Test Procedure	<p>For Conducted Power:</p> <ul style="list-style-type: none"> - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. <p>For ERP/EIRP:</p> <ul style="list-style-type: none"> - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental frequency was investigated. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-
----------------	--

	<p>radiating cable. The absolute levels of the spurious emissions were measured by the substitution.</p> <ul style="list-style-type: none"> - Spurious emissions in dB = 10 log (TX power in Watts/0.001) – the absolute level - Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Conducted Power

LTE Band IV:

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	Tune up Power tolerant
20MHz	20050	1720.0	QPSK	1	0	0	23.9	23±1
				1	49	0	23.91	23±1
				1	99	0	23.9	23±1
				50	0	1	22.85	23±1
				50	24	1	22.86	23±1
				50	49	1	22.85	23±1
				100	0	1	22.8	23±1
			16QAM	1	0	1	22.82	22±1
				1	49	1	22.8	22±1
				1	99	1	22.82	22±1
				50	0	2	22.85	22±1
				50	24	2	22.85	22±1
				50	49	2	22.86	22±1
				100	0	2	21.84	22±1
	20175	1732.5	QPSK	1	0	0	23.64	23±1
				1	49	0	23.63	23±1
				1	99	0	23.65	23±1
				50	0	1	22.78	23±1
				50	24	1	22.76	23±1
				50	49	1	22.74	23±1
				100	0	1	22.73	23±1
			16QAM	1	0	1	22.91	22±1
				1	49	1	22.93	22±1
				1	99	1	22.9	22±1
				50	0	2	22.78	22±1
				50	24	2	22.78	22±1
				50	49	2	22.78	22±1
				100	0	2	21.76	22±1
20300	1745.0	QPSK	1	0	0	23.67	23±1	
			1	49	0	23.65	23±1	
			1	99	0	23.68	23±1	
			50	0	1	22.68	23±1	
			50	24	1	22.68	23±1	

			16QAM	50	49	1	22.71	23±1
				100	0	1	22.69	23±1
				1	0	1	23.1	23±1
				1	49	1	23.13	23±1
				1	99	1	23.14	23±1
				50	0	2	22.68	23±1
				50	24	2	22.67	23±1
				50	49	2	22.66	23±1
				100	0	2	21.74	23±1

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	Tune up Power tolerant
15MHz	20025	1717.5	QPSK	1	0	0	23.86	23±1
				1	37	0	23.84	23±1
				1	74	0	23.81	23±1
				36	0	1	22.87	23±1
				36	16	1	22.88	23±1
				36	35	1	22.85	23±1
				75	0	1	22.81	23±1
			16QAM	1	0	1	22.67	22±1
				1	37	1	22.67	22±1
				1	74	1	22.66	22±1
				36	0	2	22.87	22±1
				36	16	2	22.86	22±1
				36	35	2	22.83	22±1
				75	0	2	21.85	22±1
	20175	1732.5	QPSK	1	0	0	23.64	23±1
				1	37	0	23.66	23±1
				1	74	0	23.67	23±1
				36	0	1	22.76	23±1
				36	16	1	22.75	23±1
				36	35	1	22.75	23±1
75				0	1	22.78	23±1	
16QAM			1	0	1	22.91	22±1	
			1	37	1	22.9	22±1	
			1	74	1	22.89	22±1	
			36	0	2	22.76	22±1	
			36	16	2	22.74	22±1	

	20325	1747.5	QPSK	36	35	2	22.72	22±1
				75	0	2	21.76	22±1
				1	0	0	23.54	23±1
				1	37	0	23.53	23±1
				1	74	0	23.56	23±1
				36	0	1	22.74	23±1
				36	16	1	22.76	23±1
				36	35	1	22.77	23±1
	75	0	1	22.76	23±1			
	16QAM	1	0	1	23.14	23±1		
		1	37	1	23.13	23±1		
		1	74	1	23.13	23±1		
		36	0	2	22.74	23±1		
		36	16	2	22.71	23±1		
		36	35	2	22.7	23±1		
		75	0	2	21.8	23±1		

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	Tune up Power tolerant
10MHz	20000	1715.0	QPSK	1	0	0	23.81	23±1
				1	24	0	23.83	23±1
				1	49	0	23.86	23±1
				25	0	1	22.78	23±1
				25	12	1	22.8	23±1
				25	24	1	22.77	23±1
				50	0	1	22.78	23±1
			16QAM	1	0	1	22.65	22±1
				1	24	1	22.67	22±1
				1	49	1	22.69	22±1
				25	0	2	22.78	22±1
				25	12	2	22.77	22±1
				25	24	2	22.8	22±1
				50	0	2	21.82	22±1
	20175	1732.5	QPSK	1	0	0	23.73	23±1
				1	24	0	23.74	23±1
				1	49	0	23.77	23±1
				25	0	1	22.7	23±1
25				12	1	22.7	23±1	

			16QAM	25	24	1	22.72	23±1	
				50	0	1	22.69	23±1	
				1	0	1	22.69	22±1	
				1	24	1	22.69	22±1	
				1	49	1	22.69	22±1	
				25	0	2	22.7	22±1	
				25	12	2	22.72	22±1	
				25	24	2	22.75	22±1	
				50	0	2	21.75	22±1	
				20350	1750.0	QPSK	1	0	0
	1	24	0				23.56	23±1	
	1	49	0				23.54	23±1	
	25	0	1				22.66	23±1	
	25	12	1				22.69	23±1	
	25	24	1				22.72	23±1	
	50	0	1				22.7	23±1	
	16QAM	1	0				1	23.14	23±1
		1	24				1	23.16	23±1
		1	49			1	23.15	23±1	
		25	0			2	22.66	23±1	
		25	12			2	22.69	23±1	
		25	24			2	22.7	23±1	
		50	0			2	21.75	23±1	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	Tune up Power tolerant
5MHz	20000	1715.0	QPSK	1	0	0	23.68	23±1
				1	12	0	23.66	23±1
				1	24	0	23.64	23±1
				12	0	1	22.7	23±1
				12	6	1	22.72	23±1
				12	11	1	22.75	23±1
				25	0	1	22.74	23±1
			16QAM	1	0	1	22.56	23±1
				1	12	1	22.57	23±1
				1	24	1	22.57	23±1
				12	0	2	21.71	23±1
				12	6	2	21.74	23±1
				12	11	2	21.76	23±1
				25	0	2	21.74	23±1
	20175	1732.5	QPSK	1	0	0	23.63	23±1
				1	12	0	23.64	23±1
				1	24	0	23.65	23±1
				12	0	1	22.58	23±1
				12	6	1	22.6	23±1
				12	11	1	22.59	23±1
				25	0	1	22.67	23±1
			16QAM	1	0	1	22.61	22±1
				1	12	1	22.58	22±1
				1	24	1	22.59	22±1
				12	0	2	21.49	22±1
				12	6	2	21.5	22±1
				12	11	2	21.53	22±1
				25	0	2	21.72	22±1
20350	1750.0	QPSK	1	0	0	23.55	23±1	
			1	12	0	23.54	23±1	
			1	24	0	23.53	23±1	
			12	0	1	22.69	23±1	
			12	6	1	22.69	23±1	
			12	11	1	22.67	23±1	
			25	0	1	22.73	23±1	

			16QAM	1	0	1	22.97	22±1
				1	12	1	22.96	22±1
				1	24	1	22.93	22±1
				12	0	2	21.71	22±1
				12	6	2	21.69	22±1
				12	11	2	21.7	22±1
				25	0	2	21.84	22±1

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	Tune up Power tolerant
3MHz	19965	1711.5	QPSK	1	0	0	23.86	23±1
				1	7	0	23.88	23±1
				1	14	0	23.89	23±1
				8	0	1	22.8	23±1
				8	4	1	22.78	23±1
				8	7	1	22.76	23±1
				15	0	1	22.73	23±1
			16QAM	1	0	1	22.81	22±1
				1	7	1	22.8	22±1
				1	14	1	22.83	22±1
				8	0	2	22.8	22±1
				8	4	2	22.8	22±1
				8	7	2	22.8	22±1
				15	0	2	21.78	22±1
	20175	1732.5	QPSK	1	0	0	23.63	23±1
				1	7	0	23.65	23±1
				1	14	0	23.64	23±1
				8	0	1	22.75	23±1
				8	4	1	22.72	23±1
				8	7	1	22.69	23±1
				15	0	1	22.68	23±1
			16QAM	1	0	1	22.95	22±1
				1	7	1	22.95	22±1
				1	14	1	22.94	22±1
8				0	2	22.75	22±1	
8				4	2	22.77	22±1	

	20385	1753.5	QPSK	8	7	2	22.78	22±1
				15	0	2	21.72	22±1
				1	0	0	23.77	23±1
				1	7	0	23.79	23±1
				1	14	0	23.78	23±1
				8	0	1	22.78	23±1
				8	4	1	22.78	23±1
				8	7	1	22.77	23±1
				15	0	1	22.72	23±1
			16QAM	1	0	1	22.72	22±1
				1	7	1	22.74	22±1
				1	14	1	22.71	22±1
				8	0	2	22.78	22±1
				8	4	2	22.8	22±1
				8	7	2	22.78	22±1
				15	0	2	21.88	22±1

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	Tune up Power tolerant		
1.4MHz	19957	1710.7	QPSK	1	0	0	23.69	23±1		
				1	2	0	23.69	23±1		
				1	5	0	23.7	23±1		
				3	0	0	23.83	23±1		
				3	1	0	23.83	23±1		
				3	2	0	23.8	23±1		
				6	0	1	22.71	23±1		
			16QAM	1	0	1	22.56	23±1		
				1	2	1	22.57	23±1		
				1	5	1	22.6	23±1		
				3	0	1	23.83	23±1		
				3	1	1	23.8	23±1		
				3	2	1	23.78	23±1		
				6	0	2	21.72	23±1		
			20175	1732.5	QPSK	1	0	0	23.64	23±1
						1	2	0	23.62	23±1
1	5	0				23.65	23±1			

				3	0	0	23.66	23±1
				3	1	0	23.68	23±1
				3	2	0	23.68	23±1
				6	0	1	22.59	23±1
			16QAM	1	0	1	22.59	22±1
				1	2	1	22.58	22±1
				1	5	1	22.59	22±1
				3	0	1	22.95	22±1
				3	1	1	22.92	22±1
				3	2	1	22.9	22±1
	6	0	2	21.48	22±1			
	20393	1754.3	QPSK	1	0	0	23.6	23±1
				1	2	0	23.57	23±1
				1	5	0	23.59	23±1
				3	0	0	23.73	23±1
				3	1	0	23.72	23±1
				3	2	0	23.72	23±1
				6	0	1	22.65	23±1
			16QAM	1	0	1	22.26	23±1
				1	2	1	22.29	23±1
1				5	1	22.31	23±1	
			3	0	1	23.73	23±1	
			3	1	1	23.76	23±1	
			3	2	1	23.76	23±1	
			6	0	2	22.1	23±1	

ERP & EIRP

EIRP for LTE Band IV (Part 27)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1710.7	1.4	QPSK	1/0	17.57	V	7.95	0.79	24.73	30
1732.5	1.4	QPSK	1/0	17.41	V	7.95	0.79	24.57	30
1754.3	1.4	QPSK	1/0	17.46	V	7.95	0.79	24.62	30
1710.7	1.4	QPSK	1/0	16.5	H	7.95	0.79	23.66	30
1732.5	1.4	QPSK	1/0	16.32	H	7.95	0.79	23.48	30
1754.3	1.4	QPSK	1/0	16.29	H	7.95	0.79	23.45	30
1710.7	1.4	16-QAM	1/5	17.57	V	7.95	0.79	24.73	30
1732.5	1.4	16-QAM	1/0	16.71	V	7.95	0.79	23.87	30
1754.3	1.4	16-QAM	1/0	17.5	V	7.95	0.79	24.66	30
1710.7	1.4	16-QAM	1/5	16.35	H	7.95	0.79	23.51	30
1732.5	1.4	16-QAM	1/0	15.6	H	7.95	0.79	22.76	30
1754.3	1.4	16-QAM	1/0	16.37	H	7.95	0.79	23.53	30
1711.5	3	QPSK	1/0	17.63	V	7.95	0.79	24.79	30
1732.5	3	QPSK	1/0	17.39	V	7.95	0.79	24.55	30
1753.5	3	QPSK	1/0	17.5	V	7.95	0.79	24.66	30
1711.5	3	QPSK	1/0	16.46	H	7.95	0.79	23.62	30
1732.5	3	QPSK	1/0	16.31	H	7.95	0.79	23.47	30
1753.5	3	QPSK	1/0	16.4	H	7.95	0.79	23.56	30
1711.5	3	16-QAM	1/0	16.57	V	7.95	0.79	23.73	30
1732.5	3	16-QAM	1/0	16.68	V	7.95	0.79	23.84	30
1753.5	3	16-QAM	1/0	16.51	V	7.95	0.79	23.67	30
1711.5	3	16-QAM	1/0	15.49	H	7.95	0.79	22.65	30
1732.5	3	16-QAM	1/0	15.61	H	7.95	0.79	22.77	30
1753.5	3	16-QAM	1/0	15.43	H	7.95	0.79	22.59	30
1712.5	5	QPSK	1/0	17.45	V	7.95	0.79	24.61	30
1732.5	5	QPSK	1/0	17.37	V	7.95	0.79	24.53	30
1752.5	5	QPSK	1/24	17.28	V	7.95	0.79	24.44	30
1712.5	5	QPSK	1/0	16.27	H	7.95	0.79	23.43	30
1732.5	5	QPSK	1/0	16.23	H	7.95	0.79	23.39	30

1752.5	5	QPSK	1/24	16.19	H	7.95	0.79	23.35	30
1712.5	5	16-QAM	1/0	16.29	V	7.95	0.79	23.45	30
1732.5	5	16-QAM	1/0	16.34	V	7.95	0.79	23.5	30
1752.5	5	16-QAM	1/24	16.7	V	7.95	0.79	23.86	30
1712.5	5	16-QAM	1/0	15.26	H	7.95	0.79	22.42	30
1732.5	5	16-QAM	1/0	15.32	H	7.95	0.79	22.48	30
1752.5	5	16-QAM	1/24	15.53	H	7.95	0.79	22.69	30
1715	10	QPSK	1/0	17.59	V	7.95	0.79	24.75	30
1732.5	10	QPSK	1/49	17.49	V	7.95	0.79	24.65	30
1750	10	QPSK	1/0	17.3	V	7.95	0.79	24.46	30
1715	10	QPSK	1/0	16.51	H	7.95	0.79	23.67	30
1732.5	10	QPSK	1/49	16.45	H	7.95	0.79	23.61	30
1750	10	QPSK	1/0	16.28	H	7.95	0.79	23.44	30
1715	10	16-QAM	1/0	16.53	V	7.95	0.79	23.69	30
1732.5	10	16-QAM	1/49	16.45	V	7.95	0.79	23.61	30
1750	10	16-QAM	1/0	16.87	V	7.95	0.79	24.03	30
1715	10	16-QAM	1/0	15.39	H	7.95	0.79	22.55	30
1732.5	10	16-QAM	1/49	15.33	H	7.95	0.79	22.49	30
1750	10	16-QAM	1/0	15.78	H	7.95	0.79	22.94	30
1717.5	15	QPSK	1/0	17.61	V	7.95	0.79	24.77	30
1732.5	15	QPSK	1/74	17.39	V	7.95	0.79	24.55	30
1747.5	15	QPSK	1/0	17.27	V	7.95	0.79	24.43	30
1717.5	15	QPSK	1/0	16.49	H	7.95	0.79	23.65	30
1732.5	15	QPSK	1/74	16.27	H	7.95	0.79	23.43	30
1747.5	15	QPSK	1/0	16.21	H	7.95	0.79	23.37	30
1717.5	15	16-QAM	1/0	16.65	V	7.95	0.79	23.81	30
1732.5	15	16-QAM	1/74	16.65	V	7.95	0.79	23.81	30
1747.5	15	16-QAM	1/0	16.91	V	7.95	0.79	24.07	30
1717.5	15	16-QAM	1/0	15.54	H	7.95	0.79	22.7	30
1732.5	15	16-QAM	1/74	15.52	H	7.95	0.79	22.68	30
1747.5	15	16-QAM	1/0	15.79	H	7.95	0.79	22.95	30
1720	20	QPSK	1/99	17.64	V	7.95	0.79	24.8	30
1732.5	20	QPSK	1/99	17.37	V	7.95	0.79	24.53	30
1745	20	QPSK	1/0	17.41	V	7.95	0.79	24.57	30
1720	20	QPSK	1/99	16.6	H	7.95	0.79	23.76	30


1732.5	20	QPSK	1/99	16.25	H	7.95	0.79	23.41	30
1745	20	QPSK	1/0	16.3	H	7.95	0.79	23.46	30
1720	20	16-QAM	1/99	16.59	V	7.95	0.79	23.75	30
1732.5	20	16-QAM	1/99	16.64	V	7.95	0.79	23.8	30
1745	20	16-QAM	1/0	16.86	V	7.95	0.79	24.02	30
1720	20	16-QAM	1/99	15.5	H	7.95	0.79	22.66	30
1732.5	20	16-QAM	1/99	15.57	H	7.95	0.79	22.73	30
1745	20	16-QAM	1/0	15.73	H	7.95	0.79	22.89	30

6.3 Peak-Average Ratio

Temperature	23°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	October 12, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§ 27.50(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	<input checked="" type="checkbox"/>

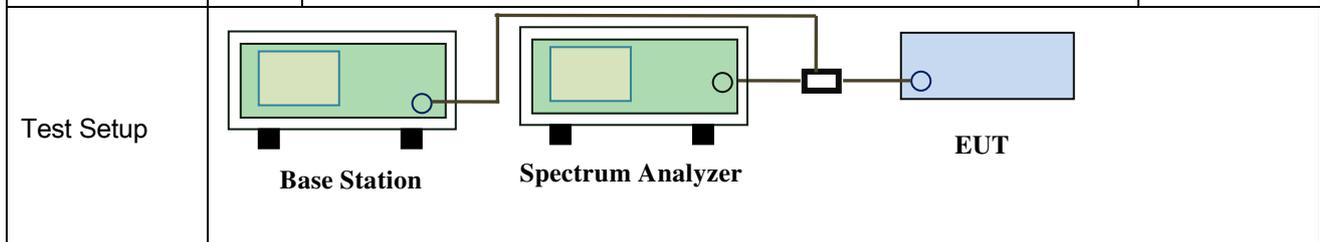

Test Procedure	<p>According with KDB 971168 v02r02</p> <p>5.7.2 Alternate procedure for PAPR</p> <p>5.1.2 Peak power measurements with a peak power meter</p> <p>The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.</p> <p>5.2.3 Average power measurement with average power meter</p> <p>As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions</p> <p>If the EUT can be configured to transmit continuously (i.e., the burst duty</p>
----------------	---

	<p>cycle \geq 98%) and at all times the EUT is transmitting at its maximum output power level, then a conventional wide-band RF power meter can be used. If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle $<$ 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than \pm 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A
Test Plot Yes (See below) N/A


LTE Band IV (part 27)

BW(MHz)	Frequency (MHz)	Mode	Modulation	Conducted Power (dBm)		Peak-Average Ratio (PAR)
				Peak	Average	
1.4	1732.5	RB 1/0	QPSK	25.69	23.64	2.05
			16QAM	25.61	22.59	3.02
3	1732.5	RB 1/0	QPSK	25.69	23.63	2.06
			16QAM	25.66	22.95	2.71
5	1732.5	RB 1/0	QPSK	25.36	23.63	1.73
			16QAM	25.36	22.61	2.75
10	1732.5	RB 1/0	QPSK	25.69	23.73	1.96
			16QAM	25.45	21.56	3.89
15	1732.5	RB 1/0	QPSK	25.33	23.64	1.69
			16QAM	25.35	22.91	2.44
20	1732.5	RB 1/0	QPSK	25.61	23.64	1.97
			16QAM	25.45	22.91	2.54

6.4 Occupied Bandwidth

Temperature	23 °C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	April 14, 2017
Tested By :	Loren Luo

Requirement(s):

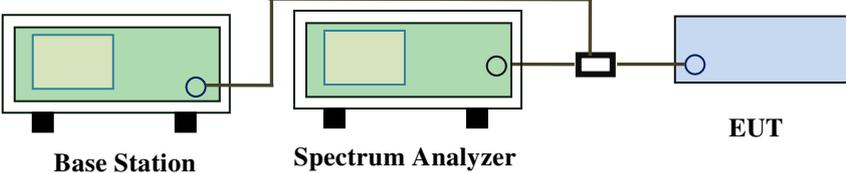Spec	Item	Requirement	Applicable
§2.1049, §27.53(a)	a)	99% Occupied Bandwidth(kHz)	<input checked="" type="checkbox"/>
	b)	26 dB Bandwidth(kHz)	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Base Station Spectrum Analyzer EUT</p>		
Test Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A


LTE Band IV (Part 27)

BW(MHz)	Channel	Frequency (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1.4	19957	1710.7	16QAM	1.1018	1.271
			QPSK	1.1069	1.293
1.4	20175	1732.5	16QAM	1.1028	1.291
			QPSK	1.1075	1.278
1.4	20393	1754.3	16QAM	1.1076	1.302
			QPSK	1.1034	1.287
3	19965	1711.5	16QAM	2.7565	3.052
			QPSK	2.7392	3.032
3	20175	1732.5	16QAM	2.7422	3.052
			QPSK	2.7494	3.067
3	20385	1753.5	16QAM	2.7646	3.070
			QPSK	2.7514	3.054
5	19975	1712.5	16QAM	4.5354	5.066
			QPSK	4.5283	5.093
5	20175	1732.5	16QAM	4.5423	5.065
			QPSK	4.5280	5.044
5	20375	1752.5	16QAM	4.5262	5.062
			QPSK	4.5427	5.062
10	20000	1715	16QAM	9.0665	10.10
			QPSK	9.0691	10.16
10	20175	1732.5	16QAM	9.0504	10.13
			QPSK	9.0808	10.10
10	20350	1750	16QAM	9.0894	10.12
			QPSK	9.0942	10.21
15	20025	1717.5	16QAM	13.532	14.87
			QPSK	13.488	14.85
15	20175	1732.5	16QAM	13.489	14.79
			QPSK	13.478	14.82
15	20325	1747.5	16QAM	13.525	14.83
			QPSK	13.522	14.88


20	20050	1720	16QAM	17.985	19.44
			QPSK	17.952	19.42
20	20175	1732.5	16QAM	17.894	19.34
			QPSK	17.902	19.62
20	20300	1745	16QAM	17.956	19.36
			QPSK	17.933	19.28

Test Plots


LTE Band IV (Part 27)

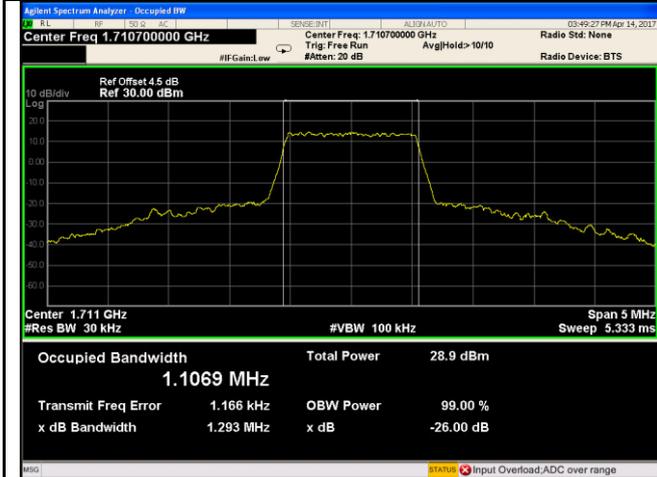


LTE band IV - Low CH QPSK-1.4

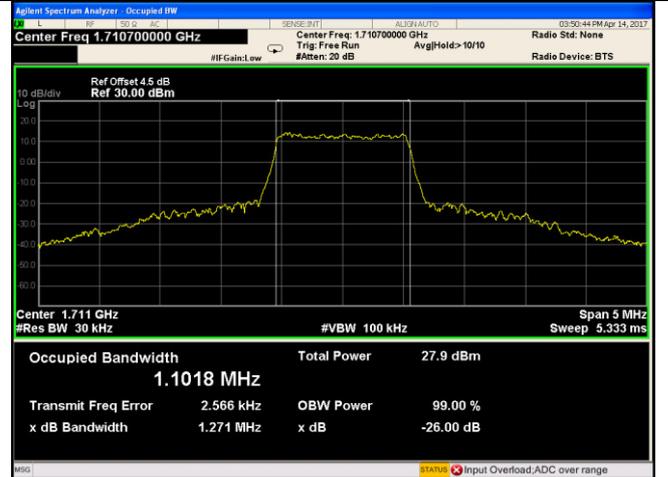


LTE band IV - Low CH 16QAM-1.4

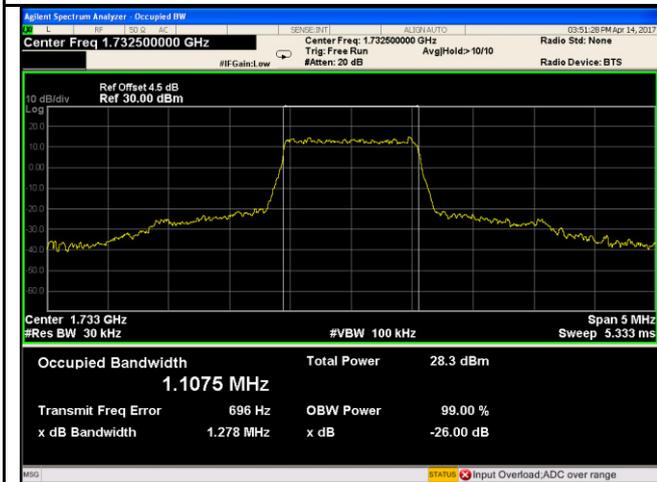


LTE band IV - Middle CH QPSK-1.4

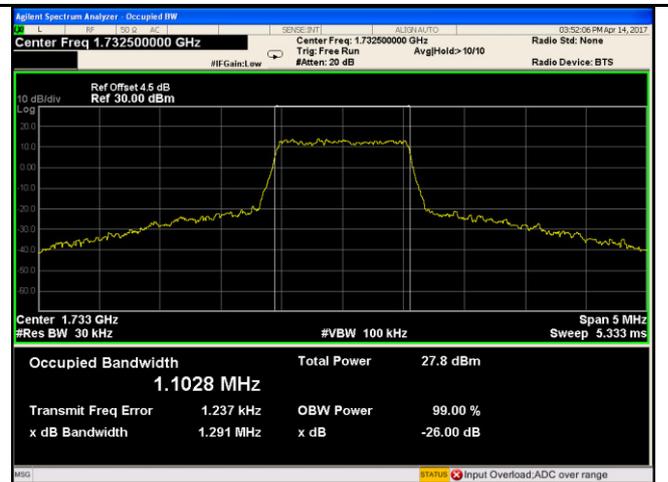


LTE band IV - Middle CH 16QAM-1.4

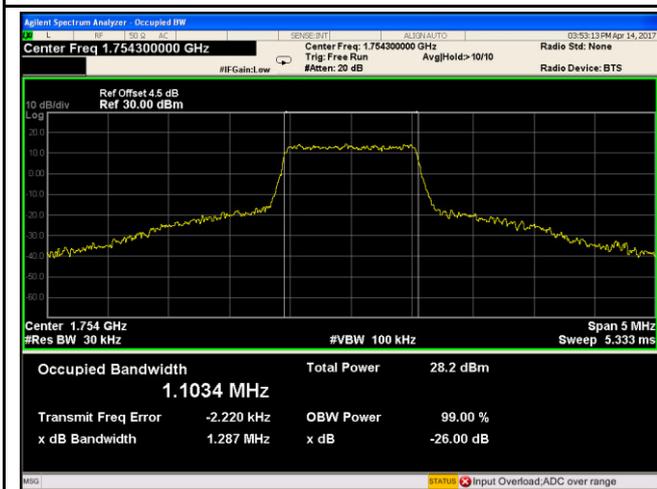


LTE band IV - High CH QPSK-1.4

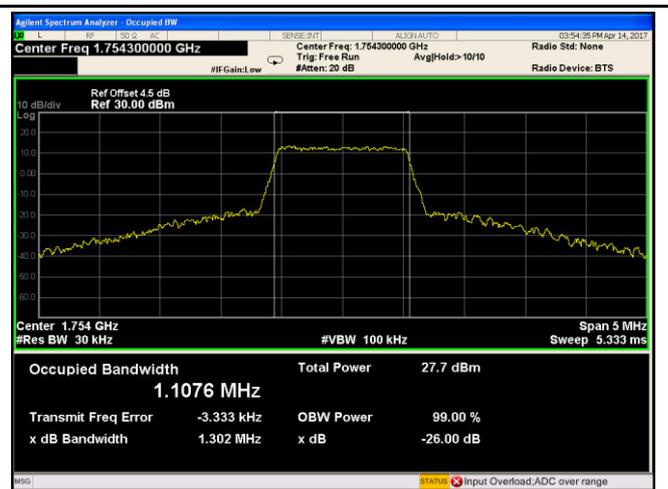


LTE band IV - High CH 16QAM-1.4

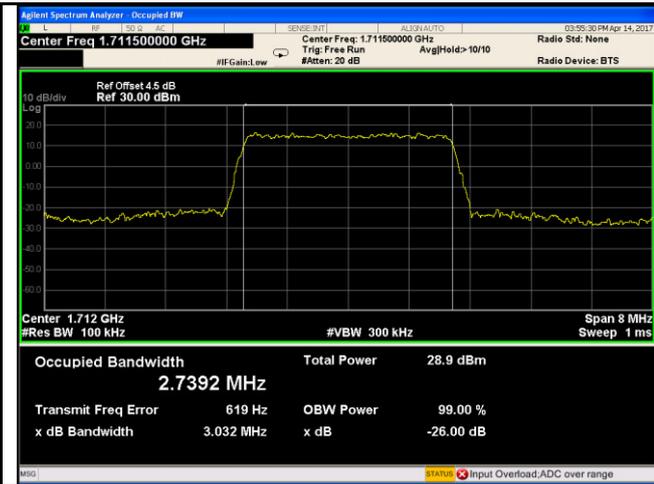

LTE band IV - Low CH QPSK-3

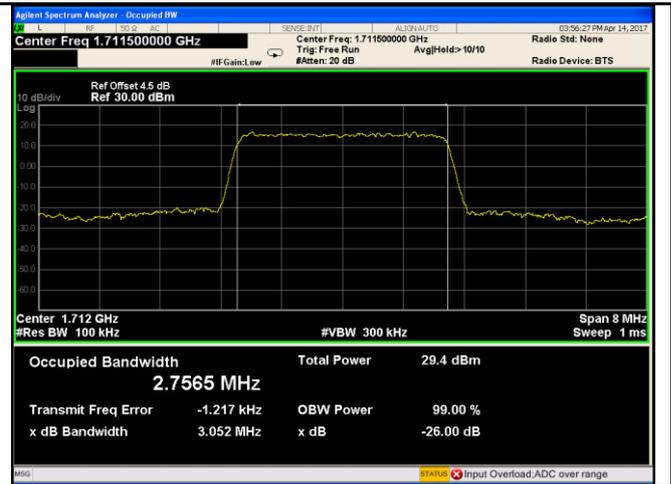


LTE band IV - Low CH 16QAM-3

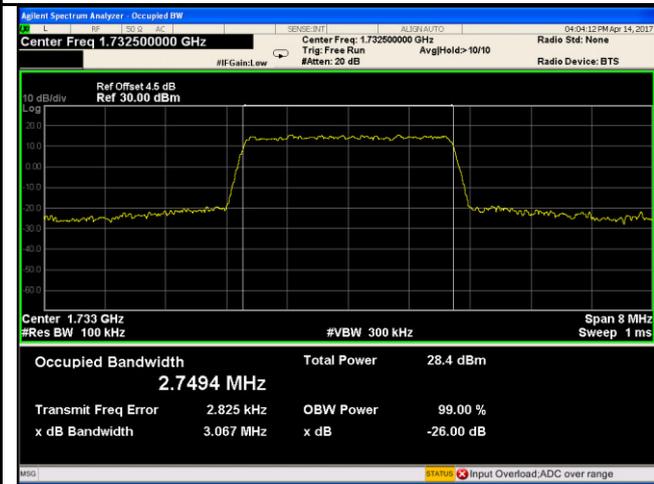


LTE band IV - Middle CH QPSK-3




LTE band IV - Middle CH 16QAM-3

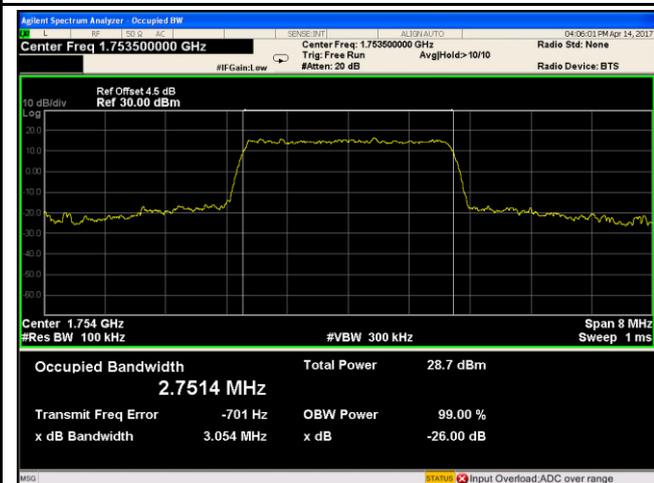

LTE band IV - High CH QPSK-3

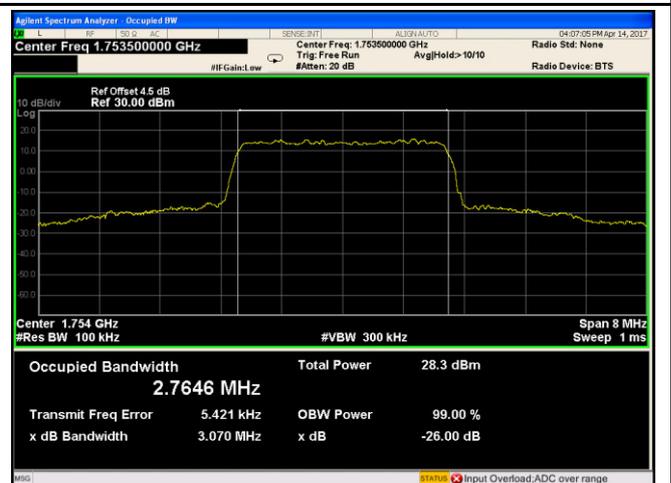


LTE band IV - High CH 16QAM-3

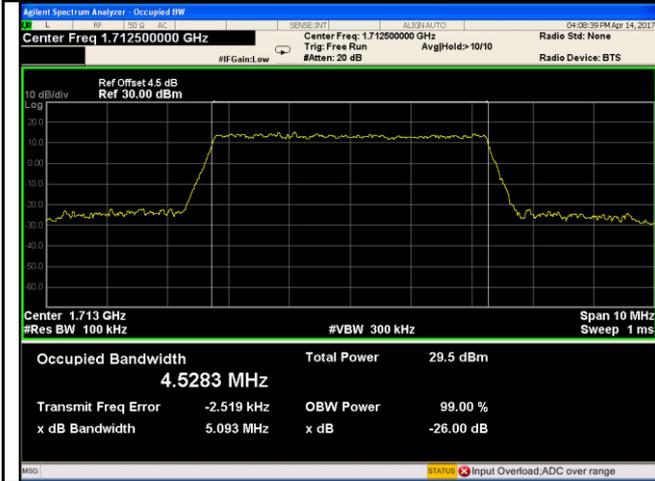


LTE band IV - Low CH QPSK-5




LTE band IV - Low CH 16QAM-5

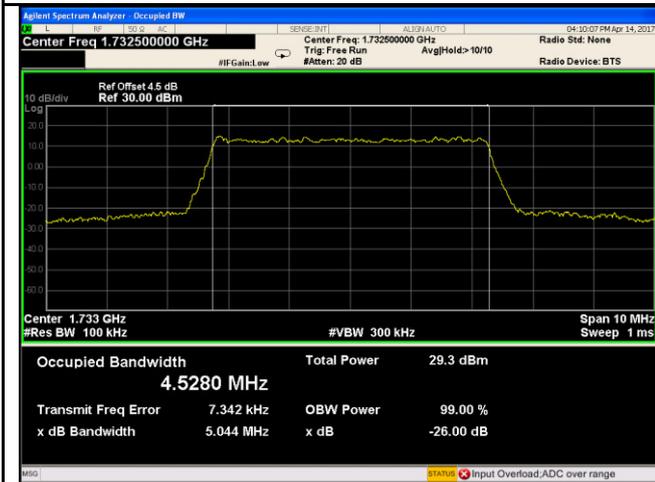


LTE band IV - Middle CH QPSK-5

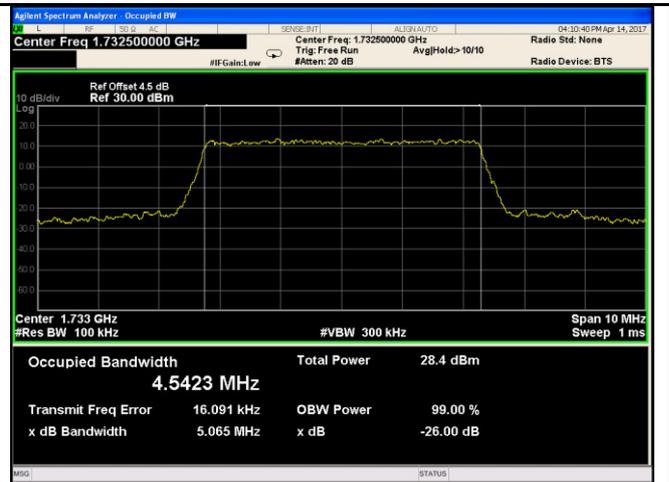


LTE band IV - Middle CH 16QAM-5

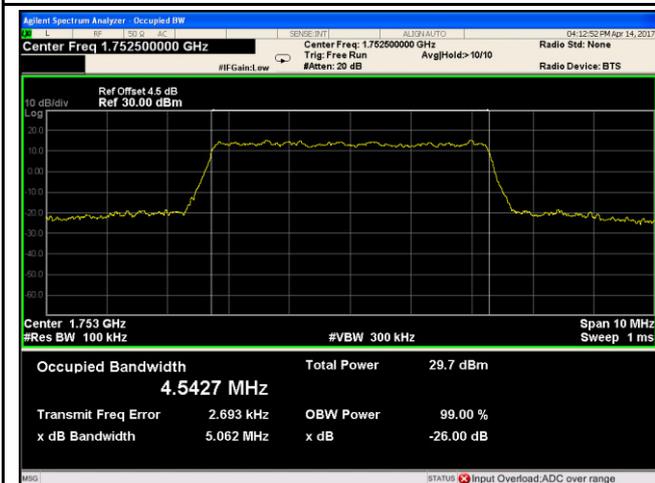

LTE band IV - High CH QPSK-5

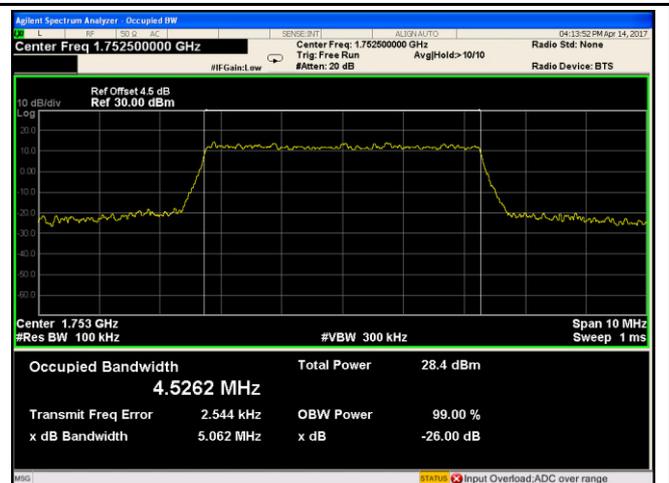


LTE band IV - High CH 16QAM-5

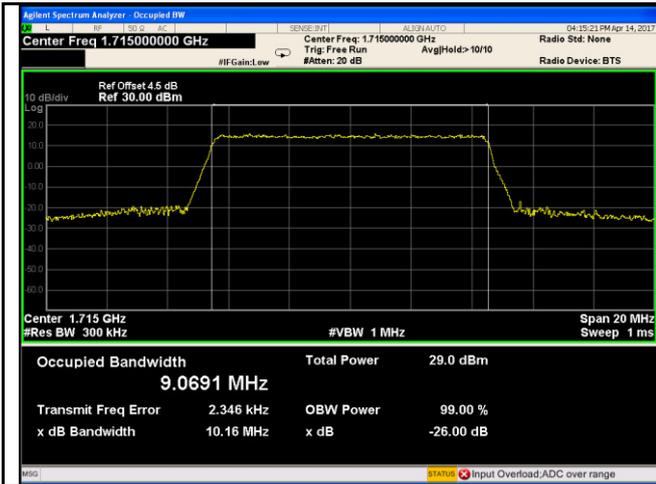

LTE band IV - Low CH QPSK-10




LTE band IV - Low CH 16QAM-10

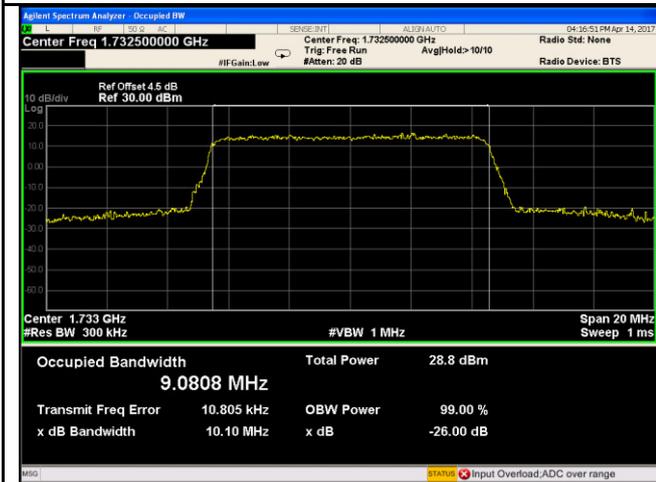


LTE band IV - Middle CH QPSK-10




LTE band IV - Middle CH 16QAM-10

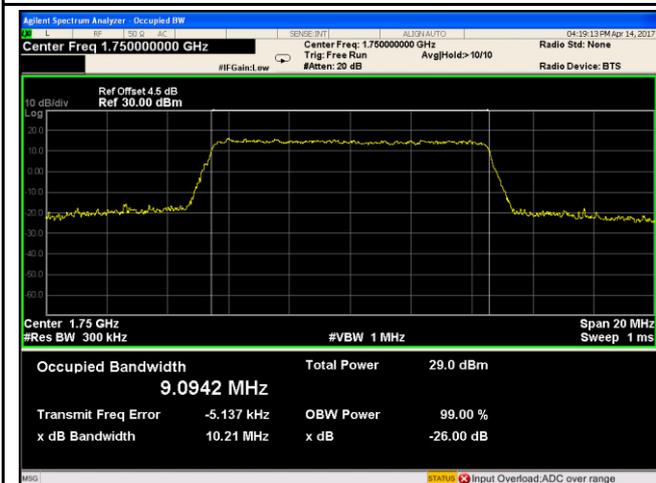

LTE band IV - High CH QPSK-10

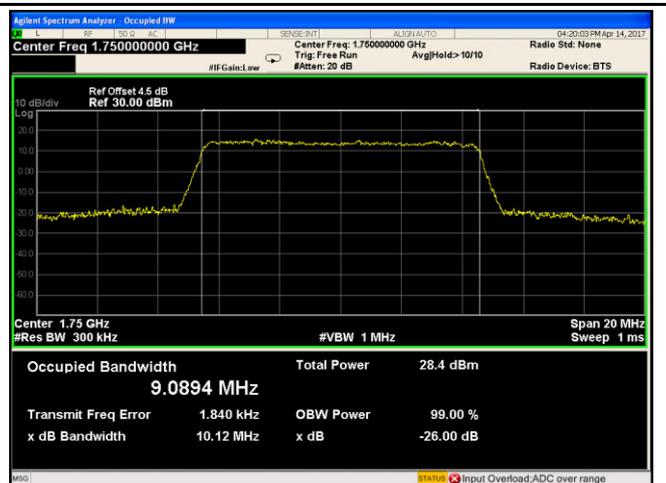


LTE band IV - High CH 16QAM-10

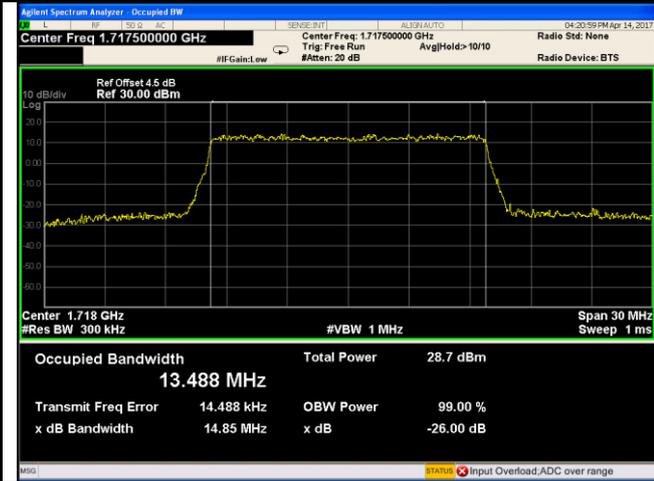

LTE band IV - Low CH QPSK-15




LTE band IV - Low CH 16QAM-15

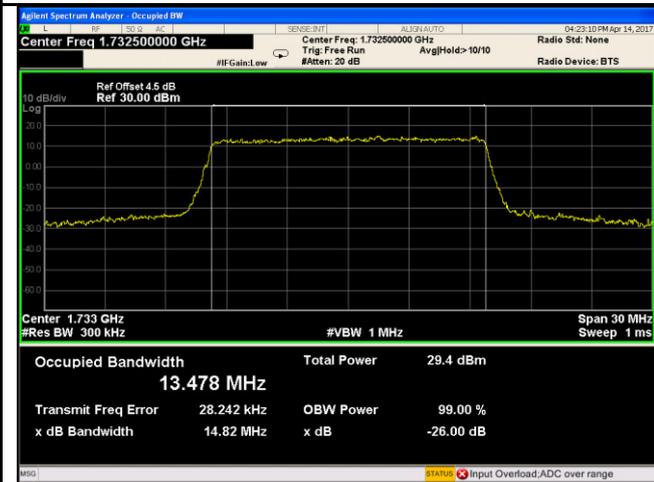


LTE band IV - Middle CH QPSK-15




LTE band IV - Middle CH 16QAM-15

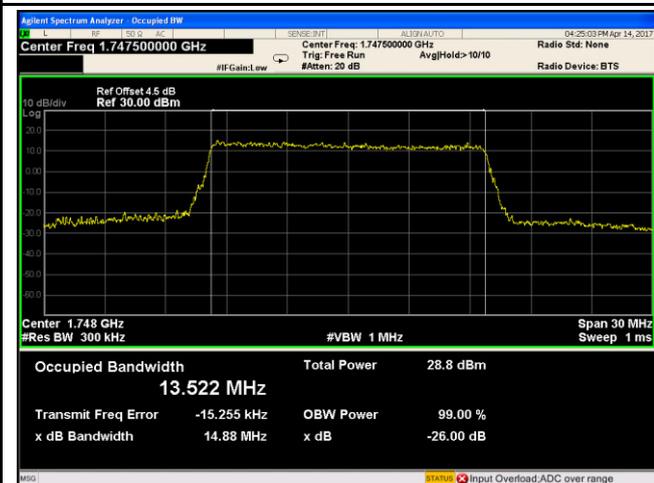

LTE band IV - High CH QPSK-15

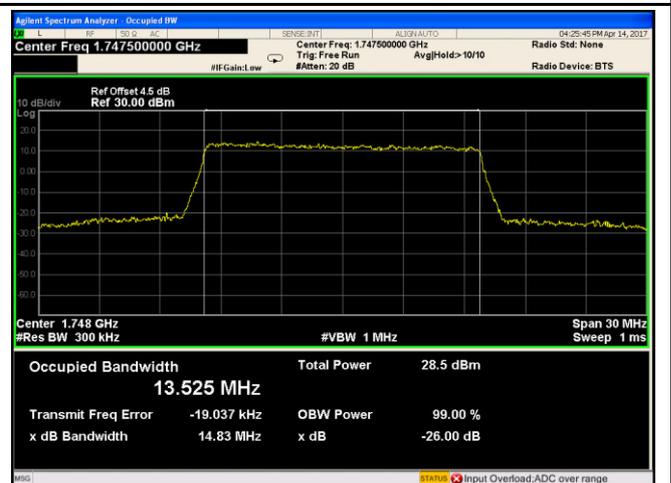


LTE band IV - High CH 16QAM-15

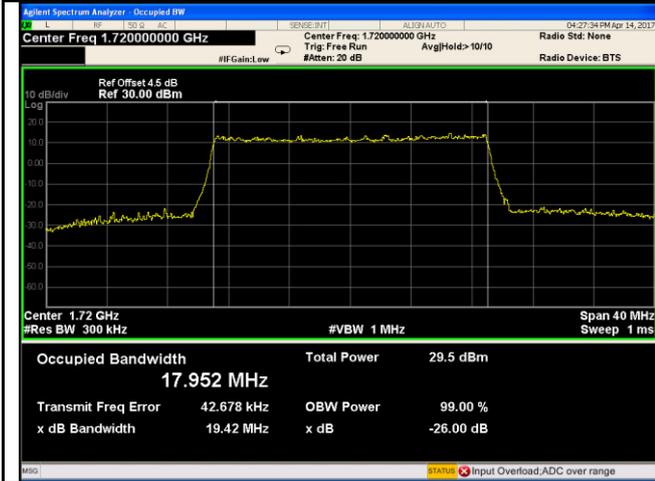

LTE band IV - Low CH QPSK-20




LTE band IV - Low CH 16QAM-20

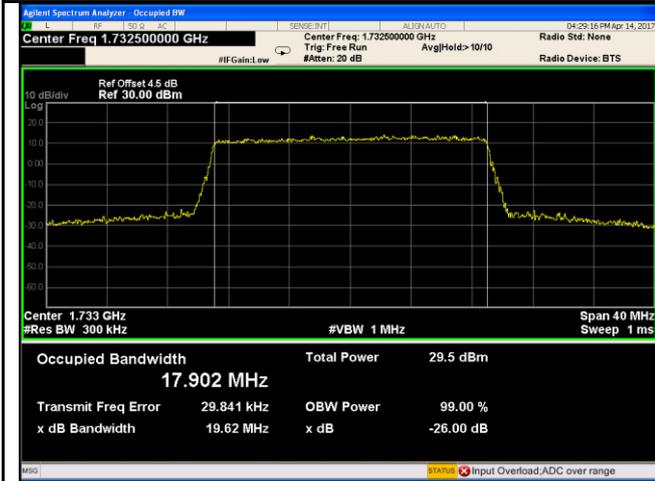


LTE band IV - Middle CH QPSK-20



LTE band IV - Middle CH 16QAM-20

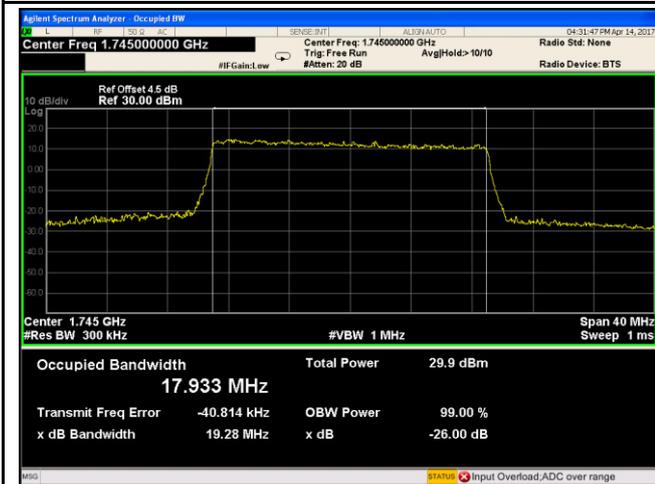

LTE band IV - High CH QPSK-20

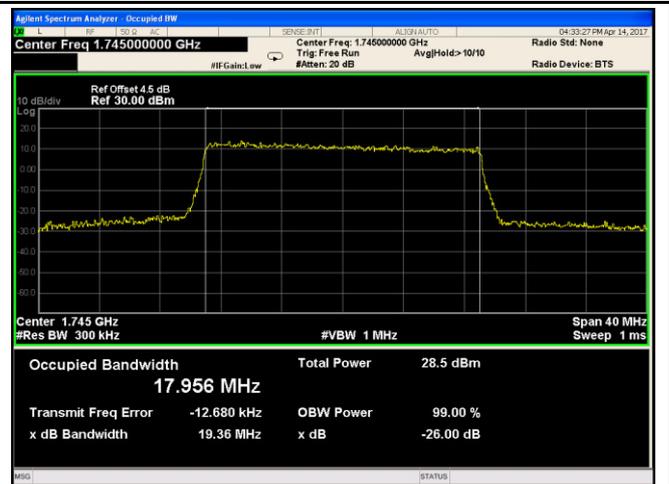


LTE band IV - High CH 16QAM-20

6.5 Spurious Emissions at Antenna Terminals

Temperature	23 °C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	April 14, 2017
Tested By :	Loren Luo

Requirement(s):

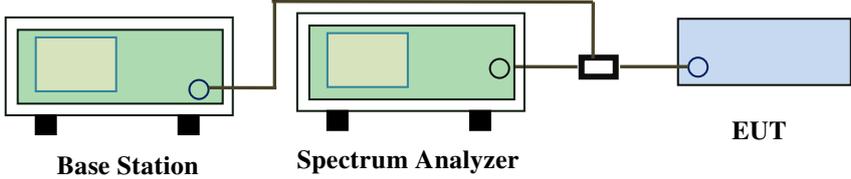Spec	Item	Requirement	Applicable
§2.1051, § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram shows a Base Station (green box) connected to a Spectrum Analyzer (green box) and an EUT (blue box) via a power divider (black box). The Base Station and Spectrum Analyzer are connected to the power divider, which then splits the signal to the EUT.</p>		
Test Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A
 Test Plot Yes (See below) N/A