

## Product Features

The ELITE series RX6 advanced biometric fingerprint reader delivers the latest multispectral imaging technology in an uncompromisingly stylish package. The reader is ideal for surface mounting directly to most plain wall finishes.

This powerfully secure and innovative reader has a beautifully clean aesthetic and features an RGB LED that can be applied to many applications, e.g. colour coded access levels, migration status or mood lighting.

The unit is moulded using tough polycarbonate/ABS plastic and includes a shadow line backplate, a subtle feature that makes the reader appear to float on the wall.

- UK design and manufacture
- High gloss finish in BLACK only
- Slim profile
- RGB LED
- Compression sealed electronics
- Wide range of output formats
- 1 year limited warranty
- Read range up to 10cm (4 inches)

## Interfacing

The reader supports a wide variety of output formats allowing it to be used in most access control and related applications, e.g. time and attendance, cashless vending etc.

The combination of an integral speaker, an RGB LED, three control inputs and a variety of LED/buzzer/external control options provide a flexible platform to give the right user interface configuration for your project.

## Quality Design

Third Millennium has nearly 20 years of award-winning experience in the design and manufacture of RFID technology and the delivery of world class, state-of-the-art access control projects with our many global partners.

*This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

technologies available with this reader	Standard Part Numbers
	<b>RX660</b>
available in gloss BLACK only	

MIFARE, MIFARE Classic and MIFARE DESFire EV1 are trademarks of NXP B.V.



advanced access control reader


## Specification

### Mechanical

Dimensions: 149mm x 63mm x 70mm (5.9 x 2.2 x 2.8 inches)

Housing: Moulded polycarbonate/ABS with Compression Sealed electronics

Mounting: Wall surface

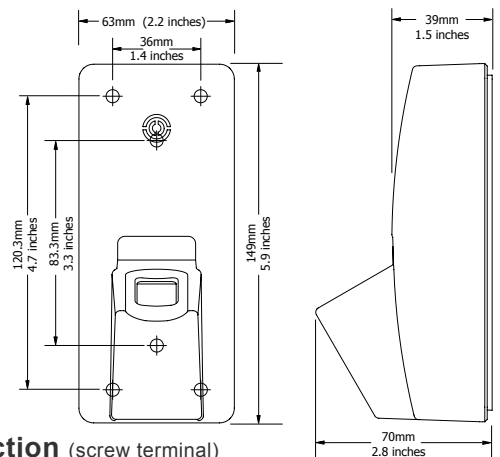

### Connection (screw terminal)

- |                 |                                  |
|-----------------|----------------------------------|
| 1 - +Vdc        | Supply voltage (+5Vdc to +16Vdc) |
| 2 - DATA1 / CLK | Wiegand or Clock/Data output     |
| 3 - DATA0 / DAT | Wiegand or Clock/Data output     |
| 4 - GREEN       | Green LED control input          |
| 5 - RED         | Red LED control input            |
| 6 - BUZZER      | Buzzer control input             |
| 7 - TMPR / CP   | Tamper or Card Present output    |
| 8 - 0V          | Supply voltage ground            |
| 9 - TTL TX      | TTL transmit line                |
| 10 - TTL RX     | TTL receive line                 |

### Environmental

- Operating Temperature: -20°C to +60°C  
 Humidity: 0 - 100% RHNC (outdoor)  
 0 - 95% RHNC (indoor)  
 Ingress Protection: IP65

### Electrical

- Voltage: +5Vdc to +16Vdc  
 Current: 450mA typical  
 Data Voltage: Rest >4Vdc / Active <1Vdc  
 Data Output: Wiegand, Clock & Data, Custom Outputs  
 Indication: 1 RGB LED  
 Sounder: Integral speaker