

Test Report of FCC Part 15 C for FCC Certificate
On Behalf of

ESI Cases and Accessories

Product description: Duracell Gooseneck Transmitter
Model No.: DU7128
Supplementary Model: DUC6193(the difference of these two models is just model No.)
FCC ID: UTO-DU7128

Prepared for: **ESI Cases and Accessories**
240 Madison Ave 11 Floor, New York, NY 10016, USA

Prepared by: **Bontek Compliance Testing Laboratory Ltd.**
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028

Report No.: BCT12DR102E
Issue Date: April 25, 2012
Test Date: April 16~25, 2012

Test by:

Reviewed By:



Nie Quan



Kevin Chi

TABLE OF CONTENTS

- 1 - GENERAL INFORMATION 3**
 - 1.1 Product Description for Equipment Under Test (EUT).....3
 - 1.2 Related Submittal(s) / Grant (s).....3
 - 1.3 Test Methodology3
 - 1.4 Test Facility.....4
- 2. SYSTEM TEST CONFIGURATION 5**
 - 2.1 EUT Configuration5
 - 2.2 EUT Exercise5
 - 2.3 General Test Procedures5
 - 2.4 List of Measuring Equipments Used6
- 3. SUMMARY OF TEST RESULTS 8**
- 4. TEST OF CONDUCTED EMISSION..... 9**
 - 4.1 Applicable Standard.....9
 - 4.2 Test Setup Diagram.....9
- 5- RADIATED EMISSIONS 10**
 - 5.1 Limit of Radiated Emissions (FCC 47 CFR 15.209 Class B):.....10
 - 5.2 EUT Setup10
 - 5.3 Test Procedure11
 - 5.4 Test Result.....11
- 6- OCCUPIED BANDWIDTH 19**
 - 6.1 Requirement of Occupied Bandwidth.....19
 - 6.2 Test Procedure19
 - 6.3 Emissions within Band Edges Test Result.....19
- 7. ANTENNA REQUIREMENT 23**
 - 7.1 Standard Applicable.....23
 - 7.2 Antenna Connected Construction23

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant:	ESI Cases and Accessories
Address of Applicant:	240 Madison Ave 11 Floor, New York, NY 10016, USA
Manufacturer:	Man shun union electronic technology(shen zhen)co.ltd
Address of Manufacturer:	Guan xin he sheng xin Road,Shengping Villge,Longgang Town,Shenzhen,China
EUT Description:	Duracell Gooseneck Transmitter
Trade Name:	N.A.
Model No.:	DU7128
Supplementary Model:	DUC6193(the difference of these two models is just model No.)
Rated Voltage	Input:12V~24V DC
Frequency Range	88~108MHz
Channel Separation	100kHz
Product Class:	Low Power Communication Device Transmitter
EUT Cable:	N/A

Remark: * *The test data gathered are from the production sample provided by the manufacturer.*

1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The following Declaration of Conformity report of EUT is prepared in accordance with FCC Rules and Regulations Part 15 Subpart C Section15.239

The objective of the manufacturer is to demonstrate compliance with the described above standards.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

BONTEK COMPLIANCE TESTING LABORATORY LTD. , EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25,2011.

CNAS - Registration No.: L3923

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.The acceptance letter from the CNAS is maintained in our files: Registration:L3923, March 22,2012.

TUV - Registration No.: UA 50203122-0001

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002

2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C Section 15.239.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 List of Measuring Equipments Used

Test equipments list of BONTEK COMPLIANCE TESTING LABORATORY LTD.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2011-7-25	2012-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
6	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-4-6	2013-4-5
7	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2011-4-11	2012-4-10
9	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2012-4-6	2013-4-5
10	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2011-6-16	2012-6-15
11	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2012-4-6	2013-4-5
14	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2012-4-6	2013-4-5
15	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2011-11-28	2012-11-27
16	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2011-11-28	2012-11-27
17	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2011-11-28	2012-11-27
18	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	N/A	N/A
19	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2011-11-28	2012-11-27
20	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2011-10-24	2012-10-23
21	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-4-6	2013-4-5
22	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
23	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2012-4-6	2013-4-5
24	CDN	FRANKONIA	CDN M2+M3	A3027019	2012-4-6	2013-4-5
25	6DB Attenuator	FRANKONIA	N/A	1001698	2012-4-6	2013-4-5
26	EM Injection clamp	FCC	F-203I-23mm	091536	2012-4-6	2013-4-5
27	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5

28	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
29	ISN	TESEQ	ISN-T800	30301	2011-6-23	2012-6-22
30	10KV surge generator	SANKI	SKS-0510M	048110003E 321	2011-11-14	2012-11-13
31	HRMONICS&FLICKRE ANALYSER	VOLTECH	PM6000	200006700433	2011-6-27	2012-6-26
32	Spectrum Analyzer	R&S	FSP	100397	2011-11-2	2012-11-1
33	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
34	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.207	AC Power Line Conducted Emission	N/A, without AC power supply
15.239	Radiation Emission	Pass
15.239	Occupied Bandwidth	Pass


4. TEST OF CONDUCTED EMISSION

4.1 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

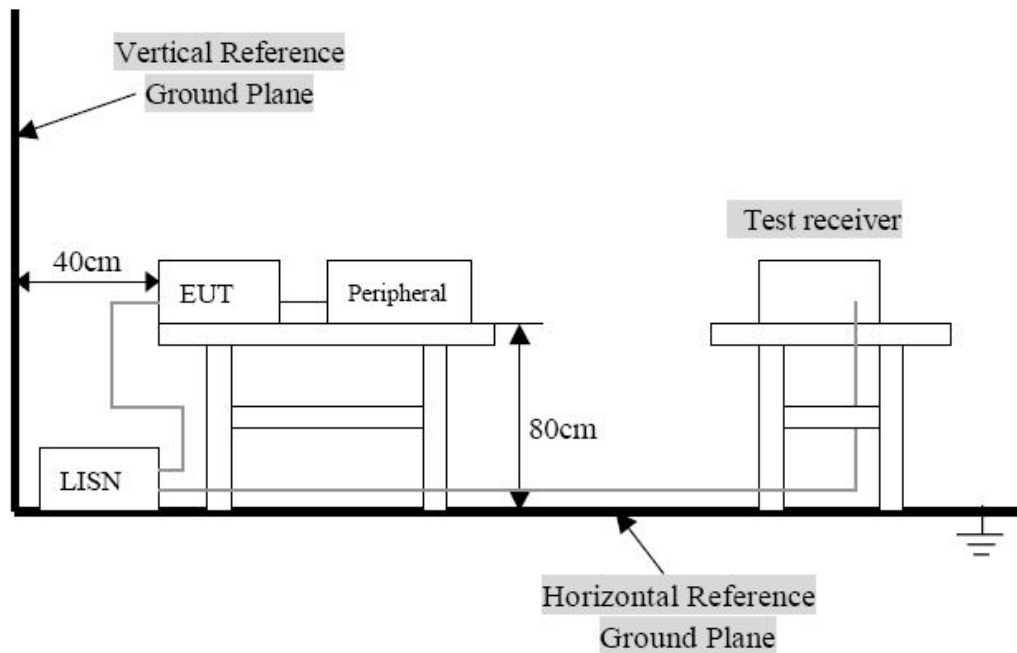

- Remark: 1. The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.
2. The EUT is excluded from investigation of Disturbance Voltage at The Mains Terminals, for it is powered by DC 12V from car bettary. According to the Section 15.207(d), measurement to demonstrate compliance with the limits of Disturbance Voltage at The Mains Terminals are not required to the devices which only employed bettary power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

5- RADIATED EMISSIONS

5.1 Limit of Radiated Emissions (FCC 47 CFR 15.209 Class B):

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40
88~216	3	43.5
216 ~ 960	3	46
960 ~ 1000	3	54

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

5.2 EUT Setup

Radiated Measurement Setup

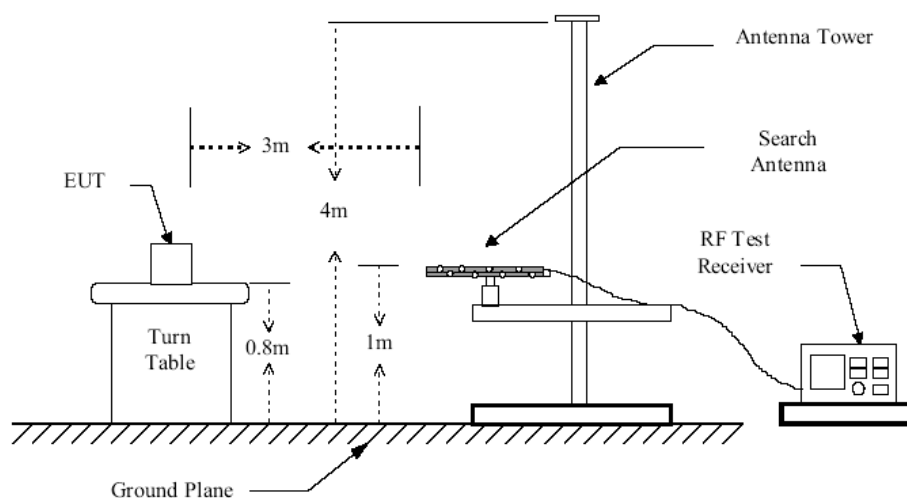


Figure 1 : Frequencies measured below 1 GHz configuration

5.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2003.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The receiving antenna was placed 3 meters far away from the turntable.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). For Spurious Emissions test, The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 6). For Field Strength of Fundamental Emissions test, Positioned the loop antenna with its plane vertical at the specified distance of 3 meters between its center and the EUT. The center of the loop antenna is set with 1m above the grounded plane. Then rotated about its vertical axis for finding out the maximum emission level of the EUT.

5.4 Test Result

Temperature (°C) : 22~23	EUT: Duracell Gooseneck Transmitter
Humidity (%RH) : 50~54	M/N: DU7128
Barometric Pressure (mbar) : 950~1000	Operation Condition: Normal Operating

Note: The EUT is playing music with iphone input.

In this testing, the EUT was respectively tested in three different orientations. That is:

- (1) EUT was lie vertically, and then its Antenna oriented upward
- (2) =EUT was lie vertically, and then its Antenna oriented downward
- (3) EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages


When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following.

Harmonics & Spurious Emission (Low Channel: 88.1MHz)

Antenna Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

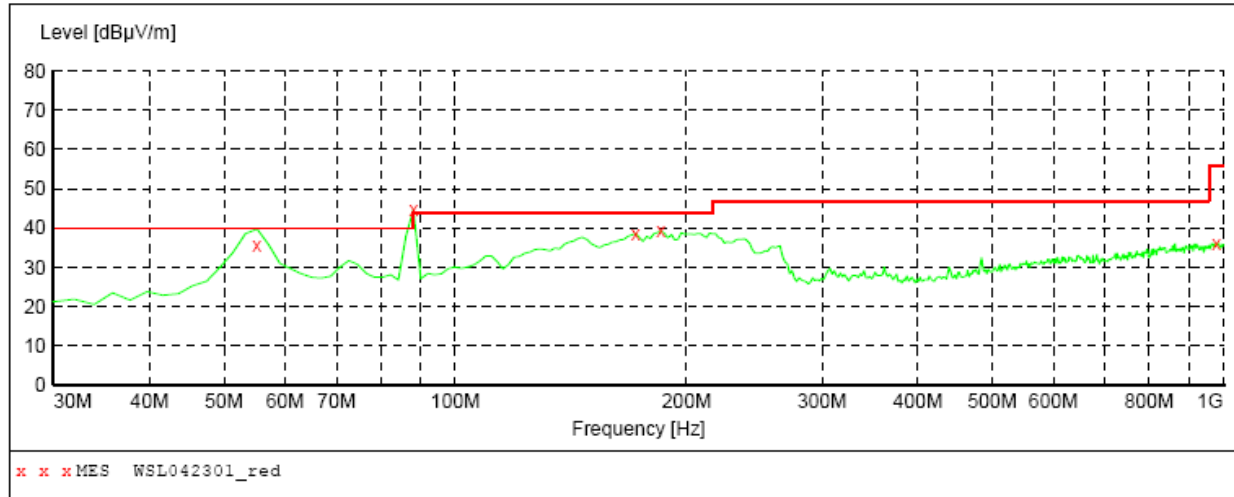

MEASUREMENT RESULT: "WSL042301_red"


4/23/2012 09:27

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
55.220000	35.80	15.6	40.0	4.2	QP	300.0	0.00	VERTICAL
88.100000	44.70	15.5	43.5	-1.2	QP	300.0	0.00	VERTICAL
171.620000	38.60	13.2	43.5	4.9	QP	100.0	0.00	VERTICAL
185.200000	39.30	14.4	43.5	4.2	QP	100.0	0.00	VERTICAL
978.660000	36.10	29.8	56.0	19.9	QP	100.0	0.00	VERTICAL

Antenna Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		Transducer	
Start	Stop	Detector	Meas. Time	IF Bandw.	
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

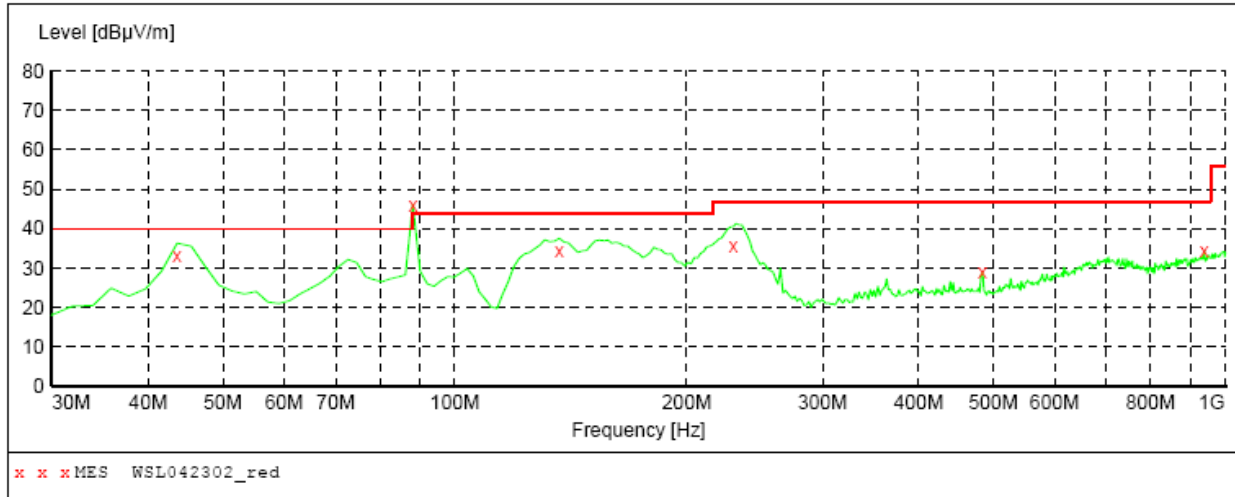

MEASUREMENT RESULT: "WSL042302_red"

4/23/2012 09:24


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
43.580000	33.30	14.0	40.0	6.7	QP	300.0	0.00	HORIZONTAL
88.100000	46.20	11.9	43.5	-2.7	QP	300.0	0.00	HORIZONTAL
136.700000	34.10	11.2	43.5	9.4	QP	300.0	0.00	HORIZONTAL
229.820000	35.50	12.0	46.0	10.5	QP	100.0	0.00	HORIZONTAL
483.960000	29.00	20.7	46.0	17.0	QP	100.0	0.00	HORIZONTAL
939.860000	34.40	28.7	46.0	11.6	QP	300.0	0.00	HORIZONTAL

Harmonics & Spurious Emission (Middle Channel: 98MHz)

Antenna Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

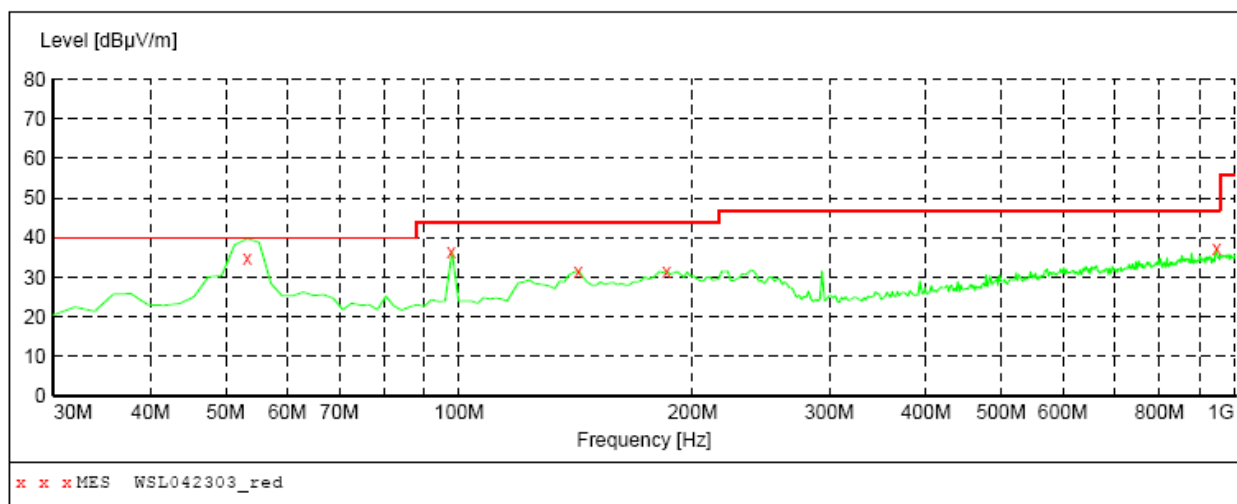

MEASUREMENT RESULT: "WSL042303_red"


4/23/2012 09:30

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	34.80	15.7	40.0	5.2	QP	100.0	0.00	VERTICAL
98.000000	36.60	17.4	40.0	3.4	QP	100.0	0.00	VERTICAL
142.520000	31.70	12.3	40.0	8.3	QP	100.0	0.00	VERTICAL
185.200000	31.70	14.4	40.0	8.3	QP	100.0	0.00	VERTICAL
947.620000	37.10	29.5	47.0	9.9	QP	100.0	0.00	VERTICAL

Antenna Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength				Transducer
Start	Stop	Detector	Meas. Time	IF Bandw.		
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW	

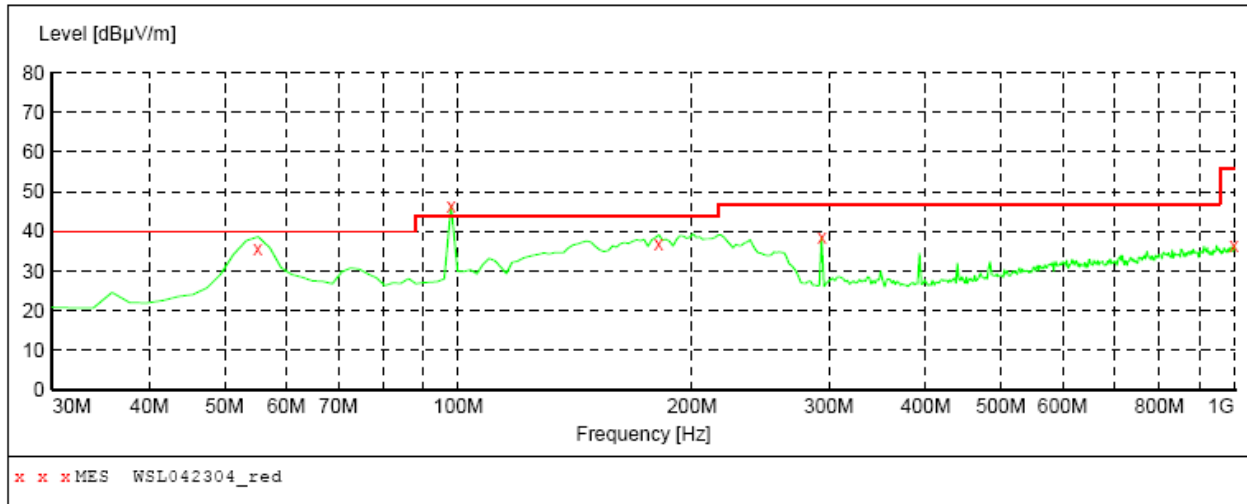

MEASUREMENT RESULT: "WSL042304_red"

4/23/2012 09:34


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
55.220000	35.70	15.6	40.0	4.3	QP	300.0	0.00	HORIZONTAL
98.000000	46.50	17.4	43.5	-3.0	QP	300.0	0.00	HORIZONTAL
181.320000	36.70	14.0	43.5	3.3	QP	100.0	0.00	HORIZONTAL
293.840000	38.60	18.6	46.0	7.4	QP	100.0	0.00	HORIZONTAL
998.060000	36.50	29.9	56.0	19.5	QP	300.0	0.00	HORIZONTAL

Harmonics & Spurious Emission (High Channel: 107.9MHz)

Antenna Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	MaxPeak	Coupled	100 kHz	VULB9163 NEW
30.0 MHz	1.0 GHz				

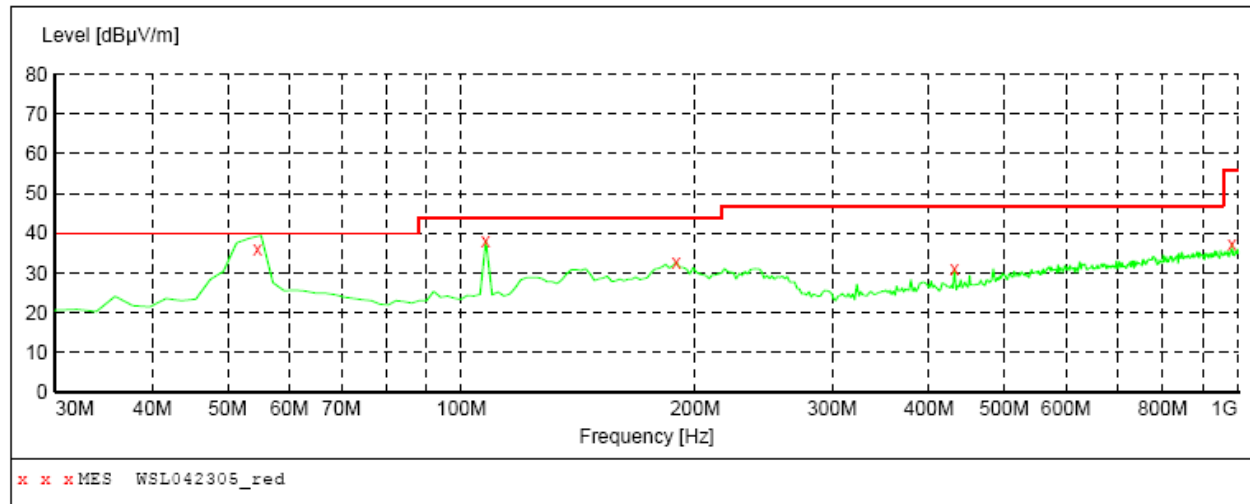

MEASUREMENT RESULT: "WSL042305_red"


4/23/2012 09:37

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
55.220000	35.40	15.6	40.0	4.6	QP	100.0	0.00	VERTICAL
107.900000	38.00	16.8	43.5	5.5	QP	100.0	0.00	VERTICAL
189.080000	32.70	14.7	43.5	10.8	QP	100.0	0.00	VERTICAL
431.580000	31.00	22.0	46.0	15.0	QP	100.0	0.00	VERTICAL
982.540000	37.30	29.8	56.0	18.7	QP	100.0	0.00	VERTICAL

Antenna Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

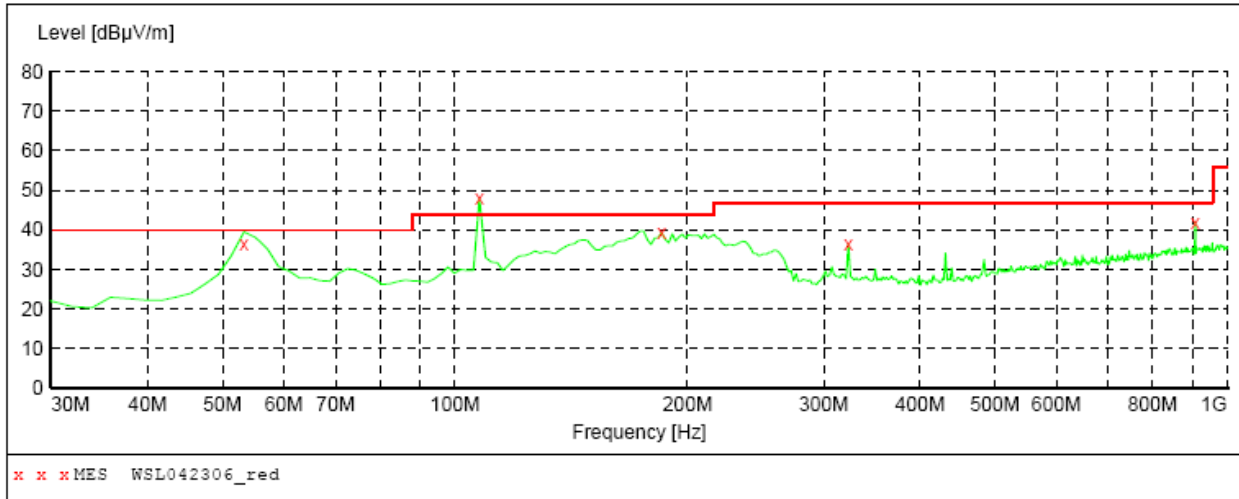

MEASUREMENT RESULT: "WSL042306_red"

4/23/2012 09:41

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	36.50	15.7	40.0	3.5	QP	300.0	0.00	HORIZONTAL
107.900000	47.90	16.8	43.5	-4.4	QP	300.0	0.00	HORIZONTAL
185.200000	39.30	14.4	43.5	4.2	QP	100.0	0.00	HORIZONTAL
322.940000	36.50	19.3	46.0	9.5	QP	100.0	0.00	HORIZONTAL
908.820000	42.00	29.3	46.0	4.0	QP	100.0	0.00	HORIZONTAL

RADIATED EMISSION BELOW 30 MHz

Frequency (MHz)	Meter Reading (dBµV)	Antenna Factor (dB/M)	Cable Loss (dB)	Emission Levels (dBµV/M)	Limits (dBµV/M)	Margin (dB)	Detector Mode
0.530	19.30	7.89	1.02	28.21	65.3	-37.09	QP
14.90	18.87	8.76	1.21	28.84	49.5	-20.66	QP
18.70	17.90	8.63	1.14	27.67	49.5	-21.83	QP
21.50	19.90	8.06	1.67	29.63	49.5	-19.87	QP

Fundamental Emission Test Data

Antenna polarization: Horizontal

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dBuV/m)	FS (dBuV/m)	Limit (dBµV/m)	Margin (dB)	Detector Mode
Low Channel: 88.1MHz						
88.1	36.4	11.9	48.3	68.0	-14.2	PEAK
88.1	13.2	11.9	25.1	48.0	-17.9	AVERAGE
Middle Channel: 98.0MHz						
98.0	31.1	17.4	48.5	68.0	-20.8	PEAK
98.0	11.8	17.4	29.2	48.0	-18.8	AVERAGE
High Channel: 107.9MHz						
107.9	32.5	16.8	49.3	68.0	-10.9	PEAK
107.9	6.9	16.8	23.7	48.0	-23.9	AVERAGE

Antenna polarization: Vertical

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dBuV/m)	FS (dBuV/m)	Limit (dBµV/m)	Margin (dB)	Detector Mode
Low Channel: 88.1MHz						
88.1	29.8	15.5	45.3	68.0	-23.3	PEAK
88.1	8.0	15.5	23.5	48.0	-23.7	AVERAGE
Middle Channel: 98.0MHz						
98.0	22.9	17.4	40.3	68.0	-21.7	PEAK
98.0	5.0	17.4	22.4	48.0	-21.3	AVERAGE
High Channel: 107.9MHz						
107.9	27.7	16.8	44.5	68.0	-27.5	PEAK
107.9	3.6	16.8	21.7	48.0	-26.6	AVERAGE

6- OCCUPIED BANDWIDTH

6.1 Requirement of Occupied Bandwidth

Emission from the intentional radiator shall be confined within a band 200kHz wide centered on the operation frequency. The 200kHz band shall lie wholly within the frequency range of 88~108MHz.

6.2 Test Procedure


- 1). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 2). The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 3). Power on the EUT and all the supporting units.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). For each suspected emission, the antenna tower was scanned (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading of both horizontal and vertical polarization.
- 6). Set EMI test receiver with Max hold. Mark peak, -20dB.

6.3 Emissions within Band Edges Test Result


Temperature (°C) : 22~23	EUT: Duracell Gooseneck Transmitter
Humidity (%RH) : 50~54	M/N: DU7128
Barometric Pressure (mbar) : 950~1000	Operation Condition: Normal Operating

Note: The EUT is playing music which iphone input.


Low Channel: 88.1MHz

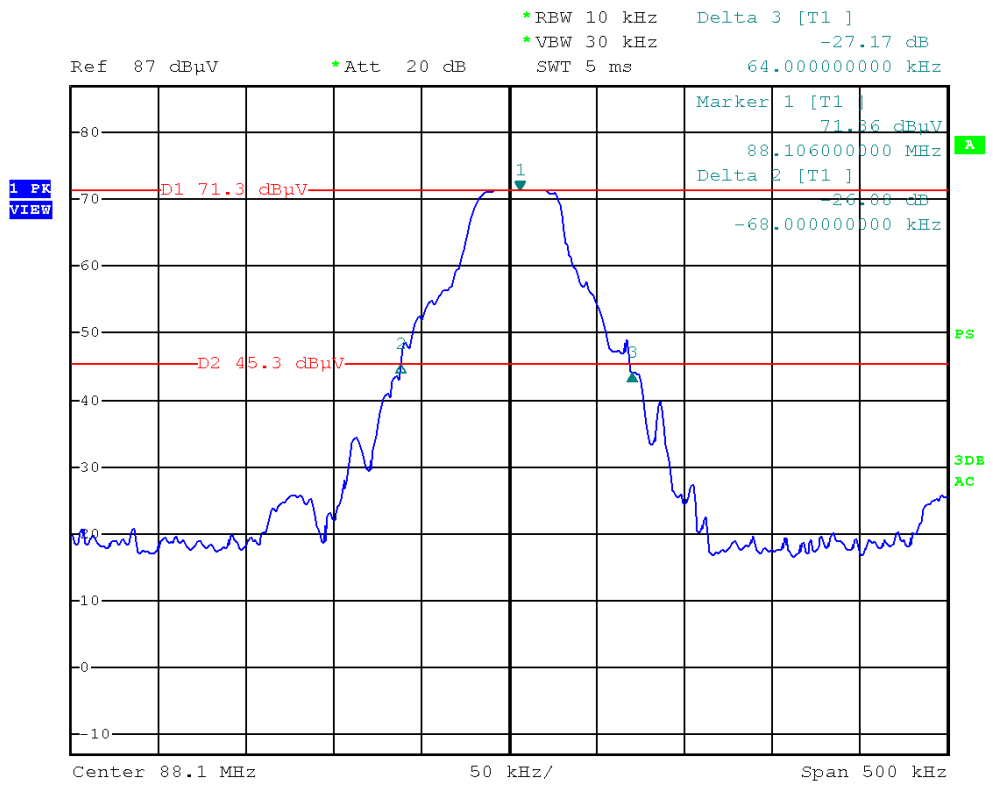

Middle Channel: 98MHz

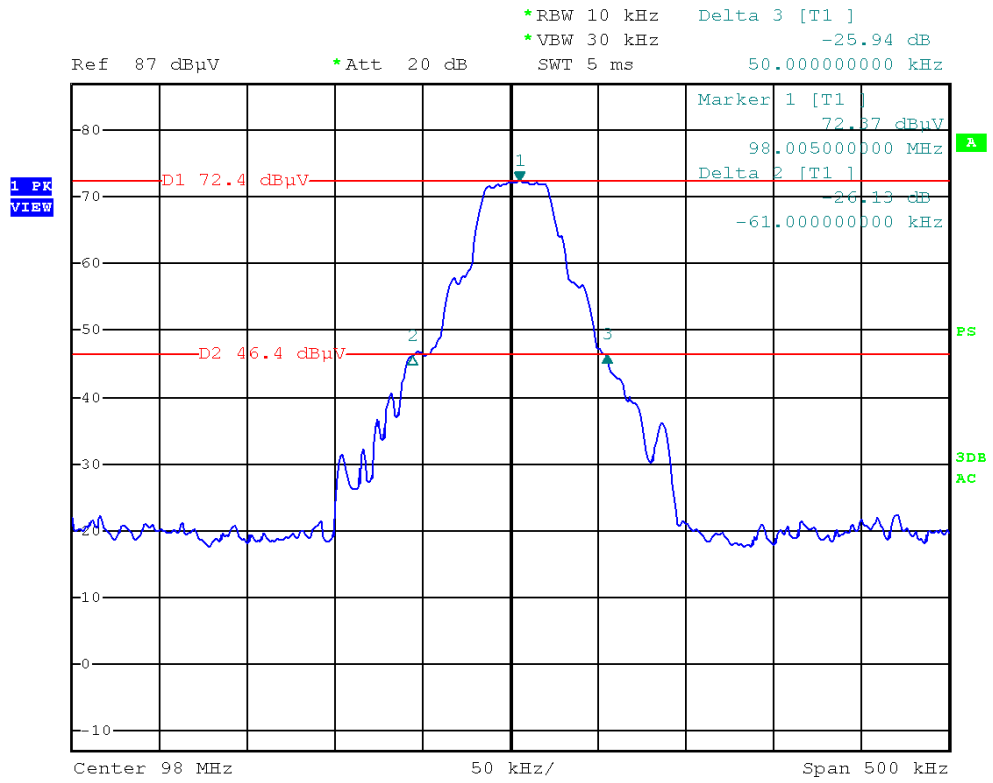

High Channel: 107.9MHz

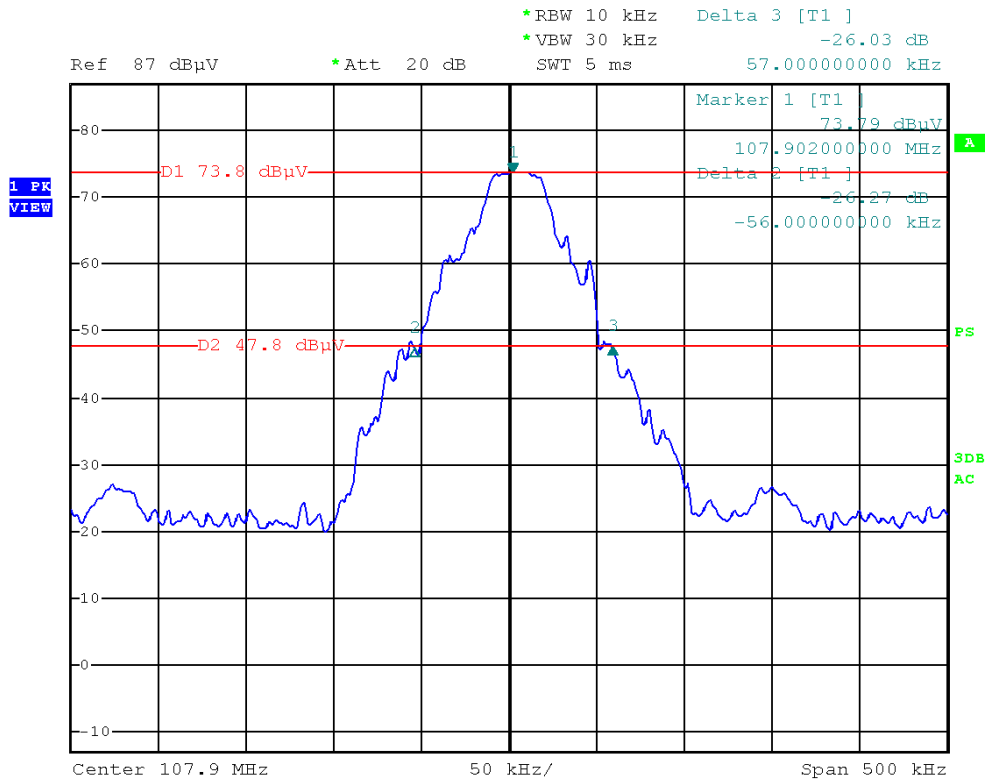

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.