



APPLIED TEST LAB INC.

Page 1 of 41

FCC Part 15C TEST REPORT

DTS (2400-2483.5 MHz)

Limits Applied: FCC 15.247

Report#: N001E040-31

Manufacturer: NovAtel Inc.

Model: PwrPak7D-E1


Serial Number: NMPM17490015B

Test Start Date: 2017-12-18

Test Completion Date: 2018-01-21

Test Result: PASS

Report Issue Date: 2018-03-26

Tested by	Approved by:
Jaeheon Yun, Test specialist 	Adiseshu Nyshadham, Quality Prime 

Report Issued to	Report Issued by
NovAtel Inc. 1120 - 68 Avenue NE Calgary, AB, T2E 8S5	Applied Test Lab Inc. Unit 4174-3961 52 Ave NE Calgary, AB, T3J 0J8

Report Revision History		
Rev	Description of Change	Date
Draft01	Initial	18-02-05
Release	Title page and information(Page 1, 3-7, 9,10, 12, 16, 18, 19, 21, 25, 28, 29, 36, 38)	18-02-20
Release 1	Title page and information(Page 1, 4, 7, 21, 24-29, 31, 36)	18-03-14
Release 2	Title page and information(Page 1, 24, 26-28, add 29)	2018-03-26
Release 3	Title page and information(Page 1, 22, 24, 26-28, add 29, 39)	2018-03-26

Applied Test Lab Inc. (ATL) test facilities are recognized by FCC and Industry Canada to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and or procedures selected by the client. ATL makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or other characteristic of the article being tested, or similar products. This report should not be relied up on as an endorsement or certification by ATL of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. The report must not be used by client to claim product endorsement by FCC or Industry Canada. Any use which a third party makes of this report, or any reliance on or decisions to be made on it, are the responsibility of such third parties. ATL accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report. This report shall not be reproduced except in full without the written approval of ATL

This report contains 41 pages



Table of Contents

1.0 General.....	3
1.1 Purpose.....	3
1.2 Relevant Standards and References.....	3
1.3 Performance Requirement.....	3
1.4 Test Results Summary.....	4
1.5 Test Facility Information.....	4
1.6 Client Information.....	4
2.0 Test Sample Information.....	5
2.1 Equipment Under Test (EUT).....	5
2.2 Support Equipment and Details.....	6
2.3 I/O Ports and Details.....	6
2.4 I/O Cable Descriptions.....	6
3.0 Test Facilities.....	7
3.1 Semi-Anechoic Chamber Test Site Description.....	8
3.2 A diagram of the Semi-Anechoic Chamber Test Site.....	10
3.3 Test Equipment List.....	11
4.0 Test Setup Description.....	12
4.1 EUT System Block Diagram and Support Equipment.....	12
4.2 Test Setup Photographs Radiated Emission(0.009MHz - 30MHz).....	13
4.3 Test Setup Photographs Radiated Emission(30MHz - 1000MHz).....	14
4.4 Test Setup Photographs Radiated Emission(1000MHz - 18000MHz).....	15
4.5 Test Setup Photographs Radiated Emission(18000MHz - 26000MHz).....	16
4.6 Test Setup Photographs Antenna Conducted Emission(9kHz - 26000MHz).....	17
5.0 Test Methodology.....	18
5.1 Method of measurement of radiated emissions or disturbance.....	18
5.2 Test Criteria.....	20
5.2.1 Radiated Emission Limits FCC Part 15.209/15.247(d) at a distance of 3 (m)	20
6.0 Test Results.....	21
6.1 FCC 15.247(b)(3) Output Power(2400-2483.5MHz DTS).....	21
6.2 FCC 15.247(d) RF Conducted Emissions & Band Edge.....	25
6.3 FCC 15. 247(d) Radiated Emission & Band Edge.....	30
7.0 Appendix A – Test Sample Description.....	39
8.0 Appendix B – List of Abbreviations and Acronyms.....	40



1.0 General

1.1 Purpose

The purpose of this report is to document conformance with FCC Part 15 Subpart C – 15.247(DTS) and to detail the results of testing performed on the sample Model: [PwrPak7D-E1](#) manufactured by [NovAtel Inc.](#). The test sample was received in good condition. Testing began [2017-12-18](#) on and was completed on [2018-01-21](#).

1.2 Relevant Standards and References

One or more of the following standards were used to evaluate the EUT:

1. **ANSI C63.4-2014:** American National Standard for Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz
2. **US Code of Federal Regulations (CFR):** Part 15 Sub part C Title 47, Radio Frequency Devices - Intentional Radiators
3. **KDB 558074 D01 DTS Meas Guidance v04 2017-04** – Guidance for performing compliance measurements on Digital Transmission System(DTS) operating under section 15.247

1.3 Performance Requirement

The EUT is marketed as [FCC Part 15 Subpart C](#) equipment and must comply with the [FCC 15.247\(DTS\)](#) emission limits and requirements.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increase emission levels should be checked and verified to ensure continuous compliance has been maintained (i.e., printed circuit board layout changes, changes to filter performance, power supply changes, I/O cable and interface changes, critical component changes etc.)



1.4 Test Results Summary

Test Type	Basic Standard	Modifications	Result
6 dB Bandwidth	15.247(a)(2)	No	NP
Output power	15.247(b)(3)	No	PASS
Power Spectral Density	15.247(e)	No	NP
RF Conducted Emissions & Band edge	15.247(d)	No	PASS
Radiated Emissions & Band edge	15.247(d)	No	PASS

NP=ATL was not contracted to perform the test.

1.5 Test Facility Information

Name	Applied Test Lab Inc.		
Address	Unit 4174-3961 52 nd Avenue NE, Calgary, Alberta, T3J 0J8, Canada		
Telephone	403 590 8701	Fax	403 590 8570
Email	emctesting@appliedtestlab.com	Website	www.appliedtestlab.com
FCC Registration	950875	IC Recognition	10988A

1.6 Client Information

Name	NovAtel Inc.		
Address	1120 - 68 Avenue NE Calgary, AB, T2E 8S5		
Telephone	403 295 4401	Website	www.novatel.com
Contact Name	Jim Turner	Contact Email	Jim.turner@novatel.com



2.0 Test Sample Information

The [PwrPak7D-E1](#) was only operated and exercised in the mode(s) and configuration(s) described in this report. All inputs and outputs to and from support equipment associated with the [PwrPak7D-E1](#) were provided or simulated under the direction and responsibility of [NovAtel Inc.](#). A description of these signals and their provision is included in Appendix A.

2.1 Equipment Under Test (EUT)

Product Description	PwrPak7D-E1, Stand-Alone Equipment
Manufacturer	NovAtel Inc.
Trade Name	PwrPak7D-E1
Model Number	PwrPak7D-E1
Serial Number	NMPM17490015B
Model discrepancy/Variations	N/A
Power Supply and Requirements	+9VDC to +36VDC, Nominal 13.2V DC
Firmware Version	OM7CR0302SN0002
Software Version	WifiConfigSequencer.exe
Antenna Type and Gain	Integral Trace, 2.6dBi
Antenna Connection Type	Integral (External connector with small cable provided to facilitate testing)
Type of Wideband System	802.11.b/g/n20
Operation Frequency Range	2412-2462MHz
Modulation type(s)	CCK, DQPSK, PBCC, BPSK, QPSK, OFDM, 16-QAM, 64-QAM
Maximum Duty Cycle	Tested 100%
Number of TX Chains	1
Other Information	See NovAtel document D21965
Product Manufacturing Status	<input type="checkbox"/> Production Unit <input type="checkbox"/> Pre-Production Unit



2.2 Support Equipment and Details

Applicable

Manufacturer	Description	Model No.	Serial Number	Other Info
Panasonic	Emission Laptop	CF-313A011KM	7EKWA16018	Emission
Panasonic	AC/DC Adaptor	CF-AA5713A M3	5713AM317110741D	Emission
Panasonic	Emission Laptop	CF-313A011KM	7EKWA16019	Emission
Panasonic	AC/DC Adaptor	CF-AA5713A M3	5713AM316Y12690D	Emission
Sorensen	DC Power Supply	XDL35-5TP	J00340748	Emission
KAYPENTAX	Attenuator	839	25773-29	Emission
Mini-circuits	Amplifier	ZHL-1217HLN SMA	H060596-8	Emission
Mini-circuit	BAIS TEE	ZFBT-4R2G-FT+	RU976000739	Emission
MOXA	USB to Serial hub	Uport 1650-8	TAGFB1070172	Emission
LINKSYS	Ethernet router	SE3008	13R11C85701269	Emission
NovAtel	GNSS Active Antenna	GPS-713-GGG-N	N/A	Emission

2.3 I/O Ports and Details

Applicable

Port Type	Description	Filter Info	Shielding Info	Other Info
COM1,COM2, COM3	COM port	No	Shielded	UUT2
USB	USB port	No	Shielded	UUT2
Ethernet	Ethernet port	No	Shielded	UUT2
Antenna	Antenna port	No	Shielded	UUT2

2.4 I/O Cable Descriptions

Applicable

Cable Description	Length (m)	Port From	Port To	Cable Type	Remarks
COM cable	2	Laptop	EUT	Shielded	UUT2
USB cable	2	Laptop	EUT	Shielded	UUT2
Power cable	1.8	AC/DC adaptor	EUT	Shielded	UUT2
Ethernet cable	5	Router	EUT	Shielded	UUT2



3.0 Test Facilities

Laboratory Location

The radiated and conducted emission test sites are located at the following address:

Applied Test Lab,
Unit 4174, 3961-52 Ave N.E., Calgary, AB T3J 0J8

Laboratory Accreditation/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site and Conducted Emission Site have been fully described, submitted to, and accepted by the FCC and Industry Canada for testing Interference by information technology equipment. In addition, ATL has implemented an interim in-house quality system which is based on the ISO 17025 standard and is actively pursuing to achieve its accreditation. The following certification numbers have been issued in recognition of the certifications:

FCC Registration Number: **950875**

Industry Canada Lab Code: **IC 10988A**

Country	Agency	Accreditation/Certification	LOGO
USA	FCC	3 (m) Semi-Anechoic Chamber to perform FCC Part 15/18 measurements	
Canada	Industry Canada	3 (m) Semi-Anechoic Chamber to perform ICES-004 and RSS measurements	 Industry Canada  Industrie Canada

Note: Unless otherwise specified, ATL performs the tests using standard test methods to evaluate the EUT for compliance to the defined International standards. However, the report is not to be used to claim compliance, certification or endorsement by FCC or Industry Canada or any other government agency unless specifically submitted to such agency for such purpose.



3.1 Semi-Anechoic Chamber Test Site Description

The Semi-Anechoic Chamber Test Site consists of a 6.24 x 9.144 x 5.79 (m) shielded enclosure. The chamber is lined with SAMWAH Ferrite Grid Absorber, model number SN-20. The ferrite tile grid is 100 x 100x 6.7 (mm) thick and weighs approximately 200 (grams). These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. Inner side Wall is lined by 600H Foam Absorber with White Cap. Chamber is illuminated by set of 12 Incandescent Bulbs.

The turntable is 198 (cm) in diameter and is located 160 (cm) from the back wall of the chamber. The chamber is grounded via Utility Ground installed at the side of the back East wall, it is bound to the Chamber ground Stud using 1/2" copper braided cable.

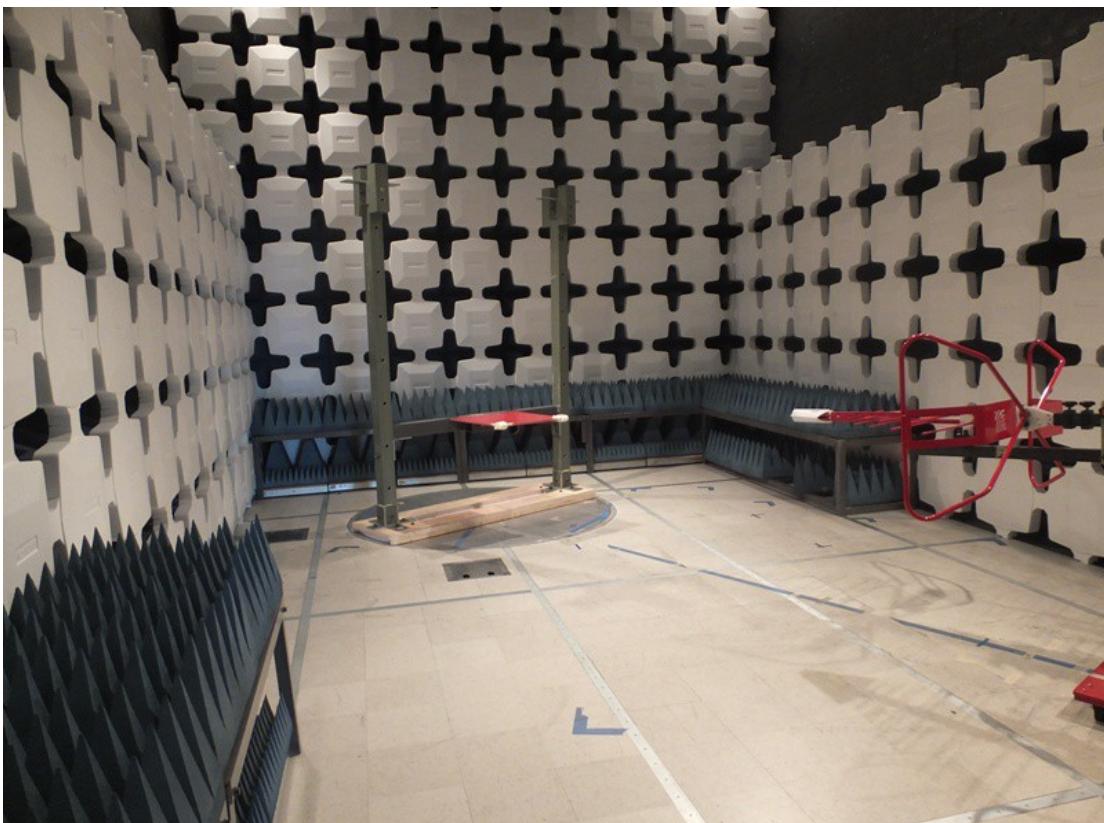


Figure 3.1 - Test Facility (Setup for 30MHz - 1000MHz)



Figure 3.2 - Test Facility (Setup for 1GHz - 18GHz)

The turntable is all aluminum, flush mounted table installed in an all steel frame. The table is remotely operated from the control area located outside the Semi Anechoic Chamber. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

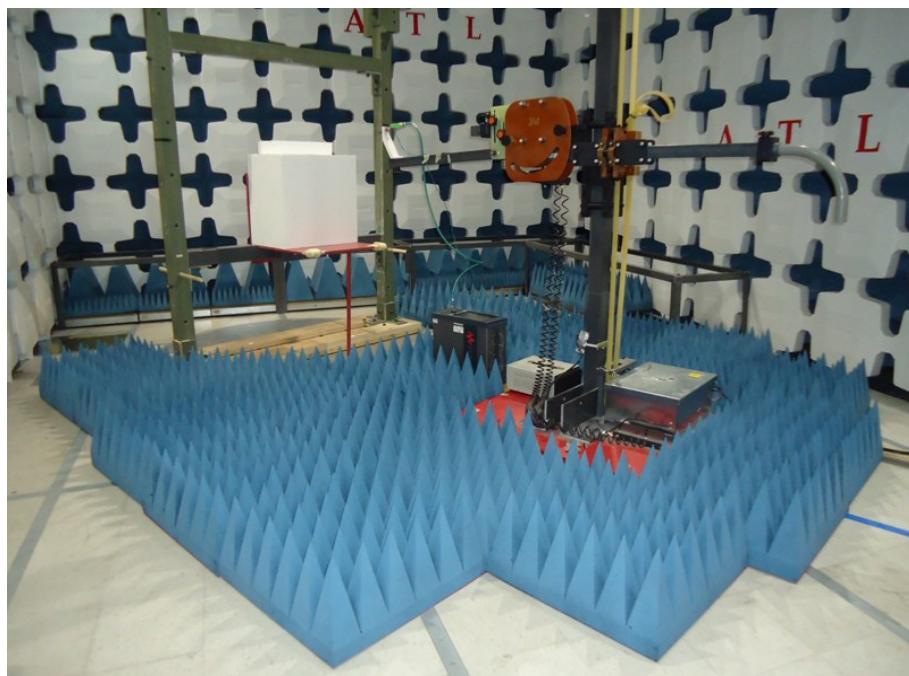


Figure 3.3 - Test Facility (Setup for 18GHz - 26GHz)



3.2 A diagram of the Semi-Anechoic Chamber Test Site

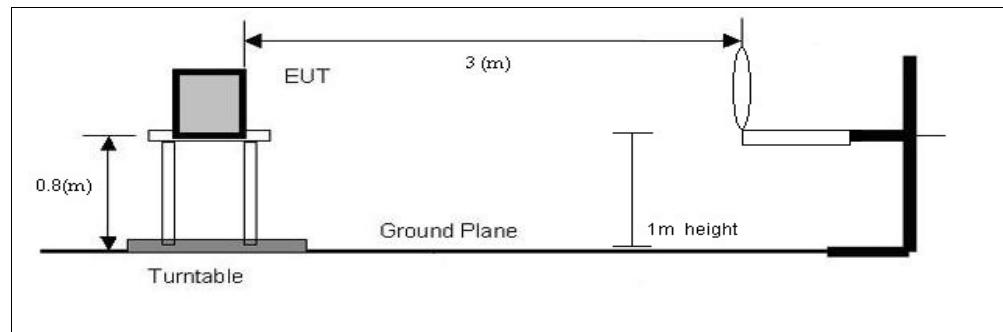


Figure 3.4 - Semi- Anechoic chamber diagram(0.009MHz - 30MHz)

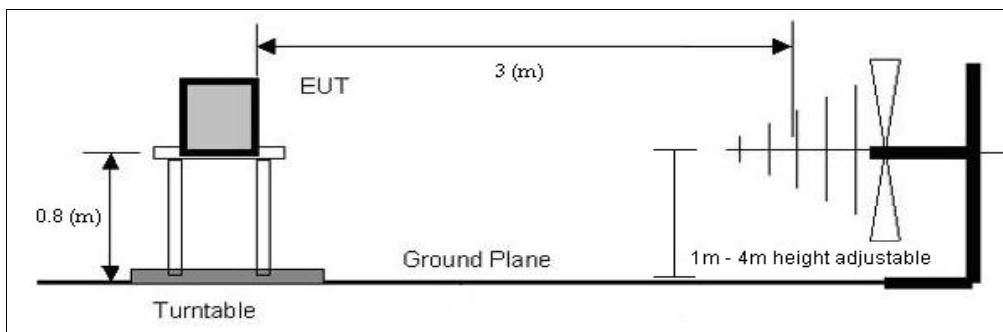


Figure 3.5 - Semi- Anechoic chamber diagram(30MHz - 1000MHz)

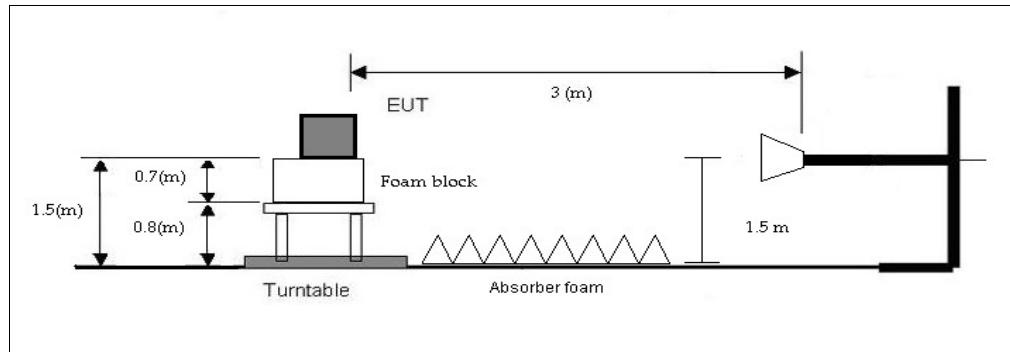


Figure 3.6 - Semi- Anechoic chamber diagram(1000MHz – 18000MHz)

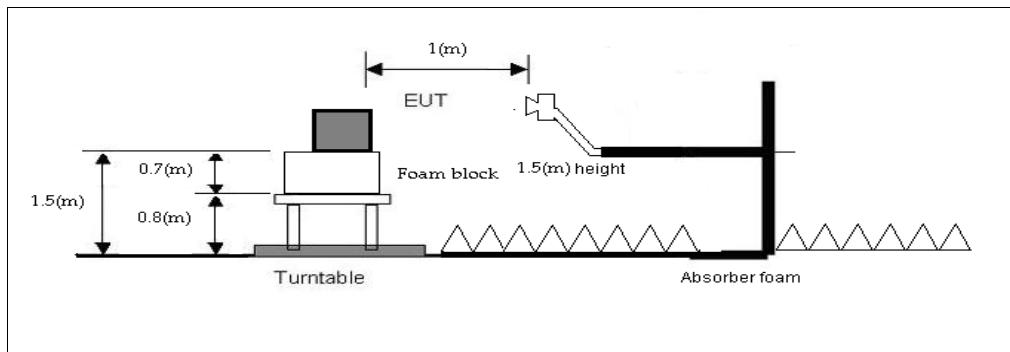


Figure 3.7 - Semi- Anechoic chamber diagram(18000MHz – 26000MHz)



3.3 Test Equipment List

Table 3.1 - Test Equipment used for Radiated Emission

Description	Manufacturer	Model Number	Serial Number	Next Cal
Bi-Log antenna	ETS Lindgren	3142E	144760	April 29, 2018
Double Ridged Horn	ETS Lindgren	3117	143094	May 5, 2019
Spectrum Analyzer	Hewlett Packard	Hp8593EM	3639A00172	February 18, 2018
EMI Receiver & RF filter section	Hewlett Packard	8546A, 85460A	3448A00267, 3448A00245	May 13, 2018
MXA Signal Analyzer	Keysight	N9020B-526	SG56080714	October 13, 2019
Cable	Micro Coax UTIFLEX	UFB293C	303	PV
Cable	Micro Coax UTIFLEX	UFB311A	SFC220863	PV
Cable	Micro Coax UTIFLEX	UFA210B-0-0120-50250	96G1557	PV
Turntable	ETS Lindgren	2187	NA	NCR
Antenna Bore-sight Mast	ETS Lindgren	2071B	136243	NCR
Multi Device Controller	ETS Lindgren	ETS 2090	148017	NCR
3 Meter chamber	ETS Lindgren	FACT 3-2.0	N/A	March 27, 2018
LNA	MITEQ	AMF-7D-01001800-22-10P	1782797	PV
LNA	Wenteq Microwave CORP	ABL0300-00-4030	N/A	PV
DC power supply	Instek	PC-3030	9503310	PV
Test SW	DVT Solutions Inc	REDvtAtlV3p29.exe - (20170610)		

NOTE: The measurement uncertainty is less than +/- 4.4 (dB) which is evaluated as per the NAMAS NIS 81 and CISPR 16-4-2

NCR: No Calibration required.

PV:Periodic Verification



4.0 Test Setup Description

4.1 EUT System Block Diagram and Support Equipment

Applicable

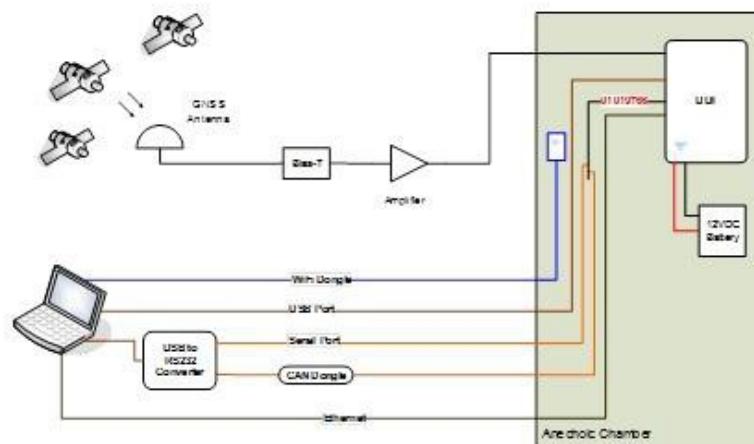


Figure 4.1a – Test setup for Radiated Emission measurement

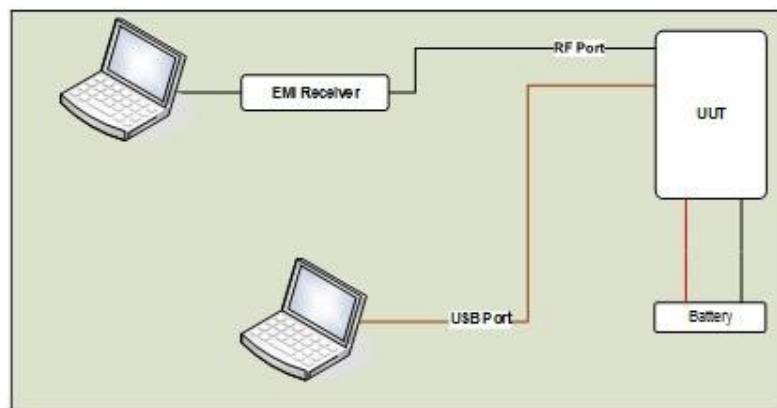


Figure 4.1b - Test setup for Conducted Emission measurement – Antenna port



4.2 Test Setup Photographs Radiated Emission(0.009MHz - 30MHz)

Applicable

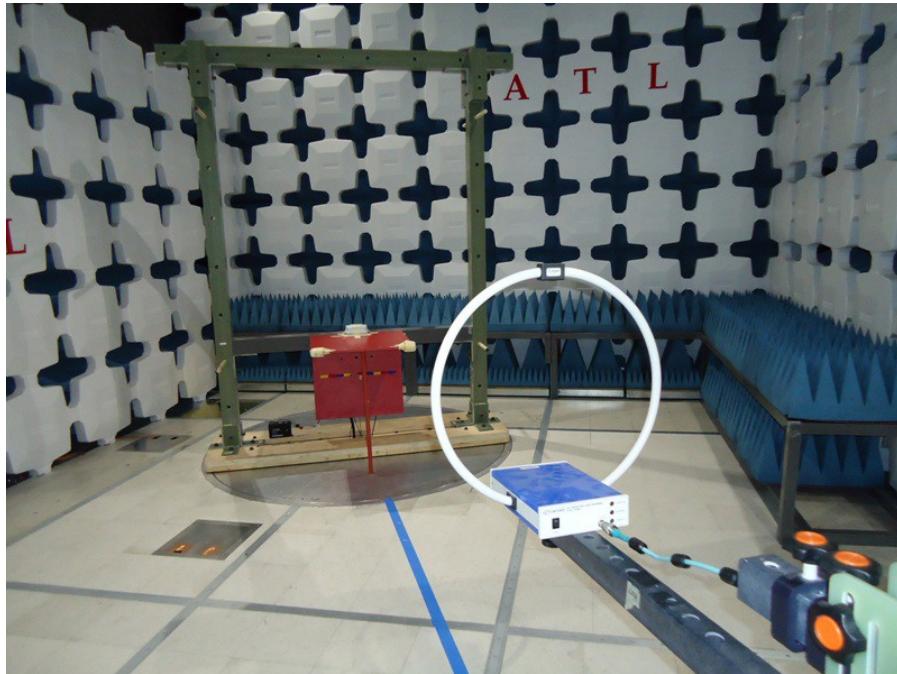


Figure 4.2 - Radiated Emission Test Setup - Front View

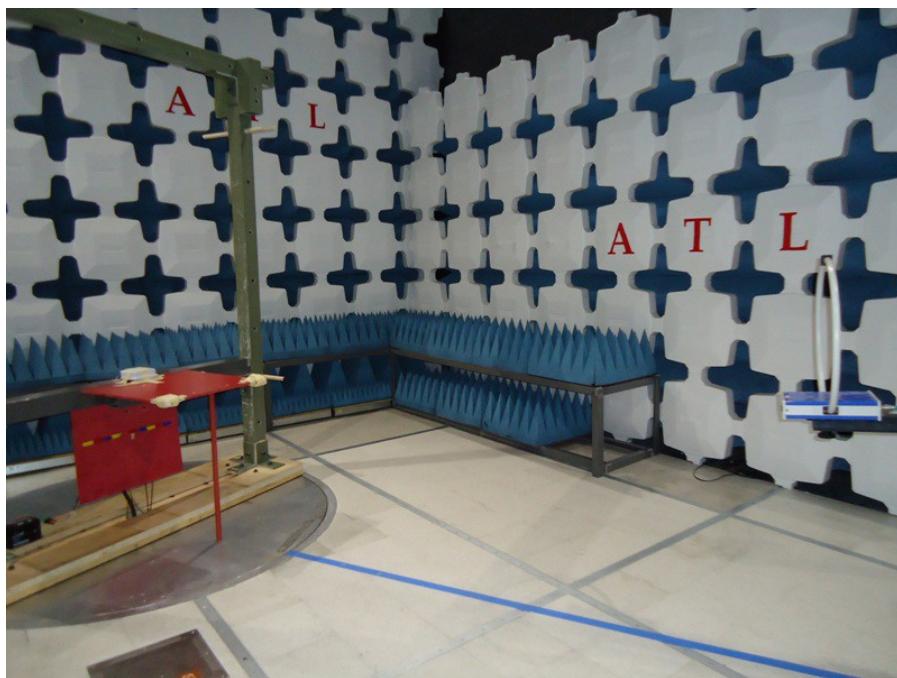


Figure 4.3 - Radiated Emission Test Setup - Side View



4.3 Test Setup Photographs Radiated Emission(30MHz - 1000MHz)

Applicable

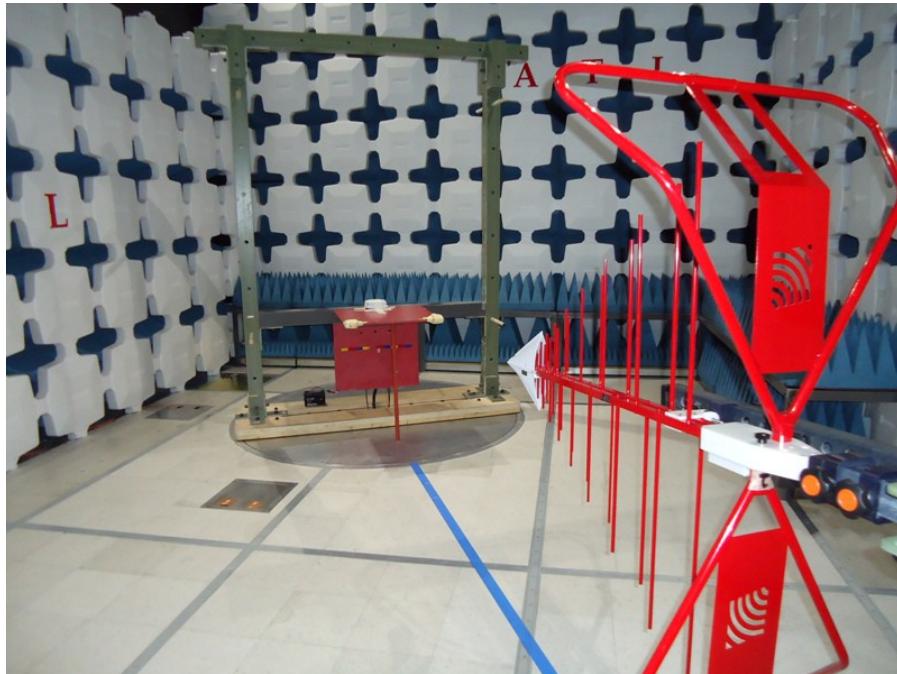


Figure 4.4 - Radiated Emission Test Setup - Front View



Figure 4.5 - Radiated Emission Test Setup - Side View



4.4 Test Setup Photographs Radiated Emission(1000MHz - 18000MHz)

Applicable



Figure 4.6 - Radiated Emission Test Setup - Front View



Figure 4.7 - Radiated Emission Test Setup - Side View



4.5 Test Setup Photographs Radiated Emission(18000MHz - 26000MHz)

Applicable



Figure 4.8 - Radiated Emission Test Setup - Front View



Figure 4.9 - Radiated Emission Test Setup - Side View



4.6 Test Setup Photographs Antenna Conducted Emission(9kHz - 26000MHz)

Applicable



Figure 4.10 – Antenna Conducted Emission Test Setup



5.0 Test Methodology

5.1 Method of measurement of radiated emissions or disturbance

Testing Setup/Configuration

Unless otherwise indicated, the following configuration steps are used for the equipment setup: The cable(s) were routed consistent with the typical application and installation instructions provided with the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cable(s) was investigated to find the configuration that produced maximum emissions. Cable(s) were of the type and length as specified in the individual requirements. The length(s) of cable(s) that produced maximum emissions was selected.

The equipment under test(EUT) was set up in a manner that is represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was measured with a spectrum analyzer or receiver using the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were performed in order to ensure that all emissions from the EUT were detected and maximized.

Correction Factors

The highest emission reading from spectrum analyzer was converted using correction factors as shown (Analyzer/Receiver) in the formula. For radiated emissions in dBuV/m, the spectrum analyzer reading in dBuV was corrected by using the following formula. This corrected reading was then compared to the applicable specification limit and the results are presented in the margin column. The margin was calculated based on subtracting the specification limit value from the corrected measurement data; a positive margin represents a measurement exceeding the specification limit, while a negative margin represents a measurement less the the specification limit.

Corrected Reading (dBuV/m) = Analyzer/Receiver Reading(dBuV) + Correction Factor(dB/m)

Correction Factor (dB/m) = Cable Loss(dB) + Antenna Factor(dB/m)-((Preamplifier Gain)(dB))

Margin (dB) = Corrected Reading(dBuV/m) - Applicable Limit(dBuV/m)



Test Instrumentation and Analyzer settings

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10dB per division were used.

Measuring equipment bandwidth setting per frequency range			
Test	Start	Stop	Band width setting
Conducted Emissions	150kHz	30MHz	9kHz
Radiated Emissions	9kHz	150kHz	200Hz
Radiated Emissions	150kHz	30Mhz	9kHz
Radiated Emissions	30MHz	1000Mhz	120kHz
Radiated Emissions	1000MHz	>1GHz	1MHz

Spectrum Analyzer / Receiver Detector Functions

The notes that accompany the measurements contained in the emissions tables indicate the type of the detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "AVG" on appropriate rows of the data sheets. In case where quasi-peak or average limits were employed and exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference.



5.2 Test Criteria

5.2.1 Radiated Emission Limits FCC Part 15.209/15.247(d) at a distance of 3 (m)

Frequency range of radiated measurements.

(a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

Applicable

Table 5.6 - Radiated Emission Part 15.209 Limits(FCC)

Emission Type	Frequency Range (MHz)	FCC @ 3 (m) (dBuV/m)	
		Quasi-peak	Average
Radiated Emission	0.009 - 0.490	-	128.52 to 93.8
	0.490 - 1.705	-	73.8 to 62.97
	1.705 - 30	-	69.54
	30 - 88	40	-
	88 - 216	43.52	-
	216 - 960	46.02	-
	960 - 1000	53.98	-
	Above 1000	-	53.98
	2400 - 2483.5	-	137



6.0 Test Results

6.1 FCC 15.247(b)(3) Output Power(2400-2483.5MHz DTS)

Applicable

Table 6.1 – Output Power(2400-2483.5MHz DTS) information

CLIENT:	NovAtel Inc.	TEST STANDARD:	FCC 15.247(b)(3)
MODEL NUMBER:	PwrPak7D-E1	PRODUCT:	PwrPak7D-E1
SERIAL NUMBER:	NMPM17490015B	CLASS:	FCC 15.247
TEMPERATURE:	20.5°C	HUMIDITY:	13%
TESTED BY:	Adiseshu Nyshadham	DATE OF TEST:	2018-01-18
TESTREFERENCE:	ANSI C63.10(2013), KDB 558074(April 5, 2017)		
TEST VOLTAGE:	9VDC, 13.2VDC, 36VDC		
SETUP:	The EUT is DC powered through a DC power supply. The EUT is connected to a support laptop via USB and RS232 directly. The EUT is continuously transmitting. Low, Mid and High channels as well as all data rates were investigated, worst case data reported. The EUT was fitted with a temporary antenna port for direct conducted measurements.		
FREQUENCY RANGE	Fundamental		
FREQUENCY TESTED:	2412MHz, 2442MHz, 2462MHz		
FIRMWARE POWER SETTING	10 dBm (Maximum power)		
EUT FIRMWARE	OM7CR0302SN0002		
MODULATION/DATA RATE	All data rates were investigated, 1M data rate was found to be worst case.		
ANTENNA TYPE/GAIN	Integral Trace/ 2.6dBi		
DUTY CYCLE	100%		
RESULTS:	PASS		



Table 6.2 – Test Data Summary – Output Power with Voltage Variations

Voltage Variations					
Frequency (MHz)	Modulation	9VDC (dBm)	13.2VDC (dBm)	36VDC (dBm)	Max Deviation from 13.2VDC (dB)
2412	1M Data Rate	8.79	8.83	8.72	0.11
2442	1M Data Rate	8.93	8.99	8.74	0.25
2462	1M Data Rate	10.11	9.38	9.3	-0.73

Table 6.3 – Power Output Test Data Summary – RF Conducted Measurement

Power Output Test Data Summary – RF Conducted Measurement				
Frequency	Modulation	Measured (dBm)	Limit (dBm)	Result
2412	1M Data Rate	8.83	30	PASS
2442	1M Data Rate	8.99	30	PASS
2462	1M Data Rate	9.38	30	PASS

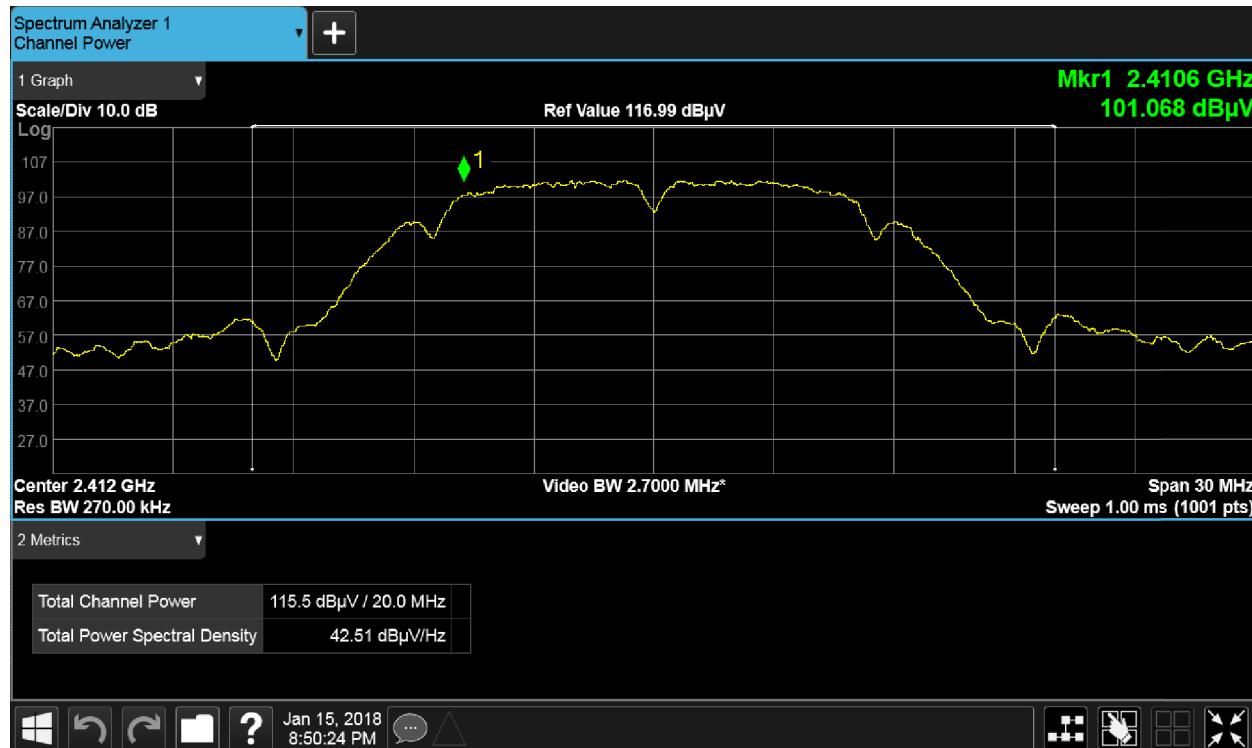


Figure 6.1 – Channel 1, Data rate 1M Data.

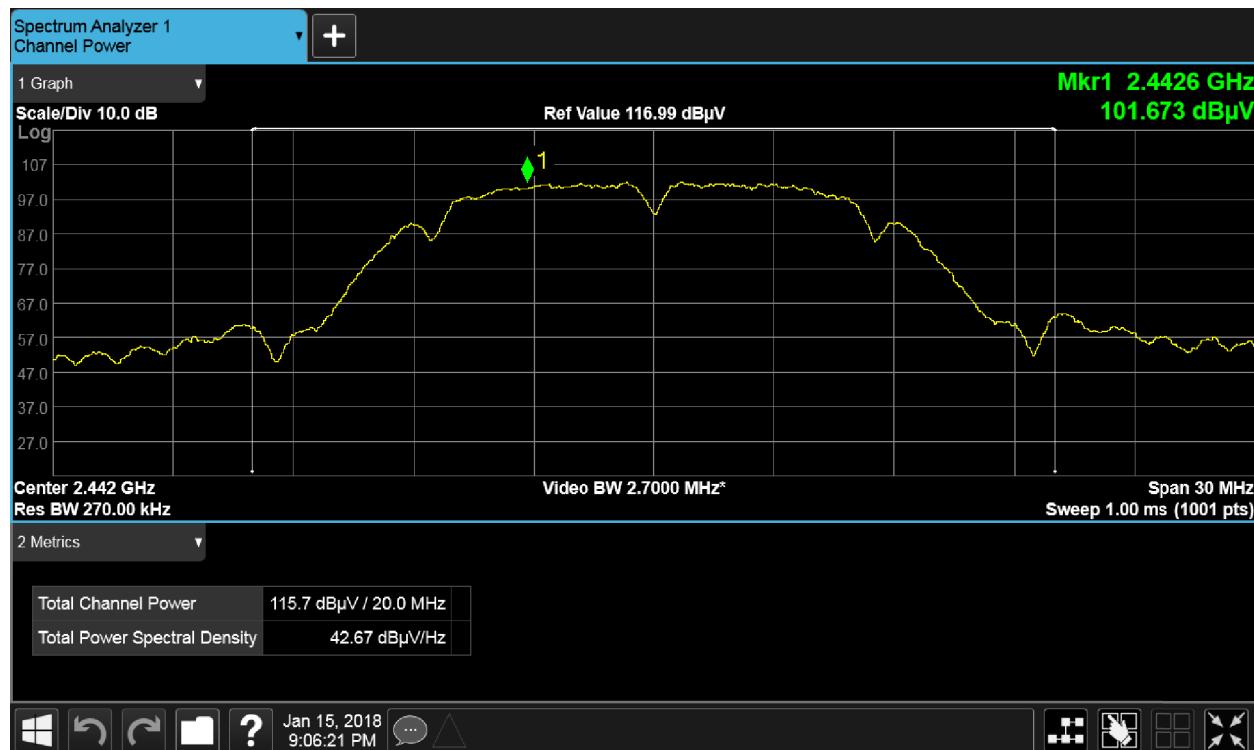


Figure 6.2 - Channel 7, Data rate 1M Data.

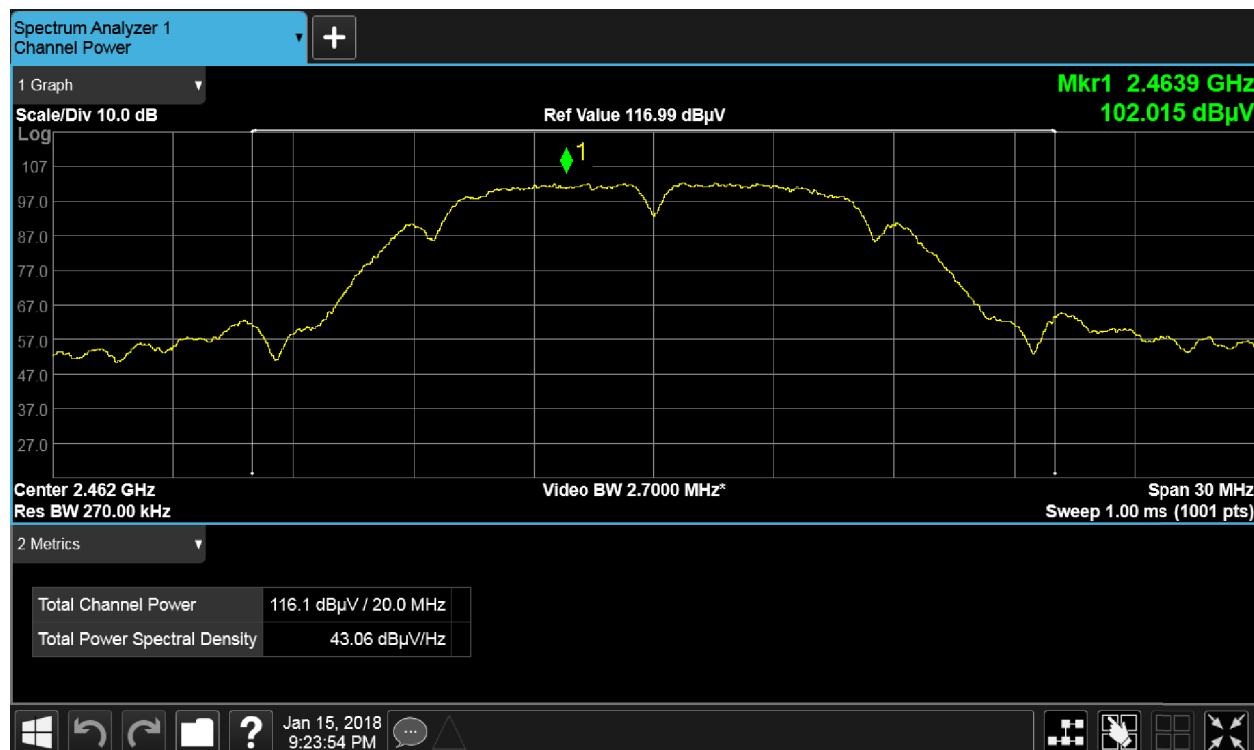


Figure 6.3 – Channel 11, Data rate 1M Data.

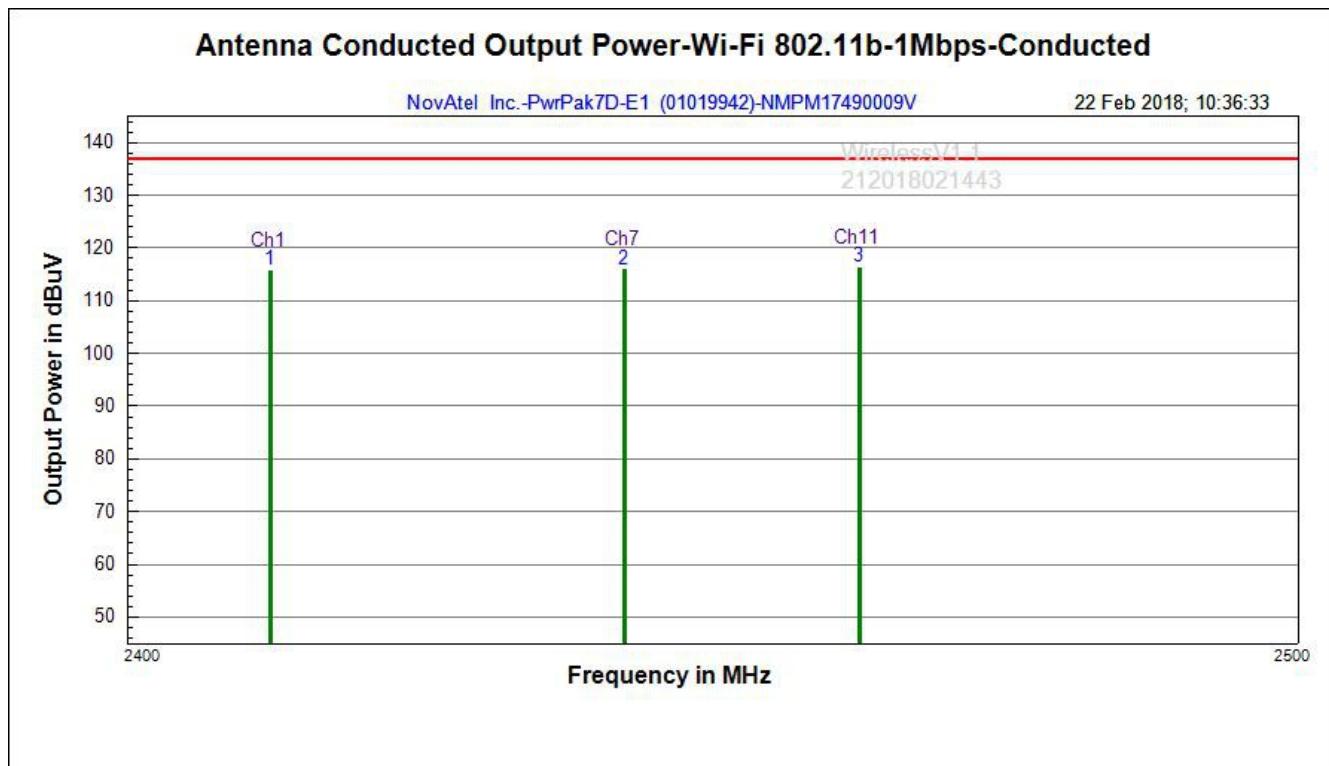


Figure 6.4 - Antenna Conducted Out Put Power (2400MHz - 2500MHz)

Table 6.3a – Antenna Conducted Output Power Measurement

Frequency (MHz)	Measured Reading (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV)	FCC 15.247(d) Limit (dBuV)	Margin (dB)
2412	115.52	0.31	115.83	137	-21.17
2442	115.68	0.31	115.99	137	-21.01
2462	116.07	0.31	116.38	137	-20.62

Note: The correction factor is the insertion loss of the 7.6cm coaxial RF cable that was a temporary antenna port for conducted measurements. Worse case insertion loss value used.



6.2 FCC 15.247(d) RF Conducted Emissions & Band Edge

Applicable

Table 6.4 – RF Conducted Emission Test Setup Information (FCC 15.247(d))

CLIENT:	NovAtel Inc.	TEST STANDARD:	FCC 15.247(d)
MODEL NUMBER:	PwrPak7D-E1	PRODUCT:	PwrPak7D-E1
SERIAL NUMBER:	NMPM17490015B	CLASS:	FCC 15.247
TEMPERATURE:	20.5°C	HUMIDITY:	14%
TESTED BY:	Adiseshu Nyshadham	DATE OF TEST:	2018-01-27
TESTREFERENCE:	ANSI C63.10(2013), KDB 558074(April 5, 2017)		
TEST VOLTAGE:	13.2VDC		
SETUP:	<p>The EUT is DC powered through a DC power supply. The EUT is connected to a support laptop via USB and a RS232 directly.</p> <p>The EUT is continuously transmitting. Low, Mid and High channels as well as all data rates were investigated, worst case data was reported. The EUT was fitted with a temporary antenna port for direct conducted measurements.</p>		
FREQUENCY RANGE	Fundamental		
FREQUENCY TESTED:	2412MHz, 2442MHz, 2462MHz		
FIRMWARE POWER SETTING	10 dBm (Maximum power)		
EUT FIRMWARE	OM7CR0302SN0002		
MODULATION/DATA RATE	All data rates were investigated, 1M data rate was found to be worst case.		
ANTENNA TYPE/GAIN	Integral Trace/ 2.6dBi		
DUTY CYCLE	100%		
RESULTS:	PASS		

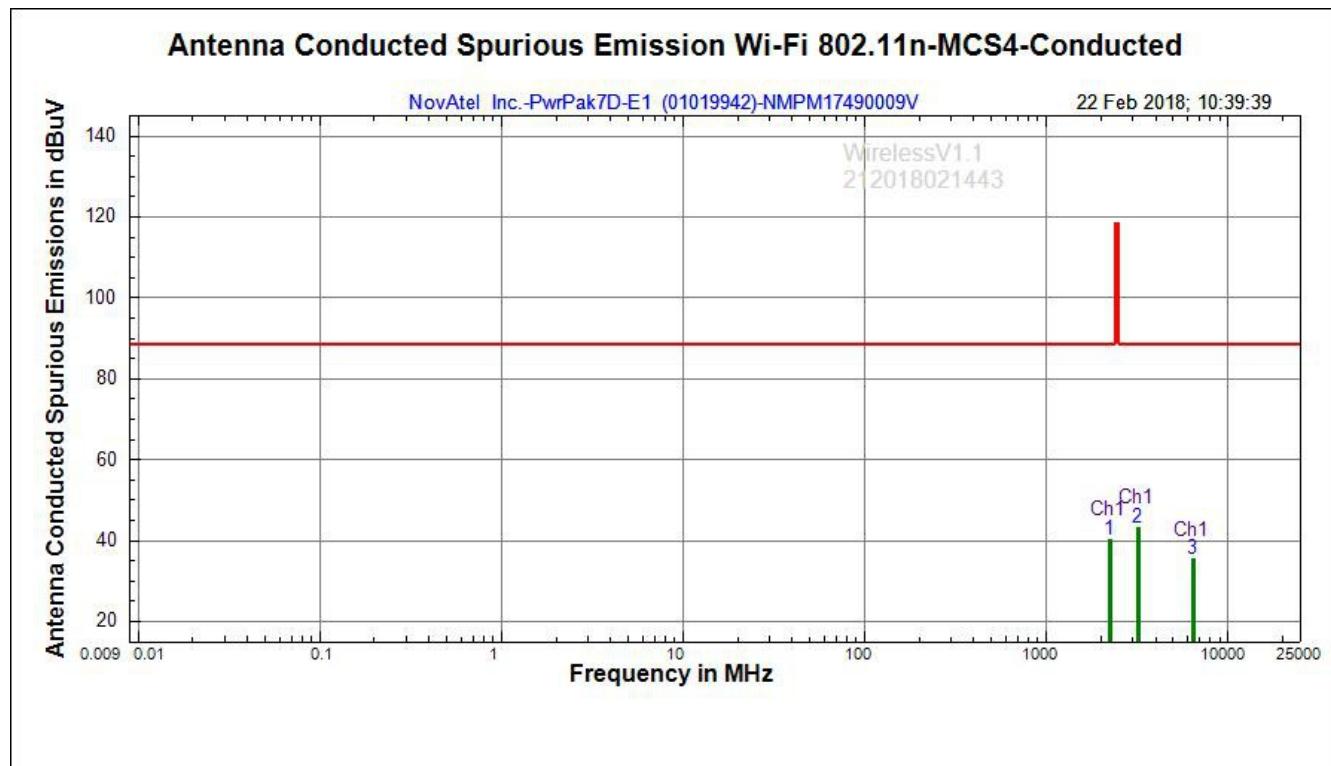


Figure 6.5 - Antenna Conducted Spurious Emission (9kHz - 25GHz)

Table 6.5 – Antenna Conducted Spurious Emission Measurement (FCC 15.247(d))

Frequency (MHz)	Measured Reading (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV/m)	FCC 15.247(d) Limit (dBuV/m)	Margin (dB)
3216	43.0261	0.31	43.34	85.99	-42.65
2235	40.117	0.31	40.43	85.99	-45.56
6432	35.13	0.31	35.44	85.99	-50.55

Limit for Spurious Emissions = Average channel Power (dBuV) -30 dB

Ex: $115.68 \text{ (dBuV)} + 0.31(\text{dB}) - 30\text{dB} = 85.99 \text{ dBuV}$,

where 115.68 dBuV is the measured reading of Antenna Conducted Output Power at 2442 MHz, shown in Table 6.3 (a).

Note: The correction factor is the insertion loss of the 7.6cm coaxial RF cable that was a temporary antenna port for conducted measurements. Worse case insertion loss value used.



Table 6.6 – Band Edge Summary (FCC 15.247(d))

Worst Case Data Rate: MCS04

Frequency (MHz)	Modulation/ Data Rate	Measured In-Band Level (dBm)	Measured Band Edge Level (dBm)	Limit (dBm)	Result
2400	MCS04 Data rate	-6.33	-41.12	-36.02	PASS
2483.5	MCS04 Data rate	-4.77	-47.19	-34.46	PASS

Limit Applied: In-Band Max power – 30dB (with 100k RBW)

Ex: For 2400 MHz, -6.33 dBm+0.31dB-30.00dB = -36.02 dBm

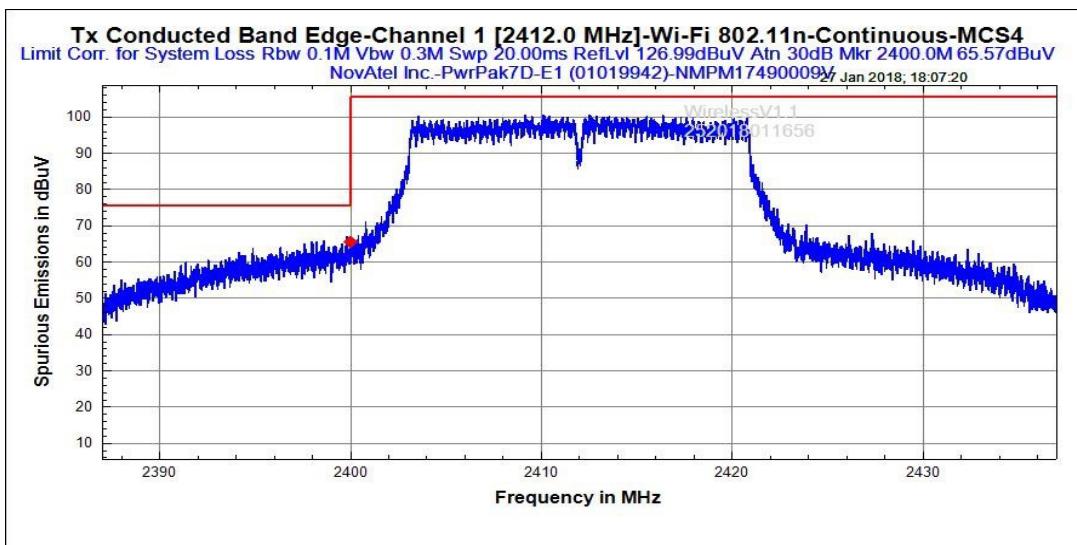


Figure 6.6 – Band Edge Plots (FCC Part 15,247(d))

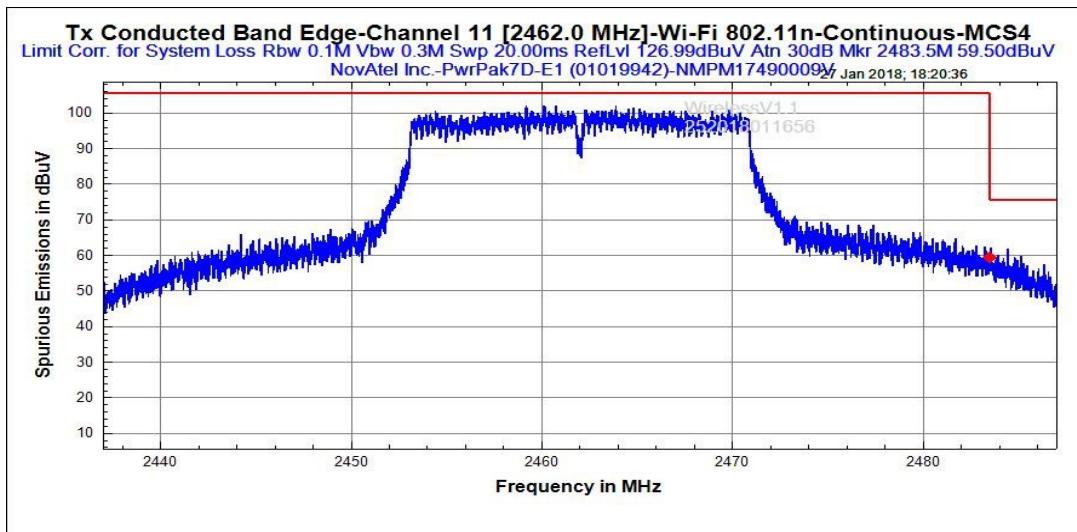


Figure 6.7 - Band Edge Plots (FCC Part 15,247(d))



Table 6.7 - Conducted Spurious Emission Test Setup Information (FCC 15.247(d))

CLIENT:	NovAtel Inc.	TEST STANDARD:	FCC 15.247(d)
MODEL NUMBER:	PwrPak7D-E1	PRODUCT:	PwrPak7D-E1
SERIAL NUMBER:	NMPM17490015B	CLASS:	FCC 15.247
TEMPERATURE:	20.5°C	HUMIDITY:	14%
TESTED BY:	Adiseshu Nyshadham	DATE OF TEST:	2018-01-27
TESTREFERENCE:	ANSI C63.10(2013), KDB 558074(April 5, 2017)		
TEST VOLTAGE:	13.2VDC		
SETUP:	<p>The EUT is DC powered through a DC power supply. The EUT is connected to a support laptop via USB and RS232 directly.</p> <p>The EUT is continuously transmitting. Low and High channels as well as all data rates were investigated, worst case data reported. The EUT was fitted with a temporary antenna port for direct conducted measurements.</p>		
FREQUENCY RANGE	Fundamental		
FREQUENCY TESTED:	2412MHz, 2462MHz		
FIRMWARE POWER SETTING	10 dBm (Maximum Power)		
EUT FIRMWARE	OM7CR0302SN0002		
MODULATION/DATA RATE	All data rates were investigated, 1M data rate was found to be worst case.		
ANTENNA TYPE/GAIN	Integral Trace/ 2.6dBi		
DUTY CYCLE	100%		
RESULTS:	PASS		

Table 6.8 - Conducted Spurious Emission measurement

Frequency (MHz)	Measured In-Band Level (dBuV)	Measured Band Edge Level (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV)	FCC 15.247(d) Limit (dBuV)	Margin (dB)
2400	100.67	65.57	0.31	65.88	70.98	-5.10
2483.5	102.23	59.5	0.31	59.81	72.54	-12.73

Limit Applied: In-Band Max power – 30dB (with 100k RBW)

Ex: For 2400 MHz, $100.67 + 0.31 - 30.00 = 70.98$ dBuV.

Note: The correction factor is the insertion loss of the 7.6cm coaxial RF cable that was a temporary antenna port for conducted measurements. Worse case insertion loss value used.



Band Edge Emission Calculations

Worst Case Data Rate: MCS04

	Channel 01 (2412 MHz)	Channel 11-(2462MHz)
100k in-band level (dBuV)	100.67	102.23
100k BW Band edge level (dBuV)	65.57	59.50
Fundamental-Band edge) level (dB down)	35.10	42.73
Fundamental-Band edge) Frequency (MHz)	2400.00	2483.50
Limit Applied (dB down)	30.00	30.00
Margin (dB)	5.10	12.73



6.3 FCC 15.247(d) Radiated Emission & Band Edge

Applicable

Table 6.9 - Radiated Spurious Emission Test Setup Information (FCC 15.247(d)/15.209)

CLIENT:	NovAtel Inc.	TEST STANDARD:	FCC 15.247(d)/ 15.209
MODEL NUMBER:	PwrPak7D-E1	PRODUCT:	PwrPak7D-E1
SERIAL NUMBER:	NMPM17490015B	CLASS:	FCC 15.247
TEMPERATURE:	23.5°C	HUMIDITY:	20%
TESTED BY:	Jaeheon Yun	DATE OF TEST:	2017-12-21 - 2018-01-17
TESTREFERENCE:	ANSI C63.10(2013), KDB 558074(April 5, 2017)		
TEST VOLTAGE:	13.2VDC		
SETUP:	<p>The EUT is DC powered through a battery. The EUT is connected to an external GNSS active antenna which is located remotely with an open view of the sky. The active antenna is powered by a Bias Tee coupler and the signal strength is tuned with an amplifier and output DC power supply. The Bias Tee coupler is powered by a AC/DC output power supply. The EUT is connected to a support laptop via 1 USB port and The 26Pin IO cable and Ethernet cable. I/O port contained 1 x CAN Interface and 3 x RS-232 ports and event in and out tie together. The RS-232 ports which were connected to a serial to USB 2 port hub which is then connected to the laptop. The USB transfer port of the EUT is connected to another support the laptop located under the chamber floor.</p> <p>The EUT is continuously transmitting. Low, Mid and High channels as well as all data rates were investigated, worst case data was reported. The EUT is fully exercised with communication and data transfer between the EUT and support laptop. Below 1GHz, the EUT is on the test table 80cm high. Above 1GHz, the EUT is on the test table 150cm high connected to the internal trace antenna.</p>		
FREQUENCY RANGE	9k - 25GHz		
FREQUENCY TESTED:	2412MHz, 2442MHz, 2462MHz		
FIRMWARE POWER SETTING	10 dBm (Maximum power)		
EUT FIRMWARE	OM7CR0302SN0002		
MODULATION/DATA RATE	All data rates were investigated, MCS07 data rate was found to be worst case.		
ANTENNA TYPE/GAIN	Integral Trace/ 2.6dBi		
DUTY CYCLE	100%		
RESULTS:	PASS		

**Table 6.10 - Radiated Emission - Horizontal Polarization Quasi-peak**

Frequency (MHz)	Azimuth Angle (deg)	Antenna Height (cm)	Measured Reading (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV/m)	FCC 15.209 Limit (dBuV/m)	Margin (dB)
51.1	0	100	-3.42	12.92	9.50	40	-30.50
70.82	0	100	-3.39	13.57	10.18	40	-29.82
155	0	100	-3.25	17.08	13.83	43.52	-29.69
240	282.9	100	9.42	19.46	28.88	46.02	-17.14
480	0	200	12.86	25.77	38.63	46.02	-7.39
864	112.5	100	-2.47	31.87	29.40	46.02	-16.62

Table 6.11 - Radiated Emission - Vertical Polarization Quasi-peak

Frequency (MHz)	Azimuth Angle (deg)	Antenna Height (cm)	Measured Reading (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV/m)	FCC 15.209 Limit (dBuV/m)	Margin (dB)
51.1	277.2	100	11.35	12.92	24.27	40	-15.73
70.82	40.9	100	10.04	13.57	23.61	40	-16.39
155	196.2	100	5.27	17.08	22.35	43.52	-21.17
240	44.6	100	8.07	19.46	27.53	46.02	-18.49
480	0	100	13.01	25.77	38.78	46.02	-7.24
864	76.8	100	0.24	31.87	32.11	46.02	-13.91

**Table 6.12 - Radiated Emission - Horizontal Polarization AVG**

Frequency (MHz)	Azimuth Angle (deg)	Antenna Height (cm)	Measured Reading (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV/m)	FCC 15. 209 Limit (dBuV/m)	Margin (dB)
2438	228.6	100	51.69	-21.77	29.92	53.98	-24.06
3256	71.4	100	55.38	-20.96	34.42	53.98	-19.56
6511	113	100	52.73	-15.98	36.75	53.98	-17.23
13024	341	100	35.85	-3.67	32.18	53.98	-21.80

Table 6.13 - Radiated Emission - Vertical Polarization AVG

Frequency (MHz)	Azimuth Angle (deg)	Antenna Height (cm)	Measured Reading (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV/m)	FCC 15. 209 Limit (dBuV/m)	Margin (dB)
2438	228.6	100	51.09	-21.77	29.32	53.98	-24.66
3256	71.4	100	56.9	-20.96	35.94	53.98	-18.04
6511	77.7	100	53.05	-15.98	37.07	53.98	-16.91
13024	341	100	47.38	-3.67	43.71	53.98	-10.27

Note: The emissions with peak detector were measured and found to meet average limits. Only Average detector measurements were shown in the above tables.

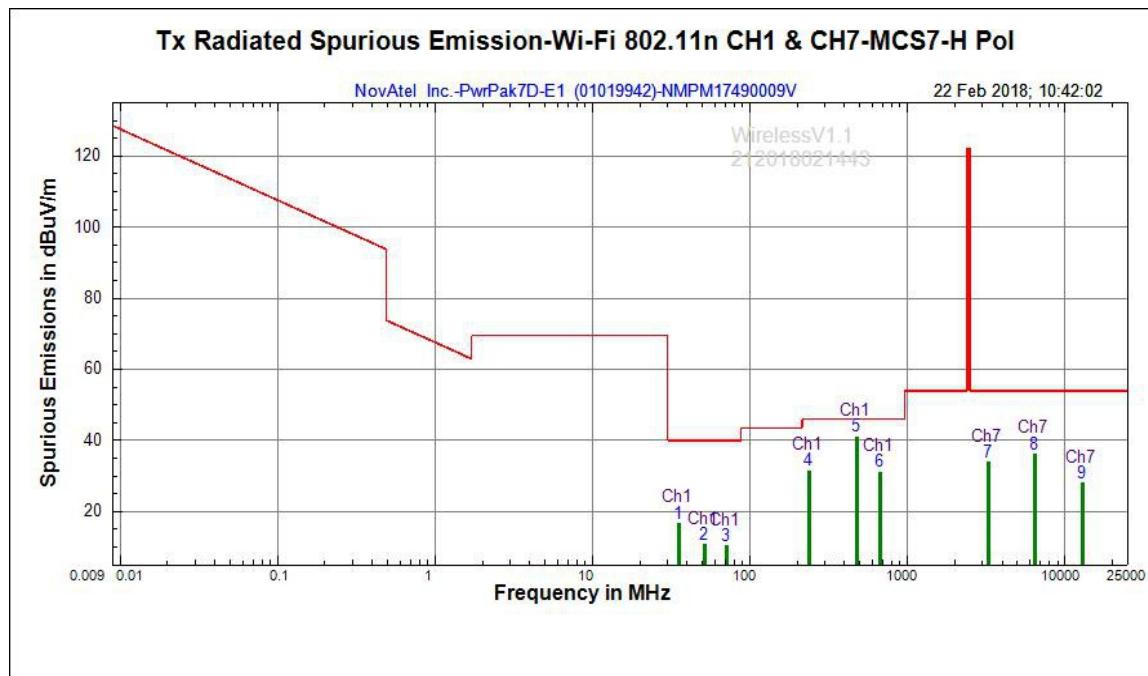


Figure 6.8 - Radiated Spurious Emission data(Ch 7, MCS07) -H-Pol

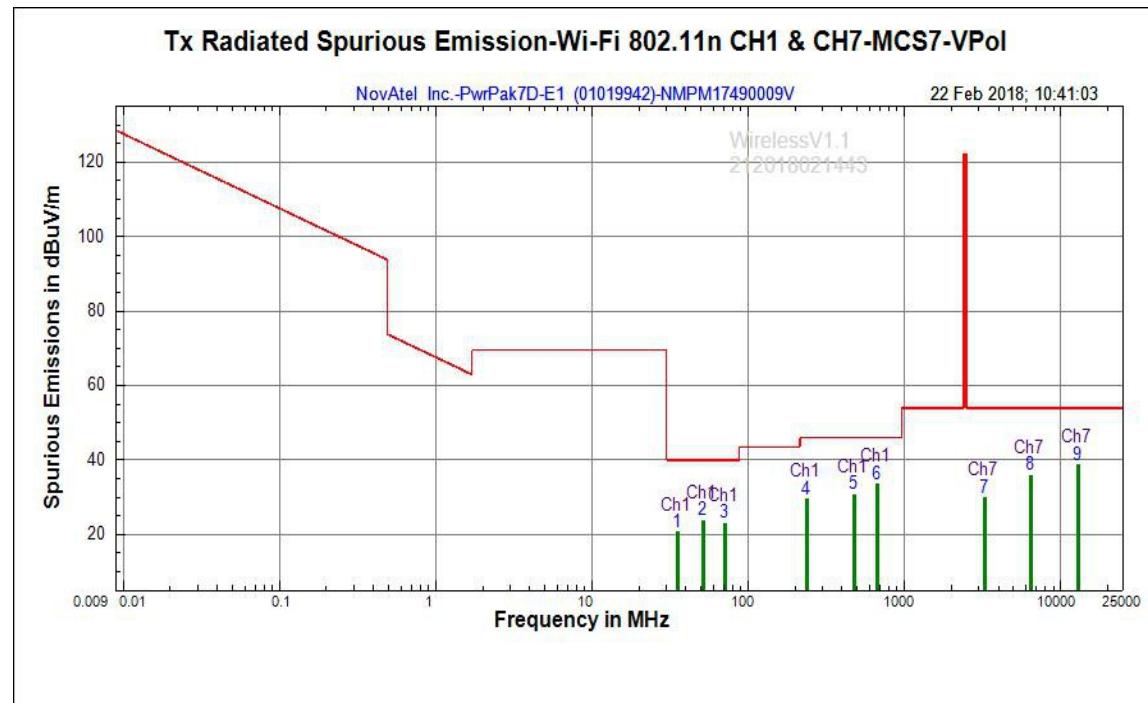


Figure 6.9 - Radiated Spurious Emission data(Ch 7, MCS07) – V-pol.



Table 6.14 – Radiated Band Edge Summary (FCC 15.247(d)) - 6Mbps data

Frequency (MHz)	Measurement (dBuV)	Factor (dB)	Field Strength (dBuV/m@ 3m)	Limit (dBuV/m @ 3m)	Margin (dB)	Detector	Result
2400	62.89	4.11	67	97.8	-30.8	Peak	PASS
2483.5	54.32	4.68	59	74	-15	Peak	PASS
2400	50.01	4.11	54.12	77.8	-23.68	AVG	PASS
2483.5	42.41	4.68	47.09	54	-6.91	AVG	PASS

[NOTE] All data rates were investigated, worst case data (6Mbps) was reported.



Applicable

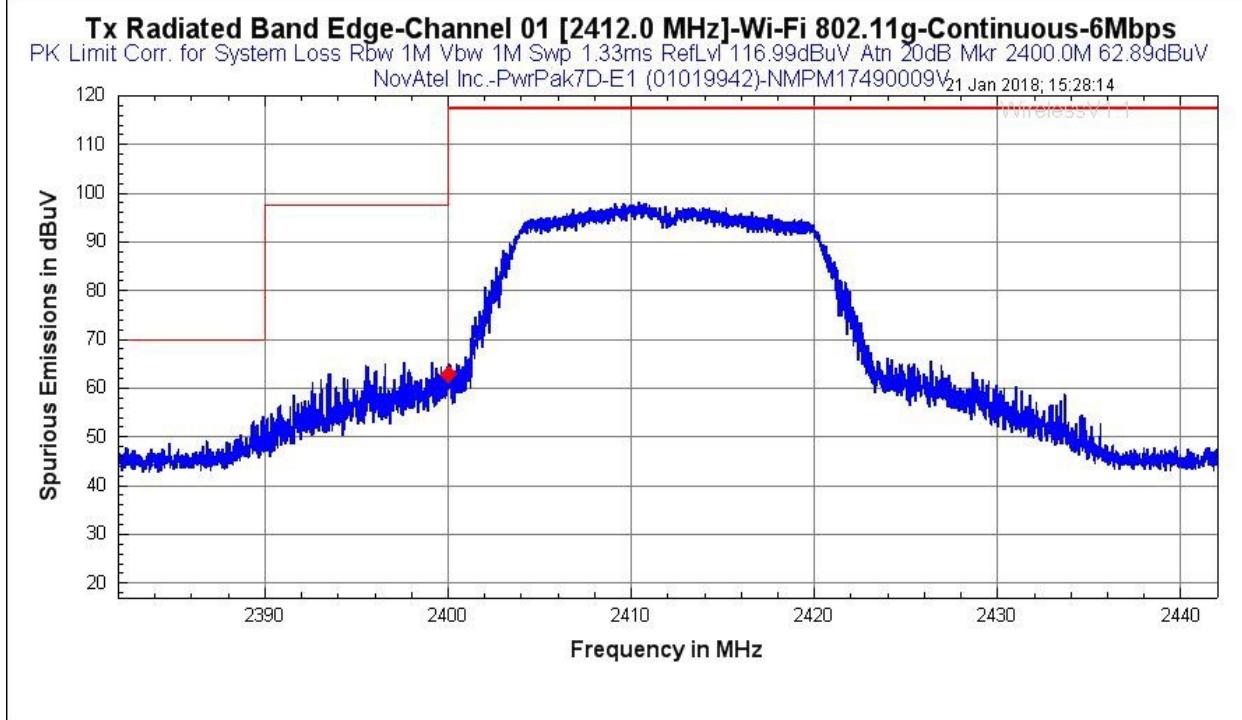


Figure 6.10 – Radiate Band Edge data (Channel 1, 6Mbps, Peak)

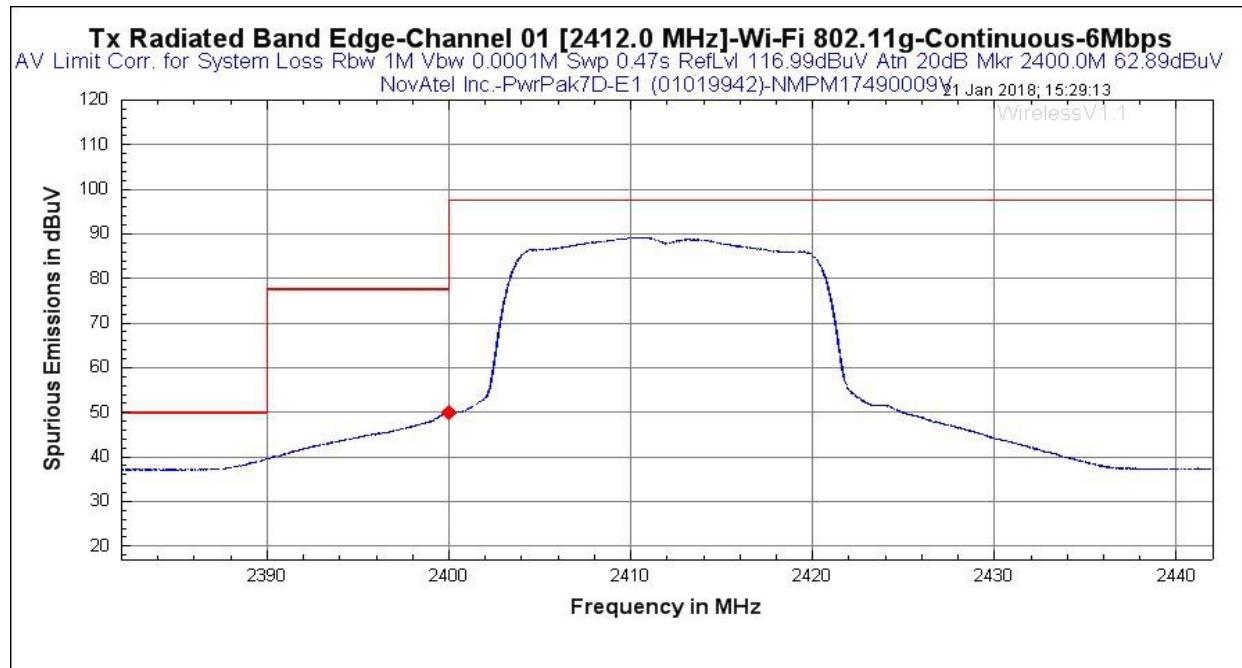


Figure 6.11 – Radiated Band Edge data (Channel 1, 6Mbps, Average)



Applicable

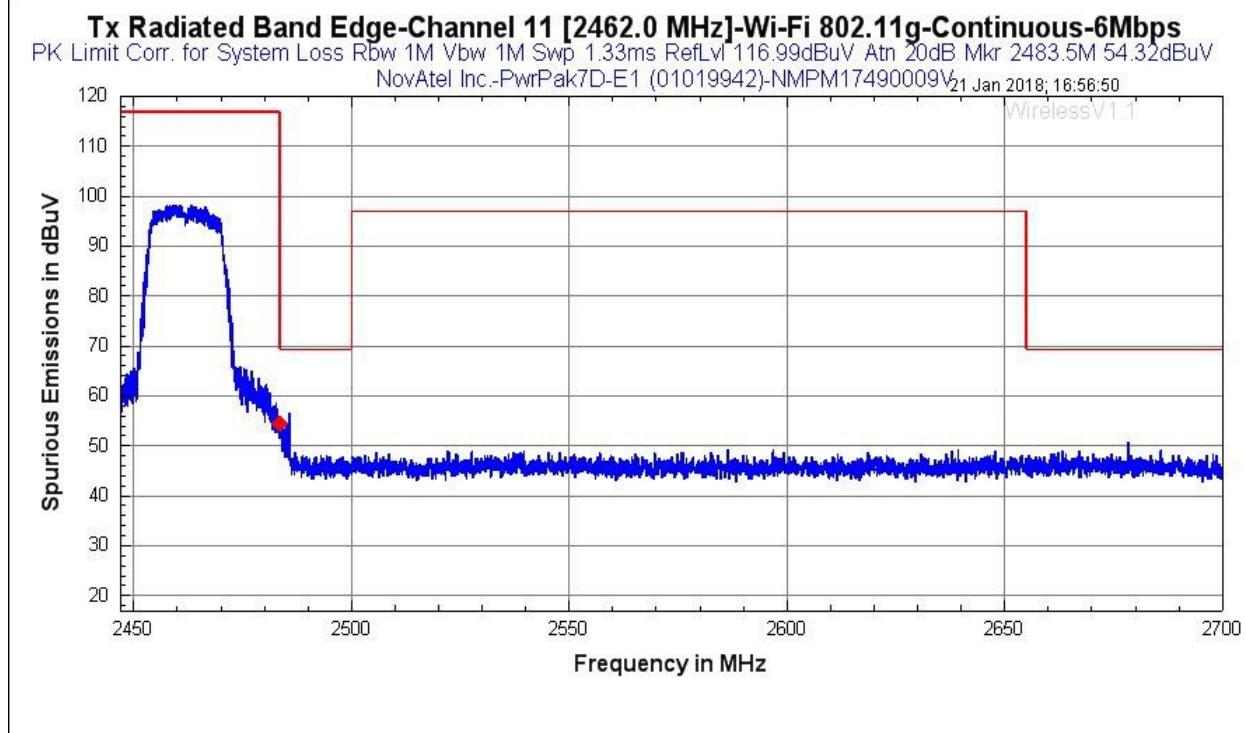


Figure 6.12 – Radiated Band Edge data (Channel 11, 6Mbps, Peak)

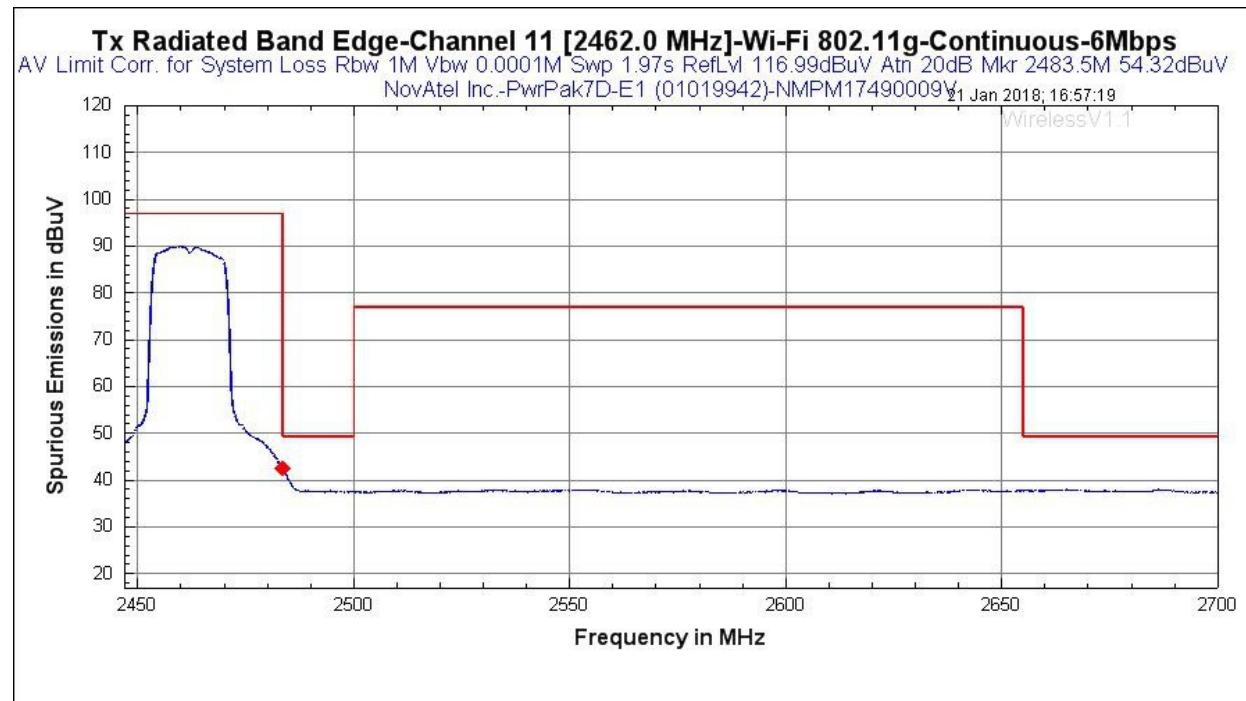


Figure 6.13 – Radiated Band Edge data (Channel 11, 6Mbps, Average)



Applicable

Table 6.15 - Radiated Spurious Emissions AVG Setup Information (FCC 15.247(d)/15.209)

CLIENT:	NovAtel Inc.	TEST STANDARD:	FCC 15.247(d)/ 15.209
MODEL NUMBER:	PwrPak7D-E1	PRODUCT:	PwrPak7D-E1
SERIAL NUMBER:	NMPM17490015B	CLASS:	FCC 15.247
TEMPERATURE:	23.5°C	HUMIDITY:	20%
TESTED BY:	Jaeheon Yun	DATE OF TEST:	2018-01-18
TESTREFERENCE:	ANSI C63.10(2013), KDB 558074(April 5, 2017)		
TEST VOLTAGE:	13.2VDC		
SETUP:	<p>The EUT is DC powered through a battery. The EUT is connected to an external GNSS active antenna which is located remotely with an open view of the sky. The active antenna is powered by a Bias Tee coupler and the signal strength is tuned with an amplifier and output DC power supply. The Bias Tee coupler is powered by a AC/DC output power supply. The EUT is connected to a support laptop via 1 USB port and The 26Pin IO cable and Ethernet cable. I/O port contained 1 x CAN Interface and 3 x RS-232 ports and event in and out tie together. The RS-232 ports which were connected to a serial to USB 2 port hub which is then connected to the laptop. The USB transfer port of the EUT is connected to another support the laptop located under the chamber floor.</p> <p>The EUT is continuously transmitting. Low, Mid and High channels as well as all data rates investigated, worst case data reported. The EUT is fully exercised with communication and data transfer between the EUT and support laptop. Below 1GHz, the EUT is on the test table 80cm high. Above 1GHz, the EUT is on the test table 150cm high connected to the internal trace antenna.</p>		
FREQUENCY RANGE	2.38GHz – 2.7GHz		
FREQUENCY TESTED:	2412MHz, 2462MHz		
FIRMWARE POWER SETTING	10 dBm (Maximum power)		
EUT FIRMWARE	OM7CR0302SN0002		
MODULATION/DATA RATE	All data rates were investigated, 6Mbps data rate was found to be worst case.		
ANTENNA TYPE/GAIN	Integral Trace/ 2.6dBi		
DUTY CYCLE	100%		
RESULTS:	PASS		

**Table 6.16 - Radiated Emission - Horizontal Polarization AVG FCC**

Frequency (MHz)	Azimuth Angle (deg)	Antenna Height (cm)	Measured Reading (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV/m)	FCC 15.209 Limit (dBuV/m)	Margin (dB)
2400	163	134.8	50.01	4.11	54.12	77.8	-23.68
2483.5	335.2	108.4	42.41	4.68	47.09	54	-6.91

Table 6.17 - Radiated Emission - Vertical Polarization AVG FCC

Frequency (MHz)	Azimuth Angle (deg)	Antenna Height (cm)	Measured Reading (dBuV)	Correction Factor (dB)	Corrected Reading (dBuV/m)	FCC 15.209 Limit (dBuV/m)	Margin (dB)
2400	163	134.8	47.44	4.11	51.55	77.8	-26.25
2483.5	335.2	108.4	39.16	4.68	43.84	54	-10.16



7.0 Appendix A – Test Sample Description

(From Data Provided by the Customer)

PwrPak7D Description



The PwrPak7D® Receiver (01019942) is an integrated GNSS Receiver / Inertial Sensor with Heading capability.

The System is comprised of:

- OEM7720 GNSS Engine (01019788)
- Epson G320 IMU
- PwrPak7 Interface Card (01019980)
- Front Panel Flex Circuit (01019884)
- WiFi Radio (2.4 GHz only) (17523226)

Functional Description:

Primary RF:

- GPS L1 C/A, L1C, L2P, L5
- GLO L1 C/A, L2C, L2P, L3, L5
- BDS B1, B2
- GAL E1, E5 ~~All BOC~~, E5a, E5b
- IRNSS L5
- SBAS L1, L5
- QZSS L1 C/A, L1C, L2C, L5
- L-Band up to 5 channels

Secondary RF:

- GPS L1 C/A, L1C, L2C, L2P
- GLO L1 C/A, L2C, L2P
- BDS B1, B2
- GAL E1, E5b
- QZSS L1 C/A, L1C, L2C

Interfaces:

- CAN
- USB Device
- USB Host
- Ethernet
- WiFi interface
- Com 1, 2 and 3 (1 and 2 RS232/RS422 capable)
- Dual antenna port (SMA connectors)
- Wheel sensor support (HD26 port)

I/O Signals:

- 1 PPS
- Event1, Event2 and Event3 inputs
- Event1, Event2 and Event3 outputs

Dimensions and Weight:

- Dimensions: 145 mm x 147 mm x 75 mm
- Weight: 500 g

Power:

- Input Voltage Range: 9.0 V_{dc} to 36 V_{dc} (-40 °C to +65 °C) (Wi-Fi On)
- Input Voltage Range: 9.0 V_{dc} to 36 V_{dc} (-40 °C to +75 °C) (Wi-Fi Off)



8.0 Appendix B – List of Abbreviations and Acronyms

Industrial, scientific and medical (ISM) applications (of radio frequency energy)

operation of equipment or appliances designed to generate and use locally radio frequency energy for industrial, scientific, medical, domestic or similar purposes, excluding applications in the field of telecommunications

ISM equipment and appliances

equipment or appliances designed to generate and/or use locally radio-frequency energy for industrial, scientific, medical, domestic or similar purposes, excluding applications in the field of telecommunications and information technology and other applications covered by other CISPR publications

Electromagnetic radiation

1. phenomenon by which energy in the form of electromagnetic waves emanates from a source into space
2. energy transferred through space in the form of electromagnetic waves

Boundary of the equipment under test

imaginary straight line periphery describing a simple geometric configuration encompassing the equipment under test. All interconnecting cables are included within this boundary

Electro-discharge machining (EDM) equipment

all the necessary units for the spark erosion process including the machine tool, the generator, control circuits, the working fluid container and integral devices

Spark erosion

removal of material in a dielectric working fluid by electro-discharges, which are separated in time and randomly distributed in space, between two electrically conductive electrodes (the tool electrode and the work piece electrode), and where the energy in the discharge is controlled

Arc welding equipment

equipment for applying current and voltage and having the required characteristics suitable for arc welding and allied processes

Equipment for resistance welding and allied processes

all equipment associated with carrying out the processes of resistance welding or allied processes consisting of e.g. power source, electrodes, tooling and associated control equipment, which may be a separate unit or part of a complex machine

Low voltage LV

a set of voltage levels used for the distribution of electricity and whose upper limit is generally accepted to be 1 000 V a.c.



End of document