

RF TEST REPORT

Test item : Mobile Computer
Model No. : FCC: XM5
IC: XM5WB
Order No. : DTNC1410-04625, DTNC1410-04628
Date of receipt : 2014-10-23
Test duration : 2014-11-03 ~ 2014-11-17
Date of issue : 2014-11-26
Use of report : FCC & IC Original Grant

Applicant : Janam Technologies LLC
100 Crossways Park West Suite 105, Woodbury, New York 11797 USA

Test laboratory : DT&C Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : FCC Part 15.225
RSS-210 Issue 8 :2010
Test environment : See appended test report
Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

Tested by:



Engineer
SeokHwan Hong

Reviewed by:



Technical Manager
HongHee Lee

Test Report Version

Test Report No.	Date	Description
DRTFCC1411-1508	Nov, 26. 2014	Initial issue

CONTENTS

1. Equipment information.....	4
1.1 Equipment description.....	4
1.2 Ancillary equipment.....	4
2. Information about test items.....	5
2.1 Test mode.....	5
2.2 Auxiliary equipment.....	5
2.3 Tested frequency.....	5
2.4 Tested environment.....	5
2.5 EMI Suppression Device(s)/Modifications.....	5
3. ANTENNA REQUIREMENTS.....	5
4. Test report.....	6
4.1 Summary of tests.....	6
4.2 Transmitter requirements.....	7
4.2.1 Occupied bandwidth.....	7
4.2.2 In-band emissions.....	8
4.2.3 Out-of-band emissions.....	9
4.2.4 Frequency Stability.....	11
4.2.5 AC Line Conducted Emissions.....	12
APPENDIX.....	15

1. Equipment information

1.1 Equipment description

FCC Equipment Class	Low Power Communications Device Transmitter(DXX)
Equipment type	Mobile Computer
Equipment model name	FCC: XM5 IC: XM5WB
Equipment add model name	NA
Equipment serial no.	Identical prototype
Frequency band	13.56MHz
Modulation type	ASK
Channel	1
Power	Li-ion Battery: DC 3.7V AC-DC Adaptor: AC 120V 60Hz
Antenna type	Loop Antenna

1.2 Ancillary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2. Information about test items

2.1 Test mode

Test mode1	Continuous transmitting mode
Test mode2	-

Note: For this test mode, a test program was supported by manufacturer.

2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2.3 Tested frequency

	TX Frequency(MHz)	RX Frequency(MHz)
Lowest Channel	13.56	13.56
Middle Channel	-	-
Highest Channel	-	-

2.4 Tested environment

Temperature	: 23~ 25 °C
Relative humidity content	: 31 ~ 47 % R.H.
Details of power supply	: DC 3.7 V

2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

3. ANTENNA REQUIREMENTS

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antenna is attached to the internal PCB.

Therefore this E.U.T Complies with the requirement of §15.203

4. Test report

4.1 Summary of tests

FCC part section(s)	RSS section(s)	Parameter	Limit	Test condition	Status Note 1
2.1049	RSS-Gen [6.6]	Occupied bandwidth	NA	Radiated	C
15.225 (a)	RSS-210 [A2.6 (a)]	In-band emissions	15,848 μ V/m @ 30m 15.553 – 13.567 MHz		C
15.225 (b)	RSS-210 [A2.6 (b)]	In-band emissions	334 μ V/m @ 30m 13.410 – 13.553 MHz 13.567 – 13.710 MHz		C
15.225 (c)	RSS-210 [A2.6 (c)]	In-band emissions	106 μ V/m @ 30m 13.110 – 13.410 MHz 13.710 – 14.010 MHz		C
15.225 (d) 15.205 15.209	RSS-210 [A2.6 (d)]	Out-of band emissions	Emissions outside of the specified band (13.110-14.010 MHz) must meet the radiated limits detailed in 15.209		C
15.225 (e)	RSS-210 [A2.6]	Frequency stability	\pm 0.01% of operating frequency	Conducted	C
15.207	RSS-Gen [8.8]	AC conducted emissions	FCC Part 15.207	AC Line Conducted	C
15.203	RSS-Gen [6.7]	Antenna requirements	FCC Part 15.203	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: Semi anechoic chamber registration number is 165783

The sample was tested according to the following specification:
ANSI C-63.10-2009, RSS-Gen Issue 4


4.2 Transmitter requirements

4.2.1 Occupied bandwidth

- Procedure:

The 99% occupied bandwidth are measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

- Measurement Data: Comply

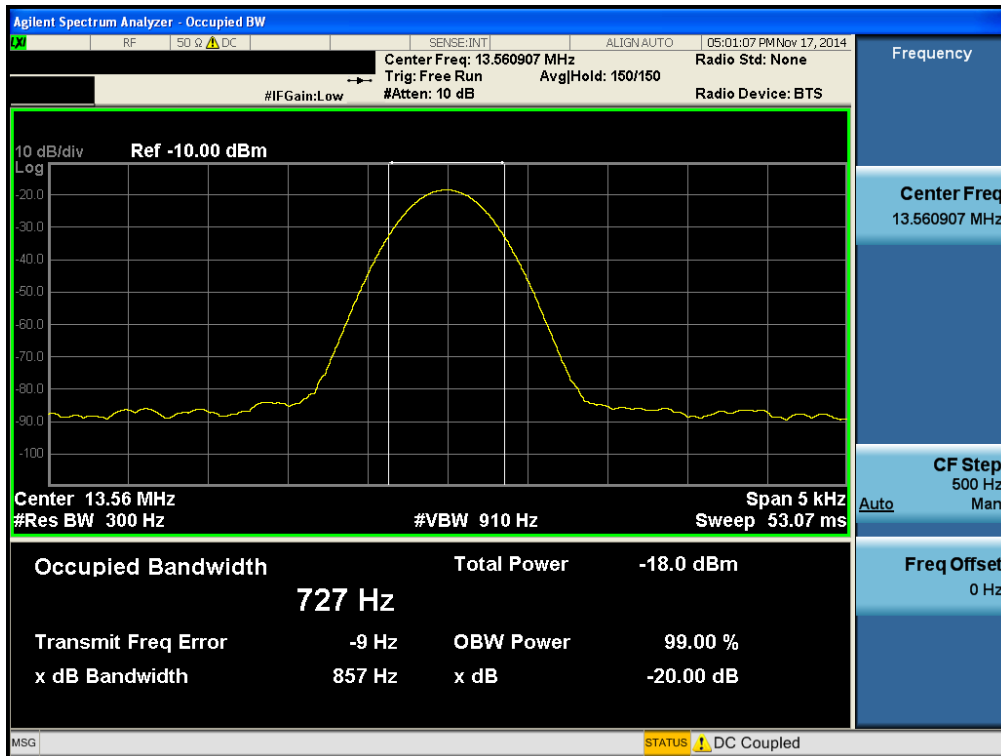

- Minimum Standard: NA

4.2.2 In-band emissions

- Procedure:

The EUT was placed on a 0.8m high wooden table inside a 10m semi anechoic chamber. An antenna was placed at 3 m distance from the EUT. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions. A loop antenna was used for this test item. And this test item was performed for both vertical and horizontal polarization.

- Measurement Data: **Comply**

Test Frequency Band [MHz]	Freq. [MHz]	EUT Posi.	Reading Level [dBuV]	T.F	Field Strength @3m [dBuV/m]	Field Strength @30m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.393	Z	8.30	20.40	28.70	-11.30	40.51	51.81
13.410 ~ 13.553	13.552	Z	17.80	20.40	38.20	-1.80	50.47	52.27
13.553 ~ 13.567	13.560	Z	24.70	20.40	45.10	5.10	84.00	78.90
13.567 ~ 13.710	13.568	Z	19.40	20.40	39.80	-0.20	50.47	50.67
13.710 ~ 14.010	13.910	Z	7.70	20.40	28.10	-11.90	40.51	52.41

Note 1. This test item was performed using a loop antenna.

Note 2. This test item was performed at 3m and the data were extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)2.

▪ Extrapolation Factor = $20 \log_{10}(30/3)^2 = 40\text{dB}$

Note 3. All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

Note 4. Sample Calculation.

Margin = Limit – Field Strength @ 30m / Field Strength @ 30m = Field Strength @ 3m – 40dB

Field Strength @ 3m = Reading + T.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

- Minimum Standard: Part 15.225(a), (b), (c)& RSS-210 A2.6(a), (b), (c)

Frequency Band [MHz]	Limit	
	[uV/m]	[dBuV/m]
13.553-13.567	15,848	84.00
13.410-13.553 13.567-13.710	334	50.47
13.110-13.410 13.710-14.010	106	40.51

4.2.3 Out-of-band emissions

- Procedure:

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110-14.010MHz. All measurements were recorded with spectrum analyzer employing a peak detector for emissions below 30MHz. Above 30MHz a Quasi-peak detector was used. All out-of-band emissions must not exceed the limits §15.209. A loop antenna was used for searching for emissions below 30MHz.

- Measurement Data: **Comply** (refer to the next page)

- Minimum Standard: Part 15. 205, 209, 225(d) & RSS-210 A2.6 (d), RSS-Gen 8.9, RSS-Gen 8.10

▪ FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3.6 ~ 4.4	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~ 156.52525	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.7 ~ 156.9	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	162.0125 ~ 167.17	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1240	3345.8 ~ 3358		

▪ FCC Part 15.205(b):

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

▪ FCC Part 15.209(a):

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	200	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ FCC Part 15.209(b):

In the emission table above, the tighter limit applies at the band edges.

- Measurement Data:

Tested Frequency : 13.56MHz
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Posi.	ANT Pol	Reading [dBuV]	T.F [dB/m]	Distance factor	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
0.035	Z	N/A	38.3	19.30	80	-22.4	36.7	59.1
0.703	X	N/A	32.4	19.2	40	11.6	30.7	19.1
31.819	Z	V	32.2	-10.3	0	21.9	40	18.1
160.098	Z	V	23.8	-7.9	0	15.9	43.5	27.6
930.603	Z	V	24.1	5.7	0	29.8	46	16.2
985.299	Z	H	24	6.6	0	30.6	54	23.4

Note 1. All measurements were recorded using a spectrum analyzer employing a peak detector for below 30MHz and a Quasi-peak detector for above 30MHz.

Note 2. Both Vertical and Horizontal polarities of the receiver antenna were evaluated with the worst case emissions being reported. The worst-case emissions are reported.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Sample calculation

Margin = Limit – Field Strength

Field Strength = Reading + T.F – Distance factor

T.F = AF + CL – AG

Distance factor = $20\log(\text{Measurement distance} / \text{The measured distance})^2$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

4.2.4 Frequency Stability

- Procedure:

Part 15.225 requires that devices operating in the 13.553 – 13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20 degrees to + 50 degrees C at normal supply voltage.

- Measurement Data: Comply

Operating Frequency : 13,560,000Hz

VOLTAGE (%)	POWER (V _{DC})	TEMP (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.700	+25(ref)	13,560,896	896	0.006606
100%		-20	13,561,109	1109	0.008177
100%		-10	13,561,090	1090	0.008039
100%		0	13,561,006	1006	0.007416
100%		+10	13,560,911	911	0.006721
100%		+20	13,560,877	877	0.006468
100%		+30	13,560,776	776	0.005722
100%		+40	13,560,691	691	0.005095
100%		+50	13,560,343	343	0.002528
85%		3.145	+25	13,560,890	890
115%	4.255	+25	13,560,871	871	0.006423
BATT.ENDPOINT	3.100	+25	13,560,742	742	0.005472

- Minimum Standard: Part 15. 225(e) & RSS-210 A2.6

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

4.2.5 AC Line Conducted Emissions

- Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.21(m). Emissions closest to the limit are measured in the quasi-peak and average detector mode with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

- Measurement Data: Comply (refer to the next page)

- Minimum Standard: FCC Part 15.207(a) & RSS-Gen 8.8

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Measurement Data

Results of Conducted Emission

DT&C



Date : 2014-11-13

Order No. :
Model No. : XM5
Serial No. :
Test Condition : NFC

Reference No. :
Power Supply : 120V 60Hz
Temp/Humi. : 23°C 31% R.H
Operator : S.H.HONG

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

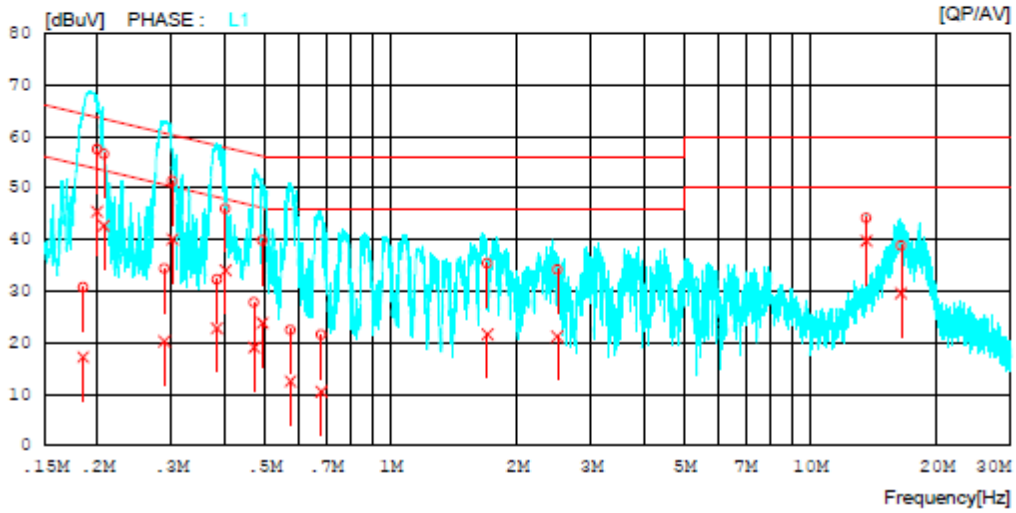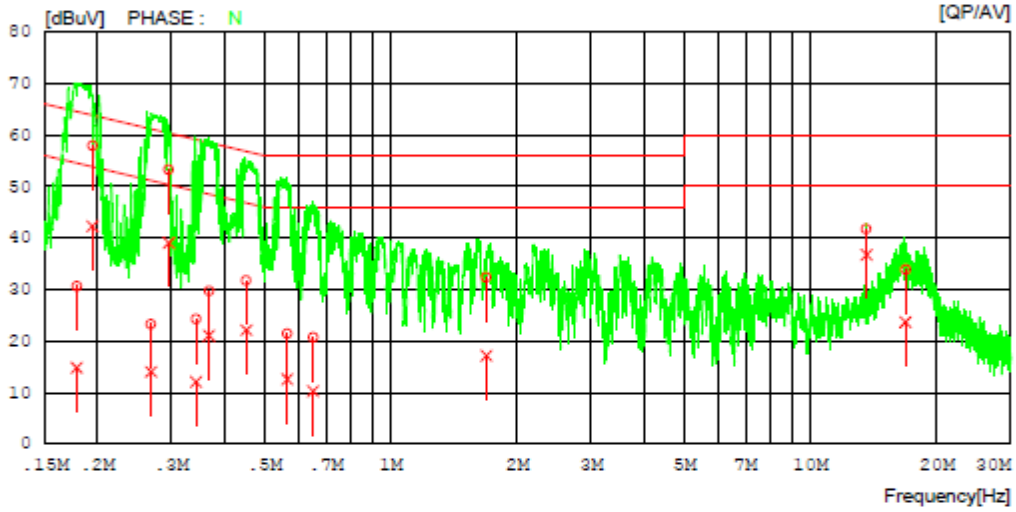

Measurement Data

Results of Conducted Emission

DT&C

Date : 2014-11-13

Order No.	:		Reference No.	:	
Model No.	:	XM5	Power Supply	:	120V 60Hz
Serial No.	:		Temp/Humi.	:	23°C 31% R.H
Test Condition	:	NFC	Operator	:	S.H.HONG

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17892	30.5	14.7	0.1	30.6	14.8	64.6	54.6	34.0	39.8	N
2	0.19426	57.8	42.2	0.1	57.9	42.3	63.9	53.9	6.0	11.6	N
3	0.26788	23.2	13.9	0.1	23.3	14.0	61.2	51.2	37.9	37.2	N
4	0.29550	53.1	38.9	0.1	53.2	39.0	60.4	50.4	7.2	11.4	N
5	0.34323	24.0	11.8	0.2	24.2	12.0	59.1	49.1	34.9	37.1	N
6	0.36895	29.5	20.9	0.2	29.7	21.1	58.5	48.5	28.8	27.4	N
7	0.45209	31.5	21.9	0.2	31.7	22.1	56.8	46.8	25.1	24.7	N
8	0.56597	21.2	12.3	0.2	21.4	12.5	56.0	46.0	34.6	33.5	N
9	0.65258	20.5	10.1	0.2	20.7	10.3	56.0	46.0	35.3	35.7	N
10	1.68600	32.1	16.9	0.2	32.3	17.1	56.0	46.0	23.7	28.9	N
11	13.56080	41.1	36.1	0.7	41.8	36.8	60.0	50.0	18.2	13.2	N
12	16.82040	33.1	23.0	0.7	33.8	23.7	60.0	50.0	26.2	26.3	N
13	0.18470	30.5	16.9	0.2	30.7	17.1	64.3	54.3	33.6	37.2	L1
14	0.19950	57.2	45.2	0.2	57.4	45.4	63.6	53.6	6.2	8.2	L1
15	0.20681	56.4	42.5	0.2	56.6	42.7	63.3	53.3	6.7	10.6	L1
16	0.28833	34.1	20.0	0.2	34.3	20.2	60.6	50.6	26.3	30.4	L1
17	0.30133	51.1	39.8	0.2	51.3	40.0	60.2	50.2	8.9	10.2	L1
18	0.38474	32.0	22.5	0.2	32.2	22.7	58.2	48.2	26.0	25.5	L1
19	0.40340	45.9	33.8	0.1	46.0	33.9	57.8	47.8	11.8	13.9	L1
20	0.47179	27.6	18.9	0.1	27.7	19.0	56.5	46.5	28.8	27.5	L1
21	0.49403	39.6	23.7	0.1	39.7	23.8	56.1	46.1	16.4	22.3	L1
22	0.57586	22.2	12.3	0.1	22.3	12.4	56.0	46.0	33.7	33.6	L1
23	0.68232	21.3	10.3	0.1	21.4	10.4	56.0	46.0	34.6	35.6	L1
24	1.69720	35.2	21.3	0.2	35.4	21.5	56.0	46.0	20.6	24.5	L1
25	2.49160	33.8	20.8	0.3	34.1	21.1	56.0	46.0	21.9	24.9	L1
26	13.56100	43.1	38.7	1.0	44.1	39.7	60.0	50.0	15.9	10.3	L1
27	16.39780	37.8	28.5	1.0	38.8	29.5	60.0	50.0	21.2	20.5	L1

APPENDIX

TEST EQUIPMENT FOR TESTS

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
MXA Signal Analyzer	Agilent	N9020A	14/10/21	15/10/21	MY48011075
Digital Multimeter	H.P	34401A	14/02/27	15/02/27	3146A13475
Dynamic Measurement DC Source	Agilent	66332A	14/09/11	15/09/11	MY43000440
Thermohygrometer	BODYCOM	BJ5478	14/05/13	15/05/13	120612-2
Vector Signal Generator	R&S	SMJ100A	14/01/07	15/01/07	100148
Temp &Humi Test Chamber	SJ Science	SJ-TH-S50	14/03/10	15/03/10	SJ-TH-S50-140205
LOOP Antenna	Schwarzbeck	FMZB1513	14/04/29	16/04/29	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	13/12/16	16/12/16	3358
Amplifier (22dB)	H.P	8447E	14/01/07	15/01/07	2945A02865
EMI TEST RECEIVER	R&S	ESU	14/01/07	15/01/07	100014
EMI TEST RECEIVER	R&S	ESR	14/02/07	15/02/07	101767
CVCF	EM TEST	NETWAVE 60-400	14/05/26	15/05/26	P1311115470
LISN	SCHWARZBECK	NNLK8121	14/08/18	15/08/18	NNLK8121-580
PULSE LIMITER	R&S	ESH3-Z2	14/01/08	15/01/08	101334