

SAR Plots

- Verification Plots
- SAR Test Plots

DT&C Co., Ltd.

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1049

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 42.606$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.49, 6.49, 6.49); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-16; Ambient Temp: 21.7; Tissue Temp: 21.6

750 MHz System Verification (250 mW)


Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.13 W/kg; SAR(10 g) = 1.38 W/kg

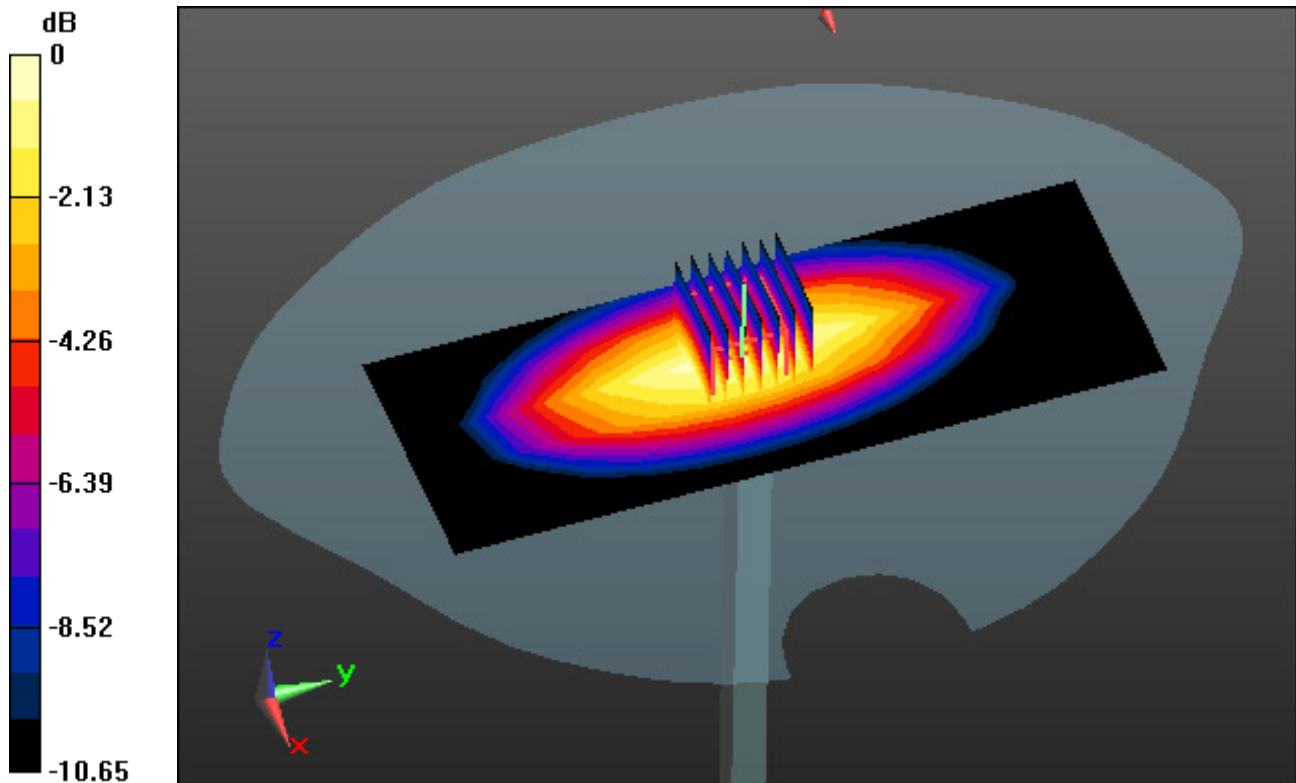

0 dB = 2.50 W/kg

DT&C Co., Ltd.

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1049

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 41.481$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.91, 9.91, 9.91); Calibrated: 5/31/2021 Electronics: DAE4 Sn1391
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 21.1; Tissue Temp: 21.0

750 MHz System Verification (250 mW)


Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.36 W/kg

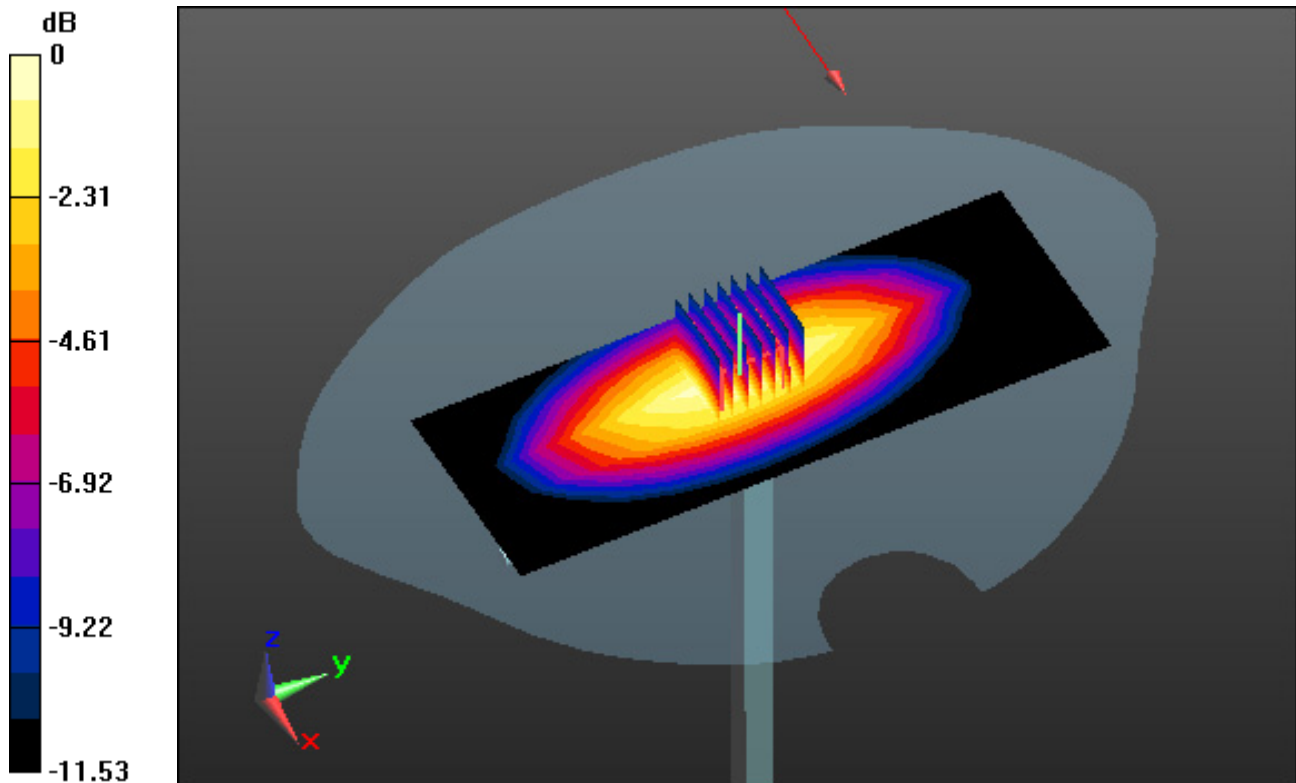

0 dB = 2.54 W/kg

DT&C Co., Ltd.

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.806$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.26, 6.26, 6.26); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-15; Ambient Temp: 21.6; Tissue Temp: 21.5

835 MHz System Verification (250 mW)


Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.6 W/kg

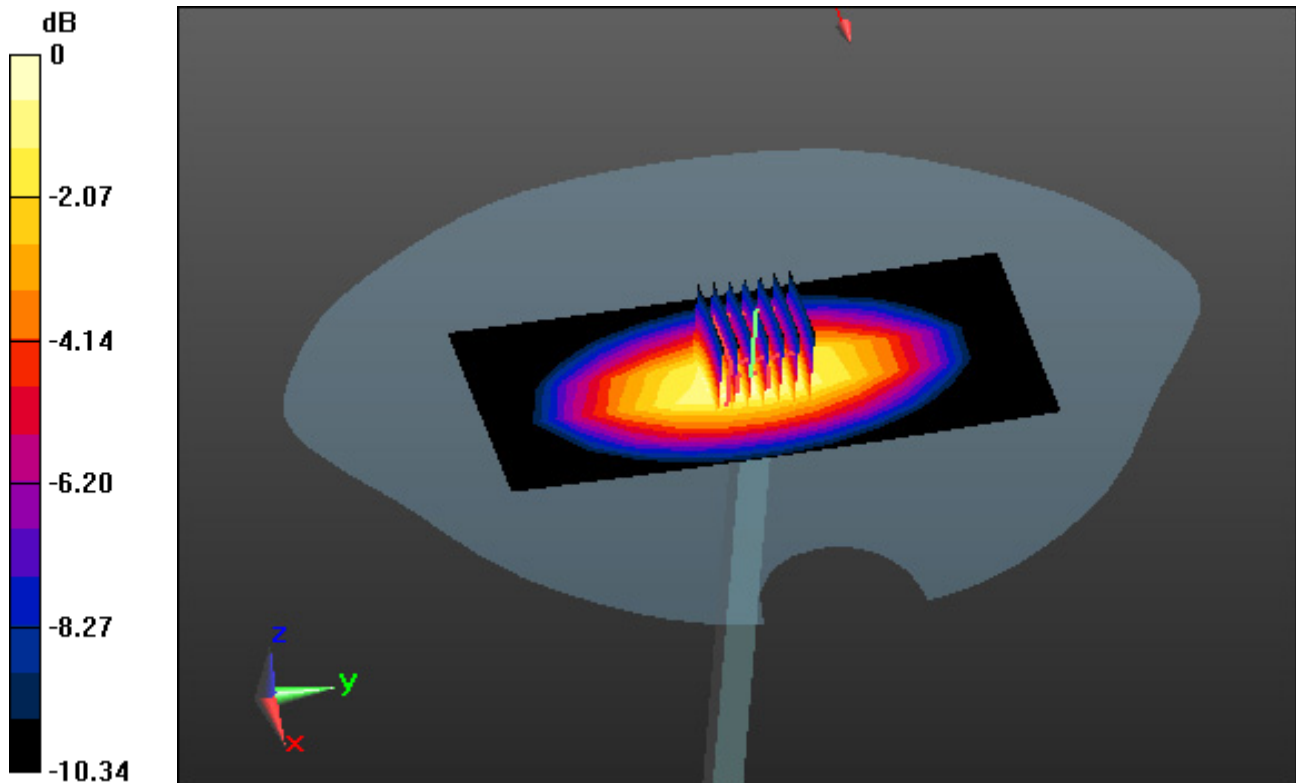

0 dB = 2.83 W/kg

DT&C Co., Ltd.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d029

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.417$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22; Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-29; Ambient Temp: 22.3; Tissue Temp: 22.1

1900 MHz System Verification (100 mW)


Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.10 dB

Peak SAR (extrapolated) = 7.10 W/kg

SAR(1 g) = 4.19 W/kg; SAR(10 g) = 2.25 W/kg

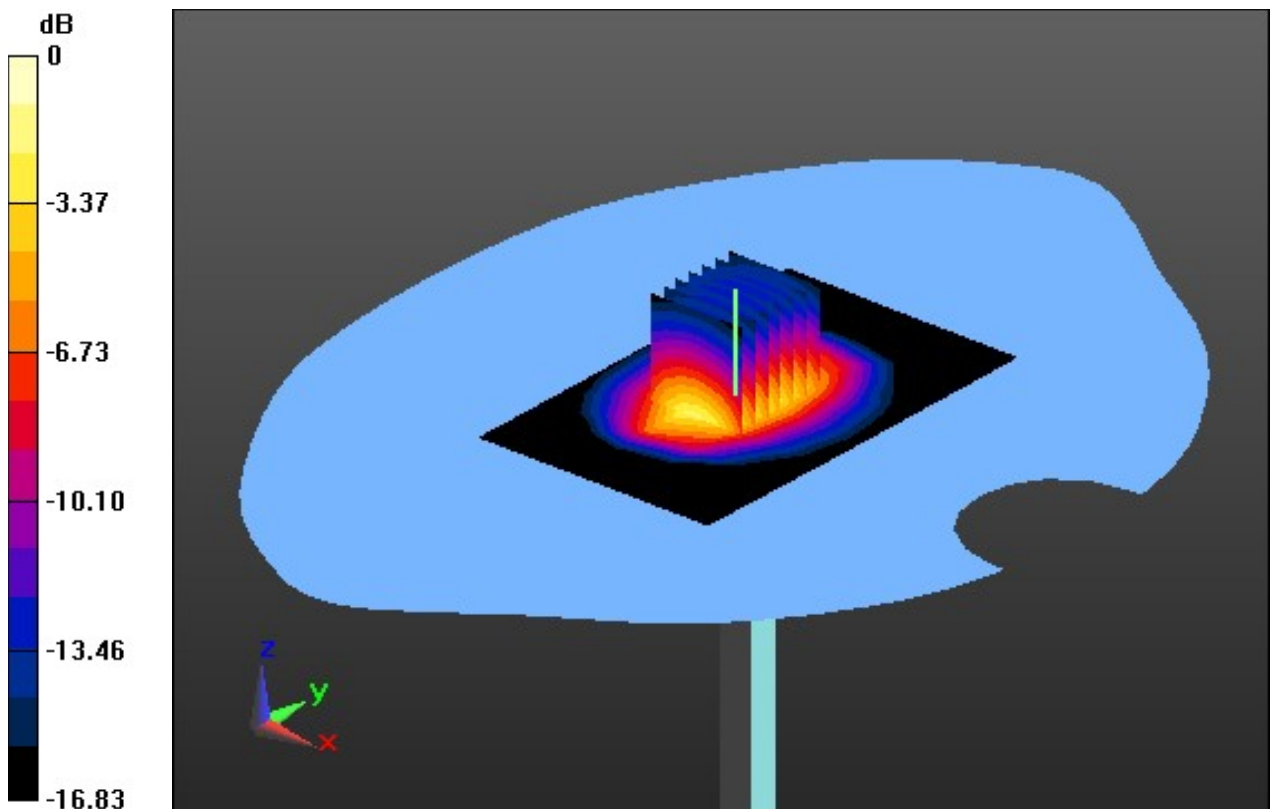

0 dB = 5.85 W/kg

DT&C Co., Ltd.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d029

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 38.654$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22; Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-30; Ambient Temp: 22.2; Tissue Temp: 22.1

1900 MHz System Verification (100 mW)


Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 7.78 W/kg

SAR(1 g) = 4.26 W/kg; SAR(10 g) = 2.25 W/kg

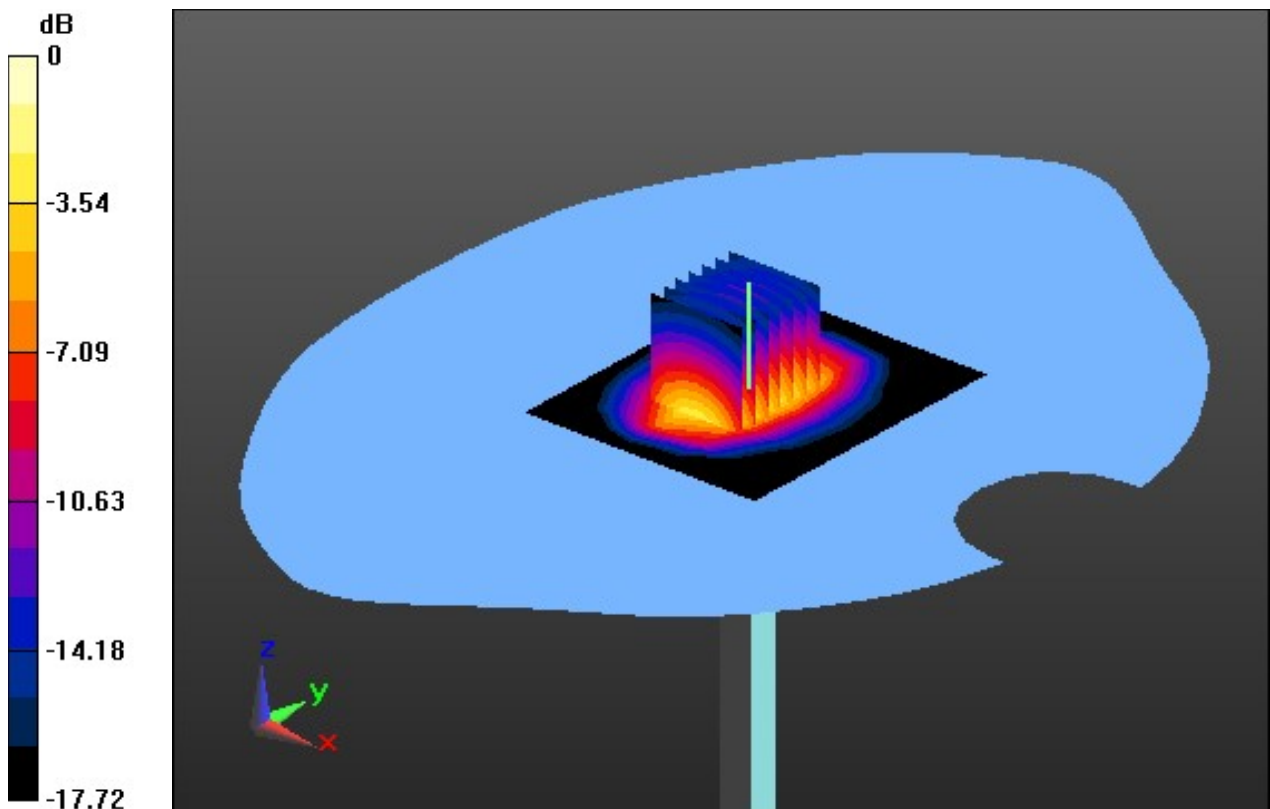

0 dB = 6.08 W/kg

DT&C Co., Ltd.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.829$ S/m; $\epsilon_r = 39.758$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 20.3; Tissue Temp: 20.5

2450 MHz System Verification (100 mW)


Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.09 dB

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.05 W/kg; SAR(10 g) = 2.29 W/kg

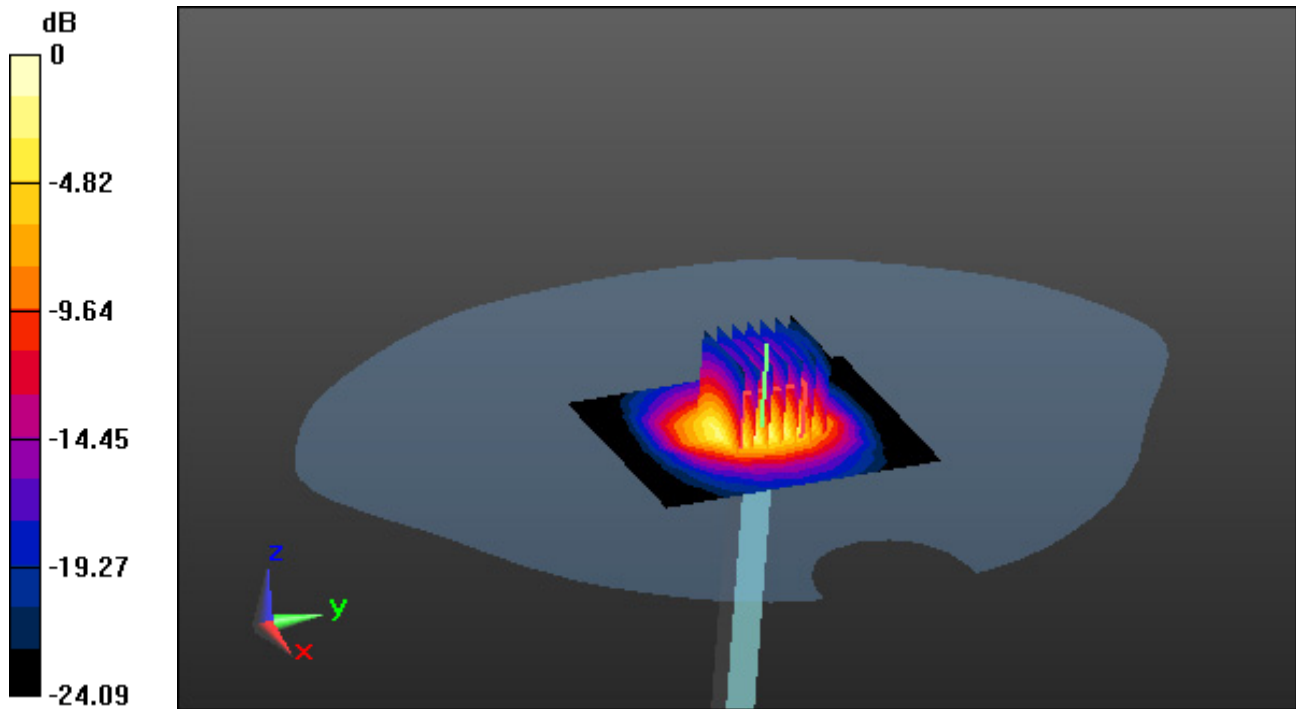

0 dB = 7.78 W/kg

DT&C Co., Ltd.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 38.158$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.6; Tissue Temp: 21.5

2450 MHz System Verification (100 mW)


Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.07 dB

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.29 W/kg; SAR(10 g) = 2.4 W/kg

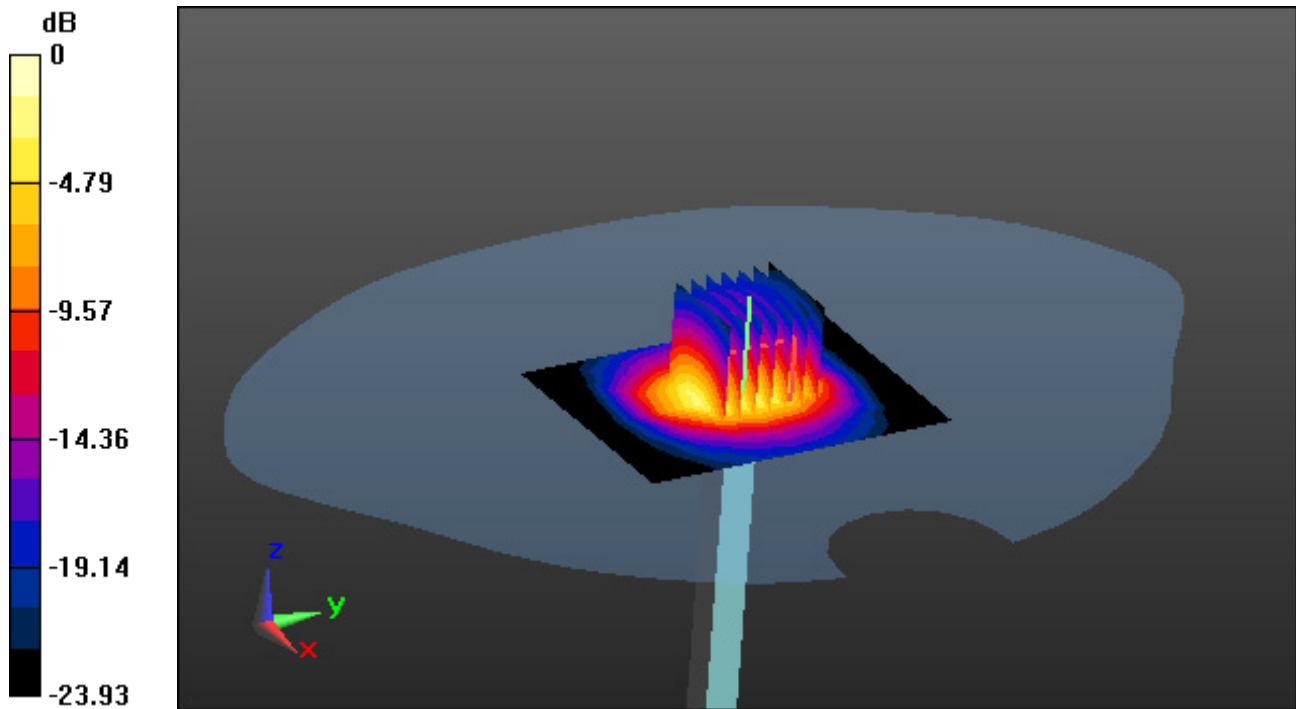

0 dB = 8.12 W/kg

DT&C Co., Ltd.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1016

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 38.354$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-21; Ambient Temp: 21.5; Tissue Temp: 21.4

2600 MHz System Verification (100 mW)


Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.14 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.81 W/kg; SAR(10 g) = 2.61 W/kg

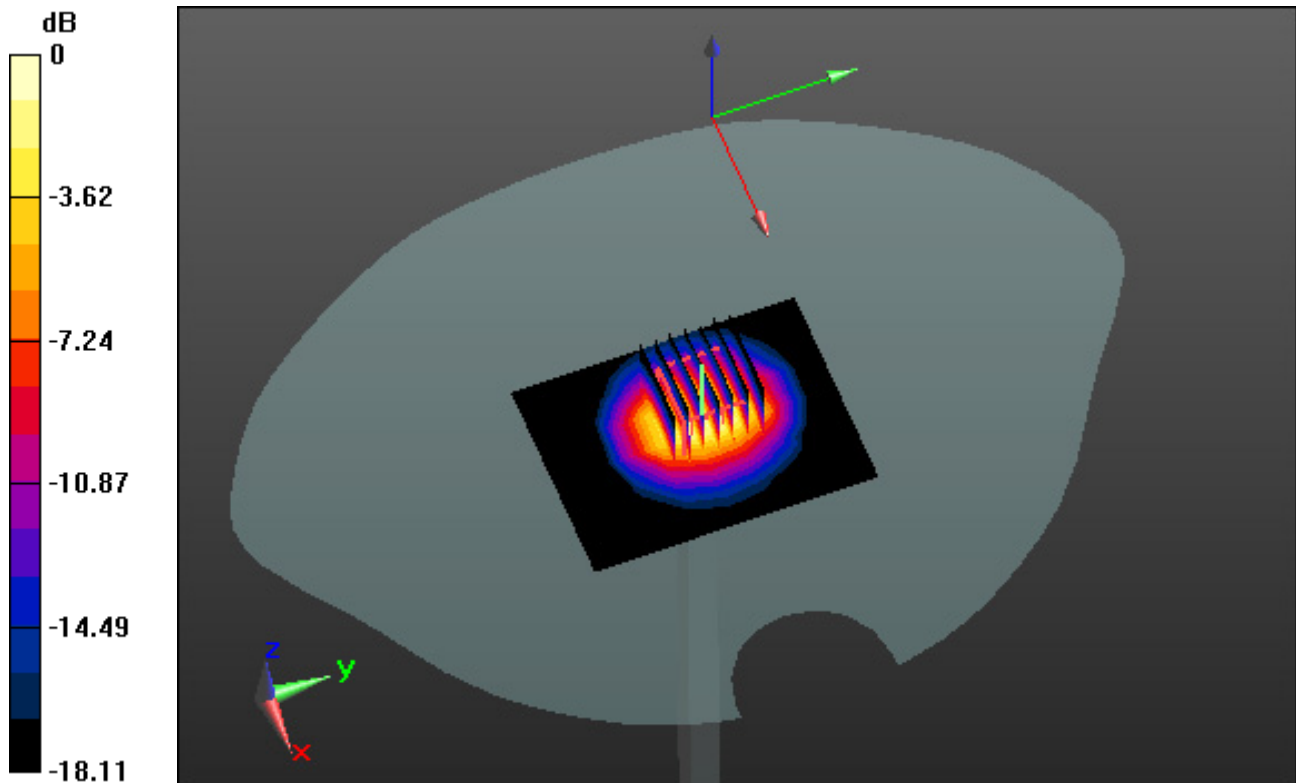

0 dB = 8.59 W/kg

DT&C Co., Ltd.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1016

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 39.123$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-23; Ambient Temp: 22.4; Tissue Temp: 22.3

2600 MHz System Verification (100 mW)


Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.89 W/kg; SAR(10 g) = 2.66 W/kg

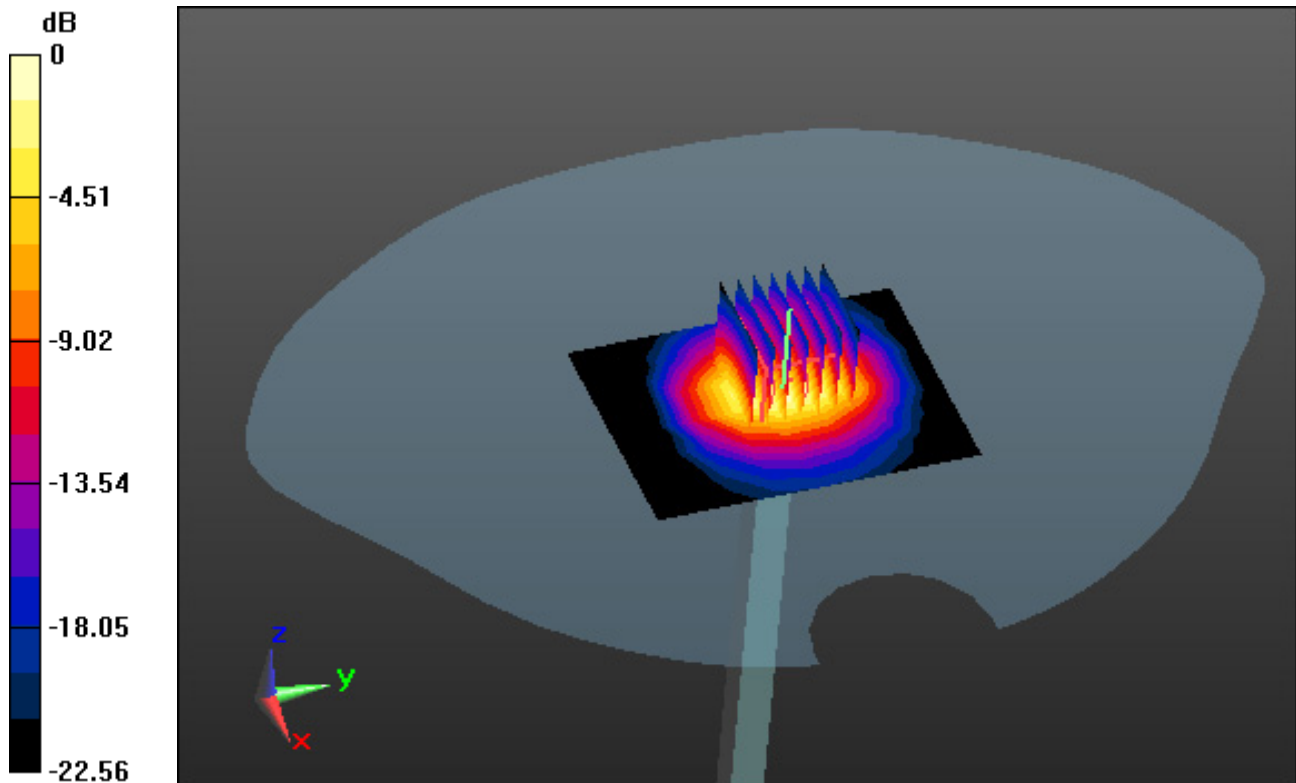

0 dB = 8.67 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 35.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(5.5, 5.5, 5.5); Calibrated: 2021-06-23 Electronics: DAE4 Sn1396
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 21.2; Tissue Temp: 21.4

5200 MHz System Verification (100 mW)


Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = -0.03 dB

Peak SAR (extrapolated) = 34.3 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.23 W/kg

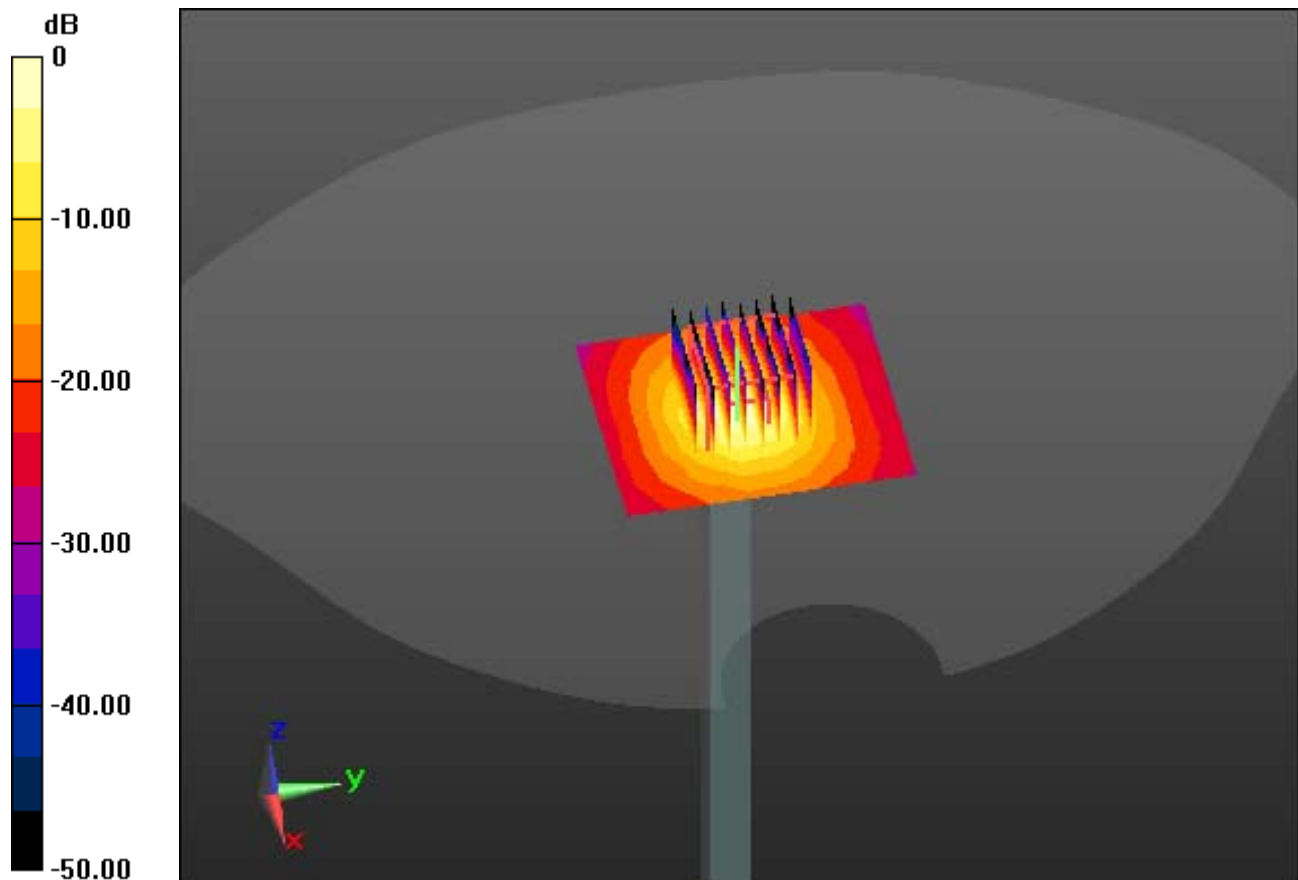

0 dB = 18.5 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.731$ S/m; $\epsilon_r = 36.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:


Probe: EX3DV4 - SN3933; ConvF(5.85, 5.85, 5.85); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-04; Ambient Temp: 21.3; Tissue Temp: 21.4

5300 MHz System Verification (100 mW)

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4
Power Drift = -0.02 dB
Peak SAR (extrapolated) = 35.5 W/kg
SAR(1 g) = 8.23 W/kg; SAR(10 g) = 2.37 W/kg

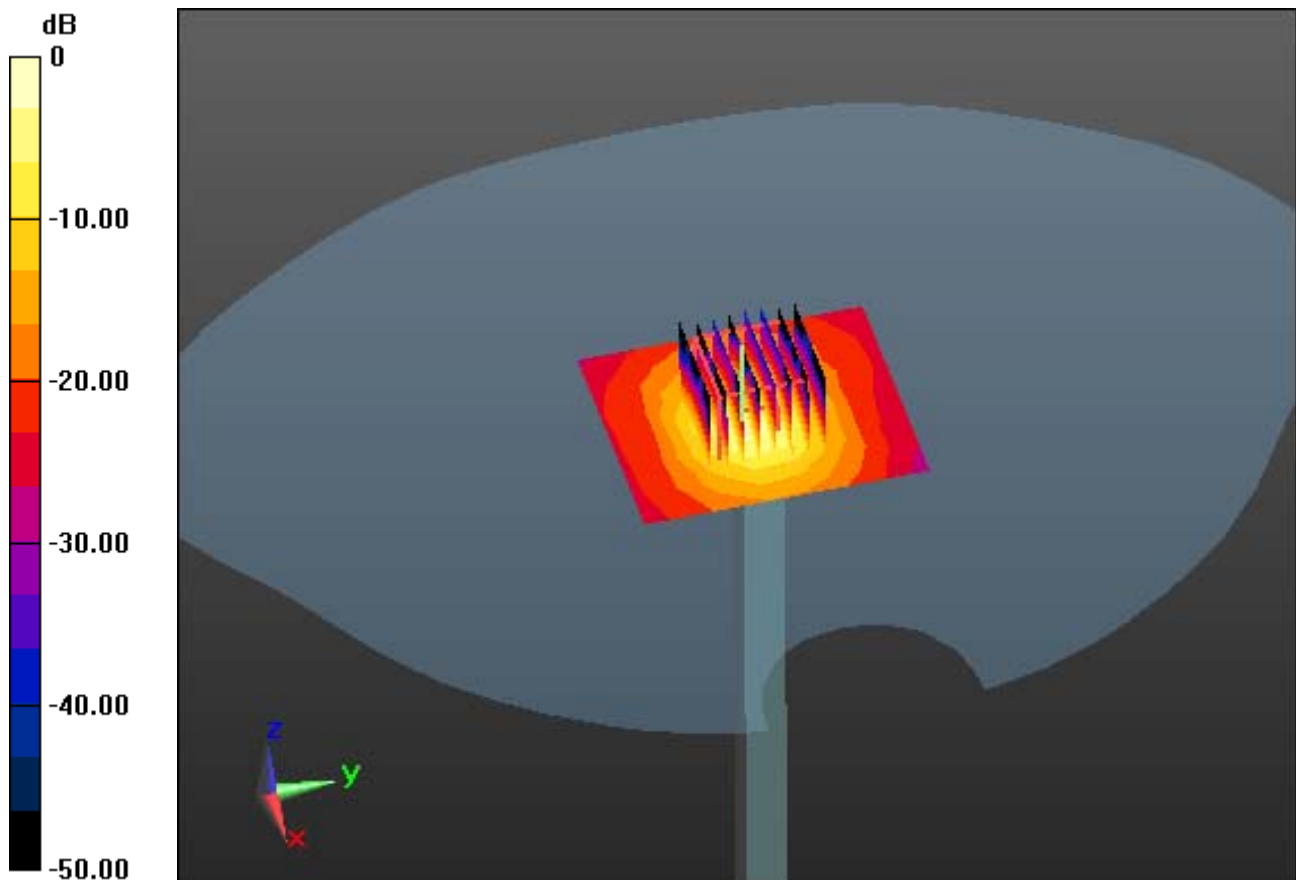

0 dB = 19.1 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5500$ MHz; $\sigma = 5.016$ S/m; $\epsilon_r = 35.706$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


Probe: EX3DV4 - SN3933; ConvF(5.15, 5.15, 5.15); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-05; Ambient Temp: 21.4; Tissue Temp: 21.6

5500 MHz System Verification (100 mW)

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4
Power Drift = 0.18 dB
Peak SAR (extrapolated) = 38.9 W/kg
SAR(1 g) = 8.61 W/kg; SAR(10 g) = 2.45 W/kg

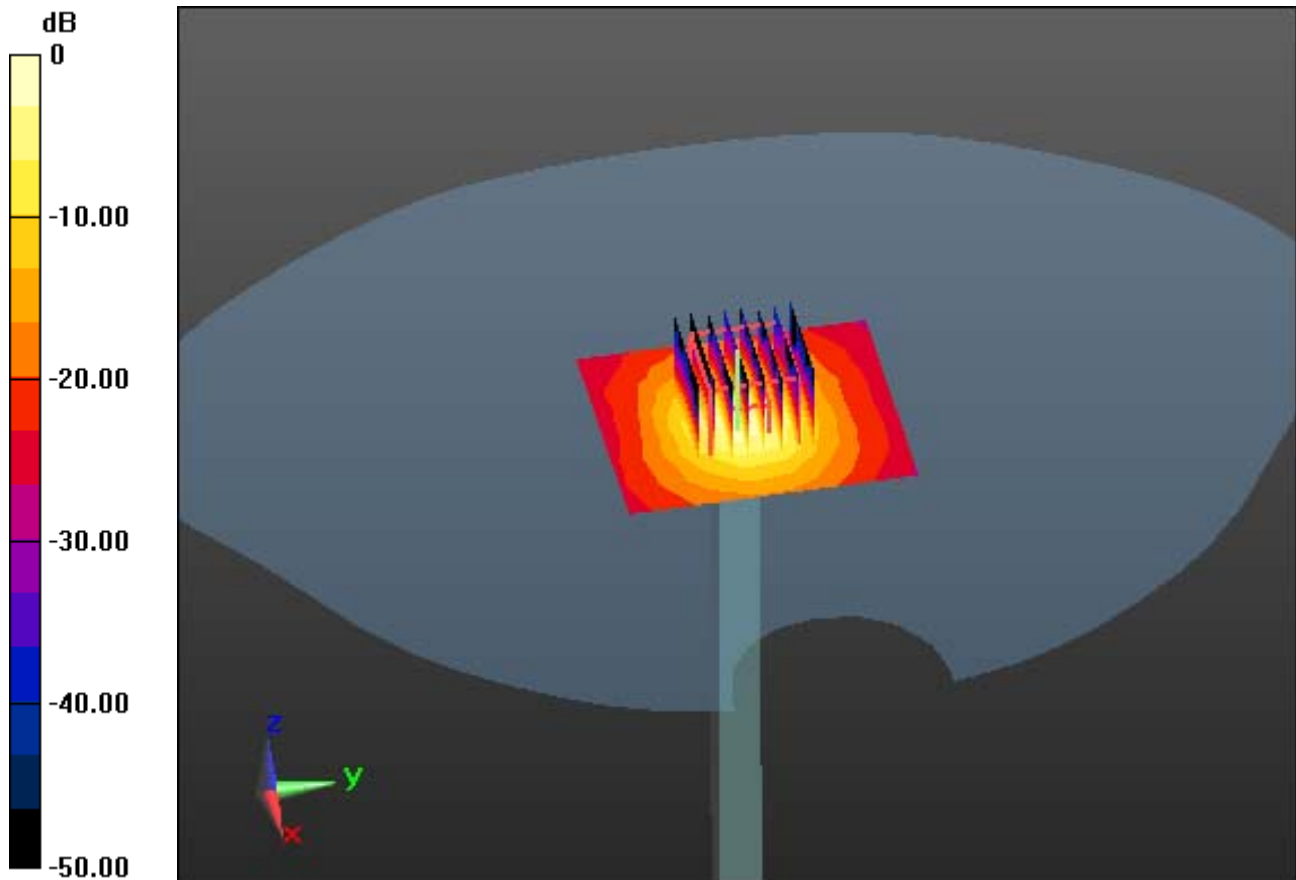

0 dB = 20.7 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.121$ S/m; $\epsilon_r = 35.528$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


Probe: EX3DV4 - SN3933; ConvF(5.1, 5.1, 5.1); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-05; Ambient Temp: 21.4; Tissue Temp: 21.6

5600 MHz System Verification (100 mW)

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4
Power Drift = 0.08 dB
Peak SAR (extrapolated) = 35.3 W/kg
SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.36 W/kg

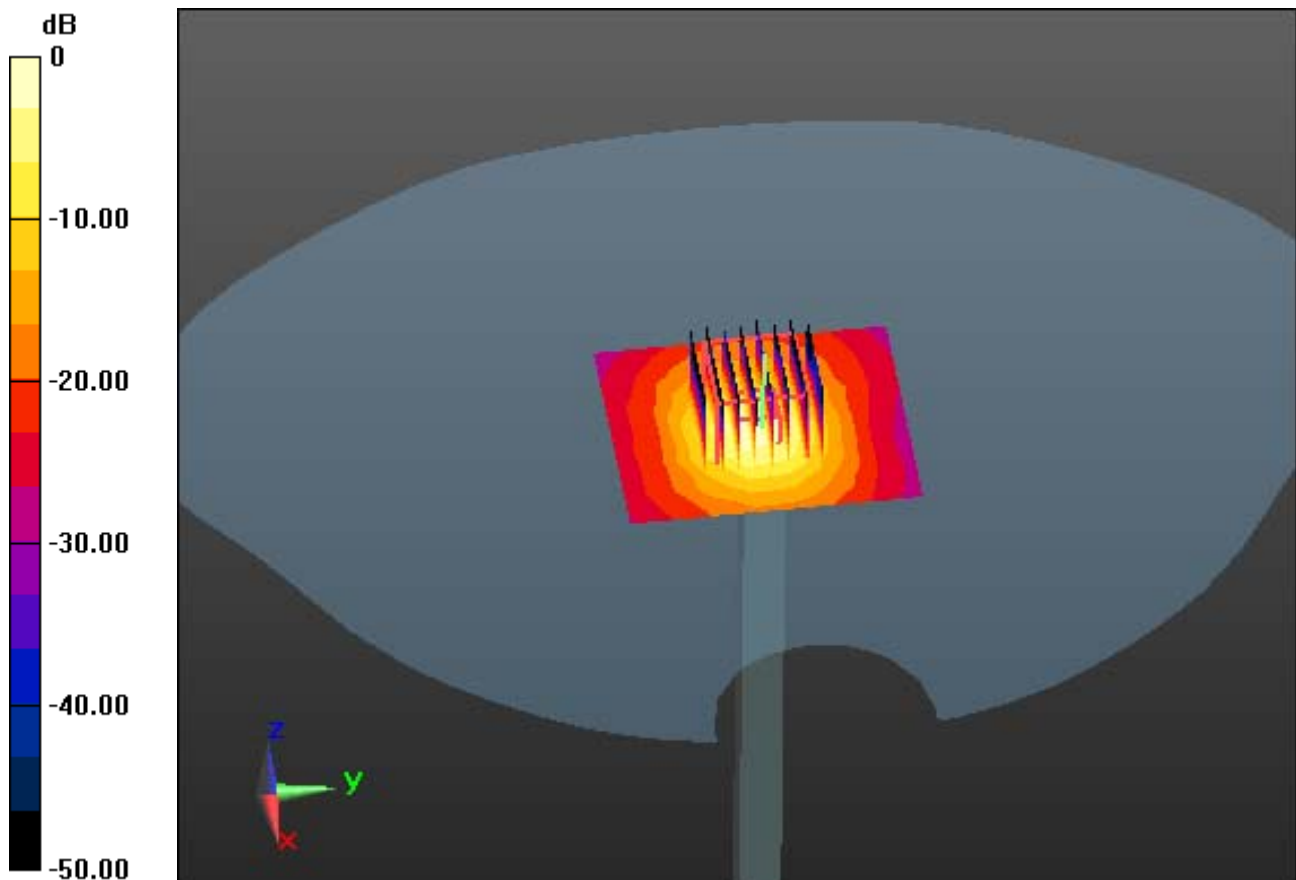

0 dB = 18.4 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.342$ S/m; $\epsilon_r = 35.243$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


Probe: EX3DV4 - SN3933; ConvF(5.3, 5.3, 5.3); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-05; Ambient Temp: 21.4; Tissue Temp: 21.6

5800 MHz System Verification (100 mW)

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4
Power Drift = -0.11 dB
Peak SAR (extrapolated) = 38.1 W/kg
SAR(1 g) = 8.27 W/kg; SAR(10 g) = 2.33 W/kg

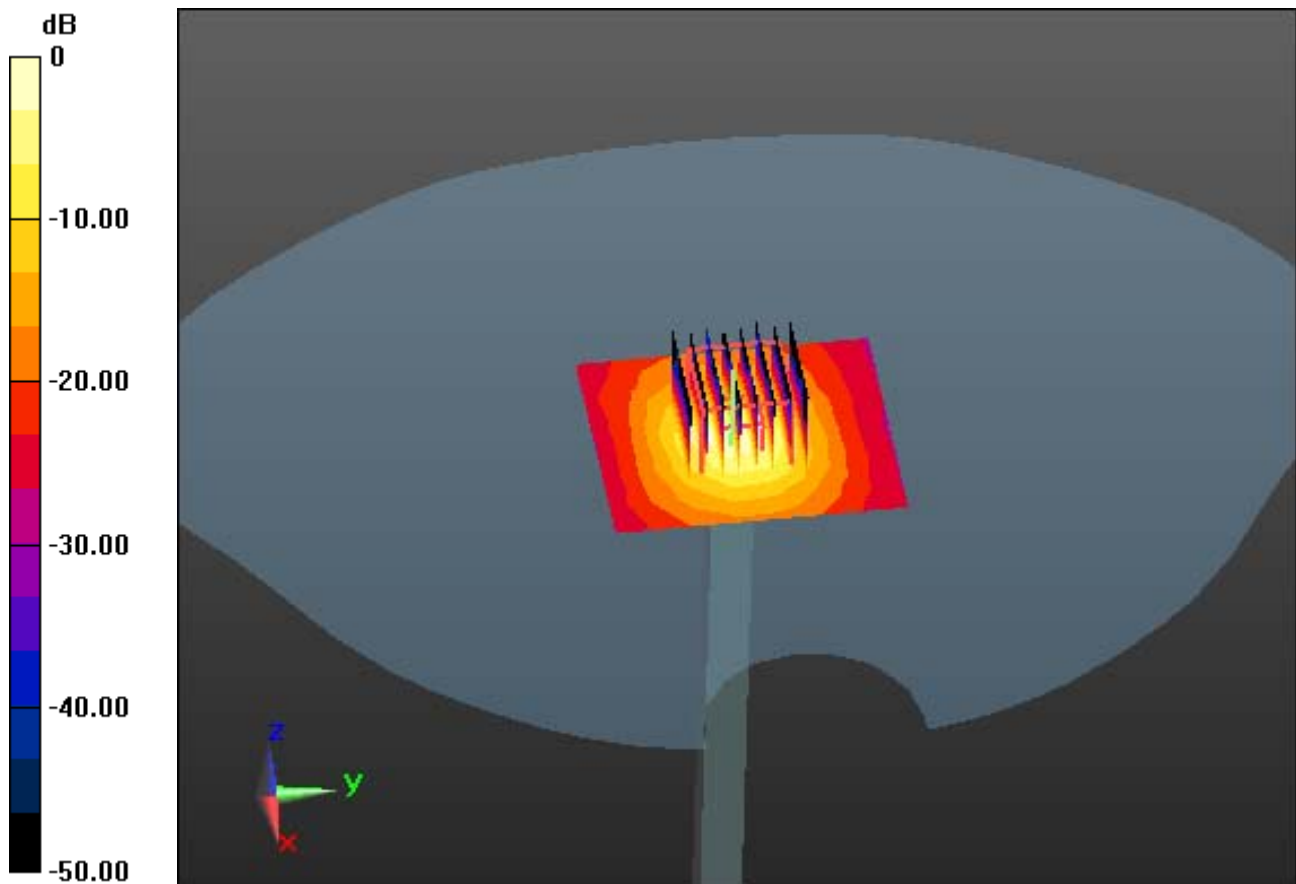

0 dB = 19.2 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.412$ S/m; $\epsilon_r = 35.765$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


Probe: EX3DV4 - SN3933; ConvF(5.3, 5.3, 5.3); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.1; Tissue Temp: 21.4

5800 MHz System Verification (100 mW)

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4
Power Drift = 0.12 dB
Peak SAR (extrapolated) = 38.4 W/kg
SAR(1 g) = 8.39 W/kg; SAR(10 g) = 2.37 W/kg

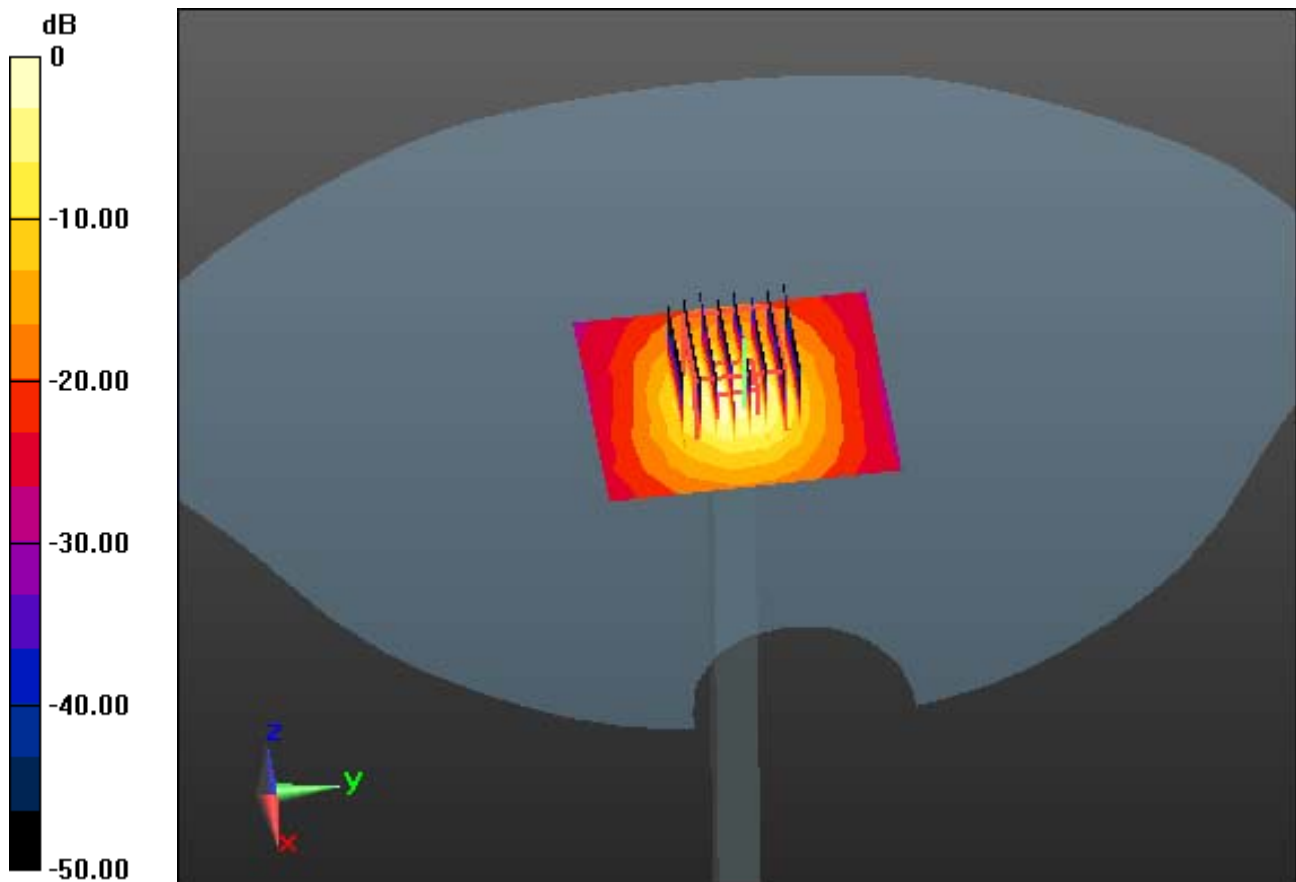

0 dB = 19.9 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, WCDMA 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.788$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.26, 6.26, 6.26); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-15; Ambient Temp: 21.6; Tissue Temp: 21.5

Right Touch, WCDMA Band 5 Ch. 4183, Ant Internal, Standard Battery


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.362 W/kg

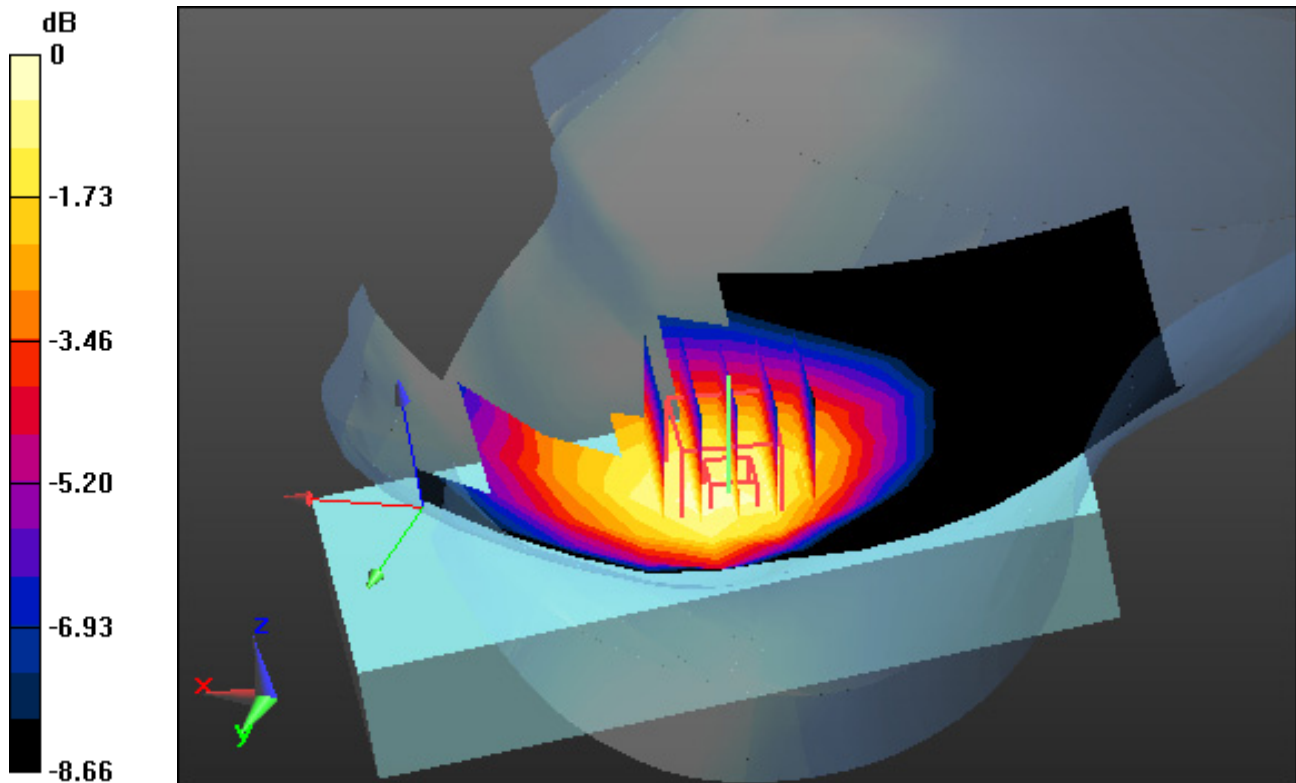

0 dB = 0.528 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, WCDMA Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22; Electronics: DAE4
Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-29; Ambient Temp: 22.3; Tissue Temp: 22.1

Right Touch, WCDMA Ch. 9400, Ant. Internal, Standard Battery


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.117 W/kg

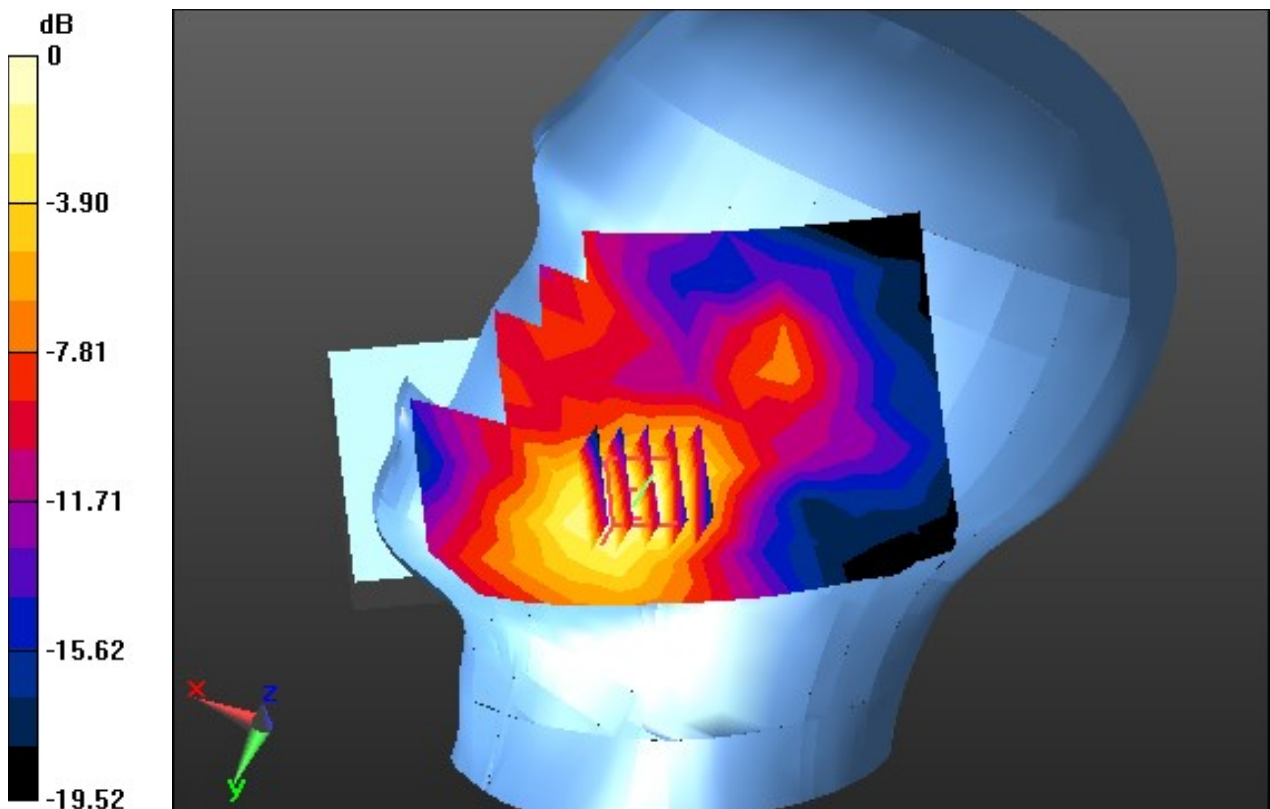

0 dB = 0.256 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.858$ S/m; $\epsilon_r = 43.146$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.49, 6.49, 6.49); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-16; Ambient Temp: 21.7; Tissue Temp: 21.6

Right Touch, LTE Band 12 Ch. 23095, Ant Internal, Standard Battery

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.132 W/kg

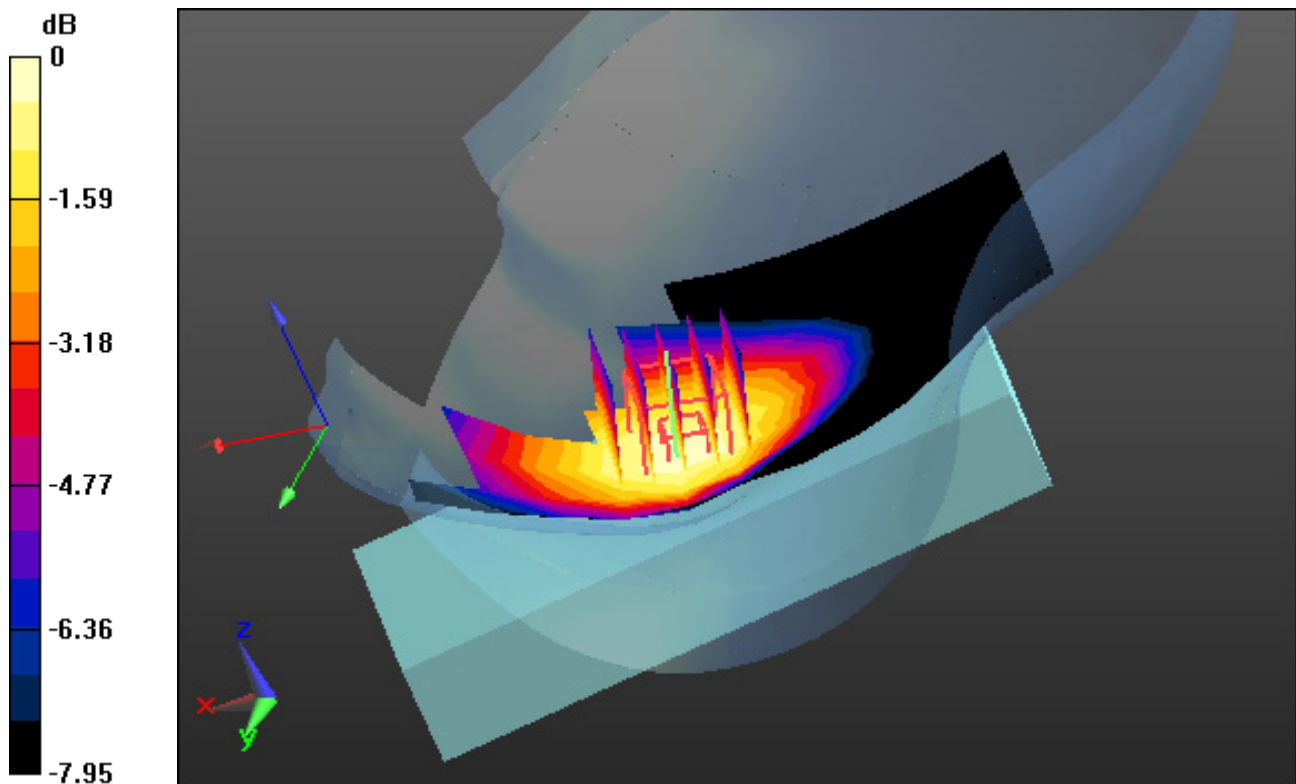

0 dB = 0.177 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 17 (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.86 \text{ S/m}$; $\epsilon_r = 42.095$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.91, 9.91, 9.91); Calibrated: 5/31/2021 Electronics: DAE4 Sn1391

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 21.1; Tissue Temp: 21.0

Right Touch, LTE Band 17 Ch. 23790, Ant Internal, Standard Battery

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.173 W/kg

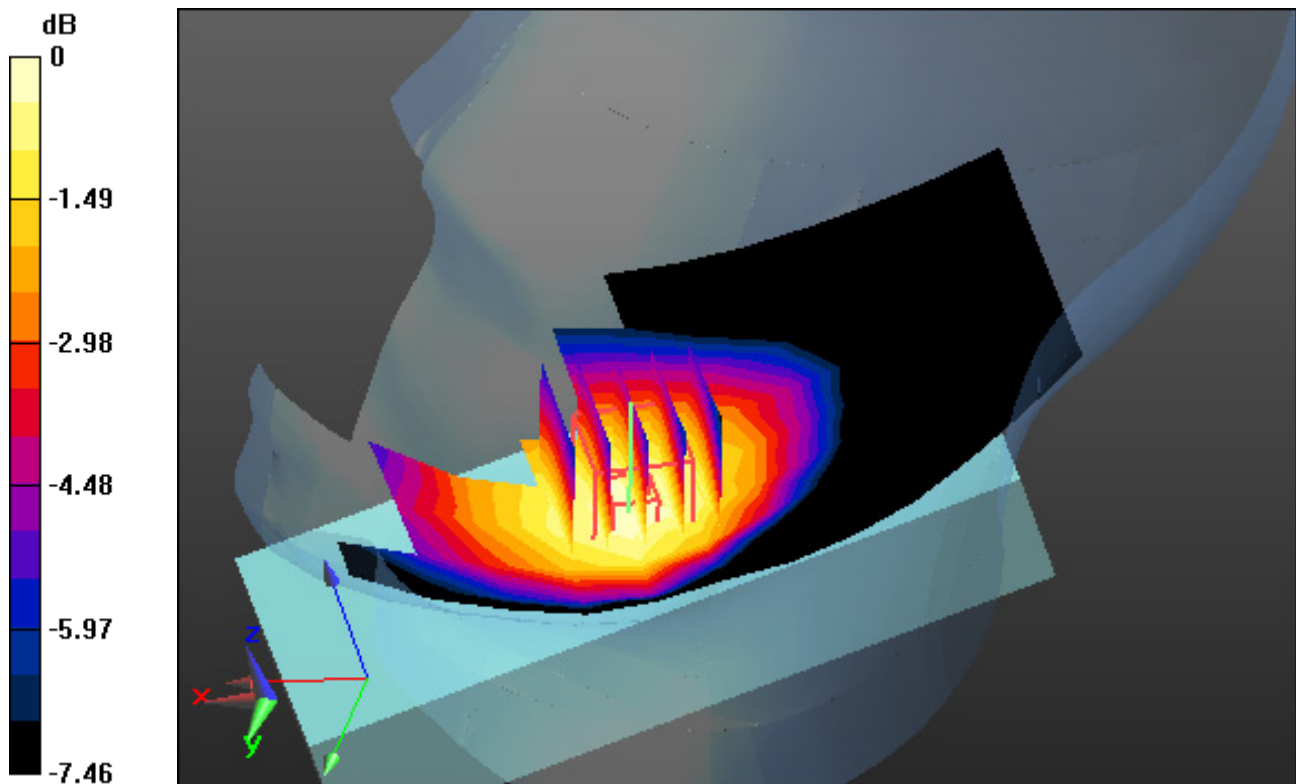

0 dB = 0.240 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 5(FCC) (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.789$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.26, 6.26, 6.26); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-15; Ambient Temp: 21.6; Tissue Temp: 21.5

Right Touch, LTE Band 5 Ch. 20525, Ant Internal, Standard Battery

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.311 W/kg

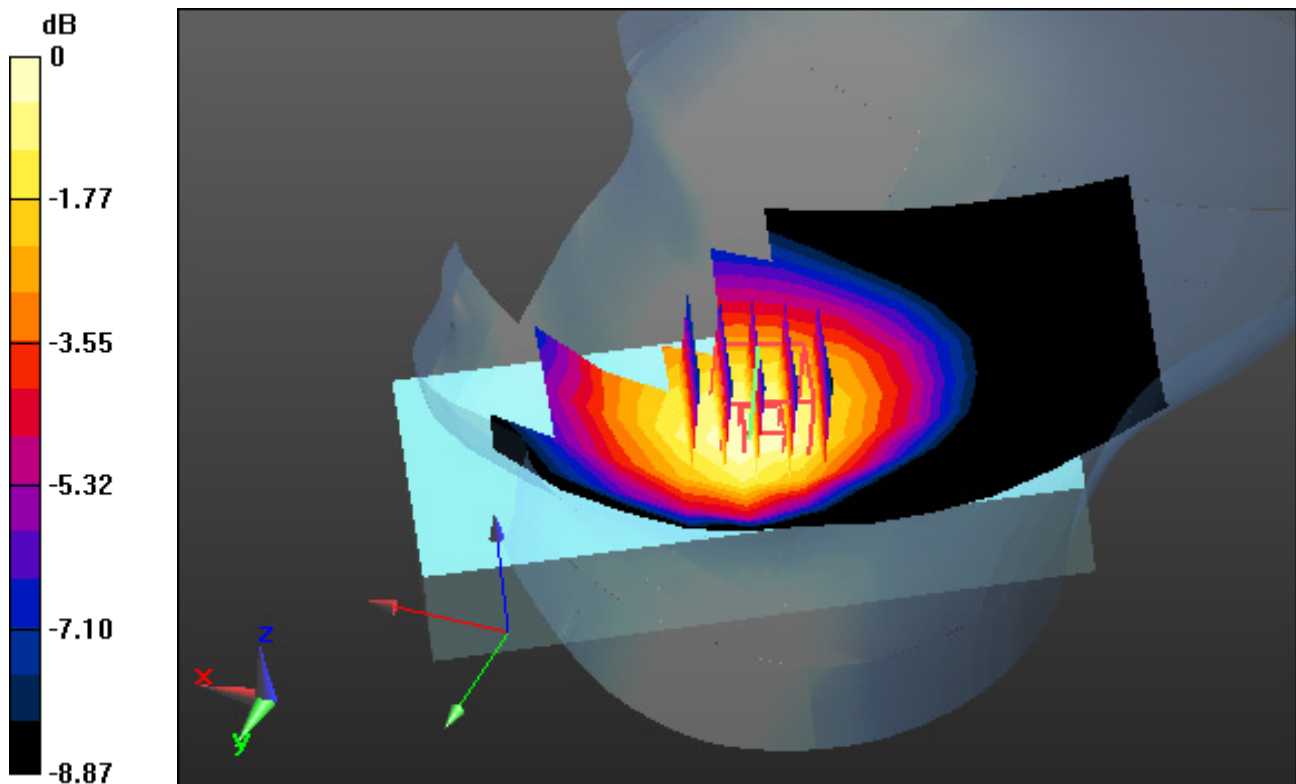

0 dB = 0.450 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 25 (0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 38.637$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-30; Ambient Temp: 22.2; Tissue Temp: 22.1

Right Touch, LTE Band 25 Ch. 26590, Ant Internal, Standard Battery

Mode : BandWidth 20 MHz, QPSK, RB Size: 1


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.093 W/kg

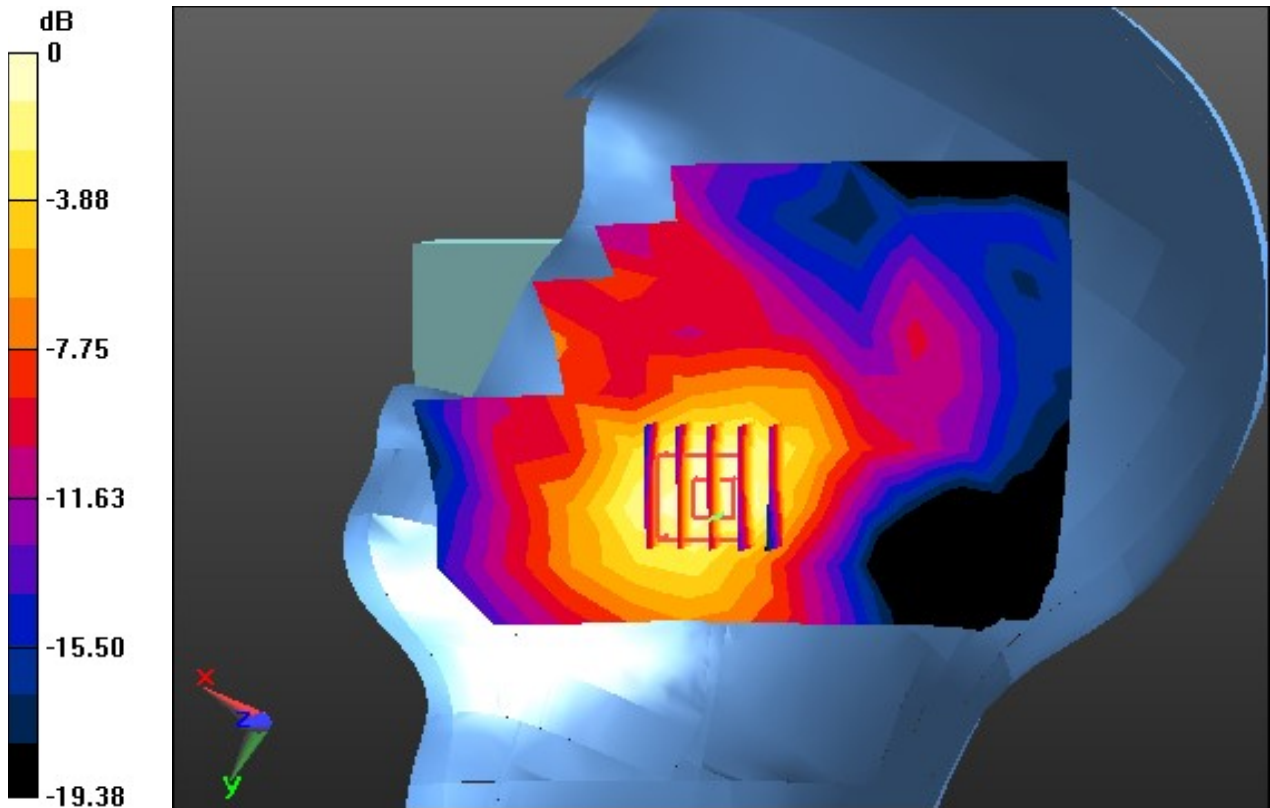

0 dB = 0.189 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 7(FCC) (0); Frequency: 2560 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 38.494$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-21; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Touch, LTE Band 7 Ch. 21350, Ant Internal, Standard Battery

Mode : BandWidth 20 MHz, QPSK, RB Size: 1


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.184 W/kg

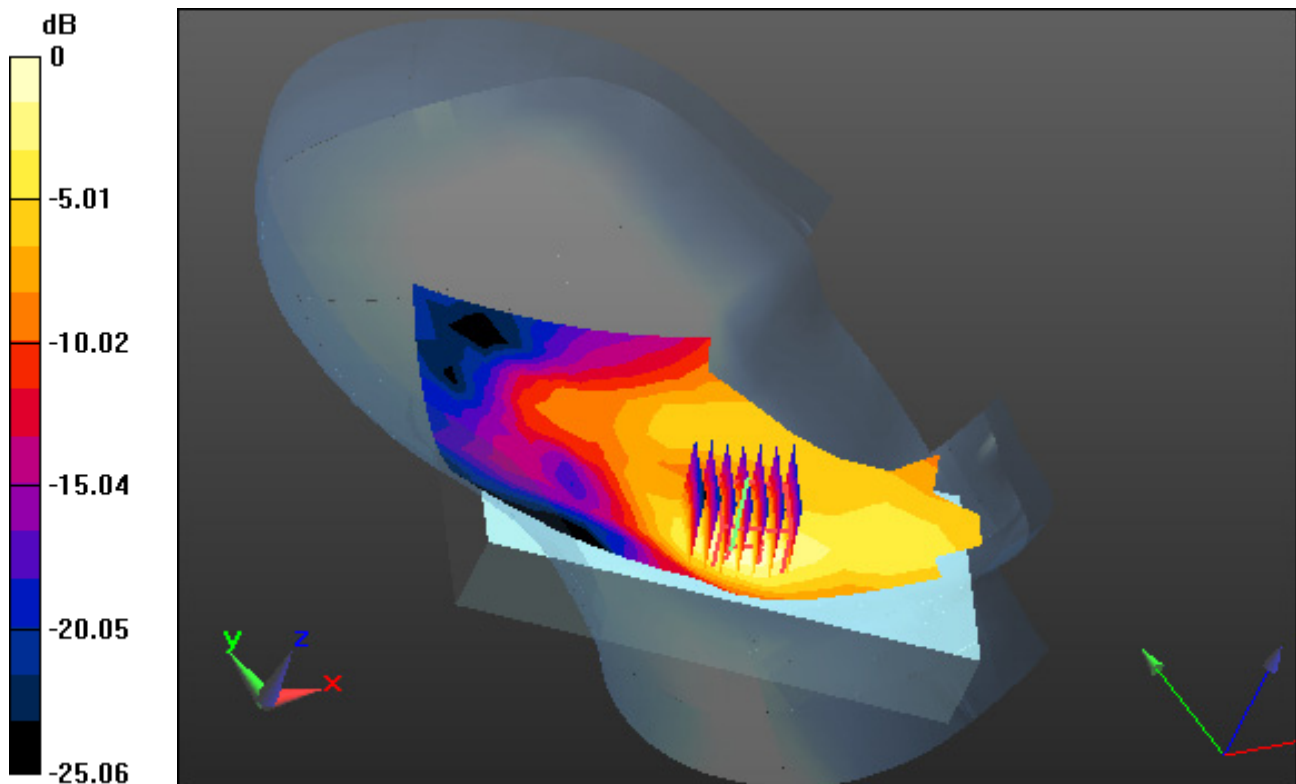

0 dB = 0.458 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 41 (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.051$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-23; Ambient Temp: 22.4; Tissue Temp: 22.3

Left Touch, LTE Band 41 Ch. 41490, Ant Internal, Standard Battery

Mode : BandWidth 20 MHz, QPSK, RB Size: 1


Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.143 W/kg

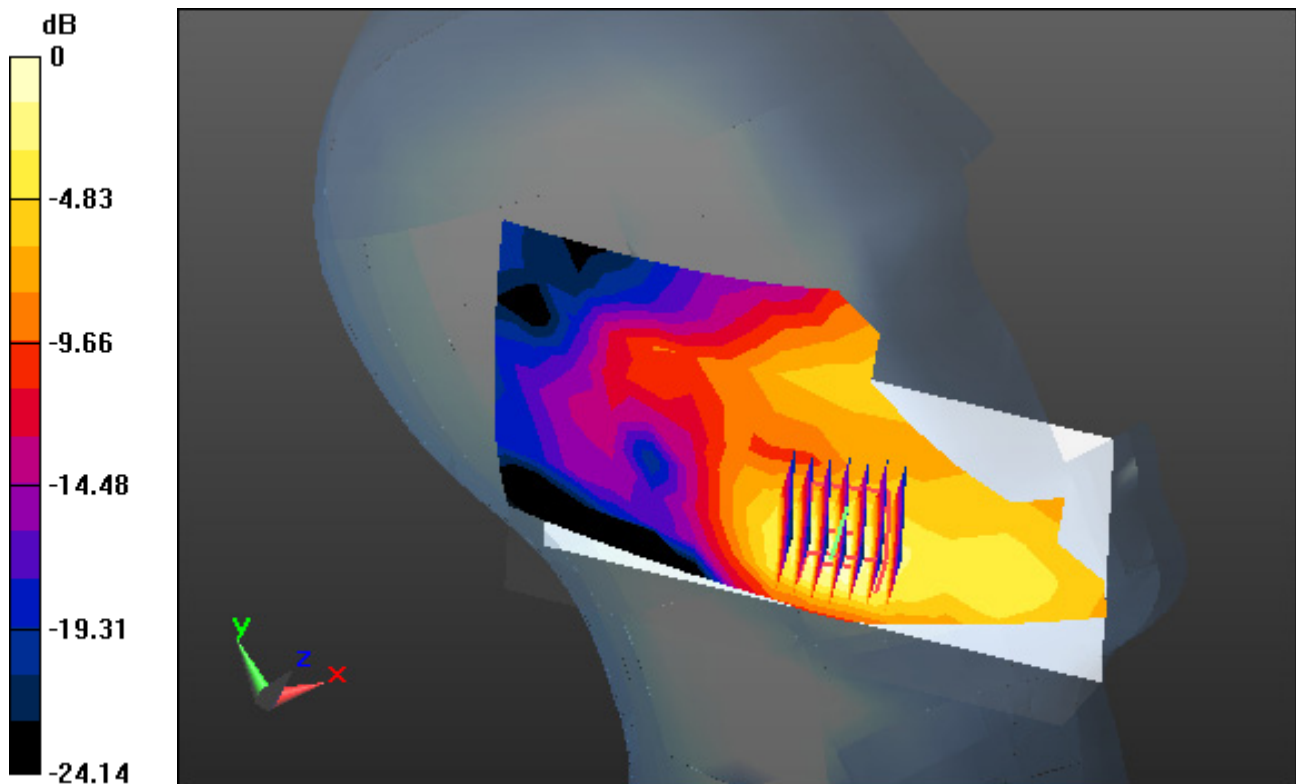

0 dB = 0.381 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, 1. W-LAN 2.4G(802.11b/g/n20, 40) (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 20.3; Tissue Temp: 20.5

Right Tilt, WLAN(802.11b) Ch. 11, Ant Internal, Standard Battery


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.070 W/kg

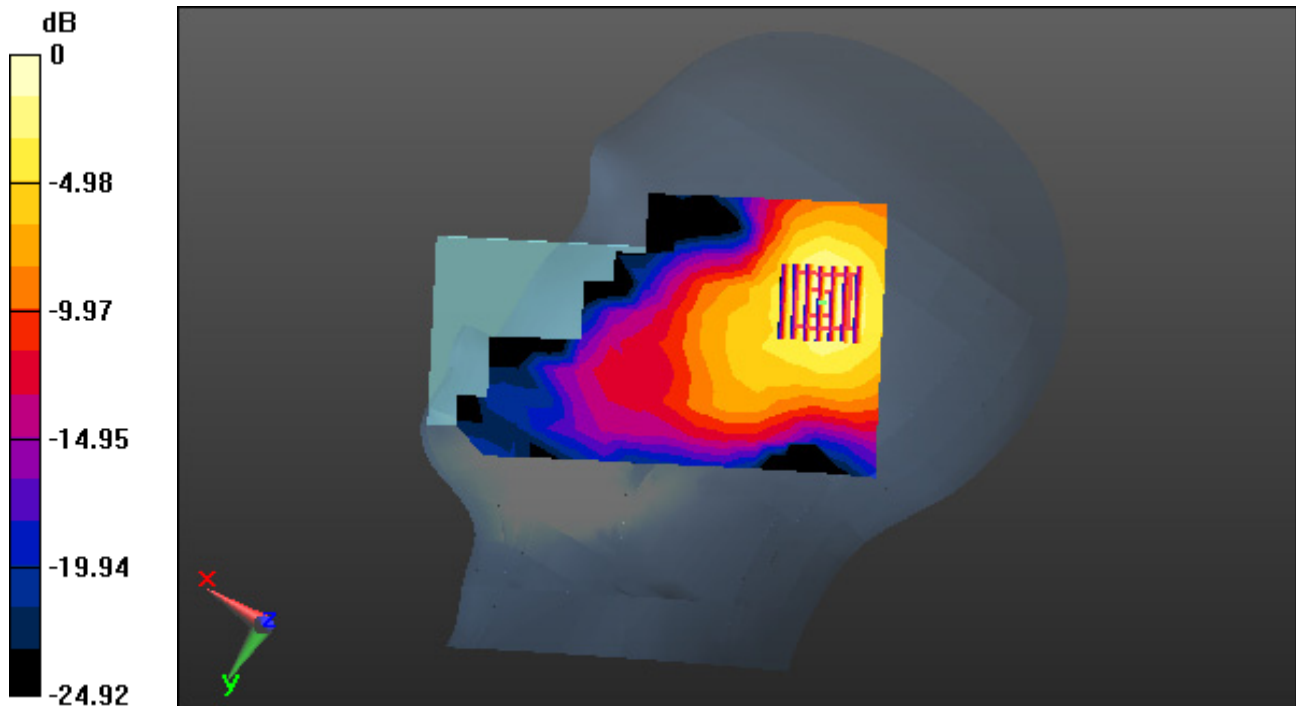

0 dB = 0.204 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, W-LAN(5G) (0); Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.746$ S/m; $\epsilon_r = 36.391$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(5.85, 5.85, 5.85); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-04; Ambient Temp: 21.3; Tissue Temp: 21.4

Left Tilt, W-LAN(802.11n HT40) Ch. 62, Ant Internal, Standard Battery


Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = 0.03dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.029 W/kg

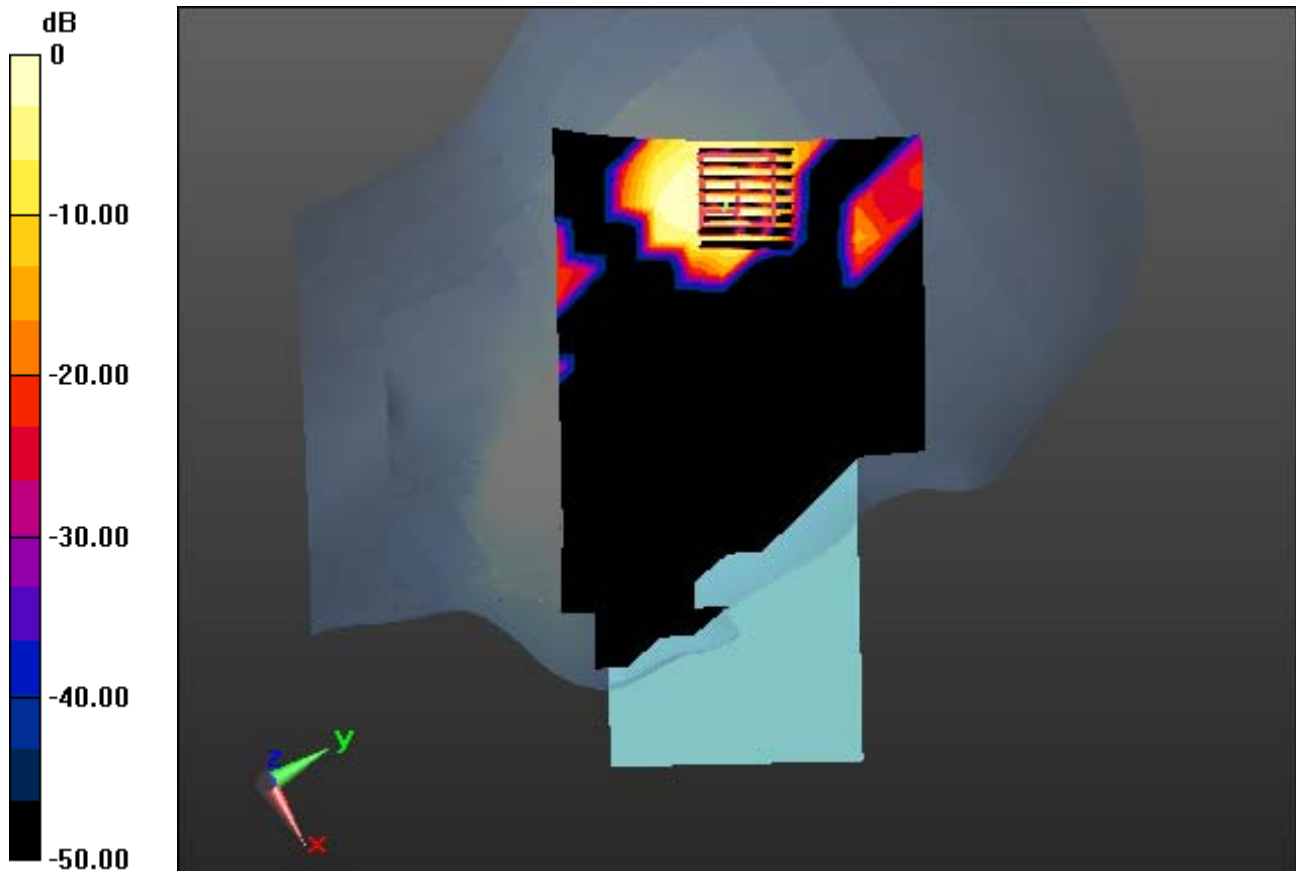

0 dB = 0.184 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, W-LAN(5G) (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.016$ S/m; $\epsilon_r = 35.706$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(5.15, 5.15, 5.15); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-05; Ambient Temp: 21.4; Tissue Temp: 21.6

Left Tilt, W-LAN(802.11n HT20) Ch. 100, Ant Internal, Standard Battery


Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.021 W/kg

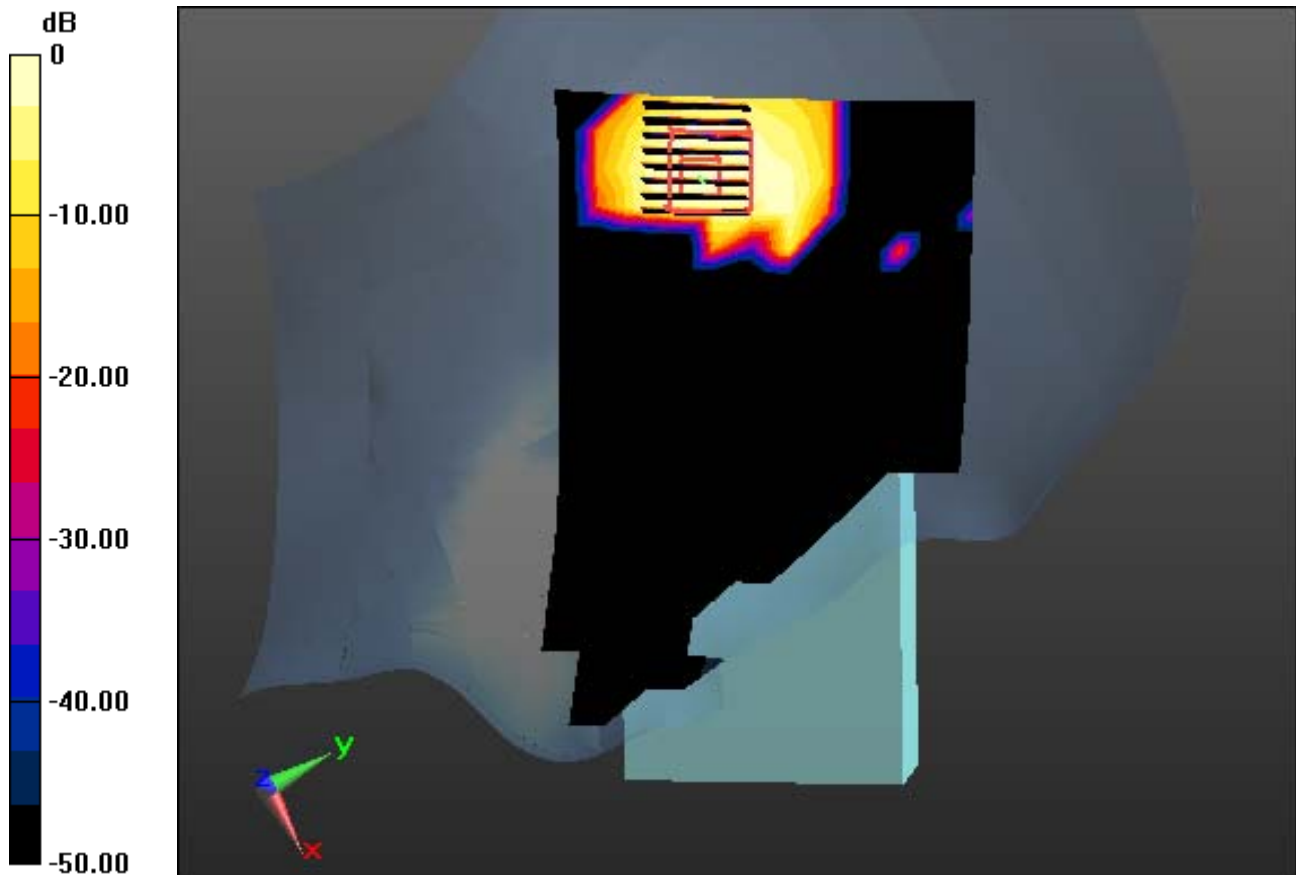

0 dB = 0.161 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, W-LAN(5G) (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 35.752$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(5.3, 5.3, 5.3); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.1; Tissue Temp: 21.4

Right Tilt, W-LAN(802.11a) Ch. 165, Ant Internal, Standard Battery


Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.050 W/kg

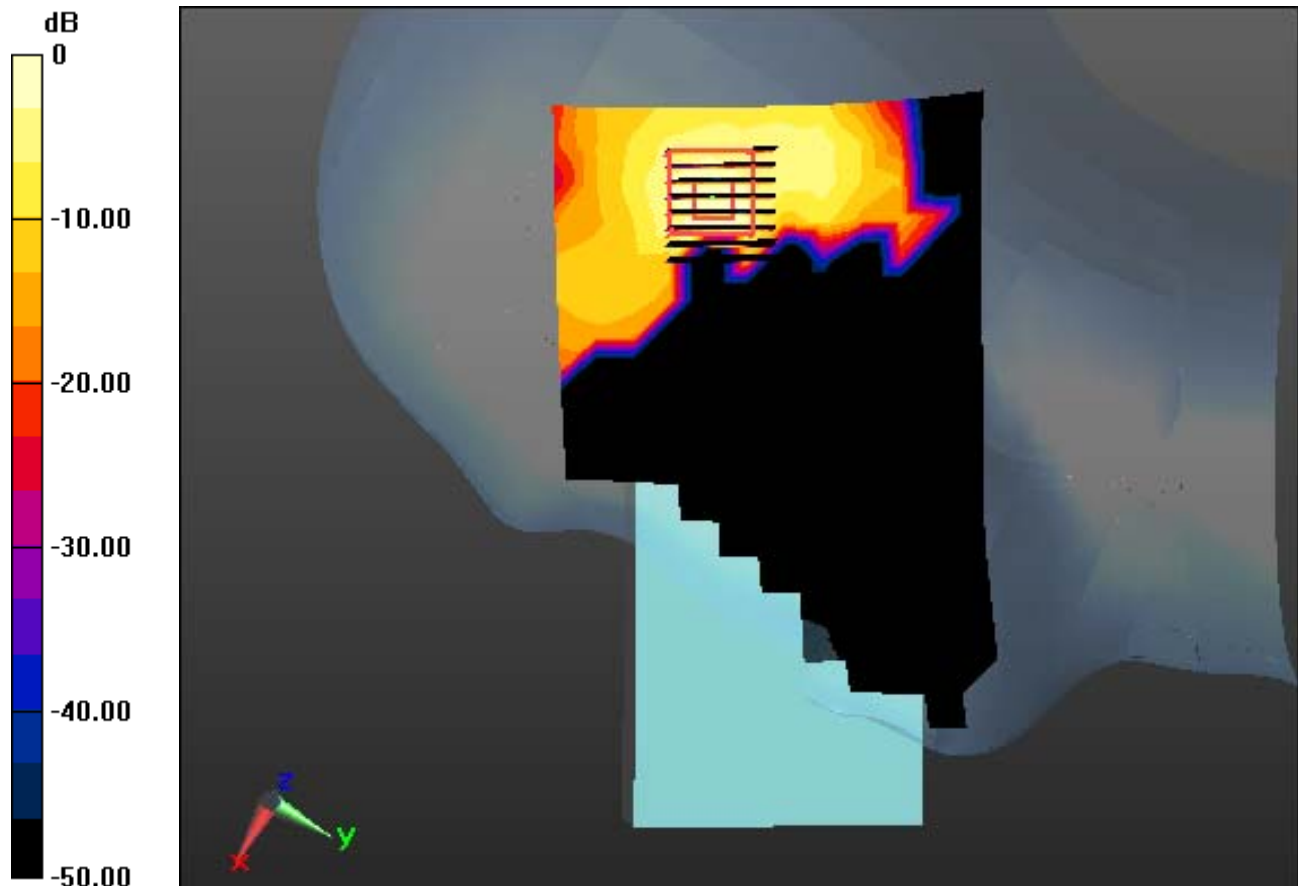

0 dB = 0.435 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.582

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 38.17$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.6; Tissue Temp: 21.5

Right Tilt, Bluetooth 2Mbps Ch. 39, Ant Internal, Standard Battery


Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.0054 W/kg

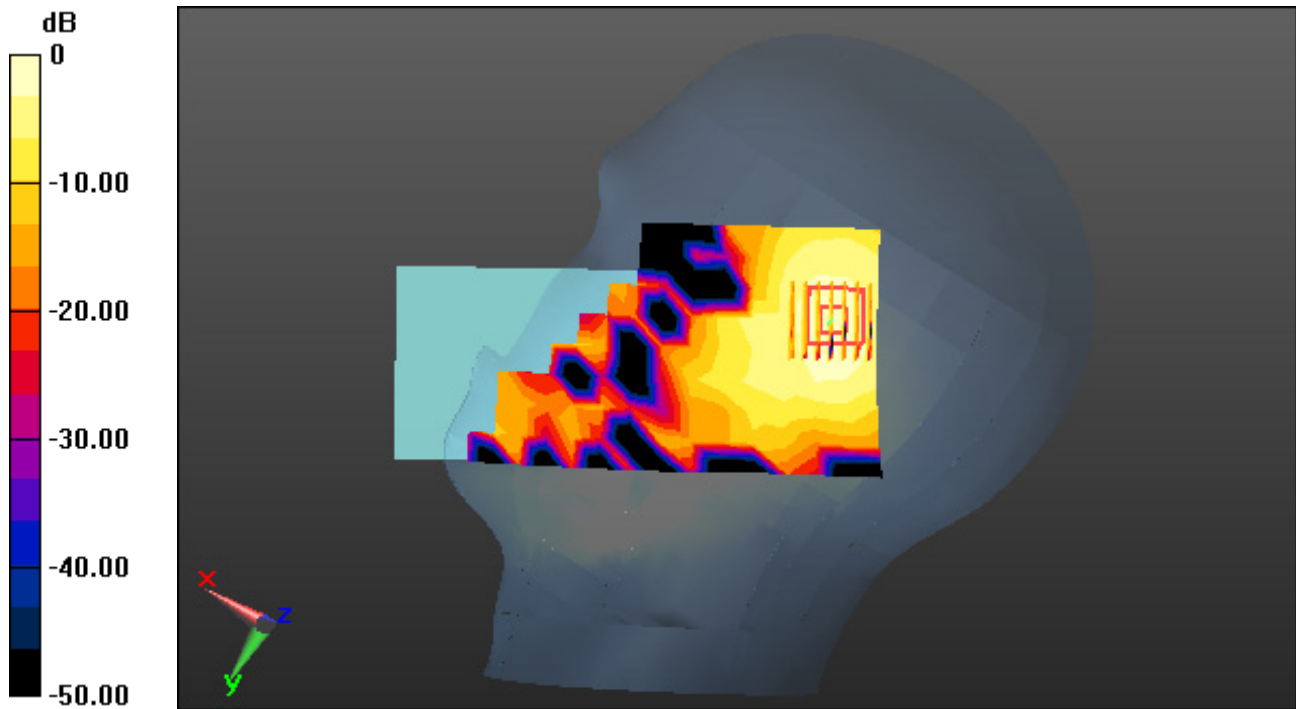

0 dB = 0.0192 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LE (0); Frequency: 2480 MHz; Duty Cycle: 1:1.168

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 38.08$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.6; Tissue Temp: 21.5

Right Tilt, Bluetooth LE 1Mbps Ch. 19, Ant Internal, Standard Battery


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.011 W/kg

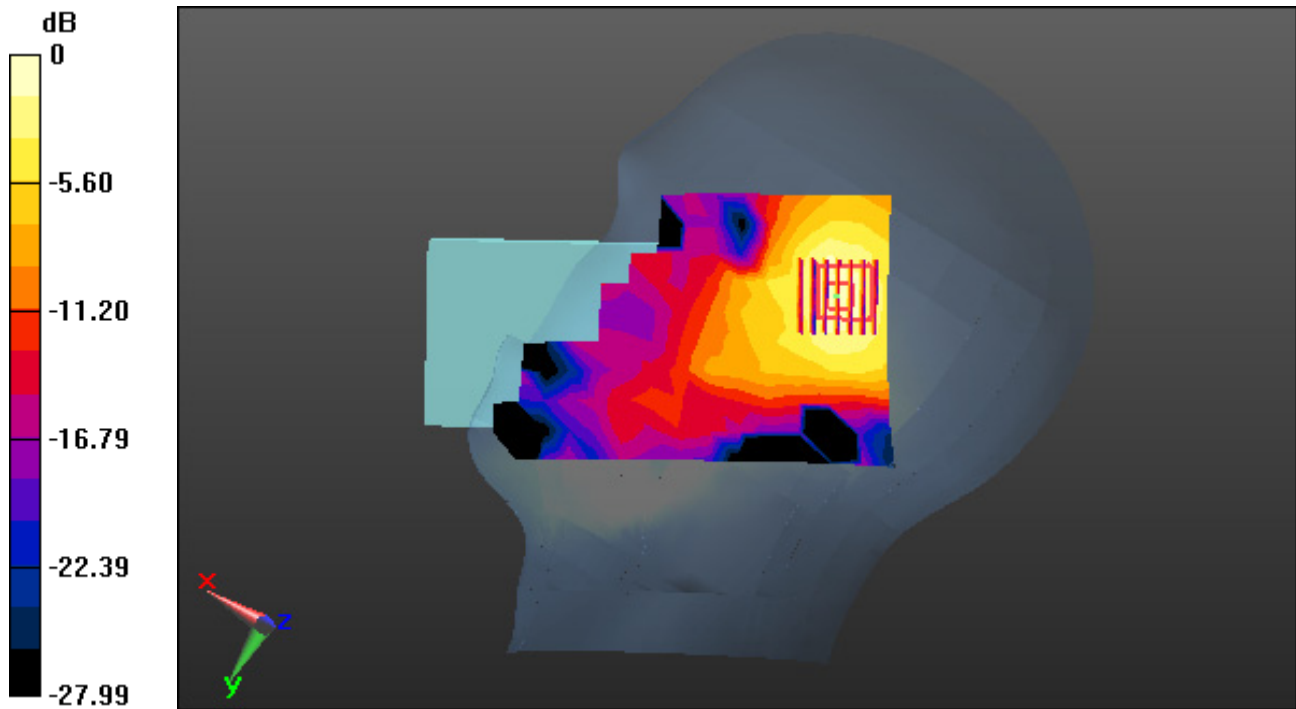

0 dB = 0.0351 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, WCDMA 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.788$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.26, 6.26, 6.26); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-15; Ambient Temp: 21.6; Tissue Temp: 21.5

1 cm space from Body, Rear, WCDMA Band 5 Ch. 4183, Ant Internal


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.273 W/kg

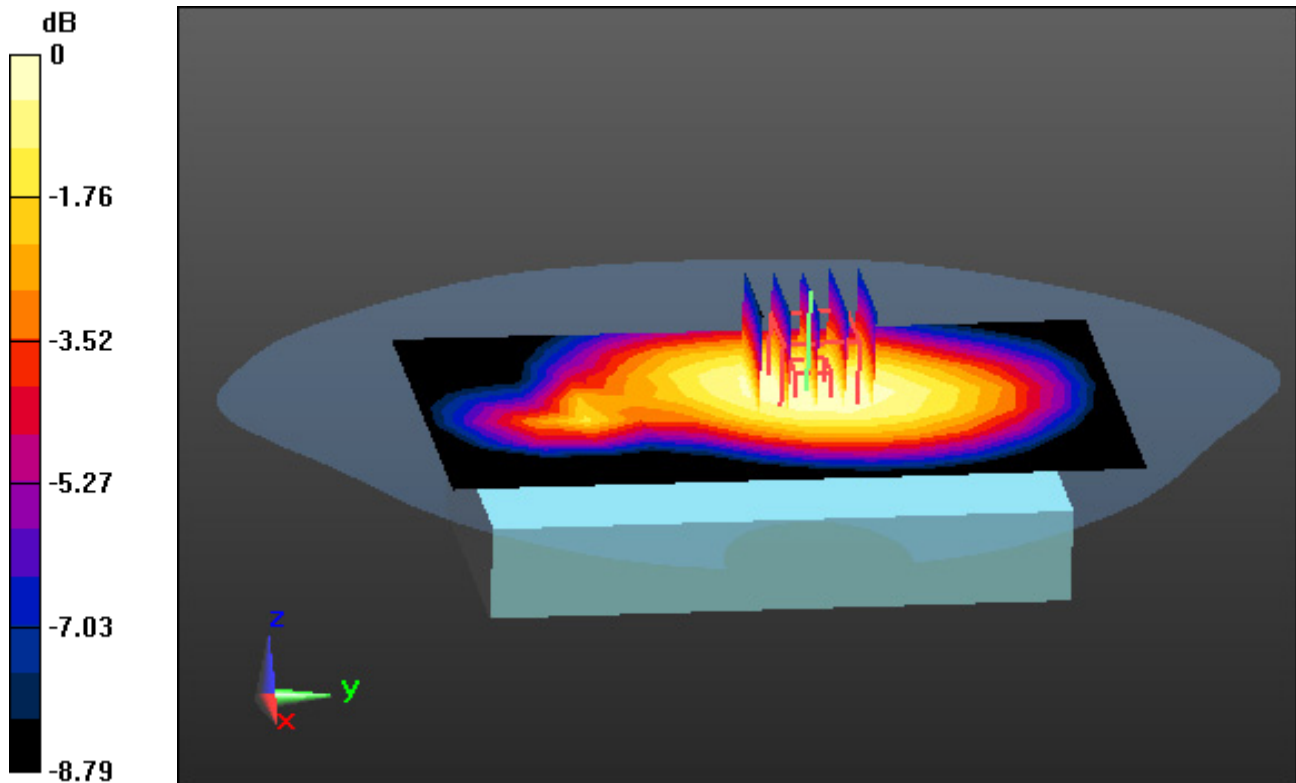

0 dB = 0.403 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, WCDMA Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22; Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-29; Ambient Temp: 22.3; Tissue Temp: 22.1

1 cm space from Body, Rear, WCDMA Ch. 9400, Ant Internal


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.239 W/kg

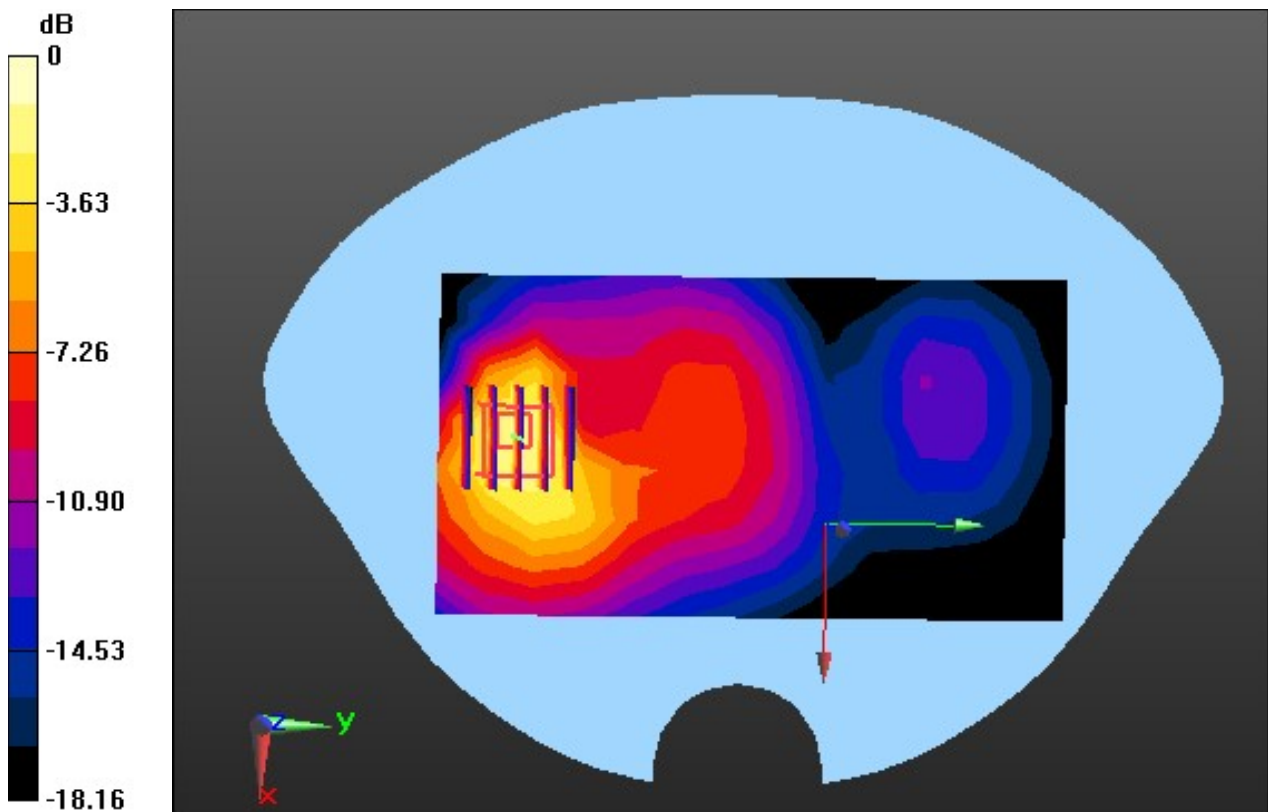

0 dB = 0.621 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.858$ S/m; $\epsilon_r = 43.146$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.49, 6.49, 6.49); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-16; Ambient Temp: 21.7; Tissue Temp: 21.6

1 cm space from Body, Rear, LTE Band 12 Ch. 23095, Ant Internal

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.113 W/kg

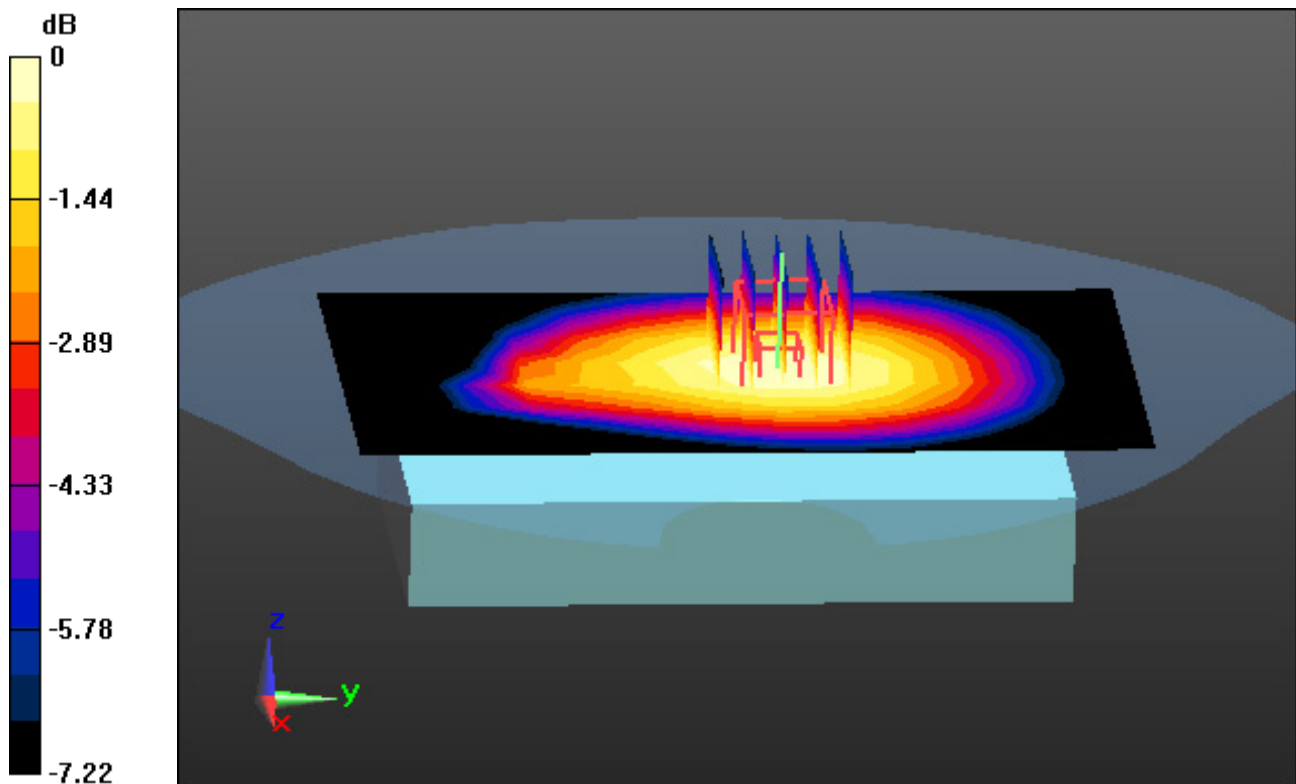

0 dB = 0.160 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 17 (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 42.095$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.91, 9.91, 9.91); Calibrated: 5/31/2021 Electronics: DAE4 Sn1391

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 21.1; Tissue Temp: 21.0

1 cm space from Body, Rear, LTE Band 17 Ch. 23790, Ant Internal

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.172 W/kg

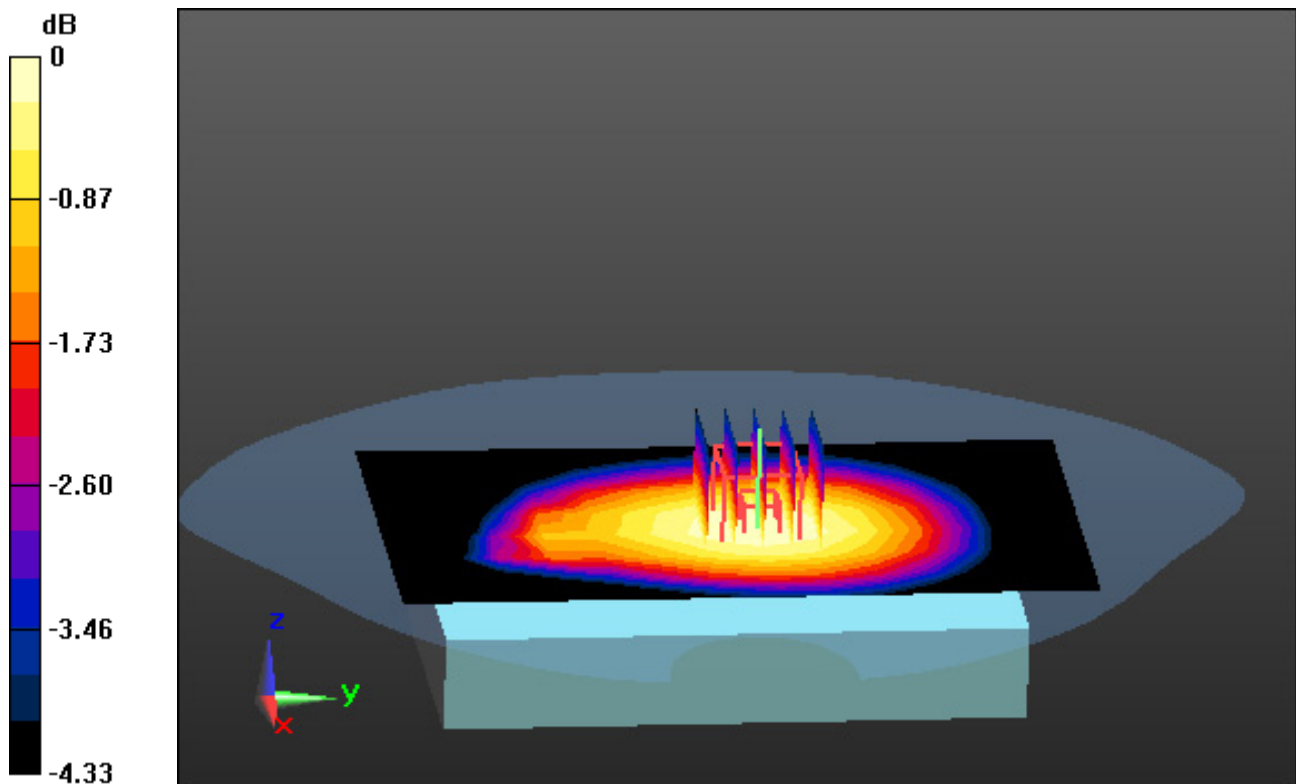

0 dB = 0.259 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 5(FCC) (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.789$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.26, 6.26, 6.26); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-15; Ambient Temp: 21.6; Tissue Temp: 21.5

1 cm space from Body, Rear, LTE Band 5 Ch. 20525, Ant Internal

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.271 W/kg

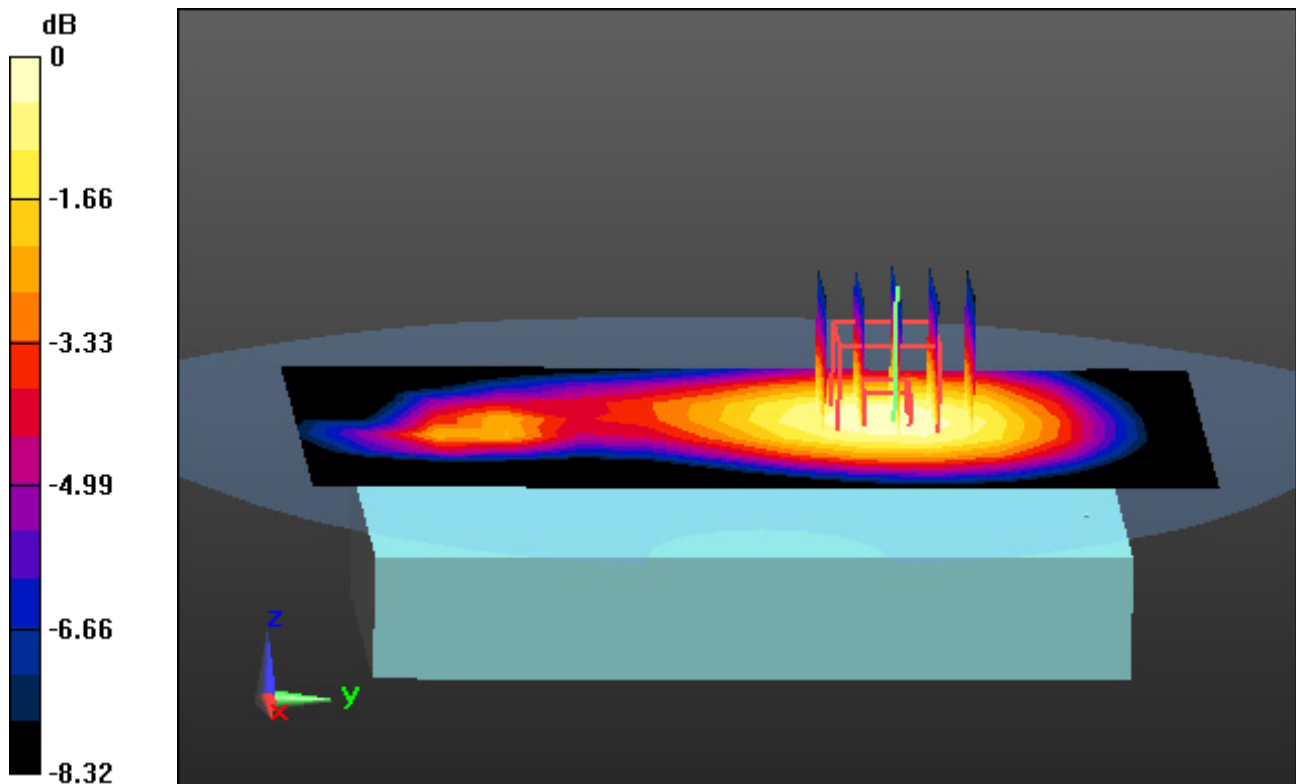

0 dB = 0.406 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 25 (0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 38.637$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-30; Ambient Temp: 22.2; Tissue Temp: 22.1

1 cm space from Body, Rear, LTE Band 25 Ch. 26590, Ant Internal

Mode : BandWidth 20 MHz, QPSK, RB Size: 1


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.454 W/kg

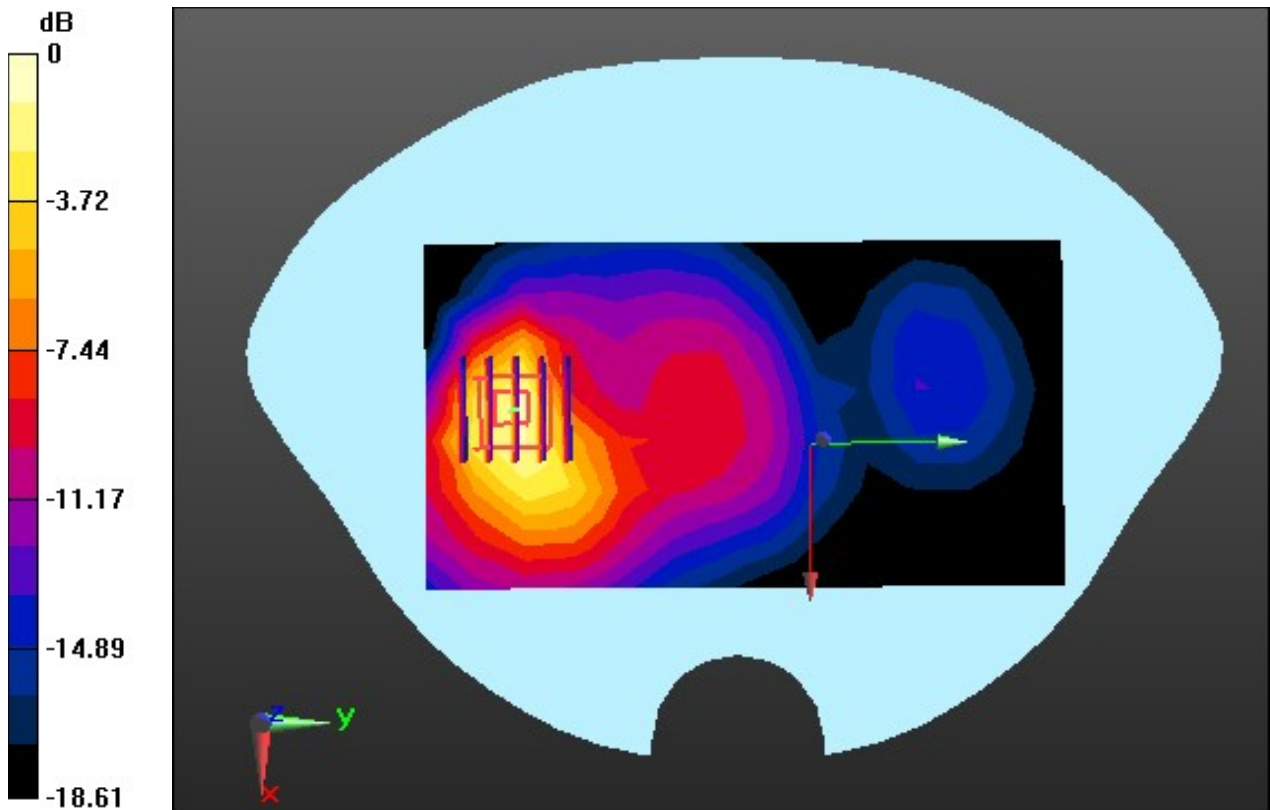

0 dB = 1.22 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 7(FCC) (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 38.494$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-21; Ambient Temp: 21.5; Tissue Temp: 21.4

1 cm space from Body, Rear, LTE Band 7 Ch. 21350, Ant Internal

Mode : BandWidth 20 MHz, QPSK, RB Size: 1


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.336 W/kg

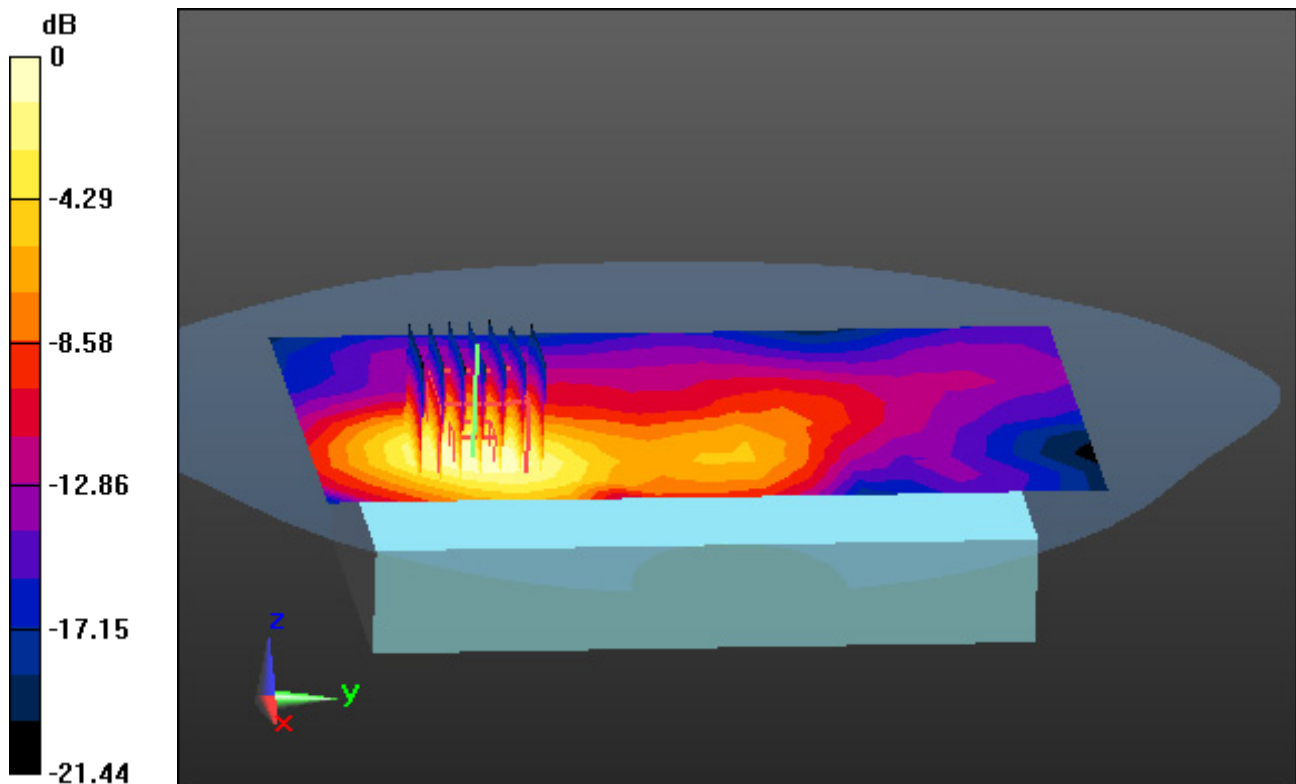

0 dB = 0.812 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 41 (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.051$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-23; Ambient Temp: 22.4; Tissue Temp: 22.3

1 cm space from Body, Rear, LTE Band 41 Ch. 41490, Ant Internal

Mode : BandWidth 20 MHz, QPSK, RB Size: 1


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.320 W/kg

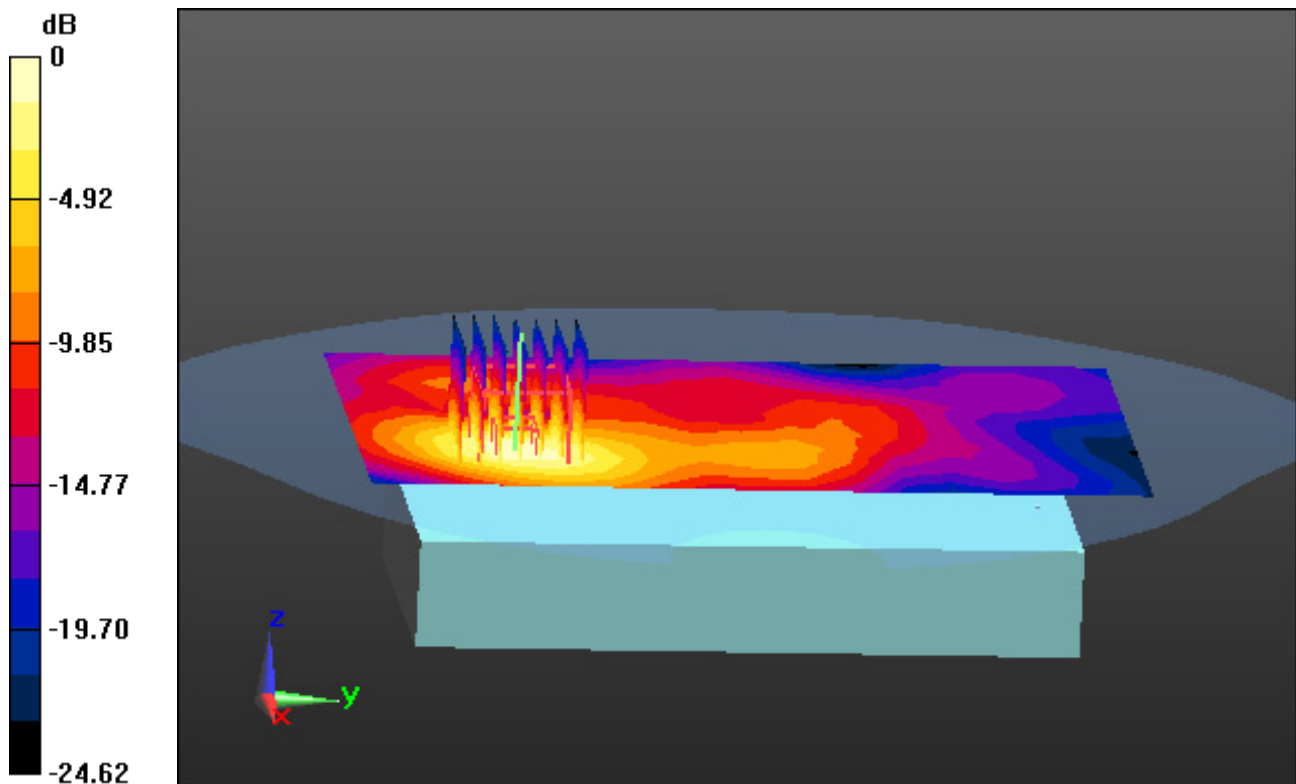

0 dB = 0.853 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, 1. W-LAN 2.4G(802.11b/g/n20, 40) (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 20.3; Tissue Temp: 20.5

1 cm space from Body, Rear, WLAN(802.11b) Ch. 11, Ant Internal


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.048 W/kg

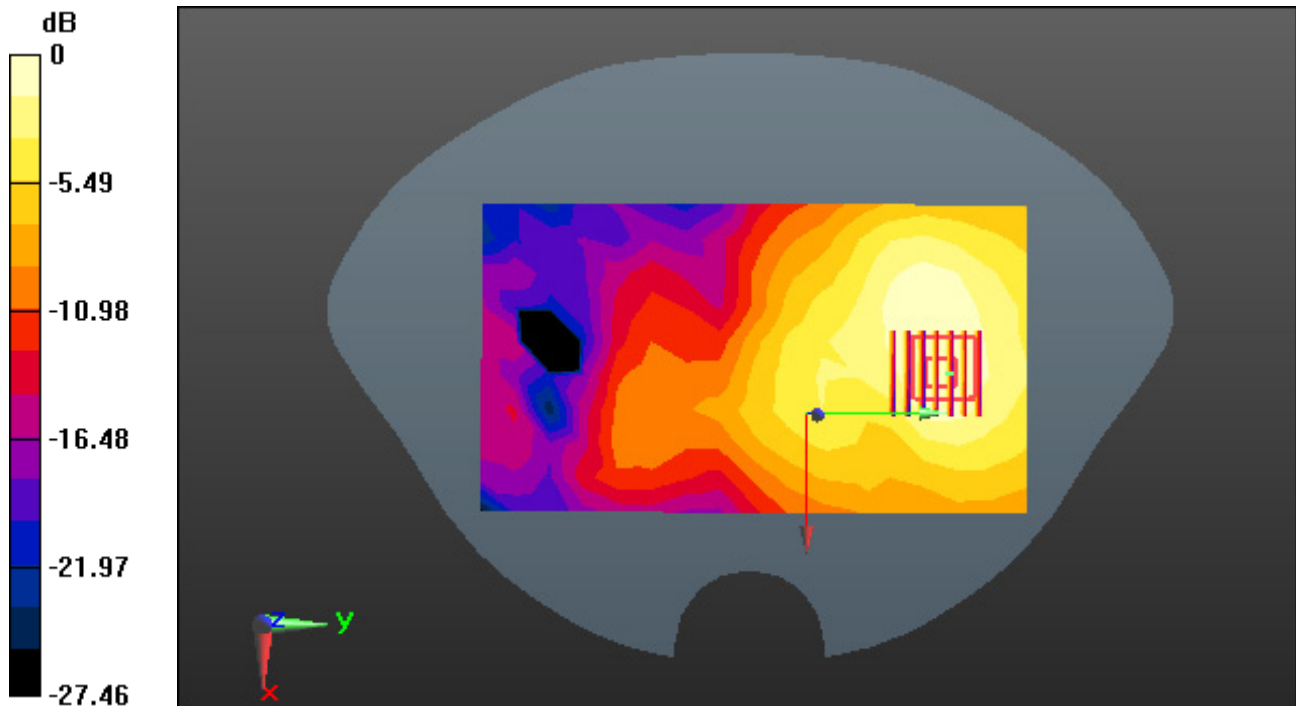

0 dB = 0.121 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, W-LAN(5G) (0); Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.746$ S/m; $\epsilon_r = 36.391$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(5.85, 5.85, 5.85); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-04; Ambient Temp: 21.3; Tissue Temp: 21.4

1.0 cm space from Body, Rear, W-LAN(802.11n HT40) Ch. 62, Ant Internal


Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.020 W/kg

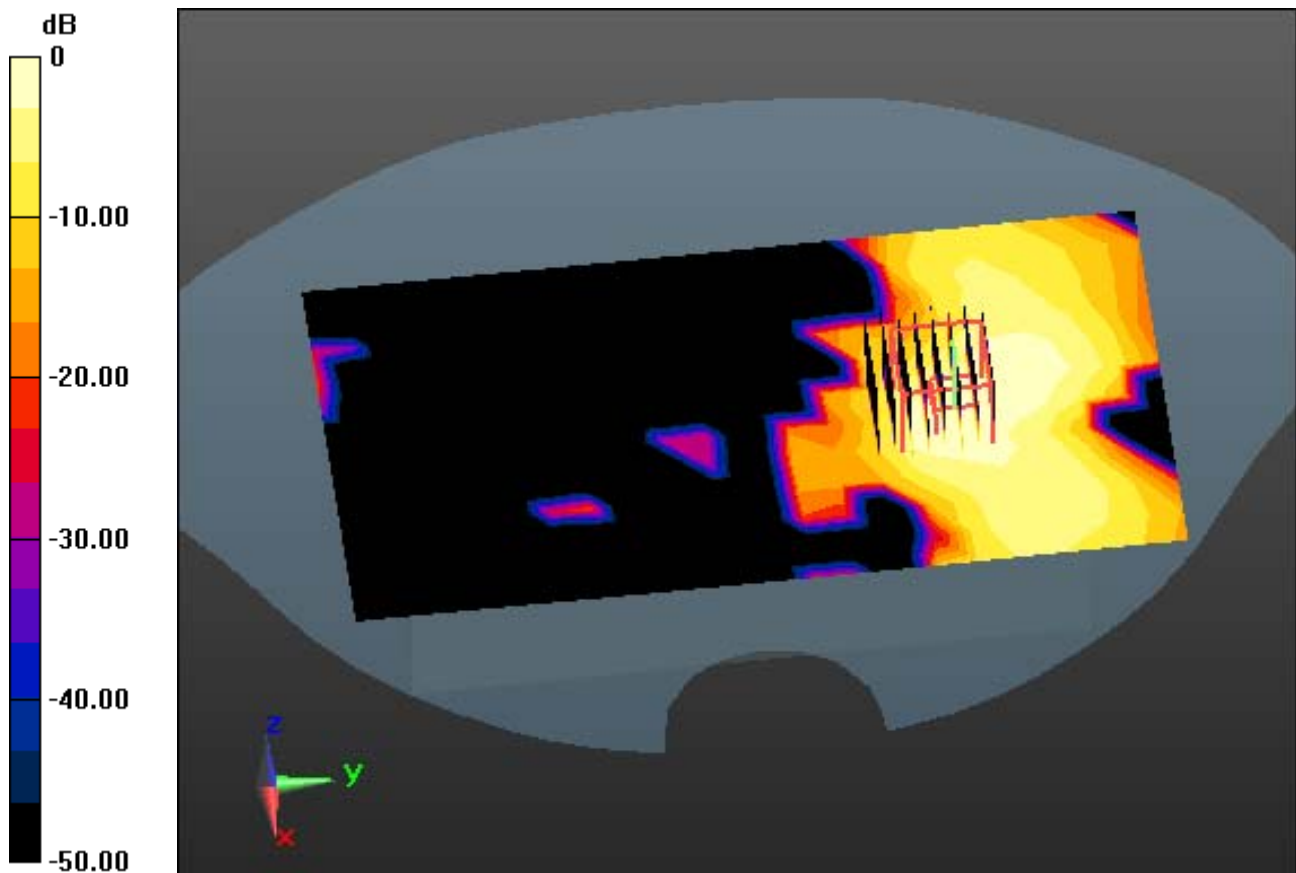

0 dB = 0.131 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, W-LAN(5G) (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.016$ S/m; $\epsilon_r = 35.706$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(5.15, 5.15, 5.15); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-05; Ambient Temp: 21.4; Tissue Temp: 21.6

1.0 cm space from Body, Rear, W-LAN(802.11n HT20) Ch. 100, Ant Internal


Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.022 W/kg

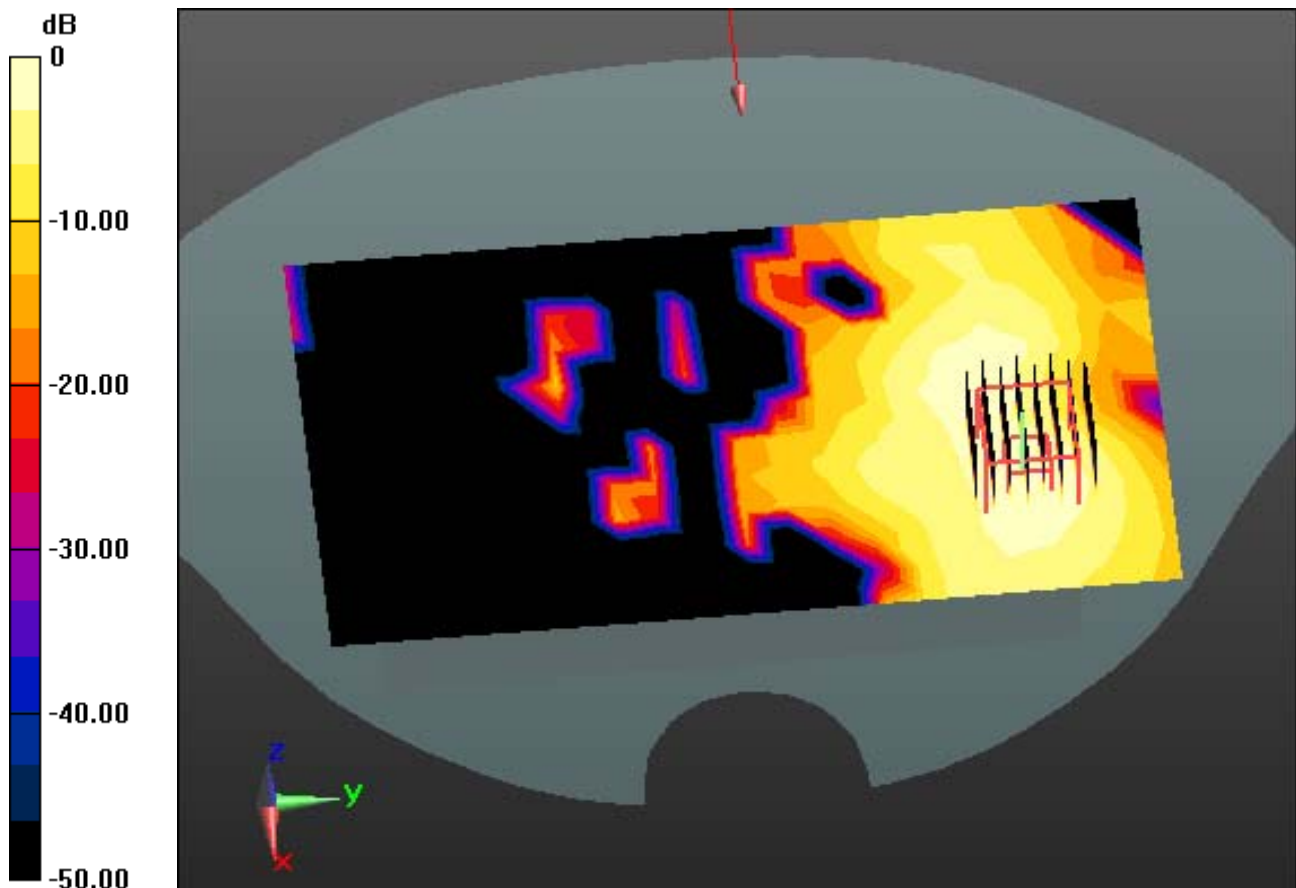

0 dB = 0.146 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, W-LAN(5G) (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.44 \text{ S/m}$; $\epsilon_r = 35.752$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(5.3, 5.3, 5.3); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.1; Tissue Temp: 21.4

1.0 cm space from Body, Rear, W-LAN(802.11a) Ch. 165, Ant Internal


Area Scan (12x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio: 1.4

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.100 W/kg

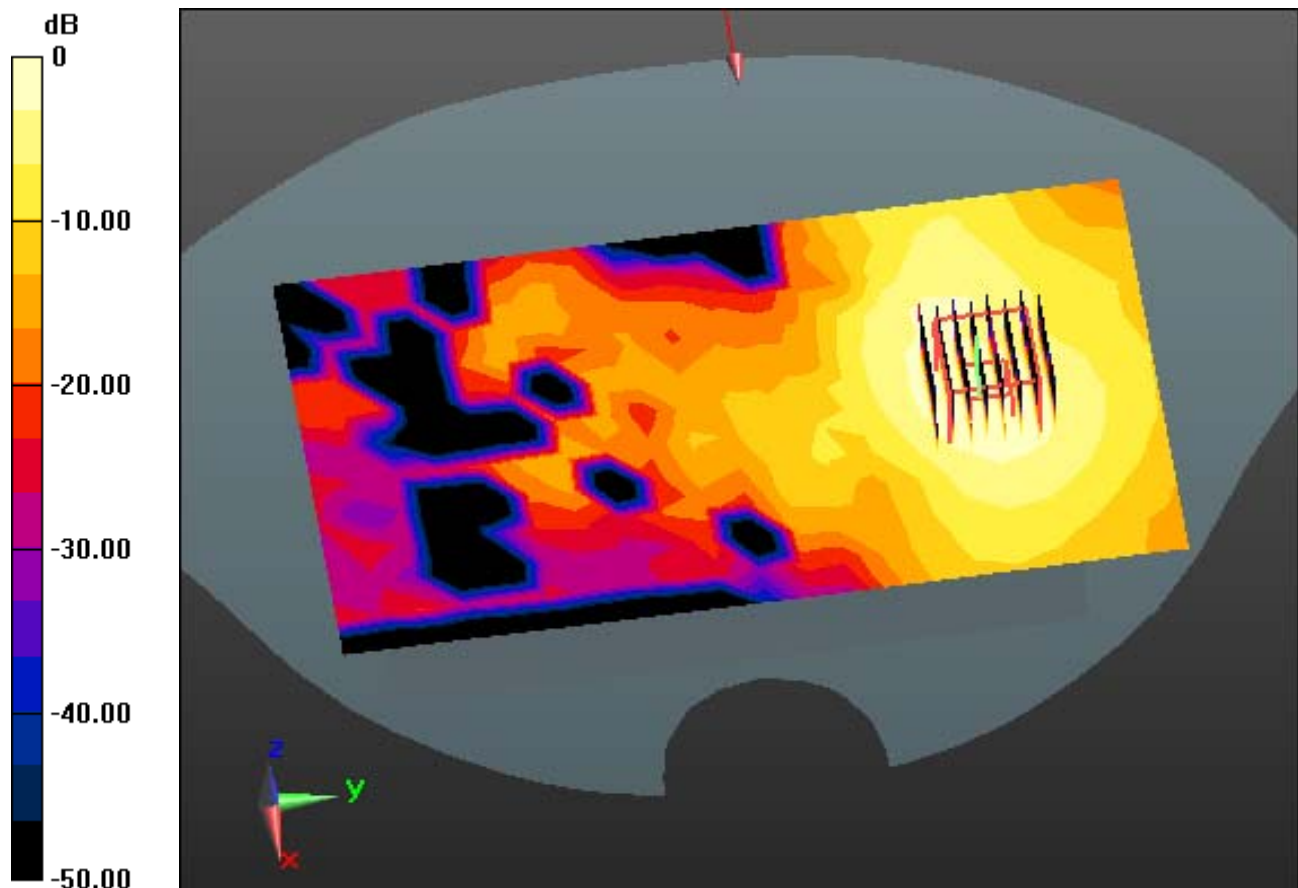

0 dB = 0.569 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.582

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 38.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.6; Tissue Temp: 21.5

1 cm space from Body, Rear, Bluetooth 2 Mbps Ch. 39, Ant Internal


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0140 W/kg

SAR(1 g) = 0.00694 W/kg; SAR(10 g) = 0.00338 W/kg

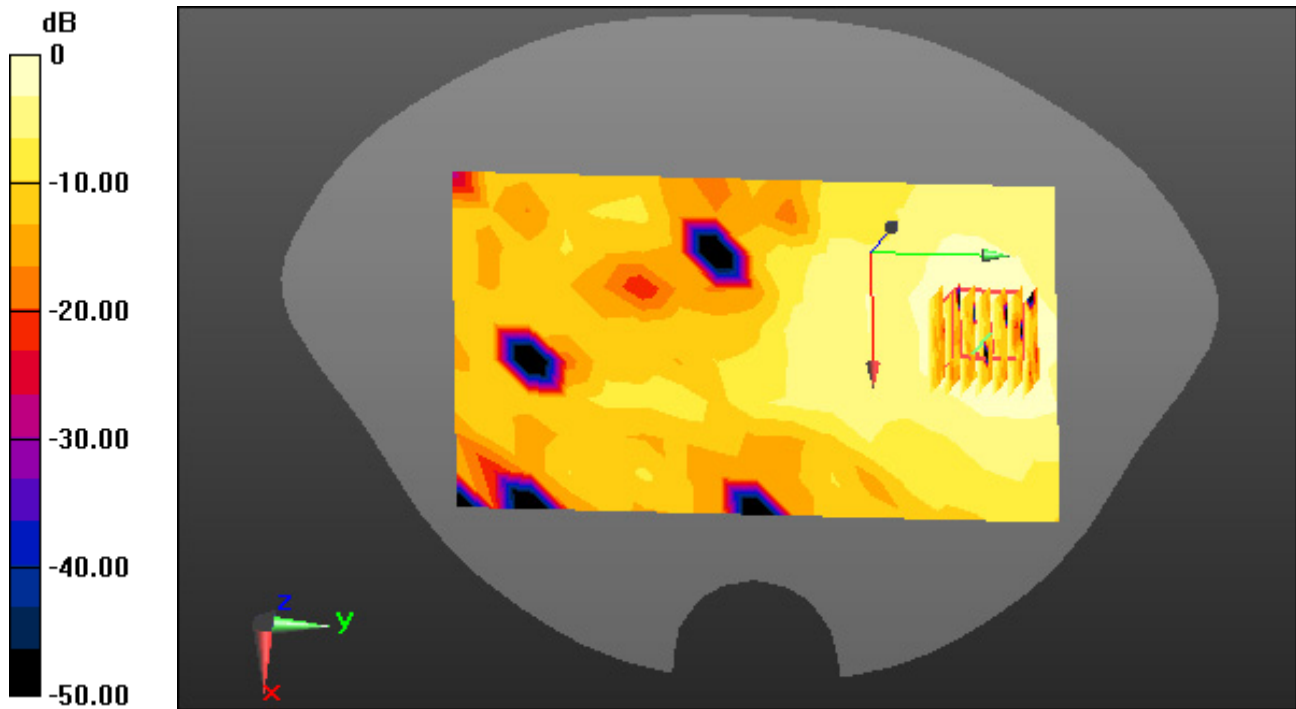

0 dB = 0.0104 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LE (0); Frequency: 2440 MHz; Duty Cycle: 1:1.168
Medium parameters used: $f = 2440$ MHz; $\sigma = 1.799$ S/m; $\epsilon_r = 38.172$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.6; Tissue Temp: 21.5

1 cm space from Body, Rear, Bluetooth LE 1 Mbps Ch. 19, Ant Internal


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00549 W/kg

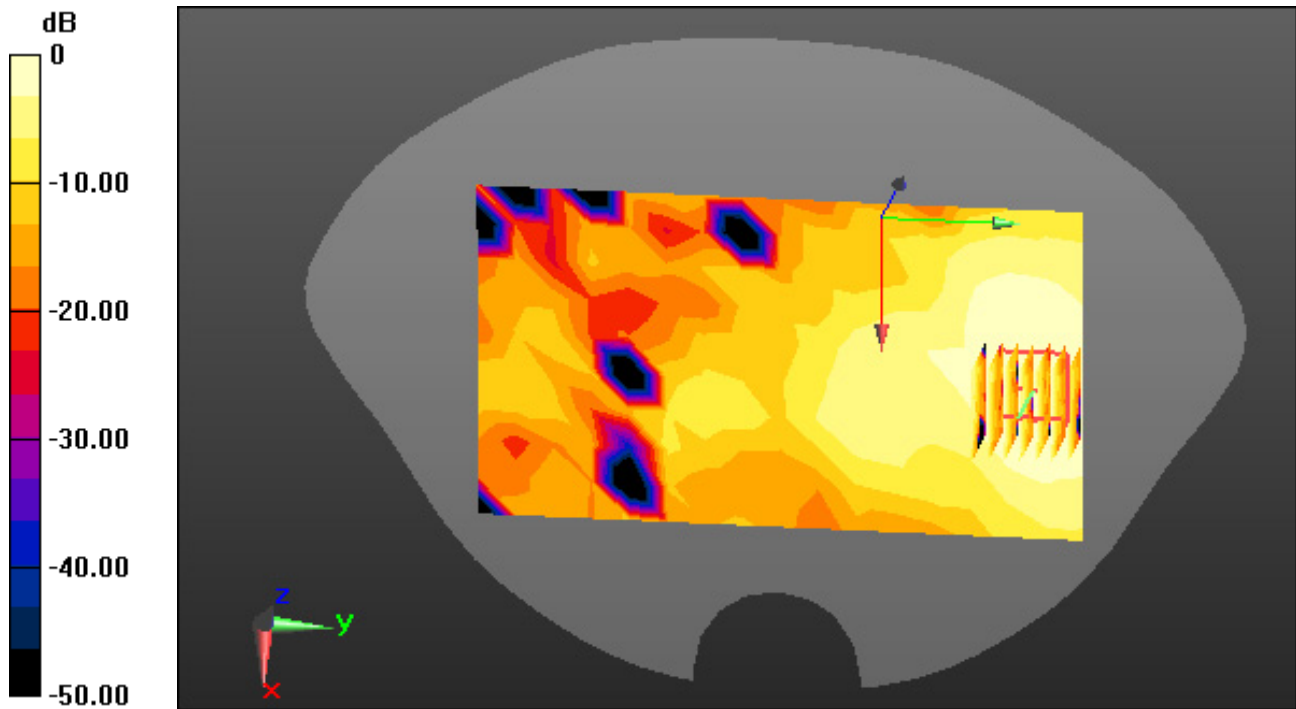

0 dB = 0.0171 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, WCDMA Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22; Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-29; Ambient Temp: 22.3; Tissue Temp: 22.1

1 cm space from Body, Bottom, WCDMA Ch. 9400, Ant Internal


Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.405 W/kg

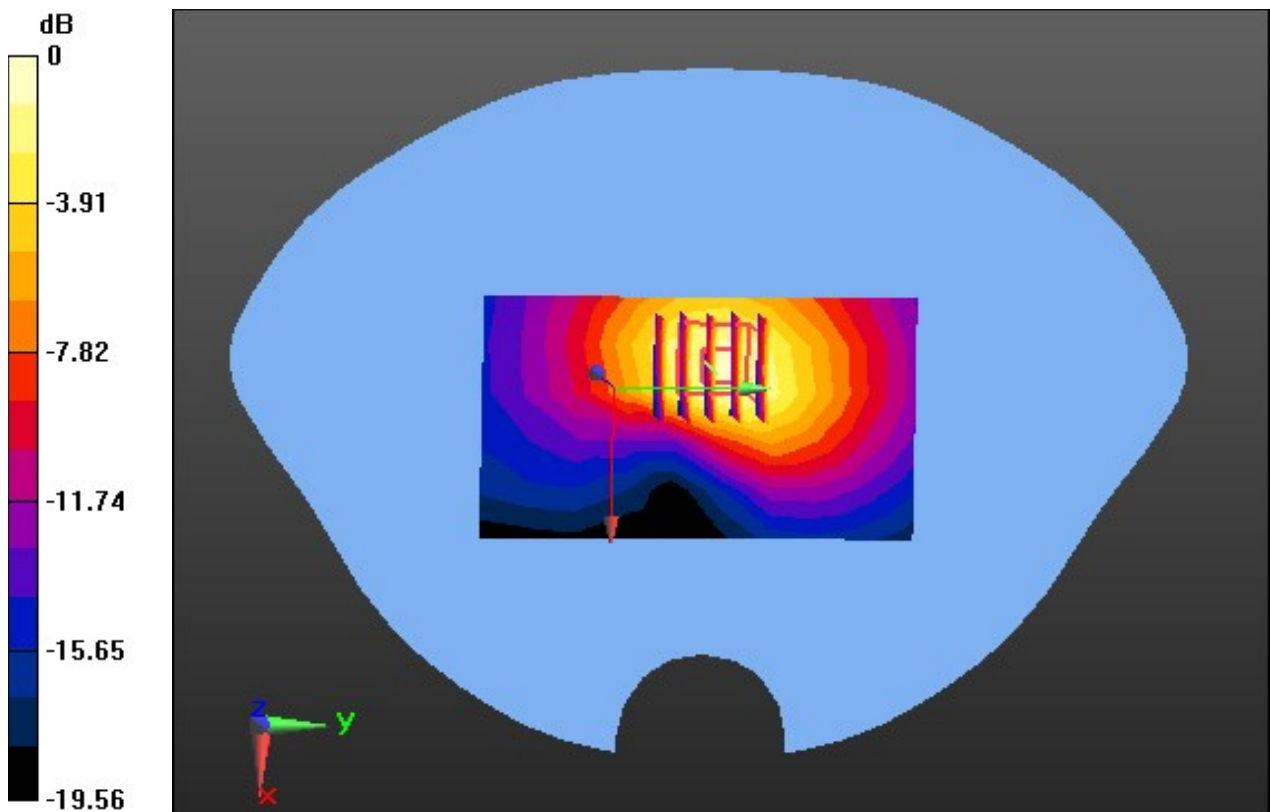

0 dB = 0.948 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 7(FCC) (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 38.494$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-21; Ambient Temp: 21.5; Tissue Temp: 21.4

1 cm space from Body, Left, LTE Band 7 Ch. 21350, Ant Internal

Mode : BandWidth 20 MHz, QPSK, RB Size: 1


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.344 W/kg

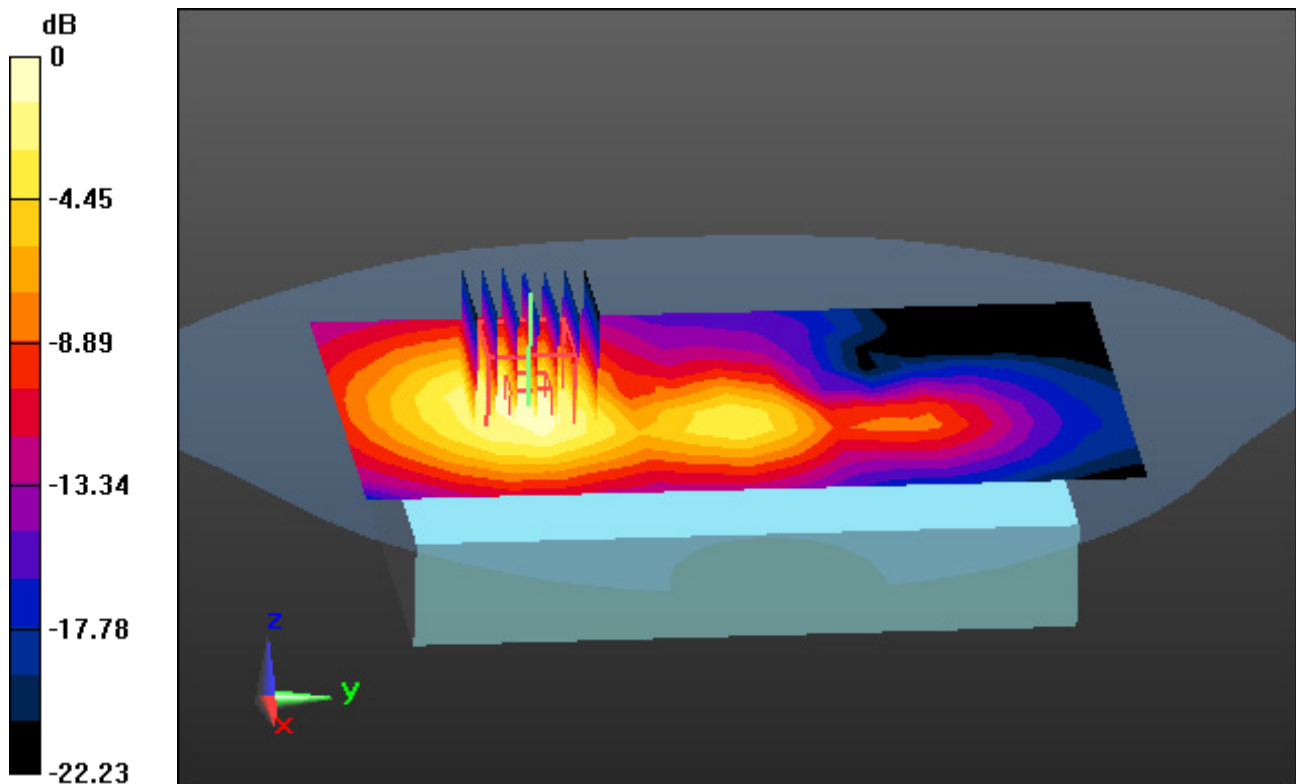

0 dB = 0.859 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, 1. W-LAN 2.4G(802.11b/g/n20, 40) (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 20.3; Tissue Temp: 20.5

1 cm space from Body, Top, WLAN(802.11b) Ch. 11, Ant Internal


Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.109 W/kg

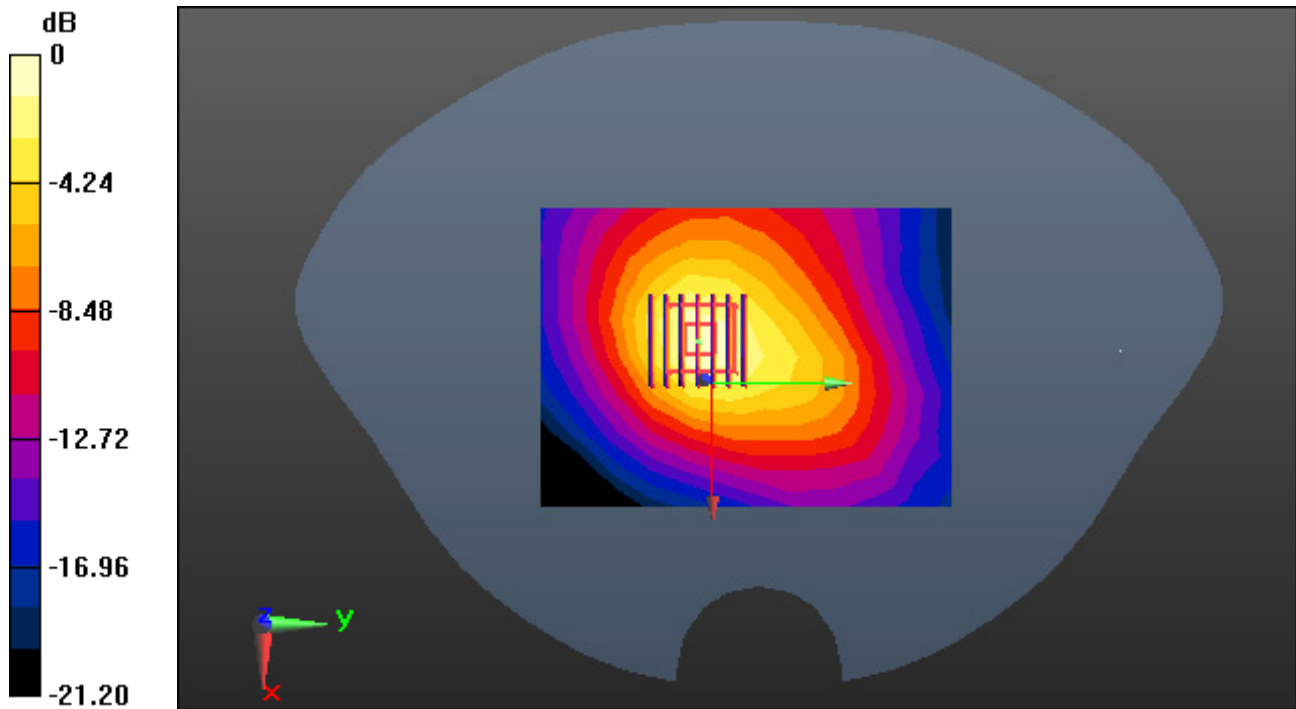

0 dB = 0.319 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, WLAN_802.11_40 (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.675$ S/m; $\epsilon_r = 35.562$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(5.5, 5.5, 5.5); Calibrated: 2021-06-23 Electronics: DAE4 Sn1396

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-03; Ambient Temp: 21.2; Tissue Temp: 21.4

1.0 cm space from Body, Rear, W-LAN(802.11n HT40) Ch. 38, Ant Internal


Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.029 W/kg

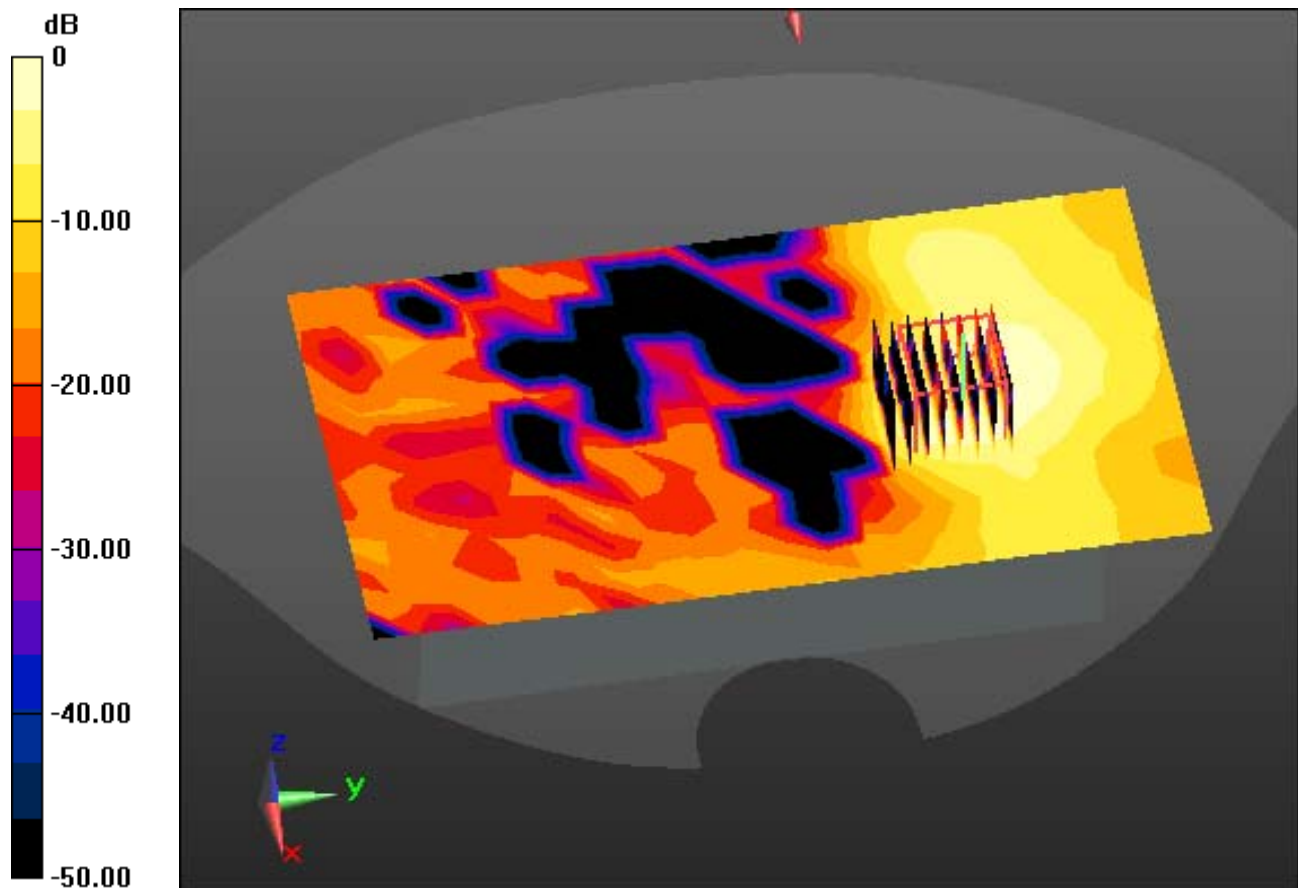

0 dB = 0.188 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.582

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 38.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.6; Tissue Temp: 21.5

1 cm space from Body, Top, Bluetooth 2 Mbps Ch. 39, Ant Internal


Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Top M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00769 W/kg

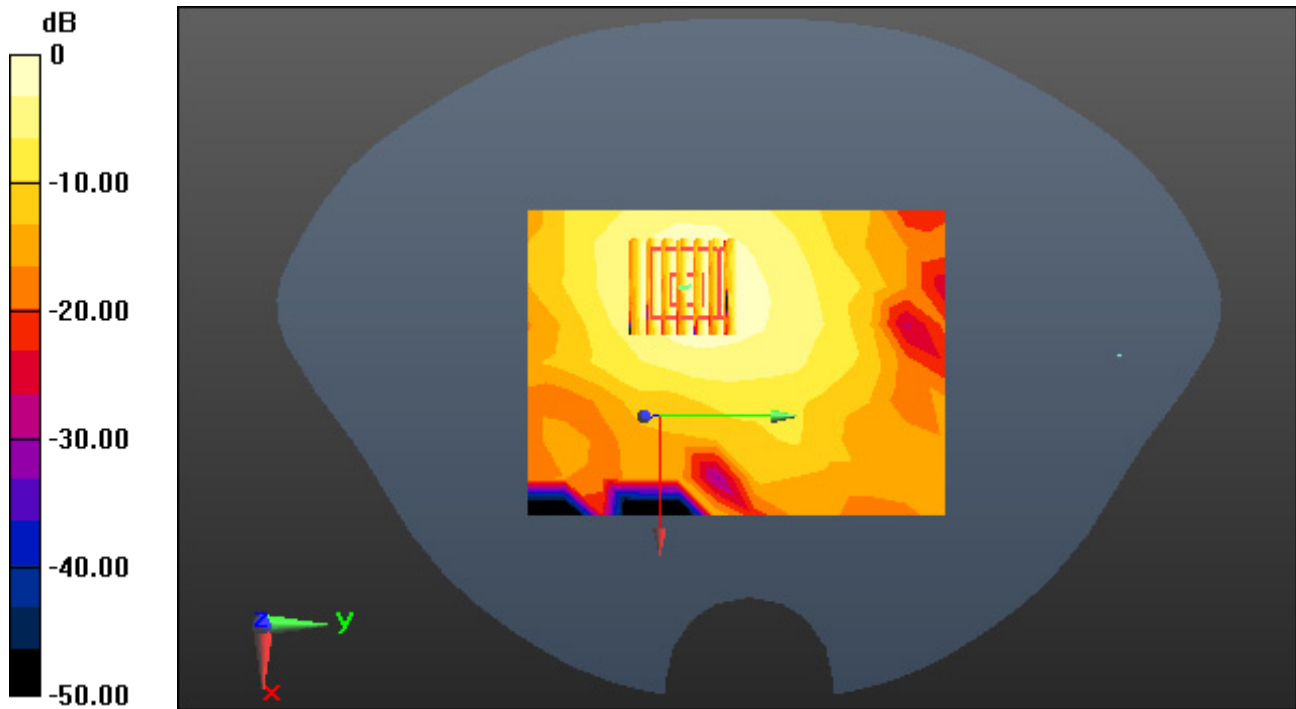

0 dB = 0.0222 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LE (0); Frequency: 2440 MHz; Duty Cycle: 1:1.168
Medium parameters used: $f = 2440$ MHz; $\sigma = 1.799$ S/m; $\epsilon_r = 38.172$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3916; ConvF(7.8, 7.8, 7.8); Calibrated: 4/30/2021 Electronics: DAE4 Sn1485
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-06; Ambient Temp: 21.6; Tissue Temp: 21.5

1 cm space from Body, Top, Bluetooth LE 1 Mbps Ch. 19, Ant Internal


Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.015 W/kg

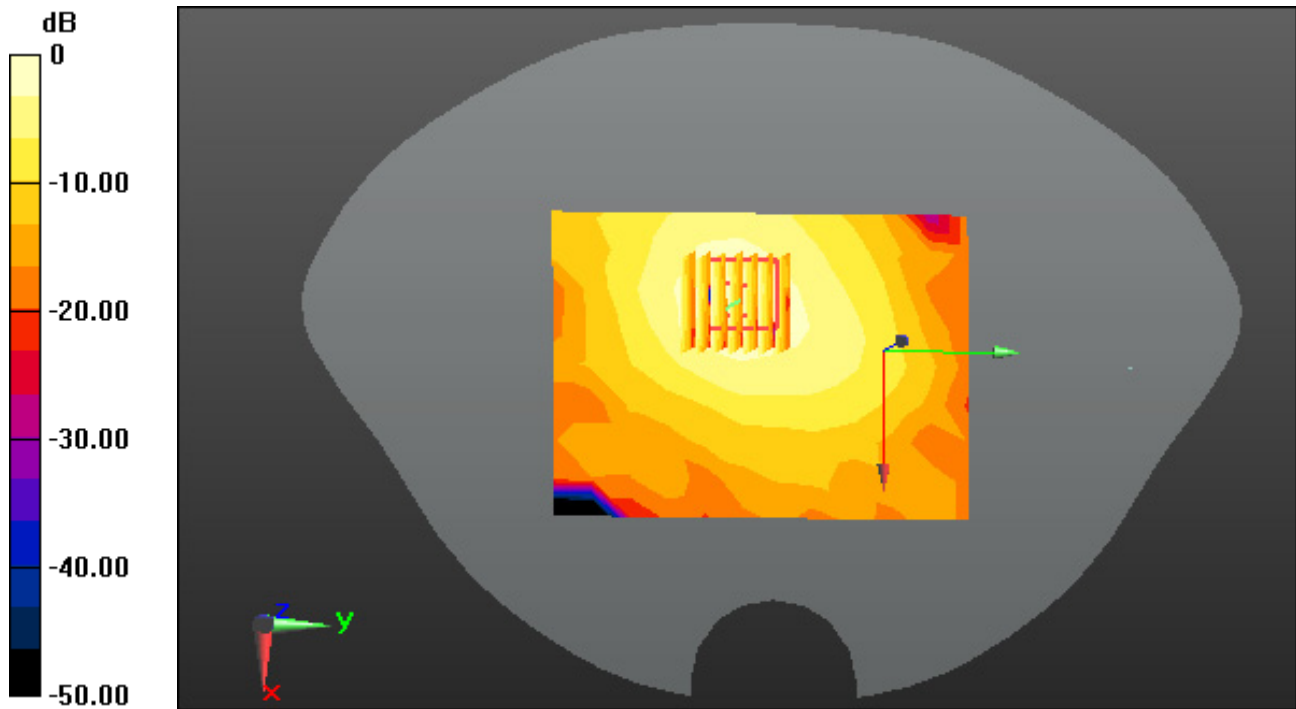

0 dB = 0.0412 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, WCDMA Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.547$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22; Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-29; Ambient Temp: 22.3; Tissue Temp: 22.1

Touch from Body, Bottom, WCDMA Ch. 9400, Ant Internal

Sensor OFF


Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.96 W/kg

SAR(1 g) = 2.61 W/kg; SAR(10 g) = 1.32 W/kg

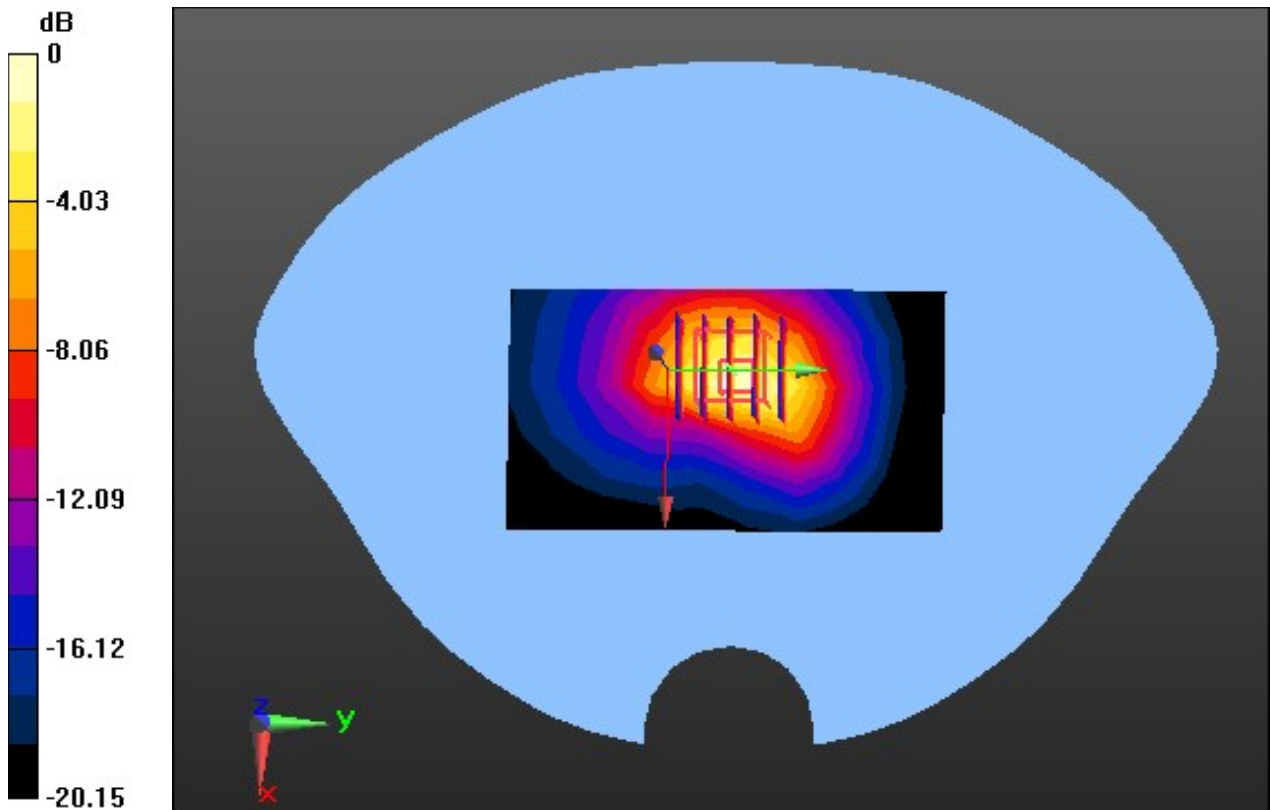

0 dB = 3.82 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 25 (0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 38.637$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(8.15, 8.15, 8.15); Calibrated: 2021-11-22 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-12-30; Ambient Temp: 22.2; Tissue Temp: 22.1

Touch from Body, Rear, LTE Band 25 Ch. 26590, Ant Internal

Mode : BandWidth 20 MHz, QPSK, RB Size: 1

Sensor ON


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.37 W/kg

SAR(1 g) = 1.95 W/kg; SAR(10 g) = 0.834 W/kg

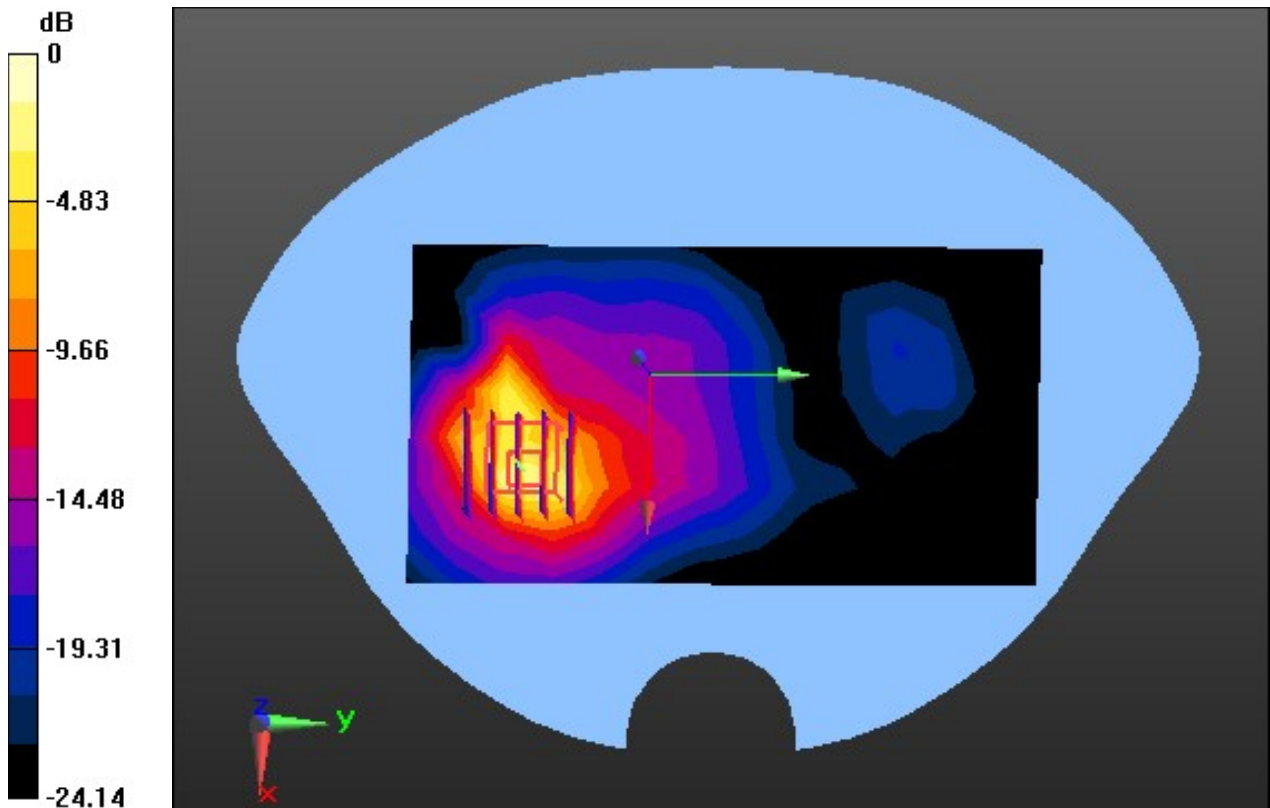

0 dB = 3.23 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 7(FCC) (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 38.494$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-21; Ambient Temp: 21.5; Tissue Temp: 21.4

Touch from Body, Rear, LTE Band 7 Ch. 21350, Ant Internal

Mode : BandWidth 20 MHz, QPSK, RB Size: 1

Sensor ON


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.07 dB

Peak SAR (extrapolated) = 13.5 W/kg

SAR(1 g) = 4.46 W/kg; SAR(10 g) = 1.62 W/kg

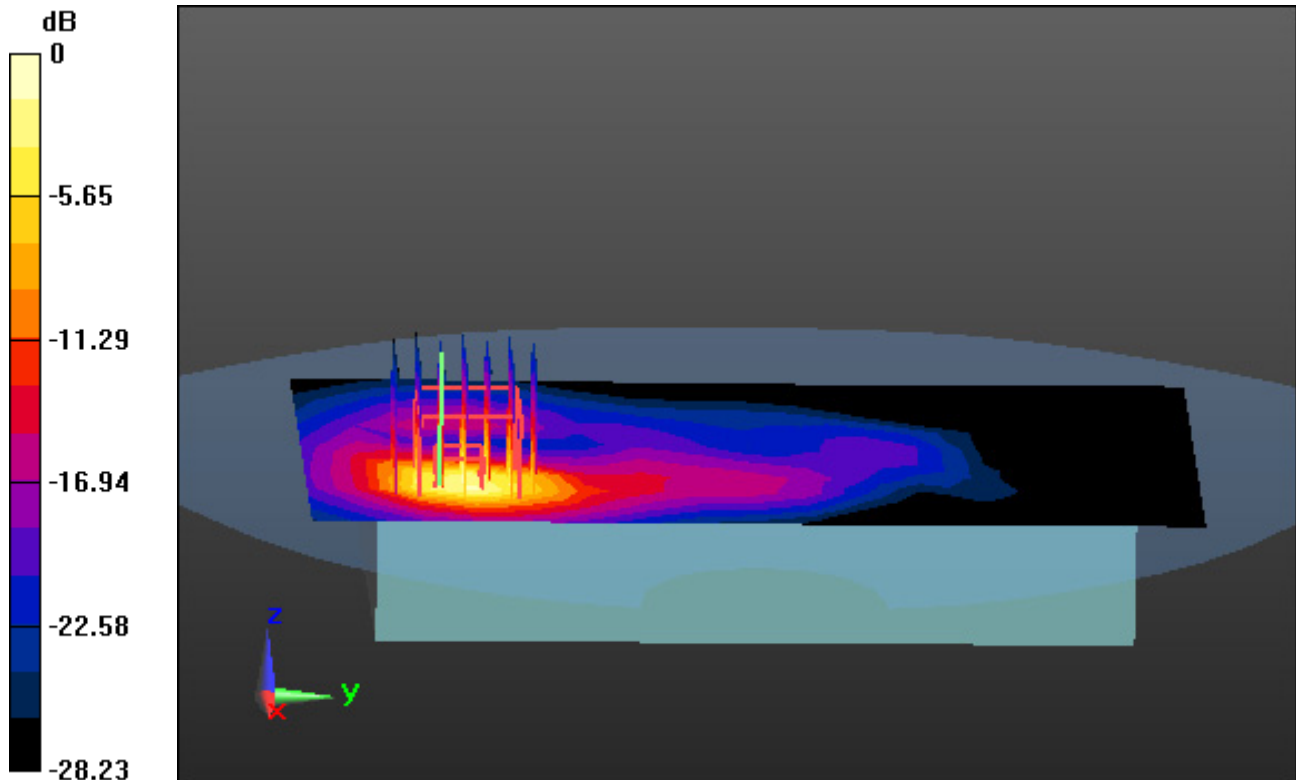

0 dB = 6.24 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, LTE Band 41 (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.051$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(4.47, 4.47, 4.47); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-12-23; Ambient Temp: 22.4; Tissue Temp: 22.3

Touch from Body, Rear, LTE Band 41 Ch. 41490, Ant Internal

Mode : BandWidth 20 MHz, QPSK, RB Size: 1

Sensor ON


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 1.54 W/kg

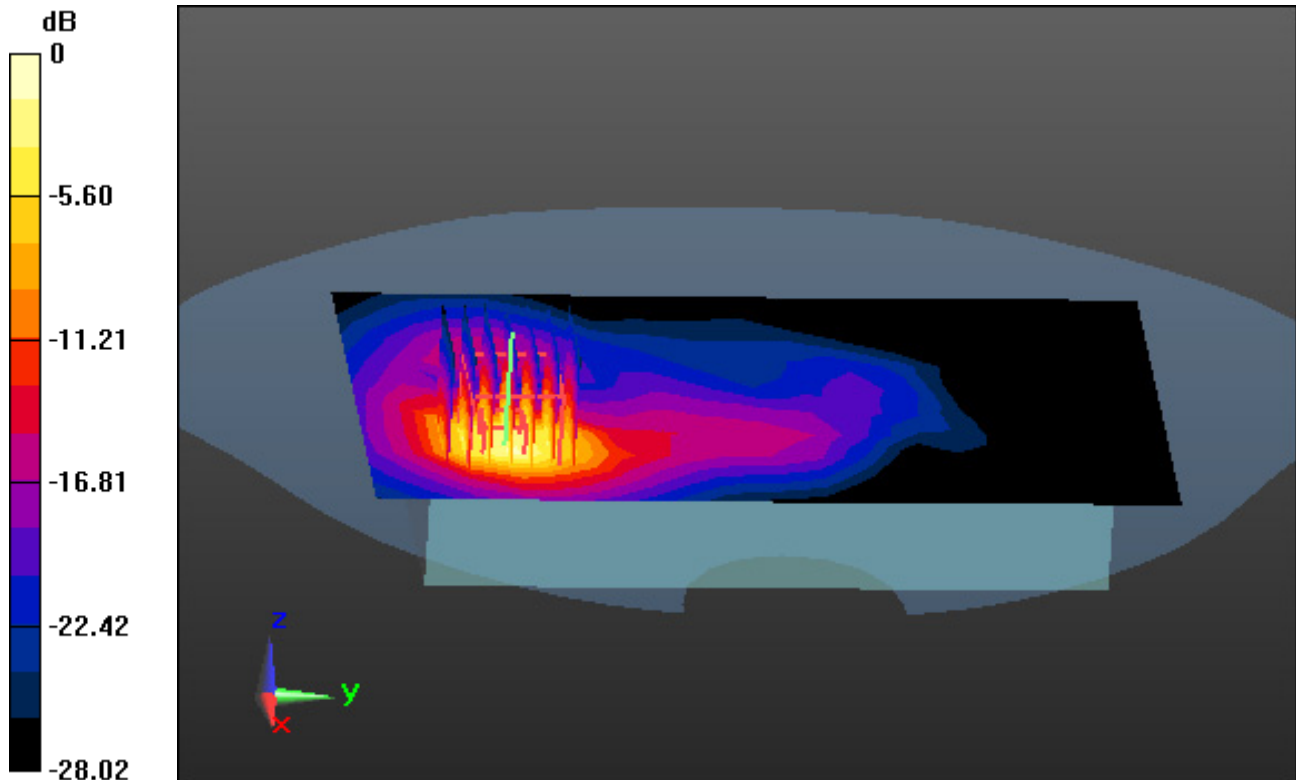

0 dB = 5.89 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, W-LAN(5G) (0); Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.746$ S/m; $\epsilon_r = 36.391$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(5.85, 5.85, 5.85); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-04; Ambient Temp: 21.3; Tissue Temp: 21.4

Touch from Body, Rear, W-LAN(802.11n HT40) Ch. 62, Ant Internal


Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.110 W/kg

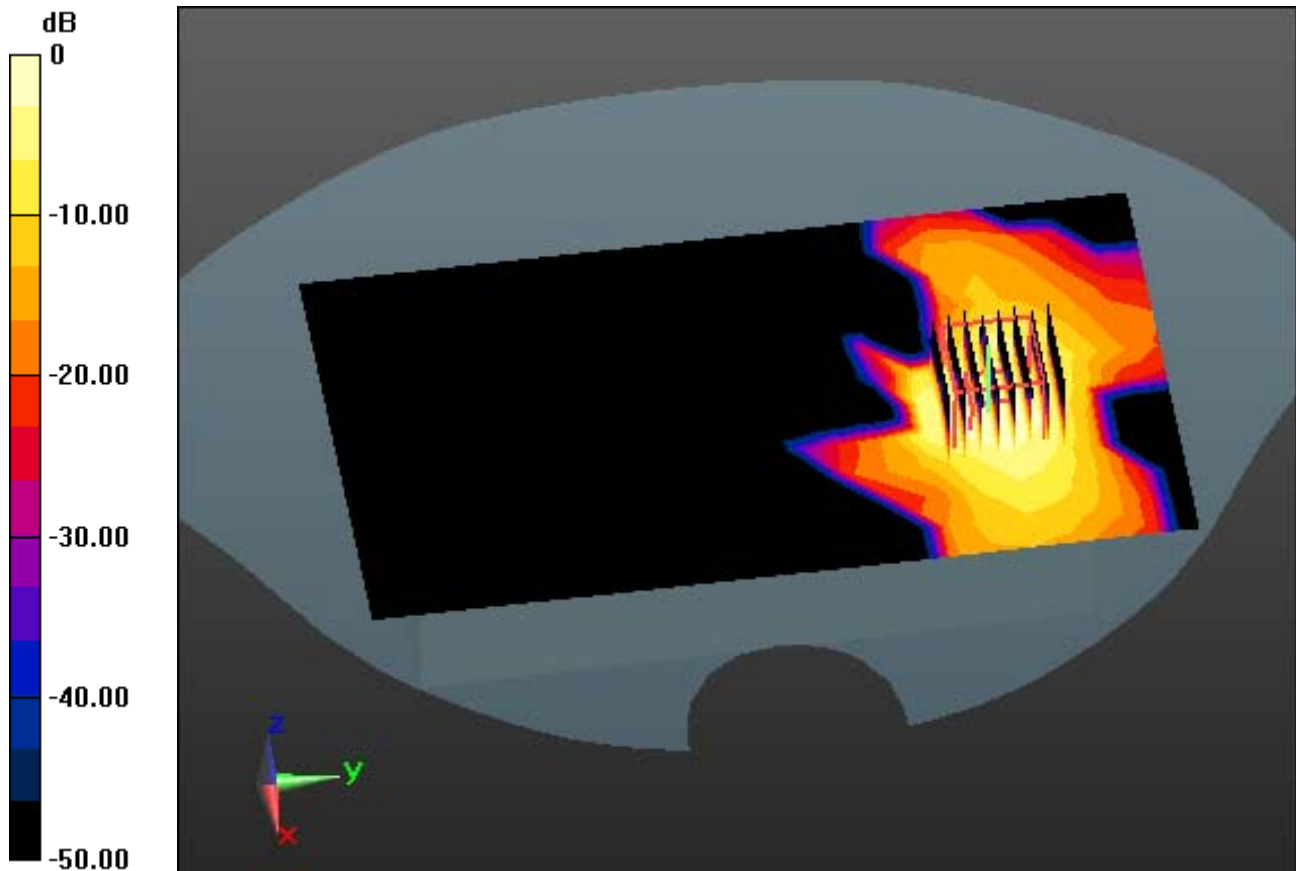

0 dB = 0.695 W/kg

DT&C Co., Ltd.

DUT: XM75P; Type: PDA

Communication System: UID 0, W-LAN(5G) (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.016$ S/m; $\epsilon_r = 35.706$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(5.15, 5.15, 5.15); Calibrated: 2021-10-19 Electronics: DAE4 Sn1394

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1837

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2022-01-05; Ambient Temp: 21.4; Tissue Temp: 21.6

Touch from Body, Top, W-LAN(802.11n HT20) Ch. 100, Ant Internal


Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio: 1.4

Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.101 W/kg

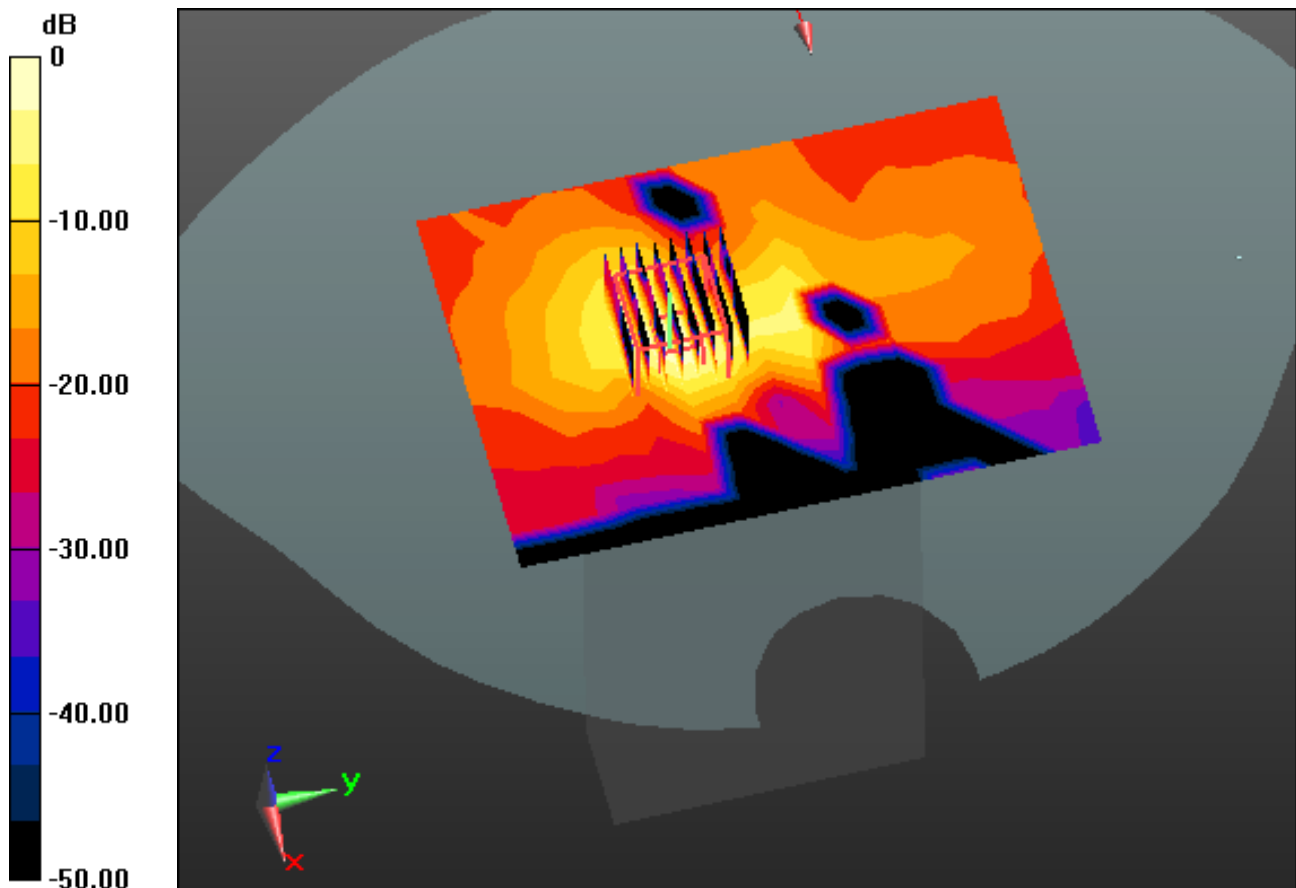

0 dB = 0.930 W/kg