



EMC TEST REPORT

Report No.: 20230717G07506X-W1

Product Name: Mobile Computer

FCC ID: UTWXT40WA

IC 6914A-XT40WA

Model No. : XT40

Applicant: JANAM TECHNOLOGIES LLC

Address: 100 Crossways Park West Suite 105 Woodbury, NY 11797

Received Date: 2023. 07.04

Dates of Testing: 2023.07.13~2023.07.17

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 Fax: 86 755 26627238

This test report consists of **19** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name..... Mobile Computer

Model No. XT40

Trade name..... Janam

Applicant..... Janam Technologies LLC

Applicant Address..... 100 Crossways Park West Suite 105 Woodbury, NY 11797

Manufacturer Janam Technologies LLC

Manufacturer Address 100 Crossways Park West Suite 105 Woodbury, NY 11797

Test Standards..... 47 CFR Part 15 Subpart B
ICES-003 Issue 7

Test Result..... PASS

Tested by Ruihong Xie

Ruihong Xie Test Engineer 2023.08.18

Reviewed by Chris You

Chris You Senior Engineer 2023.08.18

Approved by Yang Fan

2023.08.18

Yang Fan, Manager



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results.....5**
- Facilities and Accreditations6**
- 1.2.1 Facilities6
- 1.2.2 Test Environment Conditions.....6
- 1.2.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- 2.3 Test Setup and Equipments List.....8**
- 2.3.1 Conducted Emission8
- 2.3.2 Radiated Emission.....9
- 3. 47 CFR PART 15B REQUIREMENTS11**
- 3.1 Conducted Emission11**
- 3.1.1 Requirement11
- 3.1.2 Test Description11
- 3.1.3 Test Result.....11
- 3.2 Radiated Emission14**
- 3.2.1 Requirement14
- 3.2.2 Test Description15
- 3.2.3 Test Result.....15

Change History		
Issue	Date	Reason for change
1.0	2023.08.18	First edition



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices
2	ICES-003 Issue 7	Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS
3	ICES 003 Issue 7 Section3.2.1	Conducted Emission	PASS
4	ICES 003 Issue 7 Section3.2.2	Radiated Emission	PASS

NOTE:

- (1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.
- (1) The EUT has been tested according to ICES 003 Issue 7. The test procedure is according to ANSI C63.4:2014.



Facilities and Accreditations

1.2.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until Sep.30, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Sep.30, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.2.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.2 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 5.8 dB (k=2)
Uncertainty of Radiated Emission: (1~6GHz)	Uc = 5.1 dB (k=2)
Uncertainty of Radiated Emission: (6~18GHz)	Uc = 5.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	Lenovo	X240	/	/

Support Cable:

Description	Shield Type	Ferrite Core	Length
USB Cable	Un- shielding	/	0.8m

2.2 Test Mode

The EUT have the following typical setups during the test:

Setup1: EUT+ Charger;


Setup2: EUT + Notebook PC+DATA;

Setup3: EUT+ Charging Base+Charger;

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

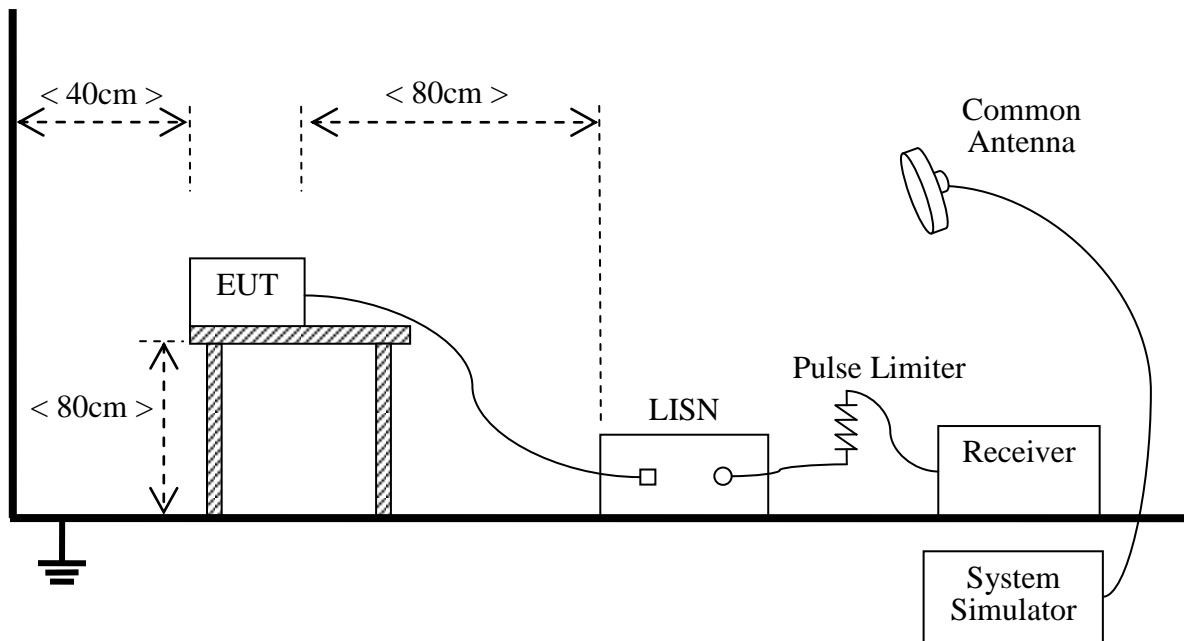

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50Ω/50μH of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2023.06.13	2024.06.12
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2023.06.09	2024.06.08
Cable	MATCHING PAD	W7	/	2023.08.02	2024.08.02


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

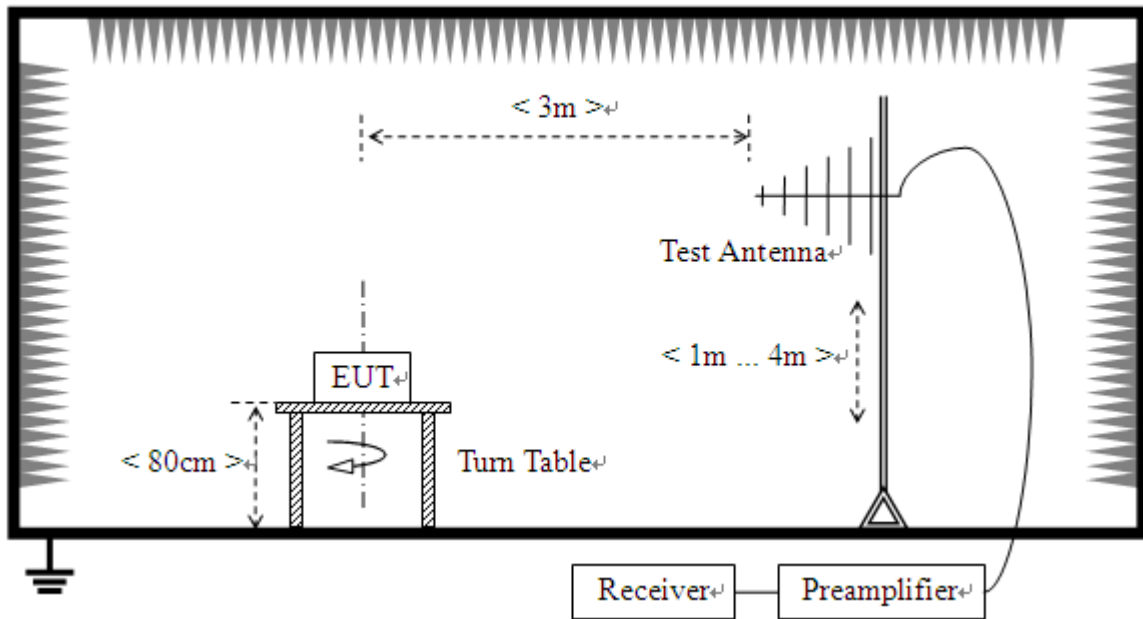

- 2) For radiated emissions above 1GHz

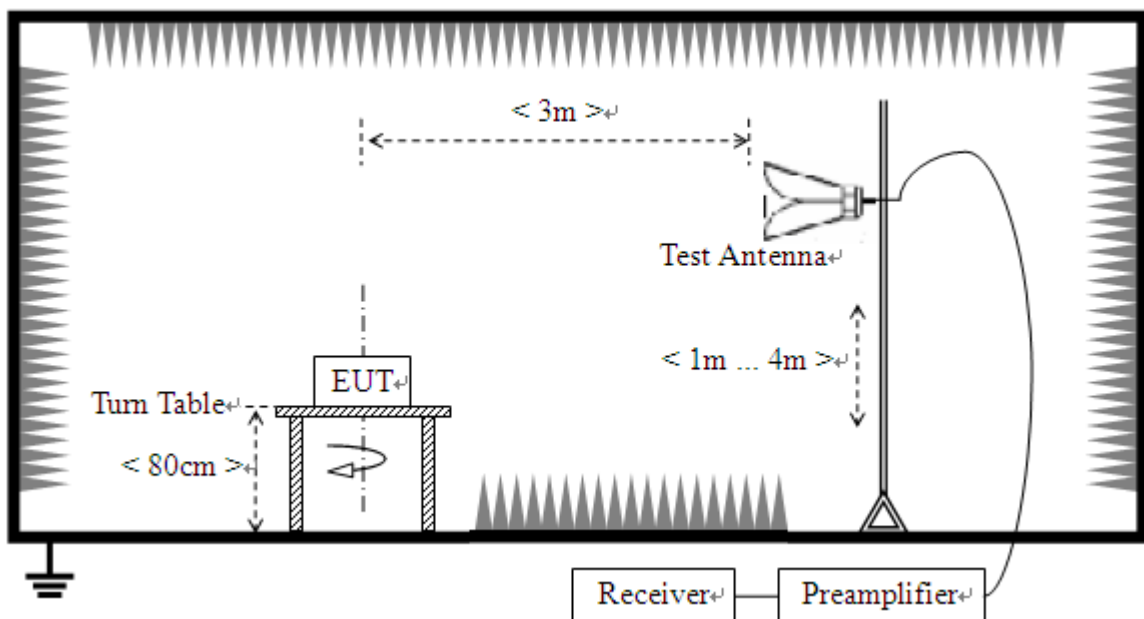

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2023.03.16	2024.03.15
Broadband Ant.	2786	ETC	A150402239	2021.03.04	2024.03.03
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2021.03.26	2024.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2023.06.08	2024.06.07
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2022.03.25	2025.06.07
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2022.04.12	2025.04.11



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.


Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.



Test voltage and frequency (120V AC,60Hz)

A. Mains terminal disturbance voltage, L phase,Setup 1

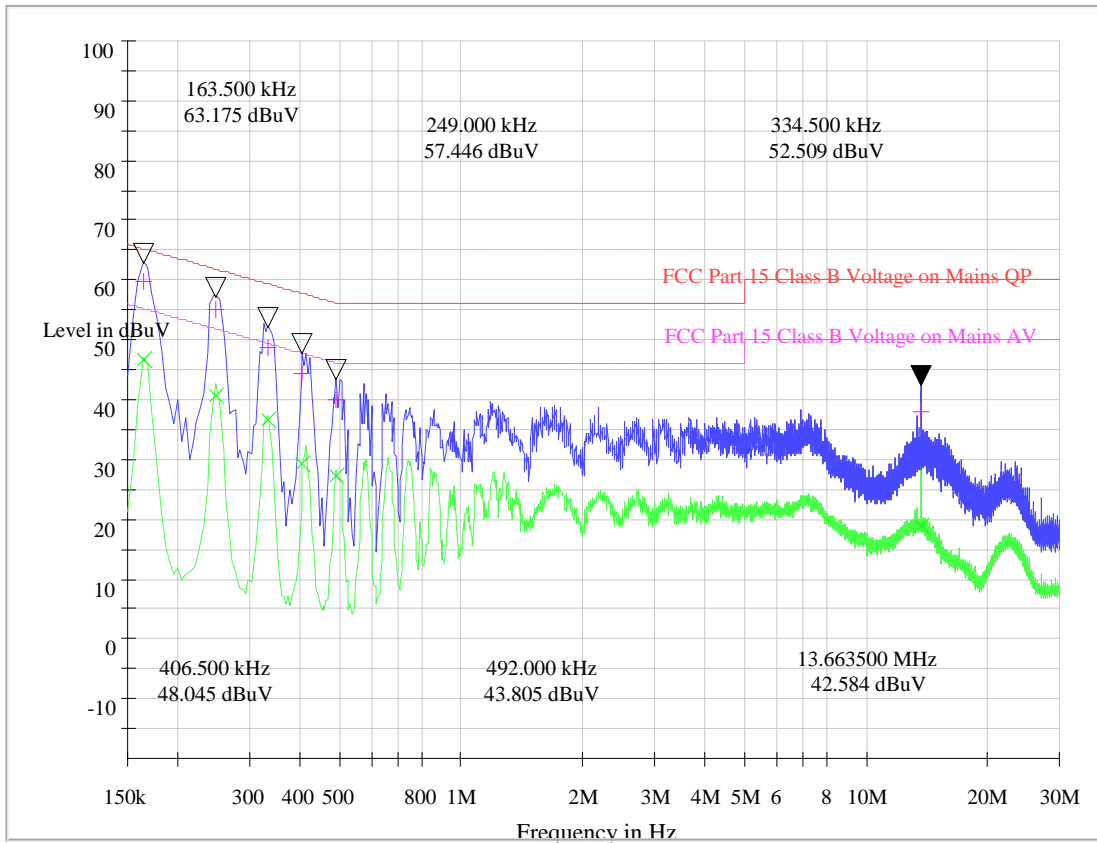


(Plot A: L Phase)

Frequency (MHz)	QuasiPea k	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.163500	59.76	46.66	0.1	10.3	5.52	65.3	8.62	55.3
0.249000	54.94	40.66	0.1	10.3	6.85	61.8	11.13	51.8
0.334500	48.81	36.69	0.1	10.3	10.53	59.3	12.65	49.3
0.406500	44.29	29.25	0.1	10.4	13.43	57.7	18.47	47.7
0.492000	40.13	27.16	0.1	10.2	16.00	56.1	18.97	46.1
13.663500	38.13	18.80	0.5	10.9	21.87	60.0	31.20	50.0



B. Mains terminal disturbance voltage, N phase, Setup 1

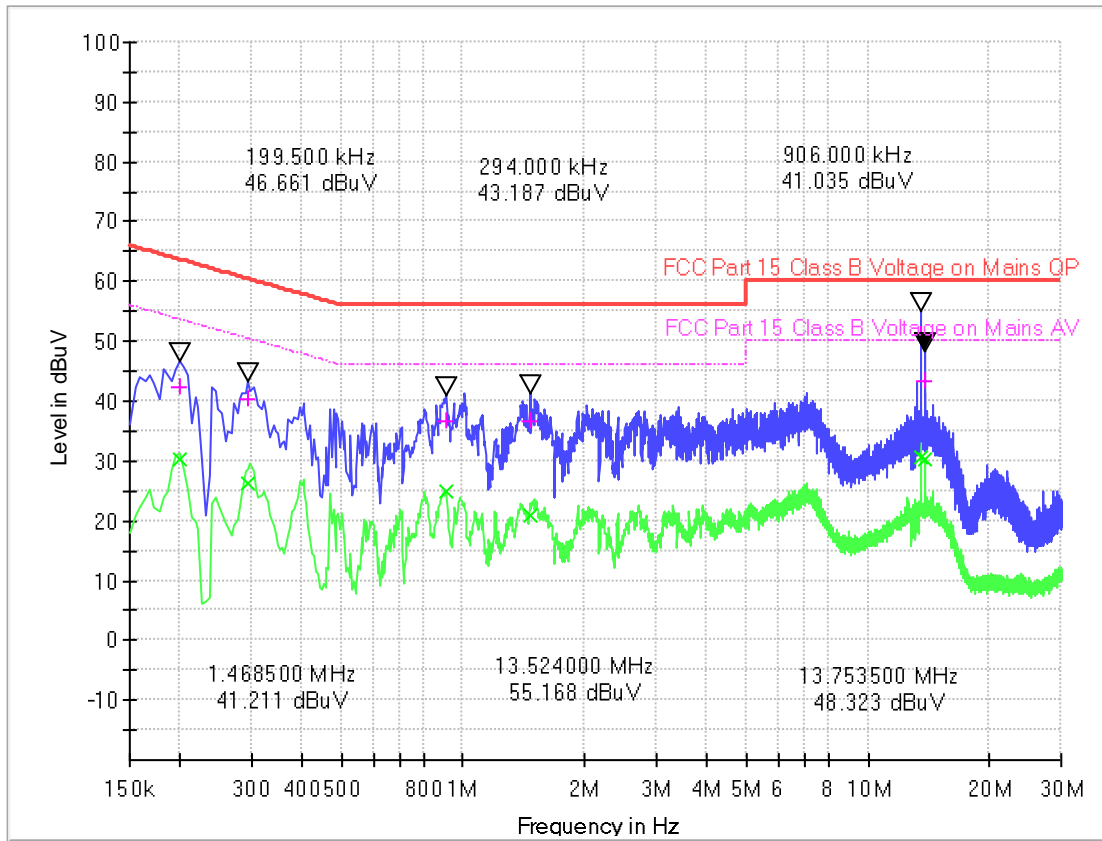

(Plot B: N Phase)

Frequency (MHz)	QuasiPea k	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.199500	42.43	30.19	0.1	10.3	21.20	63.6	23.44	53.6
0.294000	40.35	26.15	0.1	10.3	20.06	60.4	24.26	50.4
0.906000	36.67	24.77	0.1	10.2	19.33	56.0	21.23	46.0
1.468500	36.52	21.03	0.2	10.2	19.48	56.0	24.97	46.0
13.524000	50.91	30.47	0.5	10.8	9.09	60.0	19.53	50.0
13.753500	43.31	30.13	0.5	10.9	16.69	60.0	19.87	50.0

3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

According to ICES-003 the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	Class A(3m) QP ($\text{dB}\mu\text{V/m}$)	Class B(3m) QP ($\text{dB}\mu\text{V/m}$)
30 - 88	50.0	40.0
88 - 216	54.0	43.5
216 - 230	56.9	46.0
230 - 960	57.0	47.0
960-1000	60.0	54.0
Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	Class A(3m) ($\text{dB}\mu\text{V/m}$)	Class B(3m) ($\text{dB}\mu\text{V/m}$)
Above 1G	60(AV) /80(PK)	54(AV) /74(PK)

- a) For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.

For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level(uV/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$

3.2.2 Test Description

See section 2.3.2 of this report.

3.2.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.



A.Radiation disturbances, antenna polarization:Vertical,Setup1

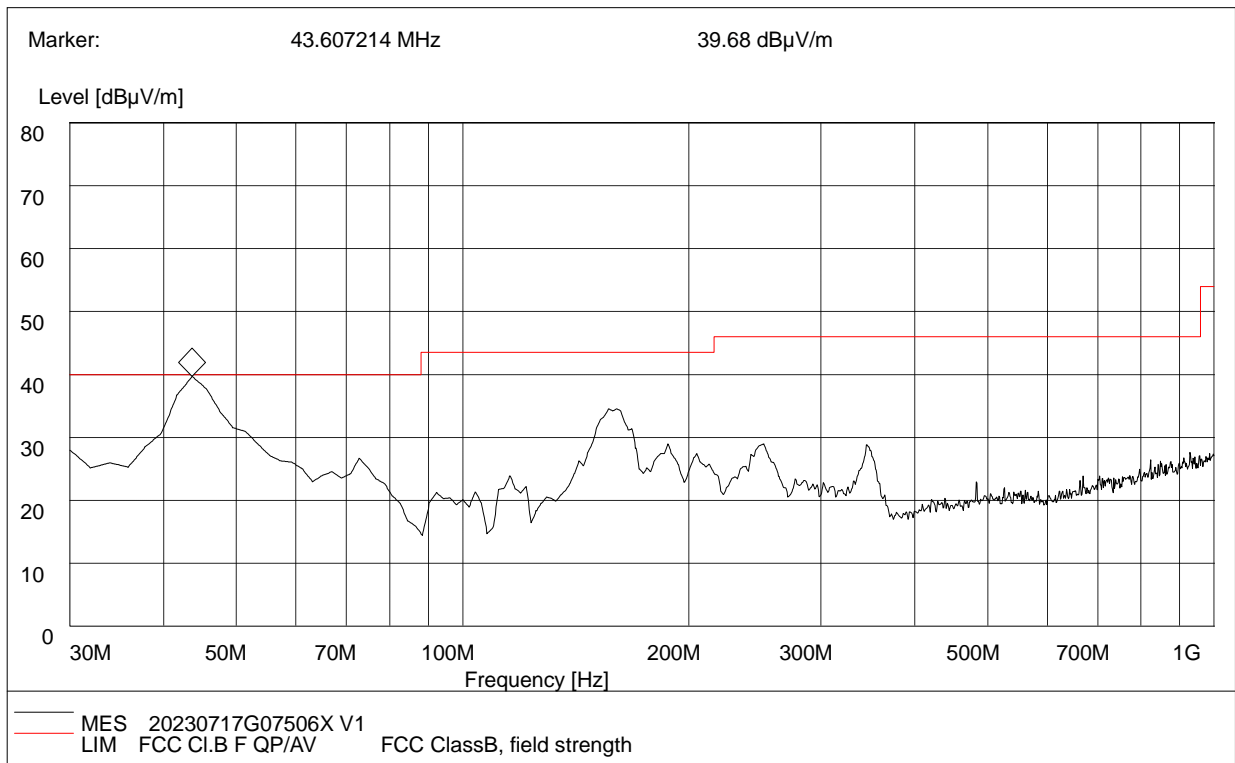


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
43.65	34.95	120.000	102	40.00	5.05	Vertical	0.5	13.2	Pass
72.76	25.66	120.000	102	40.00	14.34	Vertical	0.8	6.1	Pass
156.35	33.54	120.000	103	43.50	9.96	Vertical	1.0	11.7	Pass
187.45	27.97	120.000	106	43.50	15.53	Vertical	1.2	9.8	Pass
251.64	27.95	120.000	105	46.00	18.05	Vertical	1.2	11.9	Pass
344.90	27.87	120.000	104	46.00	18.13	Vertical	1.4	15.2	Pass



B.Radiation disturbances, antenna polarization: Horizontal,Setup1

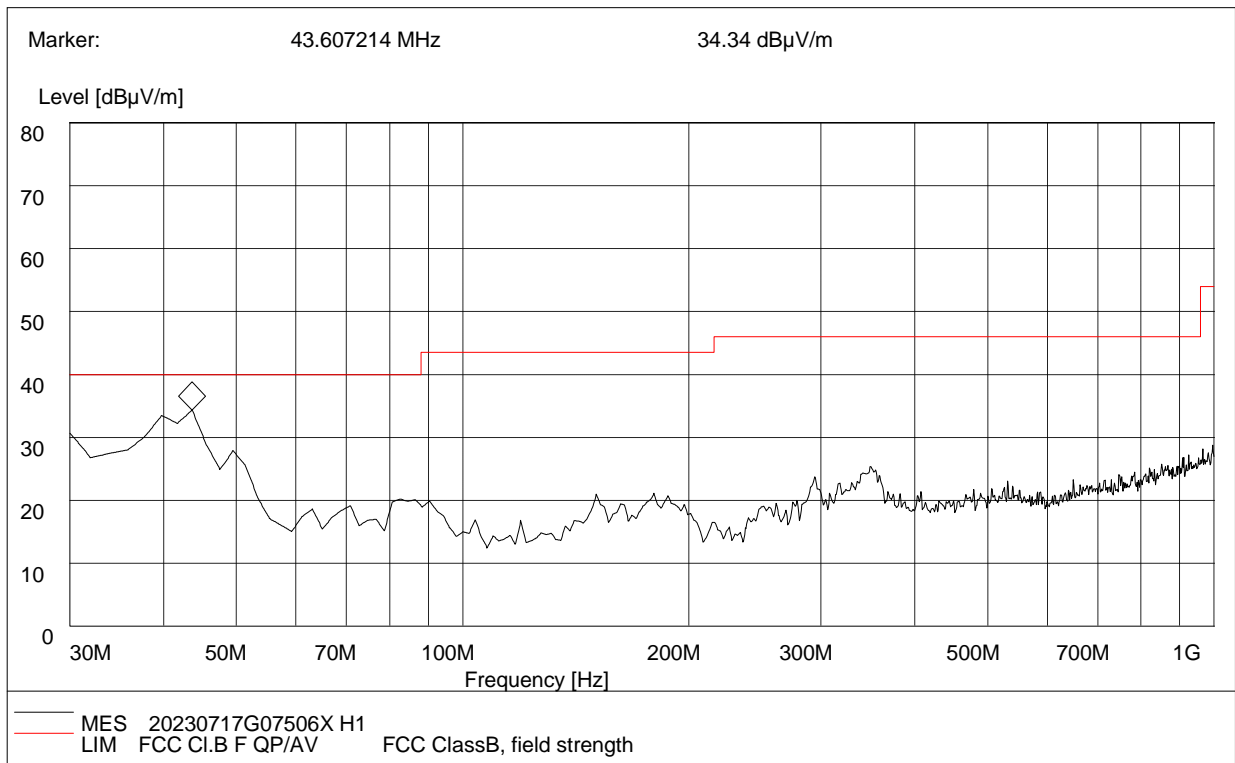


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
39.71	32.49	120.000	102	40.00	7.51	Horizontal	0.5	13.5	Pass
43.60	33.34	120.000	102	40.00	6.66	Horizontal	0.5	13.7	Pass
150.52	20.32	120.000	104	43.50	23.18	Horizontal	1.0	11.4	Pass
179.67	20.11	120.000	106	43.50	23.39	Horizontal	1.2	9.8	Pass
294.36	22.77	120.000	103	46.00	23.23	Horizontal	1.4	14.1	Pass
348.79	24.32	120.000	101	46.00	21.68	Horizontal	1.4	15.3	Pass



A.Radiation disturbances, antenna polarization: Horizontal,Setup1

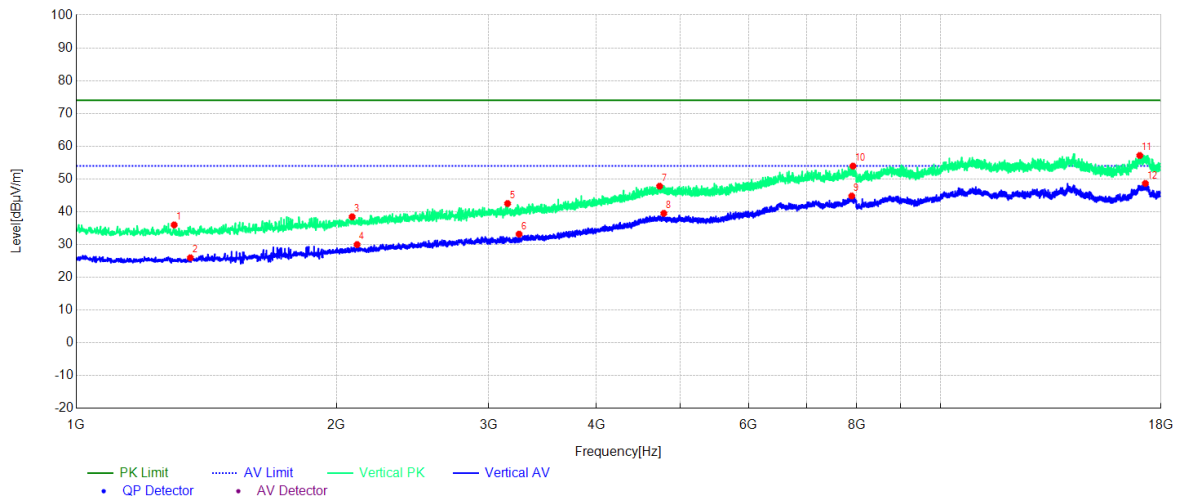


(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin[dB µV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1298.16	35.99	-13.16	74.00	38.01	PK	104	341	Vertical
2	1355.37	25.95	-13.09	54.00	28.05	AV	104	350	Vertical
3	2085.92	38.46	-10.27	74.00	35.54	PK	103	238	Vertical
4	2113.42	29.99	-10.18	54.00	24.01	AV	107	162	Vertical
5	3156.43	42.51	-6.73	74.00	31.49	PK	106	107	Vertical
6	3254.35	33.17	-6.39	54.00	20.83	AV	105	142	Vertical
7	4733.05	47.80	0.67	74.00	26.20	PK	102	150	Vertical
8	4785.86	39.52	0.85	54.00	14.48	AV	102	304	Vertical
9	7896.38	44.81	7.47	54.00	9.19	AV	100	122	Vertical
10	7921.68	53.93	7.39	74.00	20.07	PK	107	293	Vertical
11	17010.80	57.17	15.57	74.00	16.83	PK	105	36	Vertical
12	17266.15	48.64	16.05	54.00	5.36	AV	105	70	Vertical



B.Radiation disturbances, antenna polarization: Vertical,Setup1

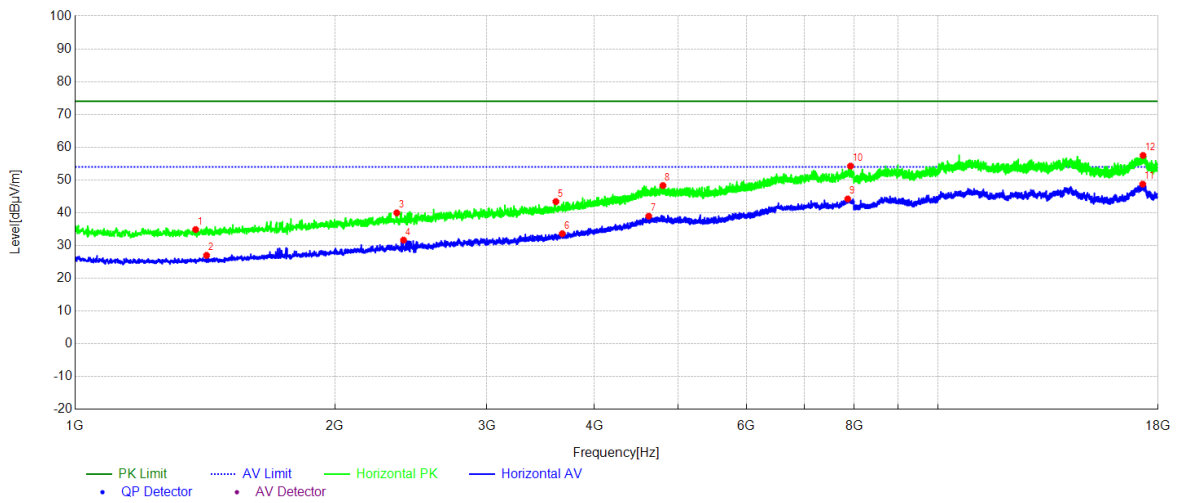

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin[dB µV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1379.58	34.88	-13.06	74.00	39.12	PK	106	207	Horizont
2	1420.28	27.01	-12.95	54.00	26.99	AV	106	143	Horizont
3	2359.87	39.96	-9.29	74.00	34.04	PK	100	251	Horizont
4	2402.78	31.66	-9.19	54.00	22.34	AV	103	196	Horizont
5	3608.62	43.40	-5.18	74.00	30.60	PK	107	153	Horizont
6	3670.23	33.62	-4.97	54.00	20.38	AV	105	69	Horizont
7	4623.02	38.94	0.33	54.00	15.06	AV	105	353	Horizont
8	4801.26	48.30	0.89	74.00	25.70	PK	102	87	Horizont
9	7861.87	44.21	7.19	54.00	9.79	AV	106	296	Horizont
10	7921.68	54.24	7.39	74.00	19.76	PK	109	183	Horizont
11	17277.66	48.72	16.07	54.00	5.28	AV	104	310	Horizont
12	17291.46	57.49	16.09	74.00	16.51	PK	102	31	Horizont

-----End of Report-----