

Product Acknowledgment

Name: **915M** Glue stick antenna

Material Code:

Product Type: **AX915SA03**

2013.07.15

Version: **1.0**

Remark:

Supplier				
	Engineering	Quality	Approved	
	Tangjunrong	wangweiji	Zhangyi	

Buyer	Friendcom Technology Co.,Ltd.			
	Product	Quality		
	jiang taizhong	Zhengrong		

Addr. : No. 22, Chuangye Road, Shilongzai Industrial Zone, Shuitian New

Village, Shiyan Town, Baoan District, Shenzhen

Post code: 518108

Tel: 0755-29683233

Fax: 0755-29683337

The copyright of all information contained in this document belongs to Shenzhen FREERULE Communication Technology Co., Ltd., and please do not distribute it to any third party without the written permission of Shenzhen Feilu Communication Technology Co., Ltd.

Index

1. Cover.....	1
2. Index.....	2
3. Product Electrical Performance.....	3-4
4. Product Structure Outline Drawing.....	5
5. VSWR.....	6


Electrical parameters

Frequency Range	915 ± 10 (MHz)
Impedance	50 (Ω)
VSWR	≤ 2.0
Gain	2.0 ± 0.5 (dBi)
Maximum Input Power	50 (W)
Polarization	Vertical polarization

Mechanical parameters

Connector type	SMA-JW
High	55.5
Color	Black
Net weight	
Operation Temperature	-20℃~60℃
Store Temperature	-30℃~65℃

Structure diagram

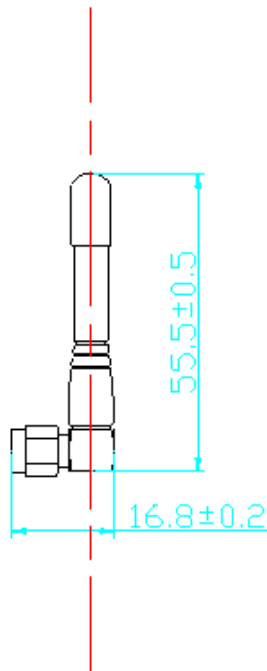

深圳市飞路通科技有限公司		DRAWING NAME:		Tolerance	
PART NAME:		TITLE:		x.x ±0.10	
PART NO.:				x.xx ±0.05	
APPROVED BY:	CHECKED BY:	DESIGNED BY:	UNIT: mm	x" ±1"	
			SCALE: 1:1		
			REVISION:		

VSWR

