



No.198 Kezhu Road, Science Town Economic& Technology  
Development District Guangzhou, China 510663  
Telephone: +86 (0) 20 82155555  
Fax: +86 (0) 20 82075059  
Email: [sgs\\_internet\\_operations@sgs.com](mailto:sgs_internet_operations@sgs.com)

**FEDERAL COMMUNICATIONS COMMISSION**  
Registration number: 282399

Report No.: GLEMO080601828RFT  
Page: 1 of 16  
FCC ID: UU7CEW112

## **TEST REPORT**

**Application No. :** GLEMO080601828RF (SGS HK NO.: 2015977/EE)

**Applicant:** FORMATION LTD.

**FCC ID:** UU7CEW112

**Fundamental Frequency :** 49.860MHz

**Equipment Under Test (EUT):**

EUT Name: WIRELESS SPEAKER

Model No.: CEW112

**Standards:** FCC PART 15C: 2007

**Date of Receipt:** June 13, 2008

**Date of Test:** June 13, 2008 to July 2, 2008

**Date of Issue:** July 3, 2008

<b>Test Result :</b>	<b>PASS *</b>
----------------------	---------------

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.  
Please refer to section 2 of this report for further details..

Authorized Signature:

  
2008-July

Stephen Guo  
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

## 2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Occupied Bandwidth	FCC PART 15 :2007	Section 15.235	PASS
Radiated Emission (30MHz to 1000MHz)	FCC PART 15 :2007	Section 15.209	PASS*
Conducted Emission	FCC PART 15 :2007	Section 15.207	PASS

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

\*The Tx passed Carrier Radiations and Radiated Emission test after modification. Please refer to the following information for further details.

Modification method: Replace the capacitor C2 with new one which capacitance is 180Pf.

### **3 Contents**

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>4</b>
4.1 CLIENT INFORMATION.....	4
4.2 DETAILS OF E.U.T. .....	4
4.3 DESCRIPTION OF SUPPORT UNITS .....	4
4.4 STANDARDS APPLICABLE FOR TESTING .....	4
4.5 TEST LOCATION .....	4
4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	4
4.7 TEST FACILITY .....	5
<b>5 EQUIPMENTS USED DURING TEST</b> .....	<b>6</b>
<b>6 TEST RESULTS</b> .....	<b>7</b>
6.1 E.U.T. TEST CONDITIONS .....	7
6.2 CARRIER EMISSION AND RADIATED EMISSIONS.....	8
6.2.1 <i>Fundamental Carrier Emissions:</i> .....	11
6.2.2 <i>Unwanted emissions</i> .....	12
6.3 OCCUPIED BANDWIDTH .....	13
6.4 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz TO 30MHz.....	14-16

## 4 General Information

### 4.1 Client Information

Applicant Name: FORMATION LTD.  
Applicant Address: RM 915-918, CORPORATION SQUARE, 8 LAM LOK ST, KOWLOON BAY, HONG KONG

### 4.2 Details of E.U.T.

EUT Name: WIRELESS SPEAKER  
Item No.: CEW112  
Power Supply: 9V DC (Size: 6-AAA) (not included)  
Adapter: Model: JU1B-090-0100D  
Input: 120V AC 60Hz 6VA Output: 9V DC 100mA  
Power Cord: 2 wires 1.8m unscreened

### 4.3 Description of Support Units

The EUT was tested as an independent unit: 49.860MHz radio transmitter.

### 4.4 Standards Applicable for Testing

The customer requested FCC tests for the EUT.

The standard used was FCC PART 15, SUBPART C: 2007 (Section 15.235);

### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory, No.198 Kezhu Road, Science Town Economic& Technology Development District Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

### 4.6 Other Information Requested by the Customer

None.

#### **4.7 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **FCC – Registration No.: 282399**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002. With the above and NVLAP's accreditation, SGS-CSTC is an authorized test laboratory for the DoC process.

## 5 Equipments Used during Test

RE in Chamber						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	N/A	N/A
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100249	28-01-2008	28-01-2009
N/A	EMI Test Software	Audix	E3	N/A	N/A	N/A
EMC0514	Coaxial cable	SGS	N/A	N/A	04-12-2007	04-12-2008
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	12-08-2007	12-08-2008
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	12-08-2007	12-08-2008
EMC0517	Horn Antenna	Rohde & Schwarz	HF906	100095	12-08-2007	12-08-2008
EMC0040	Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	05-12-2007	05-12-2008
EMC0520	0.1-1300 MHz Pre-Amplifier	HP	8447D OPT 010	2944A06252	11-03-2008	11-03-2009
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	11-03-2008	11-03-2009
EMC0075	310N Amplifier	Sonama	310N	272683	10-09-2007	10-09-2008
EMC0523	Active Loop Antenna	EMCO	6502	00042963	09-08-2006	09-08-2008
EMC0530	10m Semi- Anechoic Chamber	ETS	N/A	N/A	10-08-2007	10-08-2008

## 6 Test Results

### 6.1 E.U.T. test conditions

Power supply:	9V DC (Size: 6-AAA) (not included) Adapter: Model: JU1B-090-0100D	
Requirements:	<b>15.31(e)</b> :For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.	
Type of antenna:	Integral	
Operating Environment:		
Temperature:	22.0 -25.0°C	
Humidity:	40-60% RH	
Atmospheric Pressure:	1002-1010 mbar	
Test frequencies:	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:	
Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Test nominal frequency: 49.860MHz

## 6.2 Carrier Emission and Radiated Emissions

<b>Test Requirement:</b>	FCC Part15 C Section 15.235
<b>Test Method:</b>	ANSI C63.4
<b>Test Date:</b>	June 17,2008-June 26, 2008
<b>Measurement Distance:</b>	3m (Semi-Anechoic Chamber)
<b>Requirements:</b>	<b>15.235(a)</b> :The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.  <b>15.235(b)</b> : The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Section 15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in Section 15.209. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.  Out of band emissions shall not exceed:  40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz  <b>Detector:</b> Peak Scan (9kHz resolution bandwidth for 9kHz to 30MHz; 120kHz resolution bandwidth for 30MHz to 1000MHz)

Report No.: GLEMO080601828RFT

Page: 9 of 16

FCC ID: UU7CEW112

**Test Procedure:****1)9K to 30MHz emissions:**

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.4 section 8.2.1. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

**2)30MHz to 1GHz emissions:**


For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI 63.4. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical polarizations.

**3)1GHz to 40GHz emissions:**


For testing performed with the horn antenna, testing was performed in accordance to ANSI 63.4. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

**Test Configuration:**


- 1) 9K to 30MHz emissions:

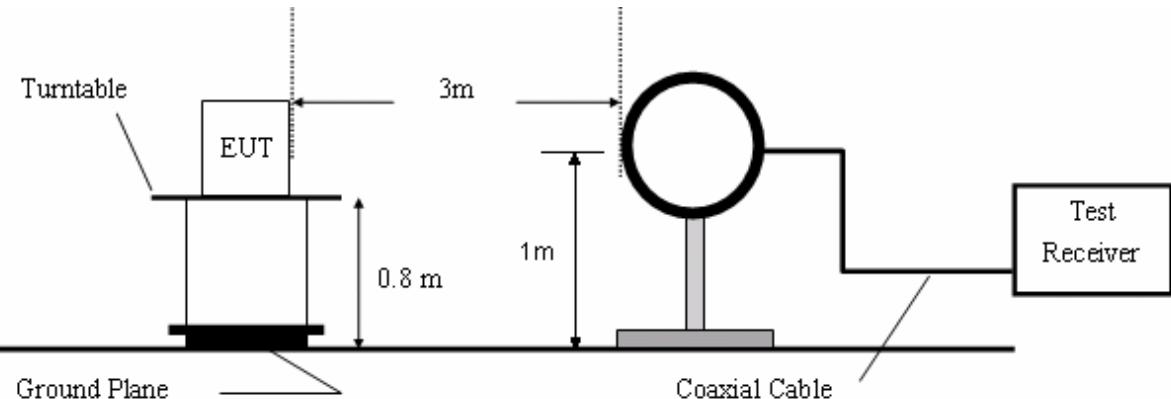

- 2) 30MHz to 1GHz emissions:

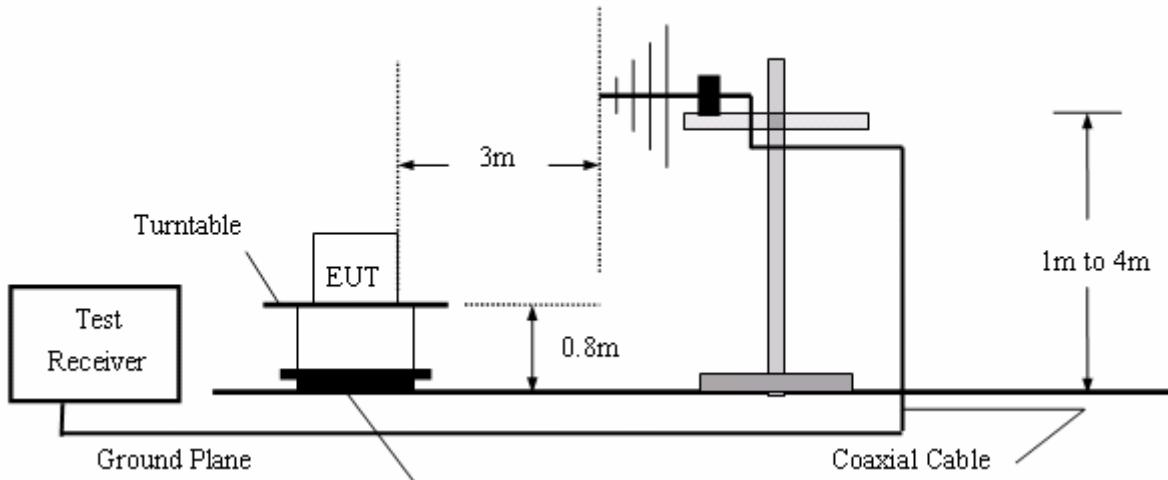

- 3) 1GHz to 40GHz emissions:

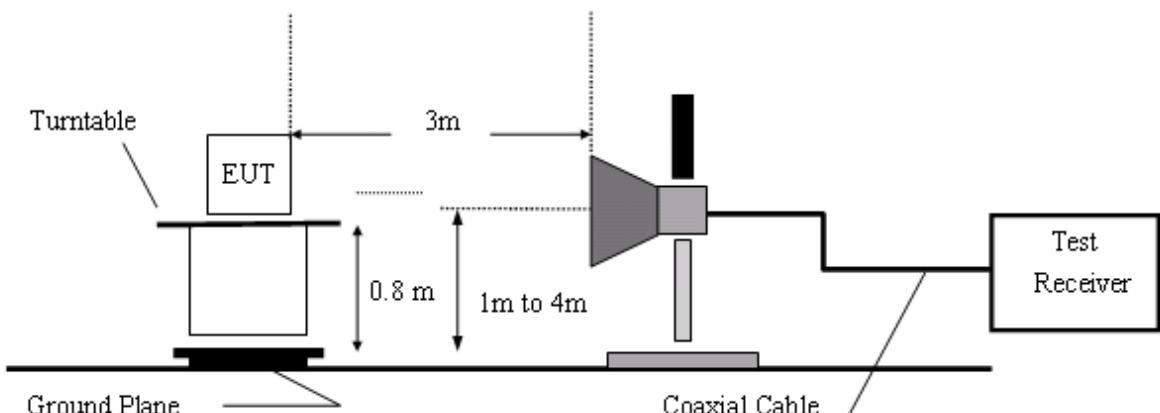

Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receive was scanned from 30MHz to 1000MHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. The worst case emissions were reported.

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Peramplifier Factor.

The following test results were performed on the EUT.

Test the EUT in transmitting mode.

### 6.2.1 Fundamental Carrier Emissions:

**Vertical:**

Frequency (MHz)	Reading Level (dBuV)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limit (dB $\mu$ V/m)	Antenna polarization
49.860	85.39	11.78	0.80	25.30	72.67	100.00	Peak
49.860	82.25	11.78	0.80	25.30	69.53	80.00	Average

**Horizontal:**

Frequency (MHz)	Reading Level (dBuV)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limit (dB $\mu$ V/m)	Antenna polarization
49.860	67.93	13.55	0.80	25.30	56.99	100.00	Peak
49.860	56.49	13.55	0.80	25.30	45.55	80.00	Average

## 6.2.2 Unwanted emissions

Horizontal.

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
97.9	38.49	11.37	1.20	25.12	25.94	43.50	-17.56
149.5	35.19	12.65	1.30	24.91	24.23	43.50	-19.27
199.44	49.17	11.98	1.70	24.61	38.24	43.50	-5.26
249.23	33.69	15.24	1.89	24.40	26.42	46.00	-19.58
299.16	41.07	17.65	2.10	24.40	36.42	46.00	-9.58
349.02	37.33	17.12	2.30	24.71	32.04	46.00	-13.96
398.88	36.02	16.61	2.49	24.99	30.13	46.00	-15.87
448.74	38.07	16.39	2.60	25.46	31.60	46.00	-14.40
498.6	37.49	16.21	2.80	25.90	30.60	46.00	-15.40

Vertical.

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
97.9	54.92	9.83	1.20	25.12	40.83	43.50	-2.67
149.58	47.06	12.44	1.30	24.91	35.89	43.50	-7.61
199.44	52.68	10.86	1.70	24.61	40.63	43.50	-2.87
249.23	38.06	12.47	1.89	24.40	28.02	46.00	-17.98
299.16	39.44	14.46	2.10	24.40	31.60	46.00	-14.4
349.02	34.94	15.76	2.30	24.71	28.29	46.00	-17.71
398.88	39.20	16.87	2.49	24.99	33.57	46.00	-12.43
448.74	37.59	16.23	2.60	25.46	30.96	46.00	-15.04
498.6	43.99	15.62	2.80	25.90	36.51	46.00	-9.49

Remark:


According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

**Test Results: The unit does meet the FCC Part 15 C Section 15.235 requirements.**

### 6.3 Occupied Bandwidth

Test Requirement:	FCC Part 15 C Section 15.235
Test Method:	ANSI C63.4
Test Date:	June 26, 2008
Requirements:	15.235(b): The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Section 15.209, whichever permits the higher emission levels.
Method of measurement:	Operation within the band 49.81 – 49.91 MHz The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical Scale is set to 10dB per division. The horizontal scale is set to 10KHz per division. Read the down 26dB bandwidth of the carrier.

The equipment was internal modulated automatically.

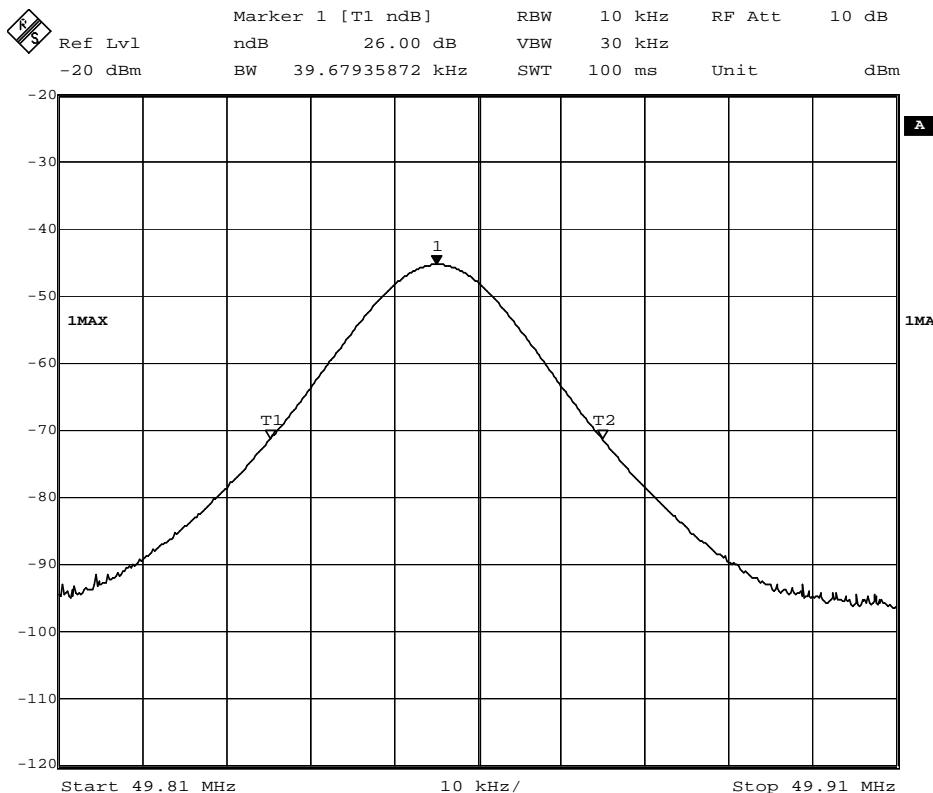

Down 26dB Bandwidth: 39.679KHz

Operation within the band 49.81 – 49.91 MHz

**The results: The unit does meet the FCC requirements**

#### **6.4 Conducted Emissions Mains Terminals, 150kHz to 30MHz**

Test Requirement: FCC 15.207  
Test Method: ANSI C63.4.  
Test Date: 18 June 2008  
Frequency Range: 150KHz to 30MHz  
Class / Severity: Class B  
Detector: Peak for pre-scan (9kHz Resolution Bandwidth)  
Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit  
EUT Operation: Test in Tx transmitting mode.

Test Procedure: The procedure used was ANSI Standard C63.4-2003. The AC mains power lines of EUT plug into  $50 \Omega$  LISN, the receiver was scanned from 150KHz to 30MHz with negative and positive power line each other. An initial pre-scan was performed for in peak detection mode using the receiver and read the final value in QP and AV detection. The EUT was measured for both the Live line and Nature line. The worst case emissions were reported.

The final level field strength is calculated by adding the LISN Factor, Cable Factor. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + LISN Factor + Cable Factor.

The following test results were performed on the EUT.


Test the EUT in transmitting mode.

Report No.: GLEMO080601828RFT

Page: 15 of 16

FCC ID: UU7CEW112

Live line:

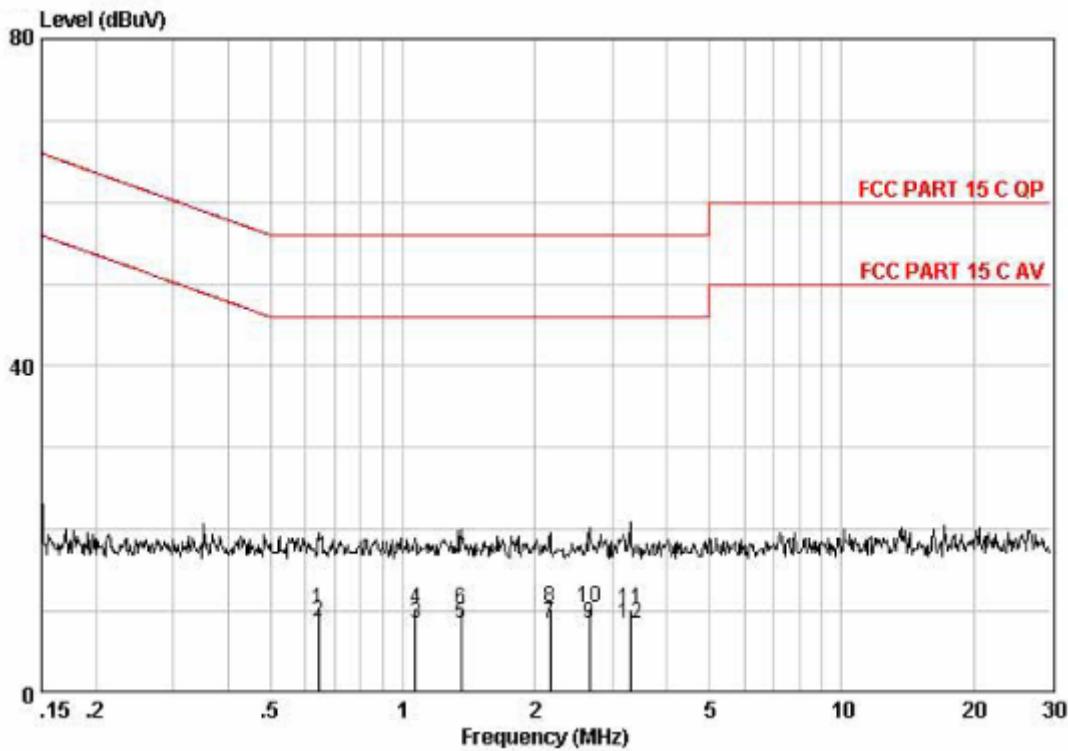


Freq	Read	Cable	LISN	Limit		Over	Remark
	Level	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.644	0.42	0.00	9.89	10.31	56.00	-45.69	QP
0.644	-1.09	0.00	9.89	8.80	46.00	-37.20	AVERAGE
1.071	-1.25	0.01	9.79	8.54	46.00	-37.46	AVERAGE
1.071	0.54	0.01	9.79	10.33	56.00	-45.67	QP
1.359	-1.33	0.02	9.77	8.46	46.00	-37.54	AVERAGE
1.359	0.42	0.02	9.77	10.21	56.00	-45.79	QP
2.167	-1.17	0.04	9.74	8.61	46.00	-37.39	AVERAGE
2.167	0.60	0.04	9.74	10.38	56.00	-45.62	QP
2.664	-1.17	0.04	9.73	8.60	46.00	-37.40	AVERAGE
2.664	0.68	0.04	9.73	10.45	56.00	-45.55	QP
3.293	0.38	0.05	9.72	10.15	56.00	-45.85	QP
3.293	-1.25	0.05	9.72	8.52	46.00	-37.48	AVERAGE

Report No.: GLEMO080601828RFT

Page: 16 of 16

FCC ID: UU7CEW112

Nature line:

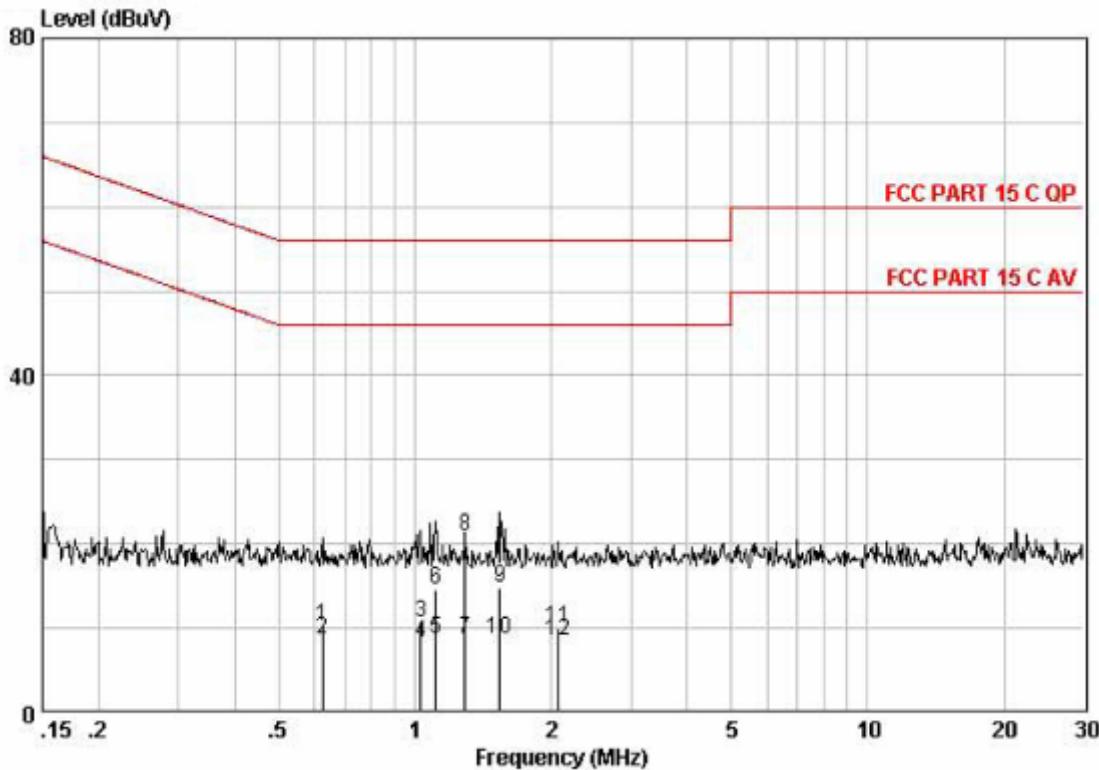

Freq	Read	Cable	LISN	Limit	Over	Over	Remark
	Level	Loss	Factor				
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.624	0.44	0.00	9.90	10.34	56.00	-45.66	QP
0.624	-1.25	0.00	9.90	8.65	46.00	-37.35	AVERAGE
1.032	0.90	0.00	9.82	10.72	56.00	-45.28	QP
1.032	-1.50	0.00	9.82	8.32	46.00	-37.68	AVERAGE
1.111	-1.09	0.01	9.81	8.73	46.00	-37.27	AVERAGE
1.111	4.68	0.01	9.81	14.50	56.00	-41.50	QP
1.289	-1.17	0.01	9.80	8.64	46.00	-37.36	AVERAGE
1.289	11.18	0.01	9.80	20.99	56.00	-35.01	QP
1.544	5.06	0.02	9.79	14.87	56.00	-41.13	QP
1.544	-1.01	0.02	9.79	8.80	46.00	-37.20	AVERAGE
2.077	0.30	0.03	9.77	10.10	56.00	-45.90	QP
2.077	-1.33	0.03	9.77	8.47	46.00	-37.53	AVERAGE