


Front

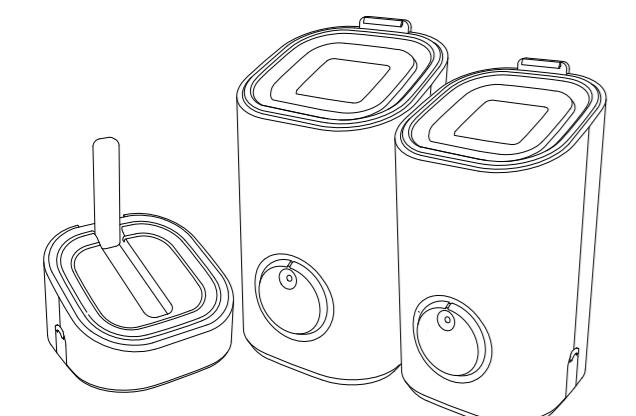

Wireless Speaker System

Instruction Manual

Model: CEW220

GB


SETTING OPERATION

CONNECTING THE WIRELESS TRANSMITTER

The Wireless Speaker System is supplied with a universal audio cable. This cable can be connected to the audio source outputs with the 3.5mm plug

1. Connect the single 3.5mm plug to the Line-in jack at the back of the transmitter (shown in the diagram).
2. Connect the opposite end of the cable with 3.5mm to your audio source. On most audio devices (including some TV's) you can connect the 3.5mm plug to the line-in jack.
3. Switch "ON" the transmitter by lifting up the antenna to an up-right position. The blue LED power indicator will illuminate. Extend the antenna for maximum range.
4. Turn the speaker ON by rotating the volume dial clockwise. The blue LED power indicator will illuminate. Adjust the volume by rotating dial.

Audio Player
(source with
3.5mm output/
standard
headphones
jack)



SAFETY INSTRUCTIONS

- Long time exposure to loud music may cause hearing damage.
- Water drops may change/stain the plastic/metal colors of the component.

CAUTIONS! Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: — Reorient or relocate the receiving antenna. — Increase the separation between the equipment and receiver. — Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. — Consult the dealer or an experienced radio/TV technician for help.


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Thank you, we hope you enjoy your selection. The Wireless Speaker System incorporates reliable radio frequency (RF) technology allowing you to place the speaker around the house or on the patio, up to 30m from the audio source – and without wires. The transmitter simply connects to any audio source such as an iPod, MP3 player, game system, CD player, TV or Stereo receiver.

FEATURES

- 49MHz Radio Frequency (RF) technology.
- Operating distance up to 30m.
- No line-of-sight limitations works through walls.
- Power switch built into telescopic antenna.
- Line-in jack for optional direct-to-source connection. Connect your MP3 player directly to the speaker with the provided cable – you can bring your music anywhere.


FUNCTIONS

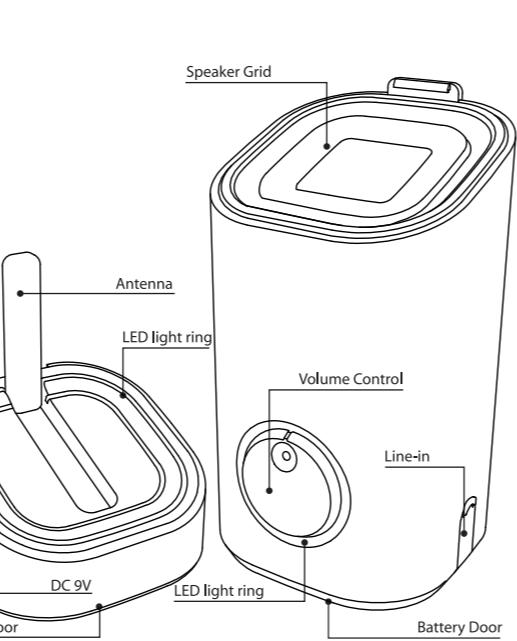

BATTERY INSTALLATION


FOR THE SPEAKER

1. Open the battery compartment cover by loosening the screw then lift the battery cover up. Insert four (4) C type 1.5V Alkaline batteries into the battery compartment with the (+) and (-) poles correctly aligned.
2. Before use, secure the compartment cover by tightening the screw.



FOR TRANSMITTER


1. Remove latch by tool (e.g. Coin) to access the battery compartment. Insert six (6) AAA 1.5V Alkaline batteries with the (+) and (-) poles correctly aligned.
2. Before use, secure the compartment cover by tightening the screw.




CHANGING THE BATTERIES
If the power indicator light is dim you may need to replace the battery. Please follow instructions above for replacing (installing) batteries.

INSTRUCTION TO DRAIN WATER OUT OF SPEAKER

- Speakers are made as per IPX4 standard
- After the Speakers are kept under shower for 10mins, please follow below steps to ensure Speaker sound quality works to the best levels
 - Turn the Speakers upside down as shown in diagram 1 to drain water out
 - Hold the Speakers with Grill facing down and shake for a couple of times to ensure water is drained out
 - Return the Speakers to normal upright position to play your favorite music / song



Dia 1
Towel Dry



Dia 2
Suggested Storage

SETTING OPERATION

Troubleshooting

If your speaker system is experiencing a noticeable degradation in wireless audio quality, first check the possible causes below. If you are unable to remedy the problem by following these hints, check user manual for further details. Under no circumstances should you try to repair the set yourself.

Problem

Interference from other radio sources or fluorescent lamps

Volume level too low

- Move transmitter or receiver elsewhere.
- Adjust the volume level of the speaker, or adjust the output level of the audio source, which is connected to the transmitter.

No Sound

- Ensure the Transmitter switch is in the ON position by raising the antenna to an up-right position.
- Ensure the speaker volume control is in the ON position.
- Speaker or Transmitter batteries may be too low. Change batteries.
- Ensure the TV or audio component is ON.
- Adjust the volume control on the speaker to turn up the volume.
- The connected audio/video equipment is not playing (CD, Tape, etc...). Check the audio source.
- The volume of audio source is turned down, adjust volume to an appropriate level.

Poor Sound Quality

- Ensure the Antenna on the Transmitter is extended to the fullest.
- Speaker or Transmitter batteries may be too low. Change batteries.
- Out of range. Move closer to the Transmitter.

Distortion

- Speaker batteries may be too low. Change the batteries and replace with new ones.
- The Speaker is too far from transmitter, move closer.
- The input level of the audio signal is too low. Turn up the volume of the audio source equipment.

Specification*

Transmitter

System: VHF/RF

Modulation: Frequency Modulation (FM)

Carrier Frequency: Channel 49.86 MHz

Radiated Output Power: < 10 mW

Effective Transmission Range: ~ 30m

Power supply: 6 x 1.5V (AAA/UM4) batteries

Battery Life Time: ~ 8 hours

Speaker

System: VHF/RF

Carrier Frequency: Channel 49.86 MHz

S/N ratio: 50dB (1kHz sine wave, A-weighted)

Audio frequency range: 20-20,000 Hz

Power supply: 4 x 1.5V (C type) batteries

Battery Life Time: ~ 8 hours

* Specification subject to changes ** Depending on ambient conditions

Always:

- Make sure battery compartments are secure.
- Use batteries of the correct size and type.
- Fit batteries correctly observing the plus (+) and minus (-) marks on the battery and compartment.
- Replace a whole set of batteries at each time.
- Remove dead batteries from equipment.
- Please remember that small button cells and AAA batteries should be kept away from young children as they could be easily swallowed. Seek medical advice if you believe a cell has been swallowed.

Never:

- Mix different types of batteries.
- Mix old and new batteries.
- Dispose of batteries in a fire.
- Do not attempt to recharge ordinary batteries.

PLEASE RETAIN THIS INFORMATION FOR FUTURE REFERENCE.

MADE IN CHINA

This product is subject to continuous improvement; we reserve the right to modify product design and/or specifications without notice and without incurring any obligations.