

North 710, Yihua Building, Shennan Road, Futian District,

Shenzhen, P. R. China

Telephone: +86-755-29451282,

Fax: +86-755-22639141

Report No.: FCC12-RTE090702

Page 1 of 19

TEST REPORT

Applicant: Lexibook America

Address of Applicant: C/O NATXIS PRAMEX INTERNATIONAL – NORTH AMERICA

1251 avenue of the Americas 34th floor

Equipment Under Test (EUT)

Product Name: Tablet

Model No.: MFC250, MFC270

Trade mark: ARNOVA

FCC ID: UU8-MFC03

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2010

Date of sample receipt: August 16, 2012

Date of Test: September 03-06, 2012

Date of report issued: September 07, 2012

Test Result: PASS *

Authorized Signature:

Kavin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: FCC12-RTE090702

Page 2 of 19

2 Version

Version No.	Date	Description
00	September 07, 2012	Original

Prepared by:	Oscear. Li	Date:	September 07, 2012
	Project Engineer		
Reviewed by:	Hams. Hu	Date:	September 07, 2012
	Reviewer		



Report No.: FCC12-RTE090702 Page 3 of 19

3 Contents

			Page
1	COV	/ER PAGE	1
2	VER	RSION	2
3	CON	NTENTS	3
4		T SUMMARY	
5	GEN	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF E.U.T.	5
	5.3	TEST MODE AND VOLTAGE	
	5.4	TEST FACILITY	
	5.5	TEST LOCATION	
	5.6 5.7	DESCRIPTION OF SUPPORT UNITS	/
	5.7 5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6		T INSTRUMENTS LIST	
7	TES	T RESULTS AND MEASUREMENT DATA	9
	7.1	CONDUCTED EMISSIONS	С
	7.2	RADIATED EMISSION	
8	TES	T SETUP PHOTO	
9	EUT	CONSTRUCTIONAL DETAILS	19



Report No.: FCC12-RTE090702

Page 4 of 19

4 Test Summary

Test Item	Section in CFR 47	Result	
Conducted Emission	Part15.107	PASS	
Radiated Emissions	Part15.109	PASS	

PASS: The EUT complies with the essential requirements in the standard.



Report No.: FCC12-RTE090702

Page 5 of 19

5 General Information

5.1 Client Information

Applicant:	Lexibook America
Address of Applicant:	C/O NATXIS PRAMEX INTERNATIONAL – NORTH AMERICA 1251 avenue of the Americas 34th floor

5.2 General Description of E.U.T.

Product Name:	Tablet
Model No.:	MFC250, MFC270
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20))
	2422MHz~2452MHz (802.11n(H40))
Power supply:	Model No.:SJ-0520-U
	Input: AC 100-240V, 50/60Hz, 0.5A
	Output: DC 5.0V, 2.0A
	DC 3.7V Li-ion Battery

5.3 Test mode and voltage

Test mode:	
Data Transfer	Data Transfer with PC
Test voltage:	AC 120V/60Hz



Report No.: FCC12-RTE090702

Page 6 of 19

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission.

The acceptance letter from the FCC is maintained in out files. Registration 600491, July 20, 2010.

Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960



Report No.: FCC12-RTE090702

Page 7 of 19

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
HP	Printer	CB495A	05257893	DoC
DELL	PC	OPTIPLEX745	GTS312	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: FCC12-RTE090702

Page 8 of 19

6 Test Instruments list

Radi	Radiated Emission:					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2012	Jul. 02 2013
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 26 2012	Feb. 25 2013
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	Mar. 10 2012	Mar. 09 2013
6	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2012	Jul. 02 2013
7	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 03 2012	Jul. 02 2013
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial cable	GTS	N/A	GTS210	Jul. 03 2012	Jul. 02 2013
10	Coaxial Cable	GTS	N/A	GTS211	Jul. 03 2012	Jul. 02 2013
11	Thermo meter	KTJ	TA328	GTS256	Jul. 06 2012	Jul. 05 2013

Cond	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS252	Sep. 08 2011	Sep. 07 2013	
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 03 2012	Jul. 02 2013	
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 03 2012	Jul. 02 2013	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 03 2012	Jul. 02 2013	
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 03 2012	Jul. 02 2013	
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 03 2012	Jul. 02 2013	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
8	Thermo meter	KTJ	TA328	GTS233	Jul. 03 2012	Jul. 02 2013	

Gene	General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)	
1	Barometer	ChangChun	DYM3	GTS257	July 10 2012	July 09 2013	



Report No.: FCC12-RTE090702

Page 9 of 19

7 Test Results and Measurement Data

7.1 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	150kHz to 30MHz				
Class / Severity:	Class B				
Receiver setup:	RBW=9kHz, VBW=30kHz				
Limit:	- 441	Limit	(dBµV)		
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	0.5-30	60	50		
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.				
Test setup:	Reference Plane LISN 40cm 80cm Filter AC power Equipment Test table/Insulation plane Remark E.U.T EMI Receiver EU.T: Equipment Under Test LISN Figuipment Under Test LISN Figuipment Under Test LISN Figuipment Under Test Else in paper Stabilization Network Test table height=0.8m				
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 012mbar				
Measurement Record:	Uncertainty: ± 3.45dB				
Test Instruments:	Refer to section 6 for details				
Test mode:	Data Transfer with PC				
Test results:	Pass				


Measurement Data



Report No.: FCC12-RTE090702

Page 10 of 19



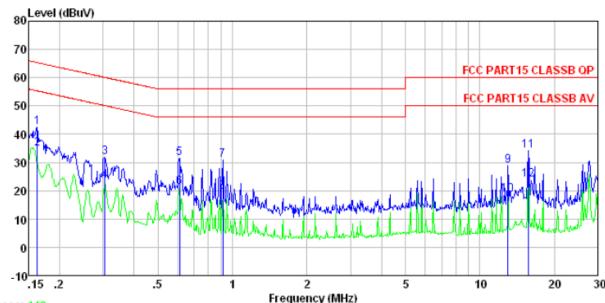

Trace: 112
Condition : FCC PART15 CLASSB QP LISN-2012 LINE

Job No. : 920RF

Test Mode : Data Transfer

Test Engineer: Hank


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBu₹	dBuV	dB	
1	0.162	42.51	-0.26	0.10	42.35	65.34	-22.99	QP
2	0.162	35.06	-0.26	0.10	34.90	55.34	-20.44	Average
3	0.305	32.12	-0.22	0.10	32.00	60.10	-28.10	QP
4 5	0.305	23.62	-0.22	0.10	23.50	50.10	-26.60	Average
	0.611	31.76	-0.20	0.10	31.66	56.00	-24.34	QP
6	0.611	21.40	-0.20	0.10	21.30	46.00	-24.70	Average
7	0.914	31.04	-0.21	0.10	30.93	56.00	-25.07	QP
8	0.914	19.61	-0.21	0.10	19.50	46.00	-26.50	Average
9	12.988	29.12	-0.49	0.20	28.83	60.00	-31.17	QP
10	12.988	18.69	-0.49	0.20	18.40			Average
11	15.718	34.42	-0.53	0.20	34.09	60.00	-25.91	QP
12	15, 718	24.06	-0.53	0.20	23.73	50, 00	-26.27	Average



Report No.: FCC12-RTE090702

Page 11 of 19

Neutral:

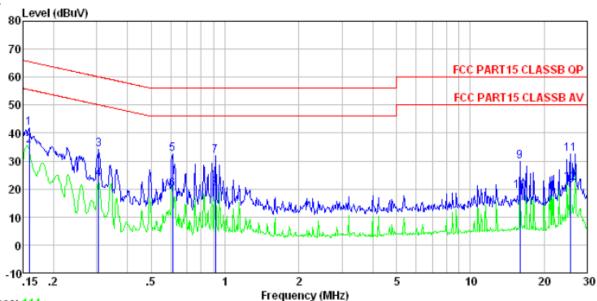

Trace: 114 : FCC PART15 CLASSB QP LISN-2012 NEUTRAL Condition

920RF

Job No. Test Mode : Data Transfer

Test Engineer: Hank

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBu₹	dB	d₿	dBu₹	dBuV	dB	
1	0.159	41.95	-0.13	0.10	41.92	65.52	-23.60	QP
2 3	0.159	35.43	-0.13	0.10	35.40	55.52	-20.12	Average
3	0.305	34.01	-0.09	0.10	34.02	60.10	-26.08	QP
4	0.305	23.49	-0.09	0.10	23.50	50.10	-26.60	Average
4 5 6	0.611	32.34	-0.08	0.10	32.36	56.00	-23.64	QP
6	0.611	19.88	-0.08	0.10	19.90	46.00	-26.10	Average
7	0.914	31.68	-0.09	0.10	31.69	56.00	-24.31	QP
8	0.914	20.30	-0.09	0.10	20.31	46.00	-25.69	Average
9	15.970	30.04	-0.42	0.20	29.82	60.00	-30.18	QP
10	15.970	19.52	-0.42	0.20	19.30	50.00	-30.70	Average
11	25.591	33.22	-0.76	0.21	32.67	60.00	-27.33	QP
12	25.591	22.79	-0.76	0.21	22.24	50.00	-27.76	Average

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at "This document is issued by the Company subject to its General Corrollions of Service printed overlear, available of request of accession at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the inservention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a support of the reproduced except in the reproduce transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC12-RTE090702


Page 12 of 19

7.2 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109							
Test Method:	ANSI C63.4:2003							
Test Frequency Range:	30MHz to 5GHz							
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver setup:								
	Frequency	Detector	RBW	VBW	Remark			
	30MHz-1GHz Quasi-peak 1		100KHz	300KHz	Quasi-peak Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
	7.5070 101.2	AV	1MHz	10Hz	Average Value			
Limit:								
Lillin.	Freque	ency	Limit (dBuV	/m @3m)	Remark			
	30MHz-8		40.0		Quasi-peak Value			
	88MHz-21	16MHz	43.5	5	Quasi-peak Value			
	216MHz-9	60MHz	46.0)	Quasi-peak Value			
	960MHz-	1GHz	54.0)	Quasi-peak Value			
	Above 1	CH ₇	54.0)	Average Value			
	Above	GHZ	74.0)	Peak Value			
Test Procedure:		amber. The tab	ole was rotated		eters above the ground to determine the			
			way from the in variable-height		ceiving antenna, which er.			
	determine the	maximum valu		ength. Both	ers above the ground to horizontal and vertical ement.			
	the antenna w	as tuned to he	ights from 1 me	ter to 4 mete	its worst case and then rs and the rota table ximum reading.			
	The test-receiver system was set to Peak Detect Function and Sp Bandwidth with Maximum Hold Mode.							
	6. If the emission level of the EUT in peak mode was 10dB lower than the limi specified, then testing could be stopped and the peak values of the EUT we be reported. Otherwise the emissions that did not have 10dB margin would re-tested one by one using peak, quasi-peak or average method as specific and then reported in a data sheet.							
Test setup:	Below 1GHz							



Report No.: FCC12-RTE090702 Page 13 of 19

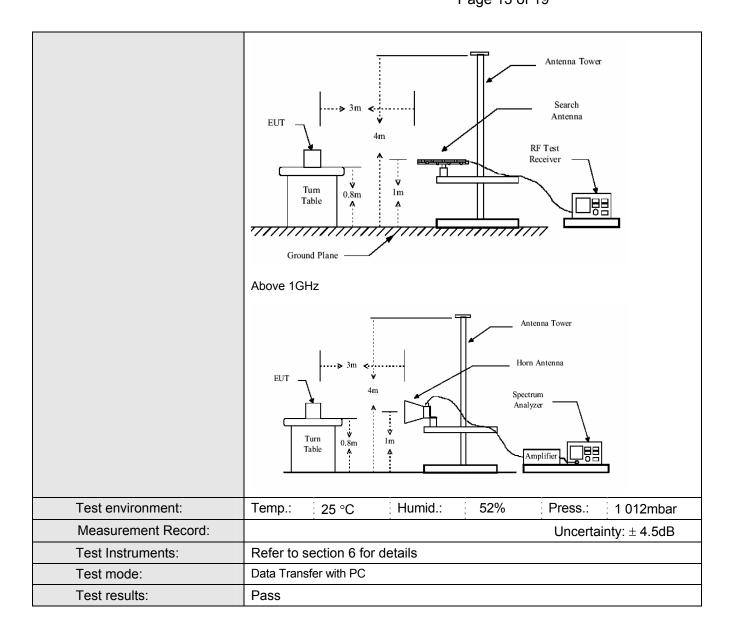

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: FCC12-RTE090702

Page 14 of 19

Measurement Data

Below 1GHz

Horizontal:

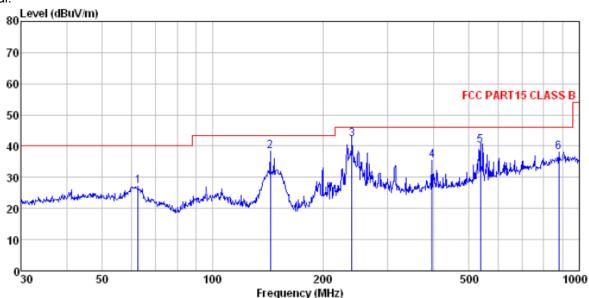

Site

: 3m chamber : FCC PART15 CLASS B 3m VULB9163 -2012-05 HORIZONTAL Condition

: 920RF Job No.

Test Mode : Data Transfer


est	Engineer:		Intenna	Cable	Preamo		Limit	Over	
	Freq					Level			Remark
	MHz	dBu∜	dB/m	₫B		dBuV/m	dBuV/m	<u>dB</u>	
1 2 3 4 5 6	62.651 143.830 239.987 396.242 537.589 878.322	47.35 48.65	15.07 17.01 19.39	2.07 2.83 3.47	31.96 32.16 31.90 31.35	27. 19 38. 44 42. 17 35. 29 40. 16 38. 20	46.00 46.00 46.00	-5.06 -3.83 -10.71 -5.84	QP QP QP QP



Report No.: FCC12-RTE090702

Page 15 of 19



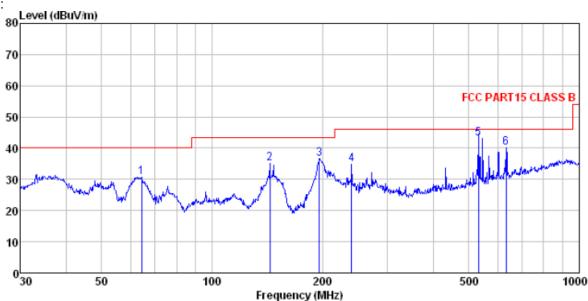

Site

: 3m chamber : FCC PART15 CLASS B 3m VULB9163 -2012-05 VERTICAL Condition

920RF Job No.

Test Mode : Data Transfer

Test Engineer: Andy

	Freq		intenna Factor				Limit Line	Over Limit	Remark
	MHz	dBu∜	<u>dB</u> /m	dB	dB	dBuV/m	dBuV/m	<u>dB</u>	
1 2 3 4 5 6		49.88 51.80	14.74 11.23 13.57 15.07 19.23 20.91	1.82 2.07 3.45	31.96 32.13	35.16 36.67 34.86 43.10	43.50 46.00 46.00	-8.34 -6.83 -11.14 -2.90	QP QP QP QP




Report No.: FCC12-RTE090702

Page 16 of 19

Above 1GHz

Horizontal:

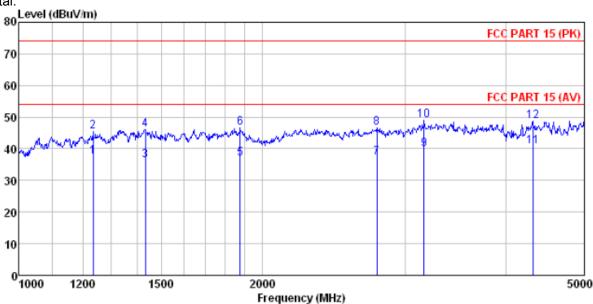

Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL Condition

920RF Job No.

Test Mode : Data Transfer


Test Enginee

	Freq	ReadA	intenna Factor		Preamp Factor		Limit Line	Over Limit	Remark
-	MHz	dBu∜	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2 3 4 5 6 7 8 9 10 11	1235.441 1235.441 1433.535 1433.535 1878.924 1878.924 2771.839 2771.839 3170.512 3170.512 4314.907	27. 10 35. 14 28. 70 38. 33 36. 10 45. 64 33. 31 42. 77 34. 02 43. 02 27. 15 35. 06	25. 48 25. 42 25. 42 25. 64 25. 64 28. 31 28. 31 28. 82 28. 82 30. 77 30. 77	4.49 4.49 4.64 4.90 5.73 5.73 6.29 8.17 8.17	19. 66 19. 66 22. 42 29. 63 29. 63 30. 27 30. 27 29. 25 29. 25 25. 23	37.08 46.54 39.88 48.88	74.00 54.00 74.00 54.00 54.00 54.00 54.00 74.00 54.00	-28.55 -17.66 -28.03 -16.99 -27.45 -16.92 -27.46 -14.12 -25.12	Average Peak Average Peak Average Peak Average Peak Average



Report No.: FCC12-RTE090702 Page 17 of 19

Vertical:

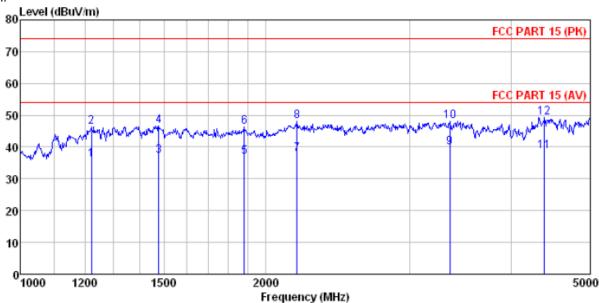

Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL Condition

: 920RF Job No.

: Data Transfer Test Mode

lest	Engineer:	Anay							
		Read	Ant enna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBu∀	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1222.230	25.40	25.44	4.48	19.37	35.95	54.00	-18.05	Average
2	1222.230	35.81	25.44	4.48	19.37	46.36	74.00	-27.64	Peak
3	1477.873	30.79	25.27	4.67	23.48	37.25	54.00	-16.75	Average
4	1477.873	40.10	25.27	4.67	23.48	46.56	74.00	-27.44	Peak
5	1882.294	36.10	25.67	4.90	29.63	37.04	54.00	-16.96	Average
6	1882.294	45.42	25.67	4.90	29.63	46.36	74.00	-27.64	Peak
7	2184.107	35.40	27.85	5.17	30.72	37.70	54.00	-16.30	Average
8	2184.107	45.88	27.85	5.17	30.72	48.18	74.00	-25.82	Peak
9	3363.631	33.10	28.51	6.70	28.50	39.81	54.00	-14.19	Average
10	3363.631	41.37	28.51	6.70	28.50	48.08	74.00	-25.92	Peak
11	4392.917	24.20	31.05	8.24	24.88	38.61			Average
12	4392, 917	34.88	31.05	8. 24	24.88	49.29		-24.71	