

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM130800479402 Page: 1 of 46

# FCC REPORT

Application No:	SZEM1308004794RF
Applicant:	Lexibook America
Manufacturer:	Jungle Tac Interactive Co., Ltd
Factory:	ATS ELECTRONICS (SHENZHEN) CO., LTD
Product Name:	8inch Tablet
Model No.(EUT):	MFC181
Trade mark:	Lexibook
FCC ID:	UU8-MFC09
Standards:	47 CFR Part 15, Subpart C (2012)
Date of Receipt:	2013-08-29
Date of Test:	2013-09-06 to 2013-09-12
Date of Issue:	2013-11-22
Test Result:	PASS *

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM130800479402 Page: 2 of 46

# 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209 ANSI C63.10 2009		PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130800479402 Page: 3 of 46

# 3 Contents

#### Page

1	CC	OVER PAGE	1
2	TE	EST SUMMARY	2
3	cc	ONTENTS	3
4	GE	ENERAL INFORMATION	2         3         4         EUT       4         6         NITS       6         05       7         NDARD CONDITIONS       7         ESTED BY THE CUSTOMER       7         8       UREMENT DATA         11       11         POWER       16         19       22         CTED EMISSIONS       25         SMISSIONS       27         Y HOPPING SEQUENCE       30         31       31
	4.1	CLIENT INFORMATION	
	4.2		
	4.3	Test Environment	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST LOCATION	
	4.6		
	4.7		
	4.8		
	4.9		
	4.10	Equipment List	8
5	TE	EST RESULTS AND MEASUREMENT DATA	11
	5.1	ANTENNA REQUIREMENT	11
	5.2	CONDUCTED EMISSIONS	12
	5.3	CONDUCTED PEAK OUTPUT POWER	16
	5.4	6DB OCCUPY BANDWIDTH	19
	5.5	Power Spectral Density	22
	5.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	25
	5.7	Spurious RF Conducted Emissions	27
	5.8	Pseudorandom Frequency Hopping Sequence	30
	5.8	8.1 Spurious Emissions	31
	5.9	BAND EDGE (RADIATED EMISSION)	. 37-46



Report No.: SZEM130800479402 Page: 4 of 46

# 4 General Information

#### 4.1 Client Information

Applicant:	Lexibook America
Address of Applicant:	C/O NATXIS PRAMEX INTERNATIONAL – NORTH AMERICA 1251 avenue of the Americas 34 <sub>th</sub> floor
Manufacturer:	Jungle Tac Interactive Co., Ltd
Address of Manufacturer:	A/F, Shanshui Building, Nanshan Yungu No.1183, Liuxian Road, Xili Town, Nanshan District, Shenzhen
Factory:	ATS ELECTRONICS (SHENZHEN) CO., LTD
Address of Factory:	4/F, Block C, Xufa Science & Technology park, No.2 Industrial Zone, Fenghuang, Fuyong. Shenzhen, China 518103

### 4.2 General Description of EUT

Name:	8inch Tablet				
Model No.:	MFC181	MFC181			
Trade mark:	Lexibook				
Operation Frequency:	2402MHz~248	0MHz			
Bluetooth Version:	4.0				
Modulation Technique:	Frequency Hop	oping Spread Spectrum(FHSS)			
Modulation Type:	GFSK				
Number of Channel:	40				
Hopping Channel Type:	Adaptive Frequ	uency Hopping systems			
Sample Type:	Portable produ	ction			
Test Power Grade:	N/A (manufacti	urer declare)			
Test Software of EUT:	RF Test tool (n	nanufacturer declare )			
Antenna Type	Integral				
Antenna Gain	1.56dBi				
Power Supply:	Adapter:	MODEL:BSYB050200U W INPUT:100-240V~ 50/60Hz,0.4A OUTPUT:5.0V === 2.0A			
	Battery:	3.7V 5000mAh 18.5Wh (Li-ion Polymer Battery)			
Test Voltage:	AC 120V 60Hz DC 3.7V Battery fully charged				
DC Cable:	82cm (Unshield				
USB Cable:	81cm (Unshield	ded)			



Report No.: SZEM130800479402 Page: 5 of 46

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz



Report No.: SZEM130800479402 Page: 6 of 46

### 4.3 Test Environment

Operating Environment:		
Temperature:	23.0 °C	
Humidity:	53 % RH	
Atmospheric Pressure:	1010 mbar	

### 4.4 Description of Support Units

The EUT has been tested independent unit.

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM130800479402 Page: 7 of 46

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

#### 4.7 Deviation from Standards

None.

#### 4.8 Abnormalities from Standard Conditions

None.

#### 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM130800479402 Page: 8 of 46

### 4.10 Equipment List

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2013-11-10	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2013-11-10	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2013-11-10	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16	
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24	



Report No.: SZEM130800479402 Page: 9 of 46

	RE in Chamber				
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	<b>SEL0053</b>		2014-05-16	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
13	Band filter	Amindeon	82346	SEL0094	2014-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130800479402 Page: 10 of 46

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24	
2	Humidity/ Temperature Indicator	Temperature HYGRO ZJ1-2B		SEL0033	2013-10-24	
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24	
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29	
5	Coaxial cable	SGS	N/A SEL0179		2014-05-29	
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24	
7	Signal Generator	r Rohde & Schwarz SML03		SEL0068	2014-05-16	
8	Band filter	amideon	82346	SEL0094	2014-05-16	
9	POWER METER	R & S	NRVS	SEL0144	2013-10-24	
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16	
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24	

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130800479402 Page: 11 of 46

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.56dBi.








Report No.: SZEM130800479402 Page: 12 of 46

_					
	est Requirement:	47 CFR Part 15C Section 15.207			
T	est Method:	ANSI C63.10: 2009			
T	est Frequency Range:	150kHz to 30MHz			
Li	imit:	Eroquopov rongo (MHz)	Limit (c	lBuV)	
		Frequency range (MHz)	Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*	
		0.5-5	56	46	
		5-30	60	50	
		* Decreases with the logarithn	n of the frequency.		
T	est Procedure:	<ol> <li>The mains terminal disturbance voltage test was conducted in a shield room.</li> <li>The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linea impedance. The power cables of all other units of the EUT were</li> </ol>			
		<ul> <li>connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded.</li> <li>3) The tabletop EUT was placed on the borizontal or society of the prizontal or society.</li> </ul>	or the unit being d to connect multiple of the LISN was not c table 0.8m above the	as	
		<ul> <li>placed on the horizontal gr</li> <li>4) The test was performed will of the EUT shall be 0.4 m frequence plane. The LISN unit under test and bonded mounted on top of the group between the closest points the EUT and associated equipment and all of the in ANSI C63.10: 2009 on corr</li> </ul>	th a vertical ground ref from the vertical ground plane was bonded to th 1 was placed 0.8 m from to a ground reference und reference plane. The s of the LISN 1 and the quipment was at least ( im emission, the relative terface cables must be	d reference plane. The e horizontal ground om the boundary of the plane for LISNs his distance was EUT. All other units of 0.8 m from the LISN 2. re positions of	

#### 5.2 Conducted Emissions



Report No.: SZEM130800479402 Page: 13 of 46

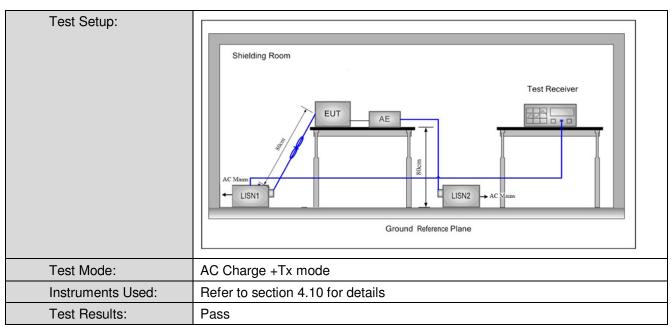


#### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.




Report No.: SZEM130800479402 Page: 14 of 46

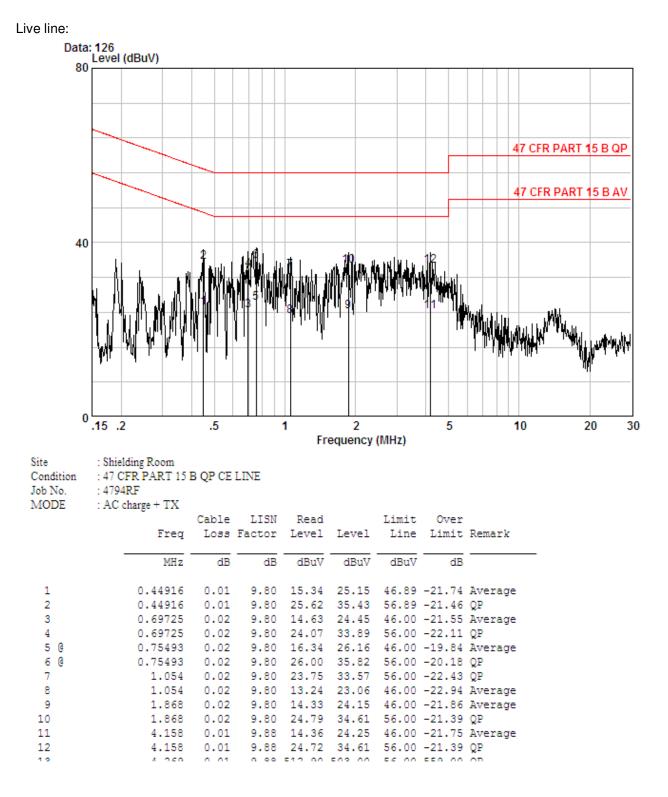



Report No.: SZEM130800479402 Page: 15 of 46

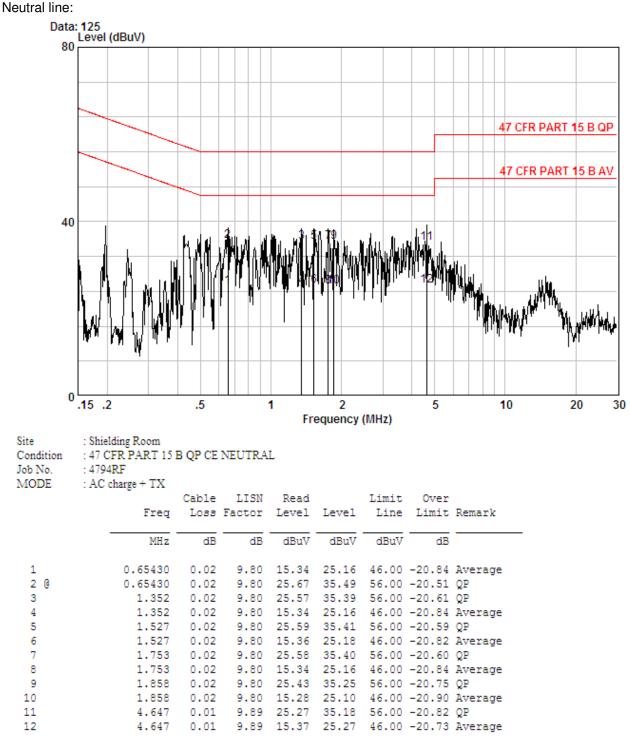

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM130800479402 Page: 16 of 46

#### 5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)					
Test Method:	KDB558074 D01					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table					
	Ground Reference Plane					
	Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	30dBm					
Test Mode:	Non-hopping transmitting with GFSK modulation					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					


#### **Measurement Data**

GFSK mode							
Test channel	Test channel Peak Output Power (dBm) Limit (dBm) Res						
Lowest	6.32	30.00	Pass				
Middle	6.24	30.00	Pass				
Highest	5.76	30.00	Pass				

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130800479402 Page: 17 of 46

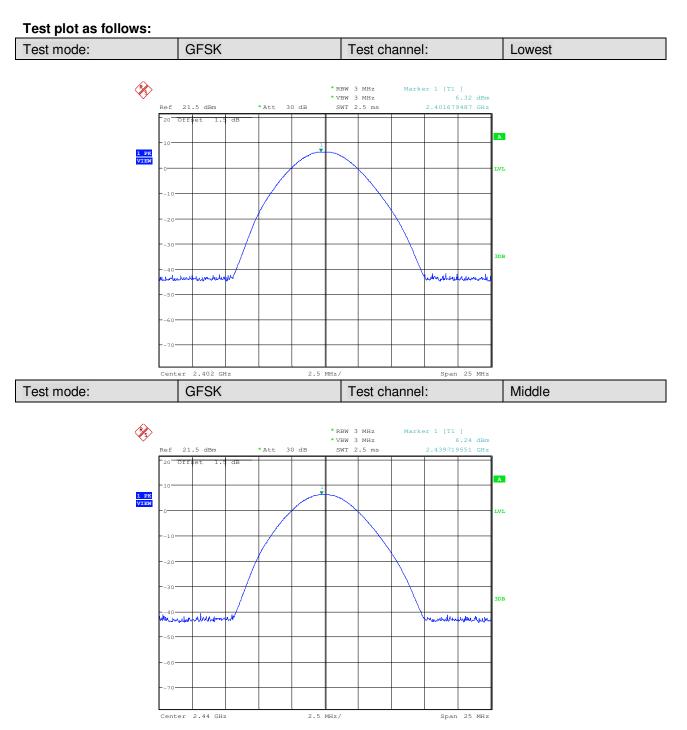




Report No.: SZEM130800479402 Page: 18 of 46

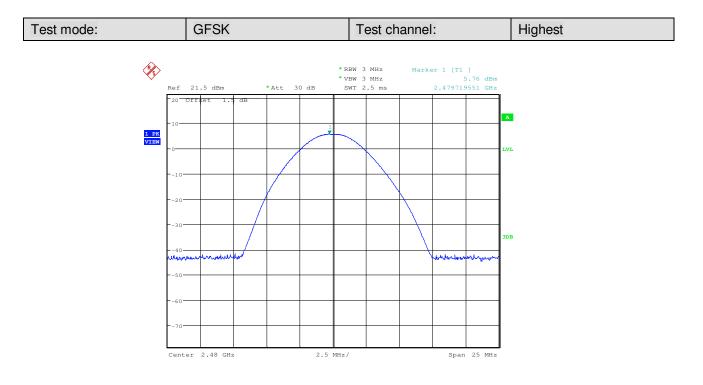



Report No.: SZEM130800479402 Page: 19 of 46

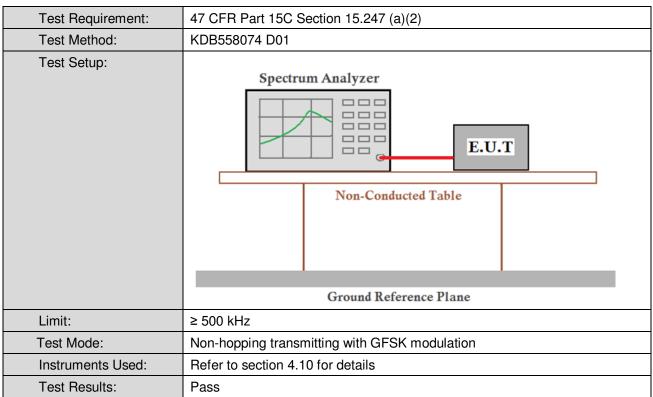

#### 5.4 6dB Occupy Bandwidth


#### **Measurement Data**

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.649038461539	≥500	Pass
Middle	0.649038461244	≥500	Pass
Highest	0.644230769233	≥500	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130800479402 Page: 20 of 46

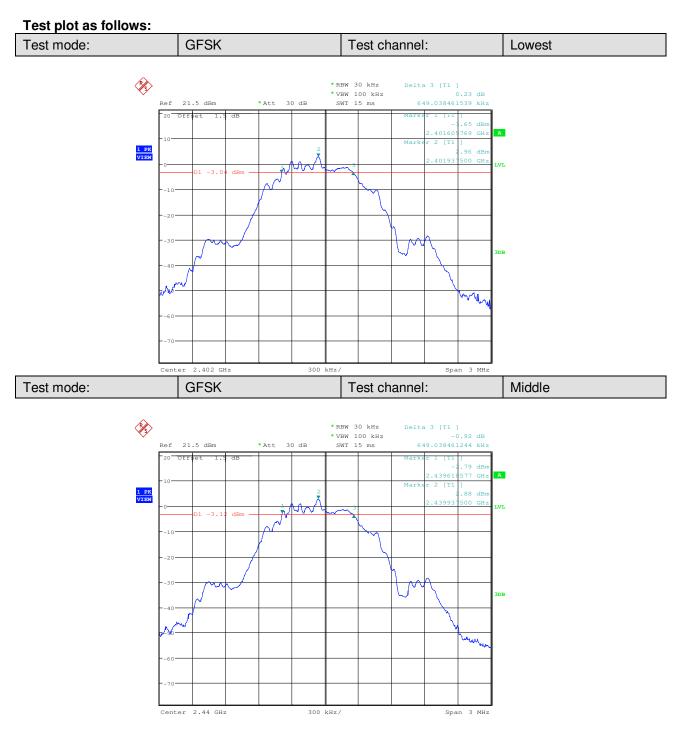

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130800479402 Page: 21 of 46

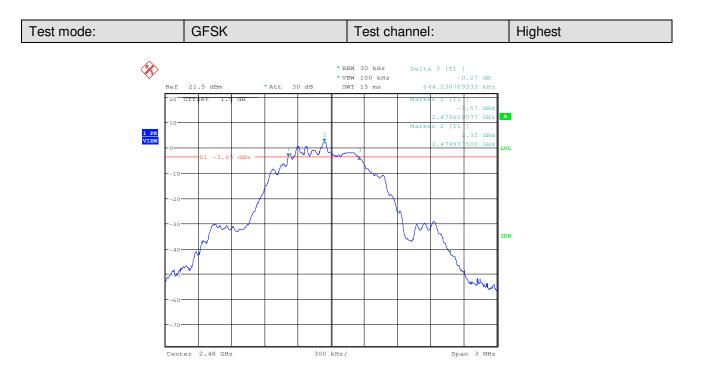





Report No.: SZEM130800479402 Page: 22 of 46

#### **Test Requirement:** 47 CFR Part 15C Section 15.247 (e) Test Method: KDB558074 D01 Test Setup: Spectrum Analyzer E.U.T 6 Non-Conducted Table **Ground Reference Plane** Limit: ≤8.00dBm Exploratory Test Mode: Non-hopping transmitting with GFSK modulation Instruments Used: Refer to section 4.10 for details Test Results: Pass

### 5.5 Power Spectral Density


#### **Measurement Data**

GFSK mode								
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result					
Lowest	5.34	≤8.00	Pass					
Middle	5.26	≤8.00	Pass					
Highest	4.81	≤8.00	Pass					

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130800479402 Page: 23 of 46

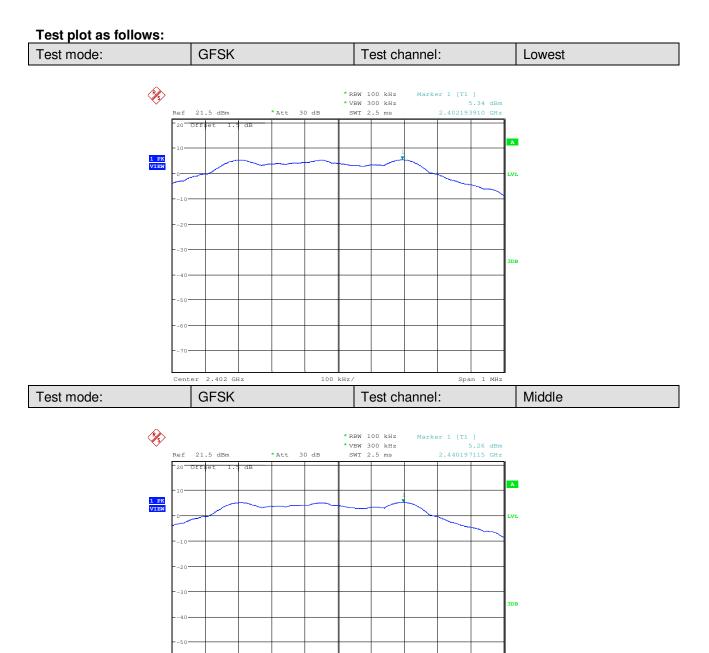

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


100 kHz/

Span 1 MHz

Center 2.44 GHz



Report No.: SZEM130800479402 Page: 24 of 46

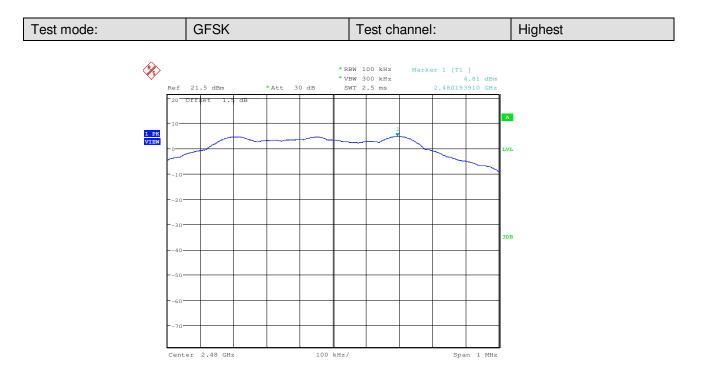



Report No.: SZEM130800479402 Page: 25 of 46


### 5.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	KDB558074 D01				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test Mode:	Non-hopping and hopping transmitting with GFSK modulation				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130800479402 Page: 26 of 46

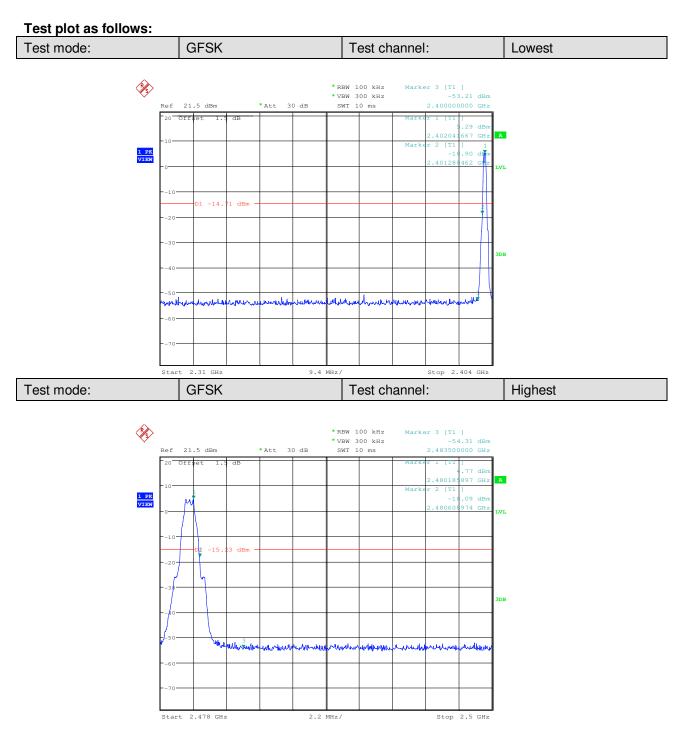




Report No.: SZEM130800479402 Page: 27 of 46

#### 5.7 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Non-hopping transmitting with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM130800479402 Page: 28 of 46

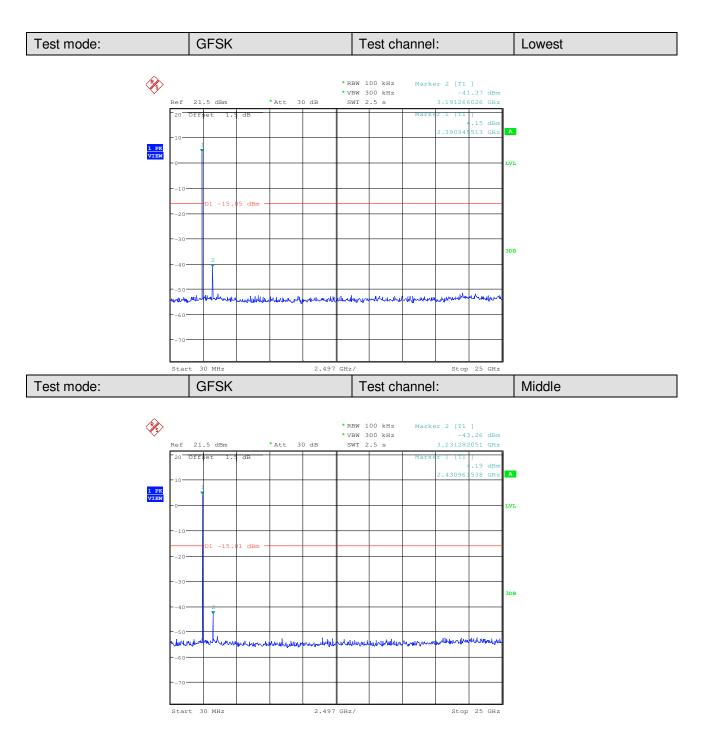



Report No.: SZEM130800479402 Page: 29 of 46

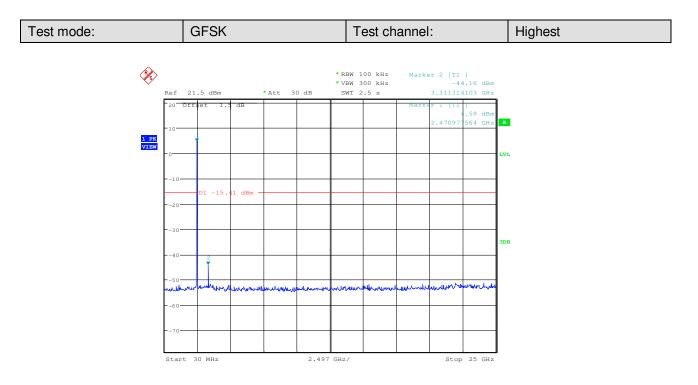





Report No.: SZEM130800479402 Page: 30 of 46

#### 5.8 Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15 <b>C Sectior</b>	n 15.247 (a)(1) requirement:	
Pseudorandom ordered by each transmitter. The	list of hopping frequencies. Eace system receivers shall have	are selected at the system hopping rate from the frequency must be used equally on the avect input bandwidths that match the hopping chat hall shift frequencies in synchronization with	erage anne
EUT Pseudorandom Fi	requency Hopping Sequence		
<ul><li>outputs are added in a stage. The sequence b with nine ones.</li><li>Number of shift registe</li><li>Length of pseudo-rand</li></ul>	a modulo-two addition stage. A egins with the first ONE of 9 co	nine-stage shift register whose 5th and 9th s And the result is fed back to the input of the onsecutive ONEs; i.e. the shift register is initia	e first
- <b>3</b>			
	ck Shift Register for Generat	-	
	andom Frequency Hopping Seq		
20 62 46 77	7 64 8 73	16.75 1	
Each frequency used eq	ually on the average by each tr	ansmitter.	
		the hopping channel bandwidths of their	



Report No.: SZEM130800479402 Page: 31 of 46

LAB

5.8.1 Spurious Emiss	sions						
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10 2009						
Test Site:	Measurement Distance	: 3n	n (Semi-Anecł	noic Cham	ber)	)	
Receiver Setup:	Frequency		Detector	RBW	'	VBW	Remark
	0.009MHz-0.090MH	z	Peak	10kHz	z	30kHz	Peak
	0.009MHz-0.090MH	z	Average	10kHz	z	30kHz	Average
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z	30kHz	Quasi-peak
	0.110MHz-0.490MH	z	Peak	10kHz	z	30kHz	Peak
	0.110MHz-0.490MH	Z	Average	10kHz	z	30kHz	Average
	0.490MHz -30MHz		Quasi-peak	10kHz	z	30kHz	Quasi-peak
	30MHz-1GHz		Quasi-peak	100 kH	lz	300kHz	Quasi-peak
			Peak	1MHz	z	3MHz	Peak
	Above 1GHz		Peak	1MHz	z	10Hz	Average
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark		Measurement distance (m)
	0.009MHz-0.490MHz	2	400/F(kHz)	-		-	300
	0.490MHz-1.705MHz		4000/F(kHz)	-			30
	1.705MHz-30MHz		30	-	-		30
	30MHz-88MHz		100	40.0	Quasi-peak		3
	88MHz-216MHz		150	43.5	Qı	uasi-peak	3
	216MHz-960MHz		200	46.0	Qı	uasi-peak	3
	960MHz-1GHz		500         54.0           500         54.0		Qı	uasi-peak	3
	Above 1GHz				Average		3
	Note: 15.35(b), frequency emissions is limit applicable to the e peak emission level rac	20c quij	B above the poment under t	maximum est. This p	peri	mitted ave	rage emission
Test Setup:							
Figure 1. Below 30MHz		Fi	gure 2. 30MH	z to 1GHz			
"This document is issued by the Co							



Report No.: SZEM130800479402 Page: 32 of 46


	Horn Antenna Tower Horn Antenna Tower Horn Antenna Tower Ground Referros Plane Test Receiver Test Receiver
	Figure 3. Above 1 GHz
Test Procedure:	<ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ul>
	i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Non-hopping transmitting mode with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM130800479402 Page: 33 of 46

	Radiated Emission below 1GHz					
	30MHz~1GHz (QP)					
Test mode: Transmitting Vertical						

#### Data: 270

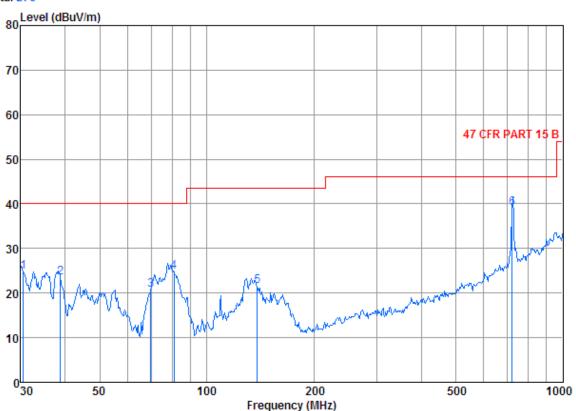


Condition: 47 CFR PART 15 B 3m 3142C VERTICAL Job No. : 4794RF Mode : AC Charge+TX

	Freq			Preamp Factor			Limit Line	Over Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	30, 53 38, 75 69, 60 80, 93 138, 39 721, 73	0.60 0.60 0.80 1.10 1.29 2.97	11.51 4.87 5.32 8.51	27.35 27.32 27.25 27.23 26.97 27.39	42.22 45.46 38.78	23.40 20.64 24.65	40.00 40.00 40.00 43.50	-15.21 -16.60 -19.36 -15.35 -21.89 -7.06



Report No.: SZEM130800479402 Page: 34 of 46

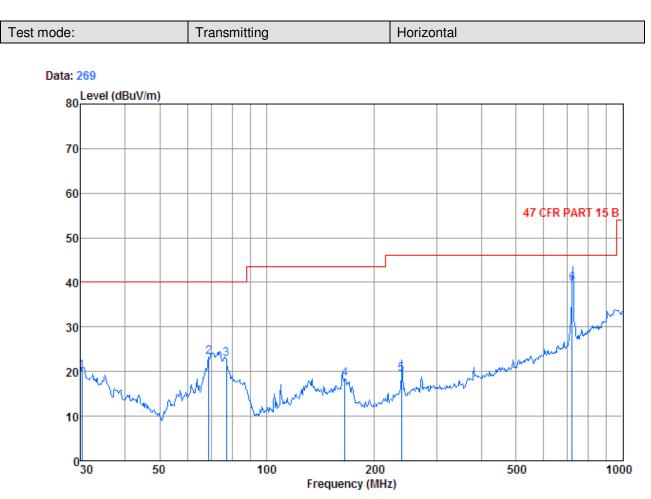

Condition: 47 CFR PART 15 B 3m 3142C HORIZONTAL Job No. : 4794RF Mode : AC Charge+TX

	Freq	CableAntenna 1 Loss Factor 1						Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	30.21 68.63 77.05 165.49 239.15 721.73	0.60 0.80 1.01 1.35 1.62 2.97	4.79 9.50 8.08	27.25 27.23 26.83	28.99 45.08 44.31 34.36 36.38 46.98	22.88 18.38 19.51	40.00 40.00 43.50 46.00	



Report No.: SZEM130800479402 Page: 35 of 46

Transmitter Emission above 1GHz									
Test mode:	st mode: GFSK Test channel: Lowest Remar		ırk:	Peak					
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3135.986	3.42	33.34	40.40	46.12	42.48	74.00	-31.52	Vertical	
4159.927	4.27	34.27	41.15	46.00	43.39	74.00	-30.61	Vertical	
5925.863	5.10	35.59	40.99	46.48	46.18	74.00	-27.82	Vertical	
7981.717	6.21	36.00	39.21	44.85	47.85	74.00	-26.15	Vertical	
9514.293	6.01	37.22	37.88	43.41	48.76	74.00	-25.24	Vertical	
11428.080	6.33	38.42	38.04	42.88	49.59	74.00	-24.41	Vertical	
3216.838	3.50	33.32	40.47	46.72	43.07	74.00	-30.93	Horizontal	
5034.994	4.79	34.43	41.76	47.26	44.72	74.00	-29.28	Horizontal	
6299.178	5.20	36.06	40.66	46.85	47.45	74.00	-26.55	Horizontal	
7663.165	6.23	36.00	39.48	45.70	48.45	74.00	-25.55	Horizontal	
10139.450	6.01	37.88	37.51	42.51	48.89	74.00	-25.11	Horizontal	
12429.540	6.58	39.33	38.46	43.16	50.61	74.00	-23.39	Horizontal	

Test mode:		GFSK	Т	est channel:	Middle	Middle Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pream Facto (dB)		Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2610.823	3.10	32.86	40.02	45.01	40.95	74.00	-33.05	Vertical
4034.777	4.18	33.94	41.07	46.30	43.35	74.00	-30.65	Vertical
5646.079	5.00	35.12	41.22	47.66	46.56	74.00	-27.44	Vertical
6868.647	5.41	35.94	40.17	46.70	47.88	74.00	-26.12	Vertical
8527.851	6.18	36.23	38.73	44.79	48.47	74.00	-25.53	Vertical
11341.140	6.30	38.43	38.00	42.39	49.12	74.00	-24.88	Vertical
2942.635	3.28	33.31	40.26	45.65	41.98	74.00	-32.02	Horizontal
4034.777	4.18	33.94	41.07	46.30	43.35	74.00	-30.65	Horizontal
4958.678	4.75	34.46	41.74	47.11	44.58	74.00	-29.42	Horizontal
6561.030	5.27	36.25	40.43	47.21	48.30	74.00 -25.70 Ho		Horizontal
8398.593	6.19	36.16	38.85	44.87	48.37	74.00	-25.63	Horizontal
10778.210	6.17	38.41	37.77	41.93	48.74	74.00	-25.26	Horizontal



Report No.: SZEM130800479402 Page: 36 of 46

Test mode:		GFSK	Tes	t channel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2875.986	3.25	33.21	40.21	46.22	42.47	74.00	-31.53	Vertical
3824.757	4.01	33.59	40.91	45.62	42.31	74.00	-31.69	Vertical
5850.919	5.07	35.45	41.06	48.11	47.57	74.00	-26.43	Vertical
7301.355	5.90	35.92	39.79	46.75	48.78	74.00	-25.22	Vertical
8927.683	6.16	36.53	38.39	44.09	48.39	74.00	-25.61	Vertical
11994.380	6.47	38.90	38.28	43.58	50.67	74.00	-23.33	Vertical
3266.346	3.53	33.30	40.49	45.64	41.98	74.00	-32.02	Horizontal
4676.696	4.61	34.92	41.54	46.34	44.33	74.00	-29.67	Horizontal
6299.178	5.20	36.06	40.66	46.85	47.45	74.00	-26.55	Horizontal
7860.737	6.21	36.00	39.31	45.48	48.38	74.00	-25.62	Horizontal
9985.762	5.97	37.70	37.47	42.60	48.80	74.00	-25.20	Horizontal
11872.880	6.44	38.78	38.22	42.47	49.47	74.00	-24.53	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
2) The disturbance range 9kHz ~ 30MHz and 13GHz~25GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

 As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130800479402 Page: 37 of 46

#### 5.9 Band edge (Radiated Emission)

· · · · · · · · · · · · · · · · · · ·	47 CFR Part 15C Section 15 ANSI C63.10 2009 Measurement Distance: 3m Frequency 30MHz-88MHz		~							
Test Site:	Measurement Distance: 3m Frequency	(Semi-Anechoic Chamber	~							
	Frequency	(Semi-Anechoic Chamber								
Limit:			Measurement Distance: 3m (Semi-Anechoic Chamber)							
	30MHz-88MHz	Limit (dBuV/m @3m)	Remark							
		40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
		74.0	Peak Value							
Test Setup:										
Test Setup:         Image: Colspan="2">Test Setup:         Image: Colspan="2">Image: Colspan="2" Image:										



Report No.: SZEM130800479402 Page: 38 of 46


	<ul> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Test Mode:	Non-hopping transmitting mode with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM130800479402 Page: 39 of 46

#### Test plot as follows:

Band edge (Radiated Emission)									
Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Vertical			

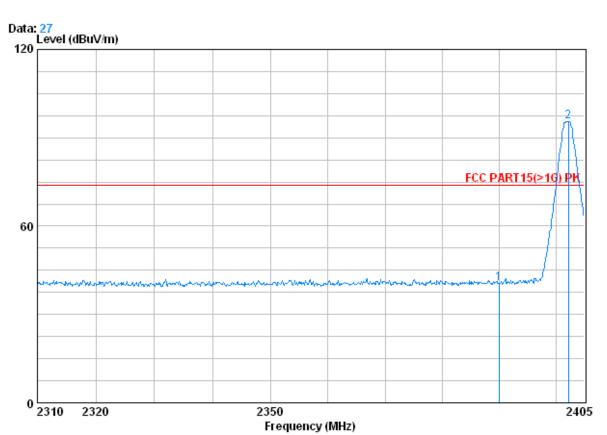


Condition : FCC PART15(>1G) PK 3m VERTICAL Job No. : 4794RF

Mode : 2402 Bandedge

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2402.245			39.85 39.86				




Report No.: SZEM130800479402 Page: 40 of 46

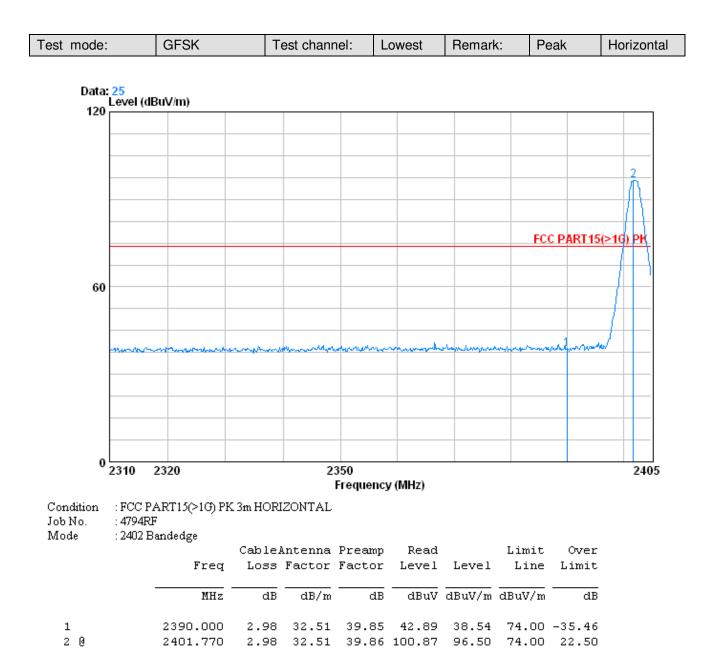




Report No.: SZEM130800479402 Page: 41 of 46

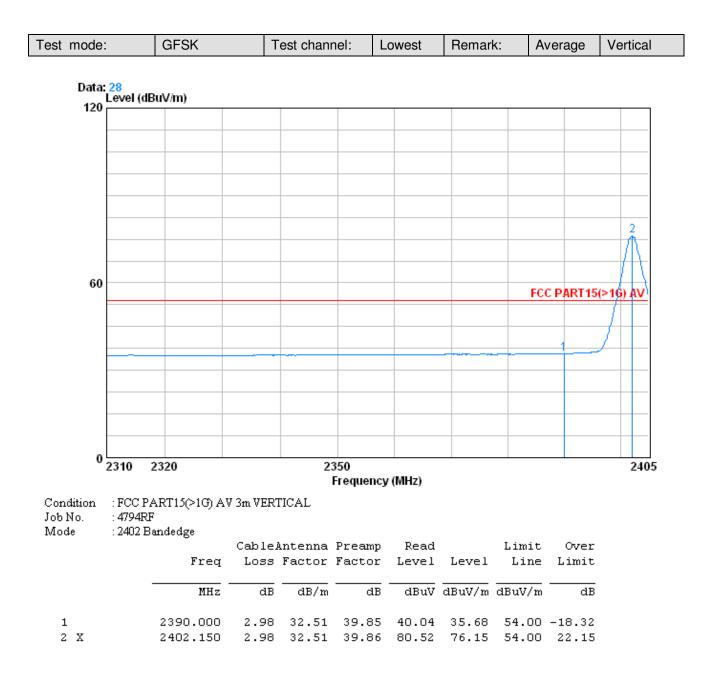






Report No.: SZEM130800479402 Page: 42 of 46

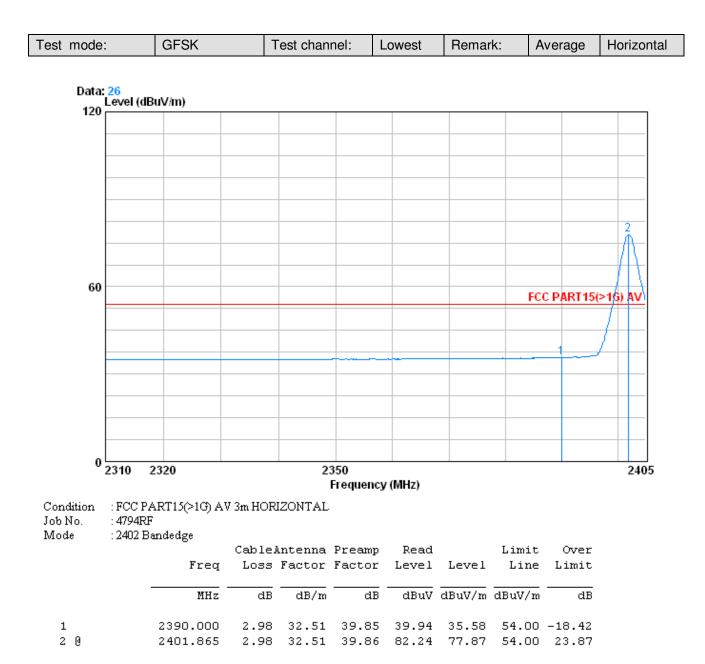



Report No.: SZEM130800479402 Page: 43 of 46

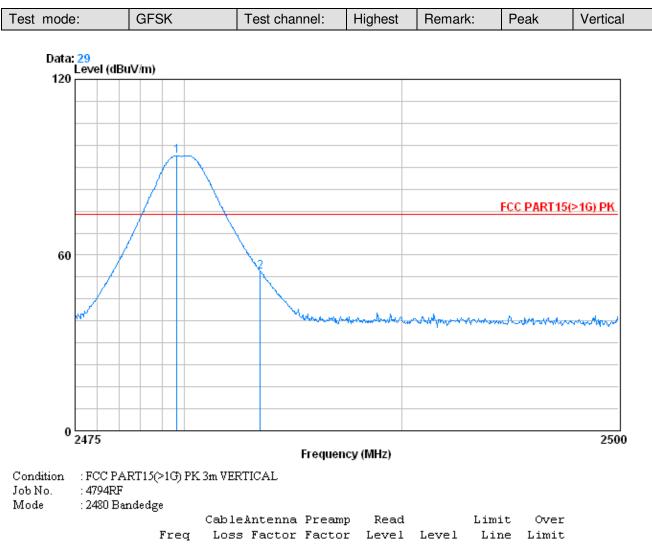

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2479.675	3.03	32.67	39.92	98.20	93.98	74.00	19.98
2	2483.500	3.03	32.67	39.92	58.60	54.38	74.00	-19.62



1 X

2

2479.650

2483.500

3.03

3.03

32.67 39.92

32.67 39.92

99.00

59.33


94.78

74.00 20.78

55.11 74.00 -18.89


#### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM130800479402 Page: 44 of 46

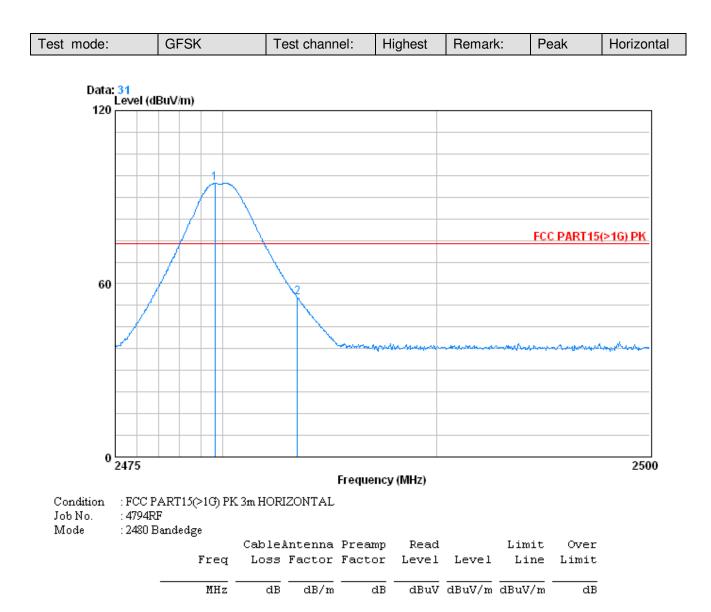



Report No.: SZEM130800479402 Page: 45 of 46

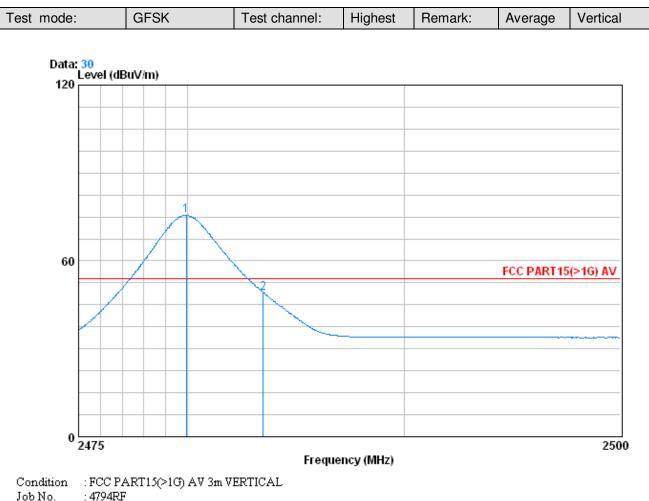


Mode : 2480 Bandedge

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2479.950 2483.500			39.92 39.92				



Report No.: SZEM130800479402 Page: 46 of 46

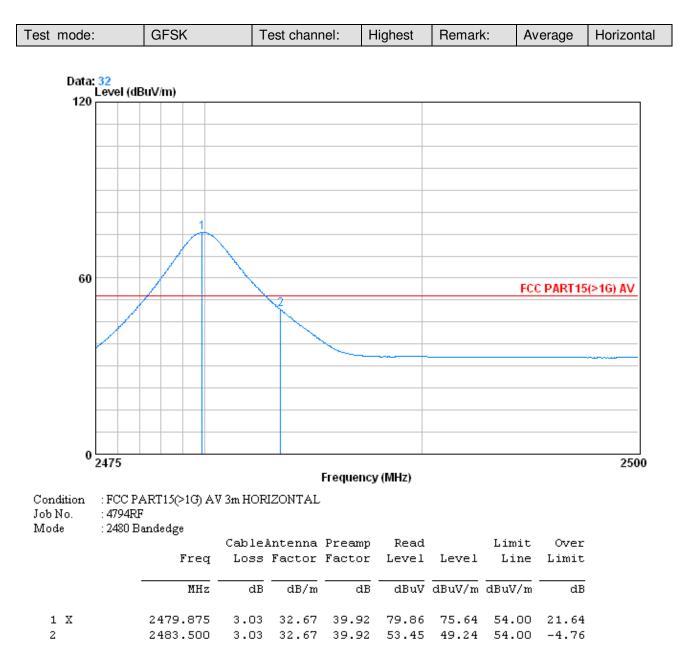

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor