

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM140400190302

Email: ee.shenzhen@sgs.com Page: 1 of 54

FCC REPORT

Application No: SZEM1404001903RF

Applicant: Lexibook America

Manufacturer: JungleTac Interactive Co., Ltd

Product Name: Lexibook Tablet – 8"

Model No.(EUT): MFC181

FCC ID: UU8-MFC10

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-05-04

Date of Test: 2014-05-04 to 2014-07-08

Date of Issue: 2014-07-21

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140400190302

Page: 2 of 54

2 Version

Revision Record						
Version Chapter Date Modifier Remark						
00		2014-07-18		Original		

Authorized for issue by:		
Tested By	(Owen Zhou) /Project Engineer	2014-06-28 Date
Prepared By	(Molinda Li) /Clerk	2014-07-21 Date
Checked By	(Emen Li) /Reviewer	2014-07-25 Date



Report No.: SZEM140400190302

Page: 3 of 54

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r01	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission) 47 CFR Part 15, Subpart C Section 15.205/15.209		ANSI C63.10 2009	PASS



Report No.: SZEM140400190302

Page: 4 of 54

4 Contents

			Page
1	CC	OVER PAGE	1
2	VF	ERSION	2
3	TE	EST SUMMARY	3
4	CC	ONTENTS	4
5	GE	ENERAL INFORMATION	5
Ī			
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6 5.7	TEST FACILITY DEVIATION FROM STANDARDS	
	5.7 5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.8 5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	
6	TE	EST RESULTS AND MEASUREMENT DATA	12
	6.1	Antenna Requirement	
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	6DB OCCUPY BANDWIDTH	
	6.5	POWER SPECTRAL DENSITY	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	Spurious RF Conducted Emissions	
	6.8	RADIATED SPURIOUS EMISSION	
		8.1 Spurious Emissions	
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	42
7	PH	HOTOGRAPHS - EUT TEST SETUP	52
	7.1	CONDUCTED EMISSION	52
	7.2	RADIATED EMISSION	52
	7.3	RADIATED SPURIOUS EMISSION	53
Q	DL	HOTOGRADUS ELIT CONSTRUCTIONAL DETAILS	54



Report No.: SZEM140400190302

Page: 5 of 54

5 General Information

5.1 Client Information

Applicant:	Lexibook America	
Address of Applicant:	C/O NATXIS PRAMEX INTERNATIONAL - NORTH AMERICA 1251 avenue of the Americas 34 th floor	
Manufacturer:	JungleTac Interactive Co., Ltd	
Address of Manufacturer:	Room 17-18, 16/F., Parklane Centre, 25 Kin Wing Street, Tuen Mun, New Territories, Hong Kong	

5.2 General Description of EUT

Name:	Lexibook Tablet – 8"		
Model No.	MFC181		
Operation Frequency:	2402MHz~24	80MHz	
Bluetooth Version:	V4.0		
	This test repo	rt is for BLE mode	
Modulation Type:	GFSK		
Number of Channel:	40		
Sample Type:	Portable production		
Antenna Type:	Integral		
Antenna Gain:	0dBi		
Battery:	DC3.7V 5000	mA (Li-on Rechargeable Battery)	
Cable:	USB Cable:	25cm (Unshielded two core)	
	DC Cable: 147cm (Unshielded two core)		
AC Adapter:	Model: BSYB050200UW		
	Input: 100-240V 50/60Hz 0.4A		
	Output:	5.0V 2.0A	
Test Voltage:	120V~60Hz		



Report No.: SZEM140400190302

Page: 6 of 54

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency		
The Lowest channel	2402MHz		
The Middle channel	2440MHz		
The Highest channel	2480MHz		



Report No.: SZEM140400190302

Page: 7 of 54

5.3 Test Environment

Operating Environment:			
Temperature:	20.0 °C		
Humidity:	55 % RH		
Atmospheric Pressure:	1005mbar		

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
earphone	Supply by SGS	N/A

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140400190302

Page: 8 of 54

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM140400190302

Page: 9 of 54

5.10 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16		
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16		



Report No.: SZEM140400190302

Page: 10 of 54

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-16		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24		
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24		
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24		
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16		
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24		
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29		
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29		
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29		
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29		
13	Band filter	Amindeon	82346	SEL0094	2015-05-16		
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16		
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24		
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24		
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16		
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24		
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04		



Report No.: SZEM140400190302

Page: 11 of 54

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM140400190302

Page: 12 of 54

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

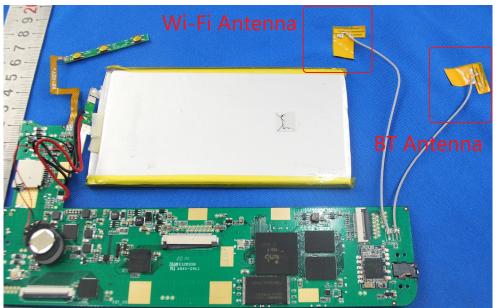



Report No.: SZEM140400190302

Page: 13 of 54


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207							
Test Method:	ANSI C63.10: 2009							
Test Frequency Range:	150kHz to 30MHz							
Limit:	Limit (dBuV)							
	Frequency range (MHz)	Quasi-peak	Average					
	0.15-0.5	66 to 56*	56 to 46*					
	0.5-5	56	46					
	5-30	60	50					
	* Decreases with the logarithm	n of the frequency.						
Test Procedure:	The mains terminal disturt room.	bance voltage test was	s conducted in a shi	elded				
,								



Report No.: SZEM140400190302

Page: 14 of 54

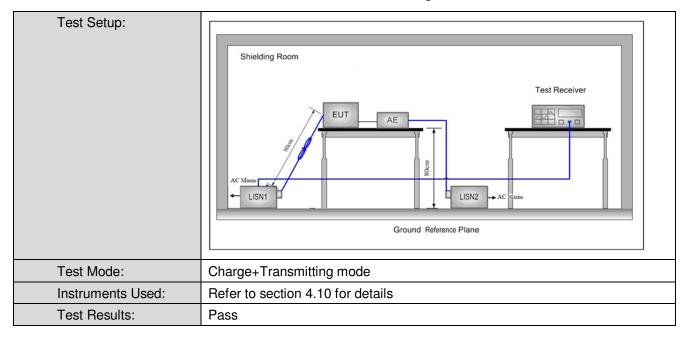



Report No.: SZEM140400190302


Page: 15 of 54

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



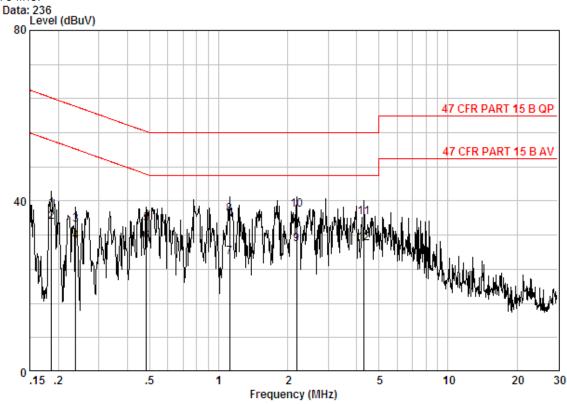

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 1903RF Test mode : Charge + TX


	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18639	0.02	9.70	28.48	38.20	64.20	-26.00	QP
2	0.18639	0.02	9.70	25.48	35.20	54.20	-19.00	Average
3	0.23784	0.02	9.70	24.77	34.49	62.17	-27.68	QP
4	0.23784	0.02	9.70	20.77	30.49	52.17	-21.68	Average
5	0.48375	0.01	9.80	24.74	34.55	56.27	-21.72	QP
6	0.48375	0.01	9.80	20.74	30.55	46.27	-15.72	Average
7	1.117	0.02	9.80	17.07	26.89	46.00	-19.11	Average
8	1.117	0.02	9.80	27.07	36.89	56.00	-19.11	QP
9	2.190	0.02	9.81	20.06	29.89	46.00	-16.11	Average
10	2.190	0.02	9.81	28.06	37.89	56.00	-18.11	QP
11	4.315	0.01	9.88	26.21	36.11	56.00	-19.89	QP
12	4.315	0.01	9.88	20.21	30.11	46.00	-15.89	Average



Report No.: SZEM140400190302

Page: 16 of 54



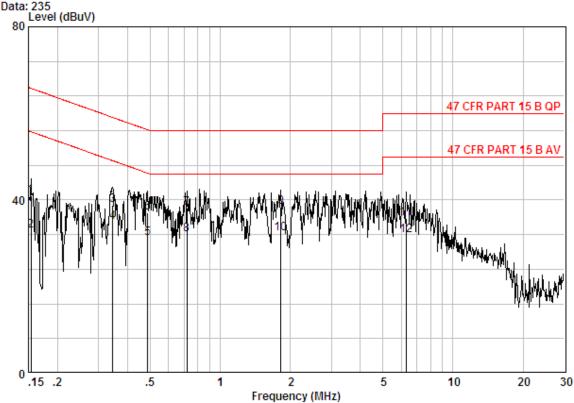

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 1903RF Test mode : Charge + TX

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15403	0.02	9.70	31.17	40.89	65.78	-24.89	QP
2	0.15403	0.02	9.70	23.17	32.89	55.78	-22.89	Average
3	0.34463	0.01	9.75	29.14	38.90	59.09	-20.19	QP
4	0.34463	0.01	9.75	25.14	34.90	49.09	-14.19	Average
5	0.48890	0.01	9.80	21.32	31.13	46.19	-15.06	Average
6	0.48890	0.01	9.80	27.32	37.13	56.19	-19.06	QP
7	0.71977	0.02	9.80	28.33	38.15	56.00	-17.85	QP
8	0.71977	0.02	9.80	22.33	32.15	46.00	-13.85	Average
9	1.819	0.02	9.80	28.44	38.26	56.00	-17.74	QP
10 @	1.819	0.02	9.80	22.44	32.26	46.00	-13.74	Average
11	6.319	0.01	9.97	25.88	35.86	60.00	-24.14	QP
12	6.319	0.01	9.97	21.88	31.86	50.00	-18.14	Average

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140400190302

Page: 17 of 54

6.3 Conducted Peak Output Power

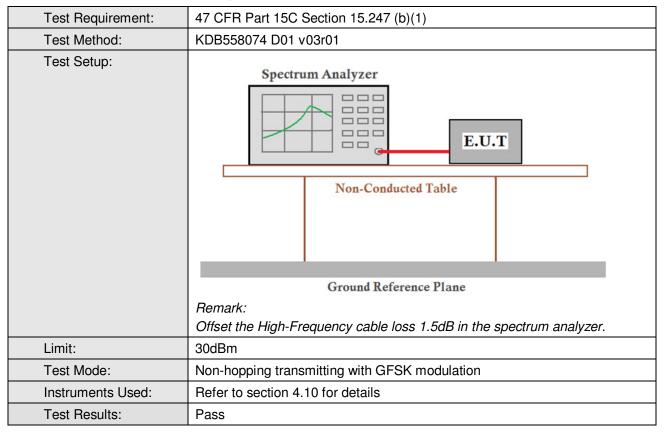

Measurement Data

GFSK mode									
Test channel	Test channel Peak Output Power (dBm) Limit (dBm) Result								
Lowest	4.97	30.00	Pass						
Middle	4.86	30.00	Pass						
Highest	4.19	30.00	Pass						






Report No.: SZEM140400190302


Page: 18 of 54

Test plot as follows:

Test mode: GFSK Test channel: Lowest

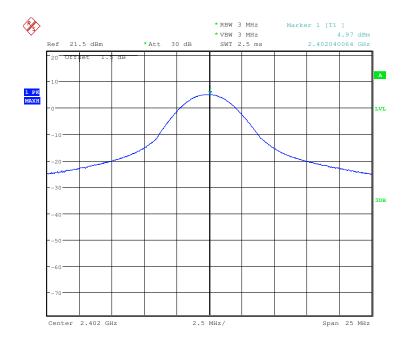



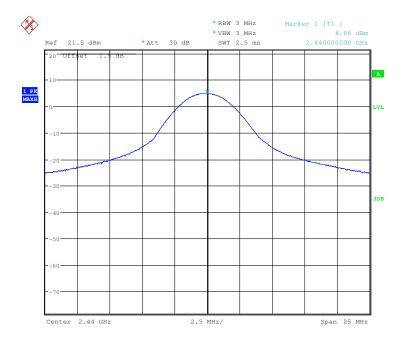




Report No.: SZEM140400190302

Page: 19 of 54

Test mode: GFSK Test channel: Highest

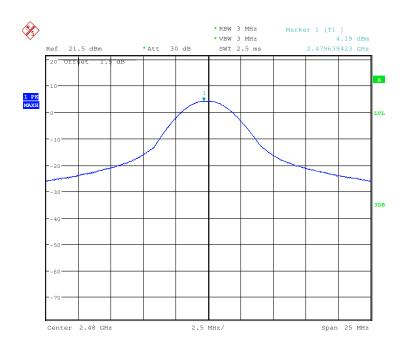




Report No.: SZEM140400190302

Page: 20 of 54

6.4 6dB Occupy Bandwidth

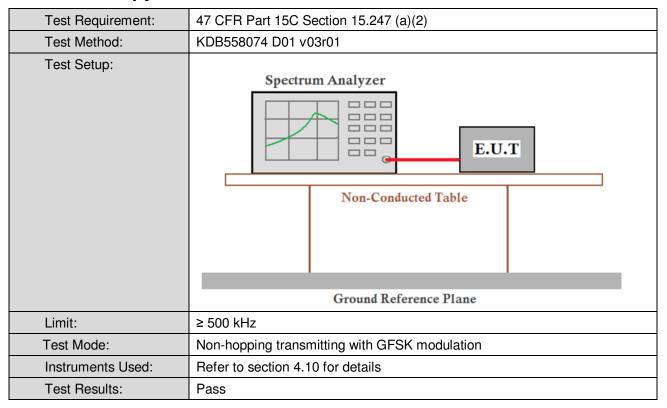

Measurement Data

Test channel	6dB Occupy Bandwidth (kHz)	Limit (kHz)	Result
Lowest	687.50000000	≥500	Pass
Middle	692.307692307	≥500	Pass
Highest	692.307692307	≥500	Pass




Report No.: SZEM140400190302


Page: 21 of 54

Test plot as follows:

Test mode: GFSK Test channel: Lowest

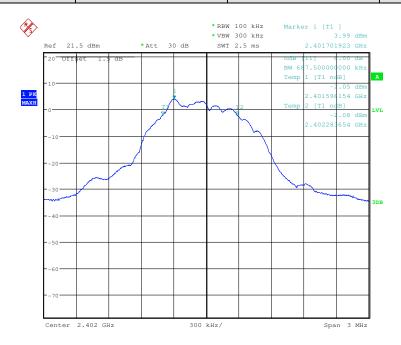

Test mode: GFSK Test channel: Middle

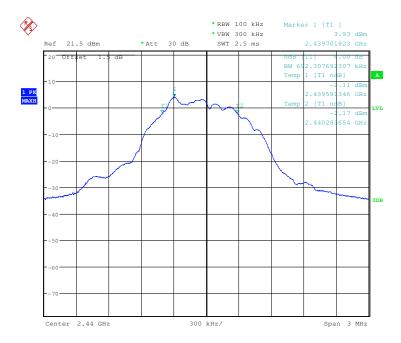




Report No.: SZEM140400190302

Page: 22 of 54

Test mode: GFSK Test channel: Highest

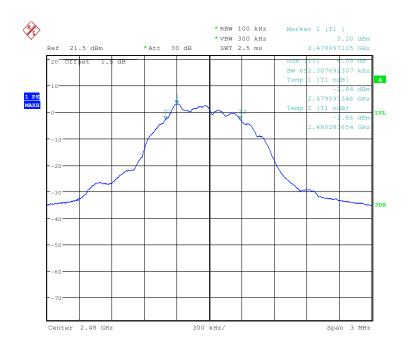




Report No.: SZEM140400190302

Page: 23 of 54

6.5 Power Spectral Density

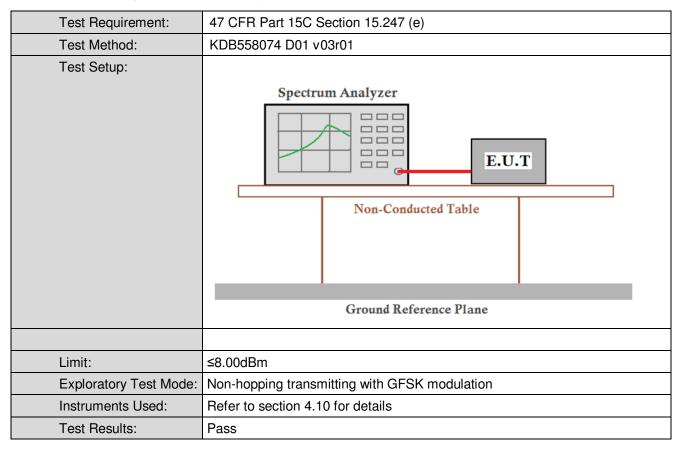

Measurement Data

GFSK mode									
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result						
Lowest	3.76	≤8.00	Pass						
Middle	3.55	≤8.00	Pass						
Highest	2.79	≤8.00	Pass						




Report No.: SZEM140400190302


Page: 24 of 54

Test plot as follows:

Test mode: GFSK Test channel: Lowest

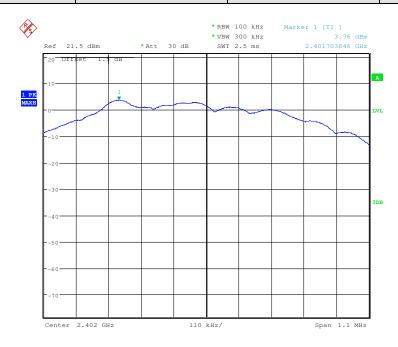

Test mode: GFSK Test channel: Middle

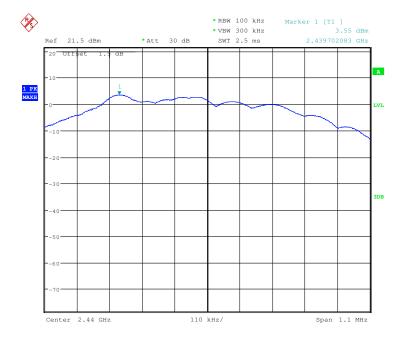




Report No.: SZEM140400190302

Page: 25 of 54

Test mode: GFSK Test channel: Highest

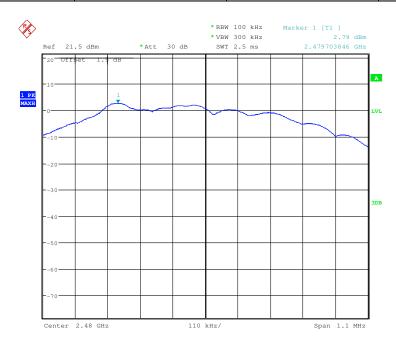




Report No.: SZEM140400190302

Page: 26 of 54

6.6 Band-edge for RF Conducted Emissions

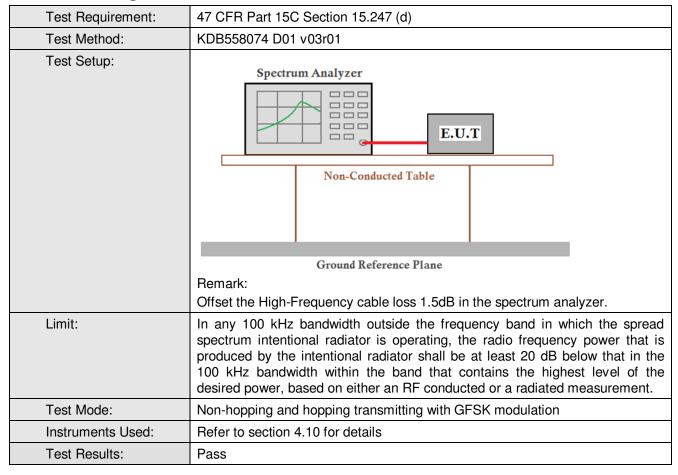




Report No.: SZEM140400190302


Page: 27 of 54

Test plot as follows:

Test mode: GFSK Test channel: Lowest

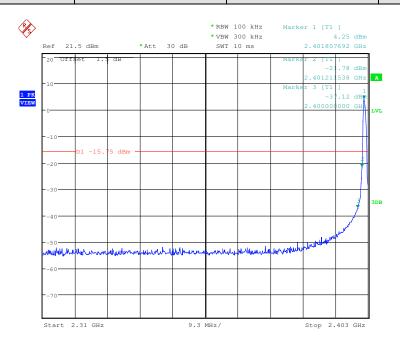

Test mode: GFSK Test channel: Highest

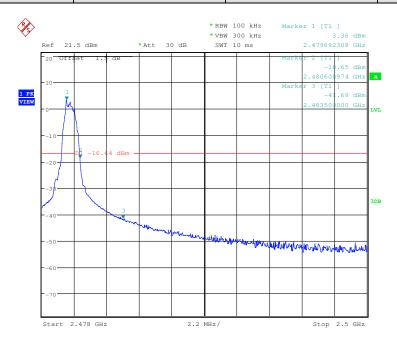





Report No.: SZEM140400190302

Page: 28 of 54

6.7 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	KDB558074 D01 v03r01			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limite				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Non-hopping transmitting with GFSK modulation			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			





Report No.: SZEM140400190302

Page: 29 of 54

Test plot as follows:

Test mode: GFSK Test channel: Lowest

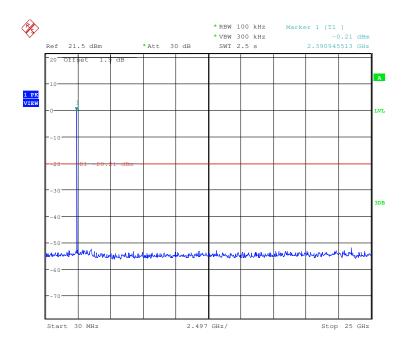


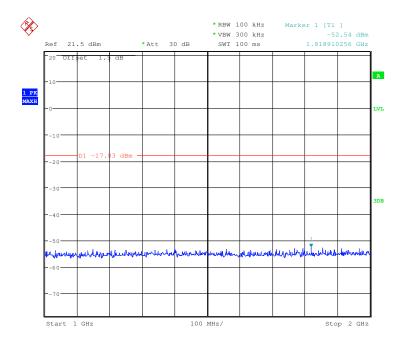




Report No.: SZEM140400190302

Page: 30 of 54

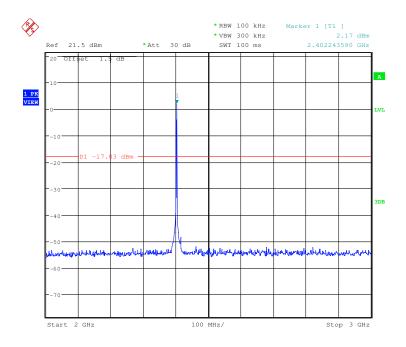

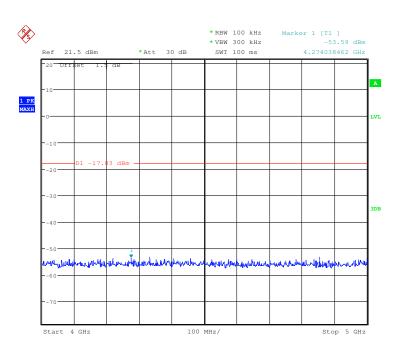





Report No.: SZEM140400190302

Page: 31 of 54

Test mode: GFSK Test channel: Middle

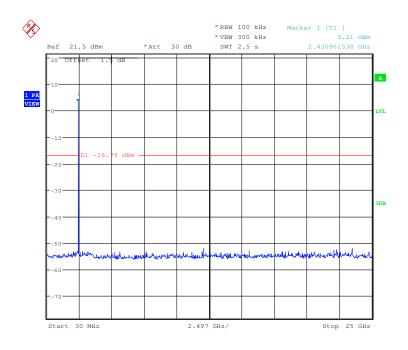


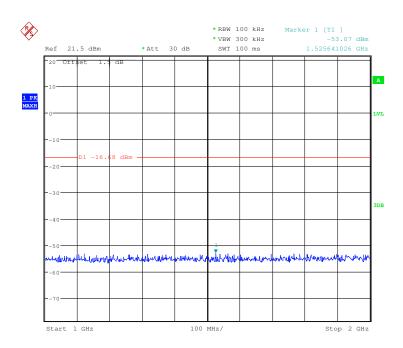




Report No.: SZEM140400190302

Page: 32 of 54

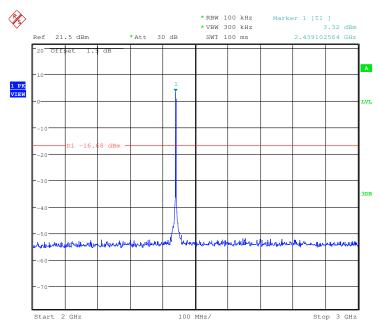

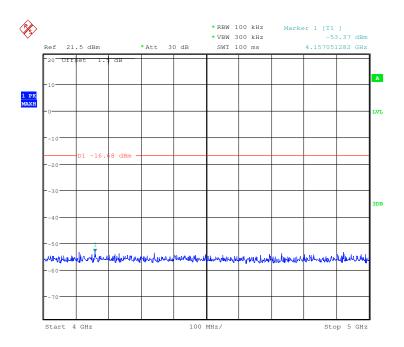





Report No.: SZEM140400190302

Page: 33 of 54

Test mode: GFSK Test channel: Highest

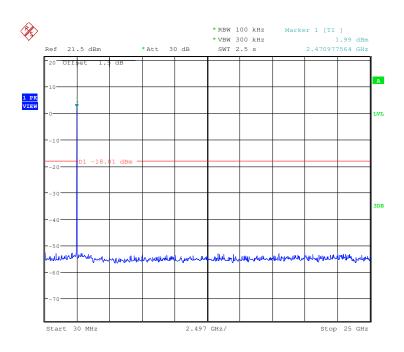


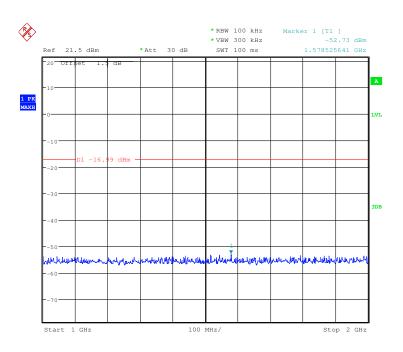




Report No.: SZEM140400190302

Page: 34 of 54

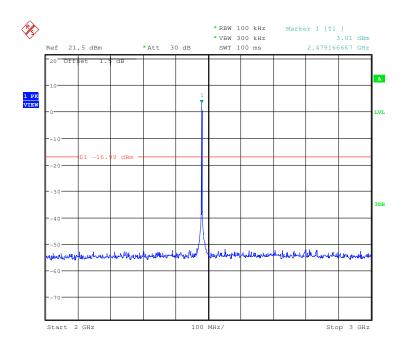

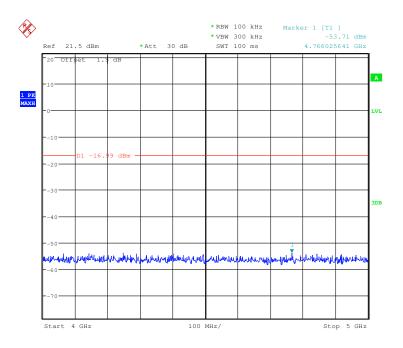

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140400190302

Page: 35 of 54


6.8 Radiated Spurious Emission

6.8.1 Spurious Emissions									
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency		Detector	RBW		VBW	Remark		
	0.009MHz-0.090MH	Z	Peak	10kHz	7	30kHz	Peak		
	0.009MHz-0.090MH	Z	Average	10kHz	<u> </u>	30kHz	Average		
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	<u> </u>	30kHz	Quasi-peak		
	0.110MHz-0.490MH	Z	Peak	10kHz	7	30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	<u> </u>	30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	<u> </u>	30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	lz	300kHz	Quasi-peak		
	Above 1GHz	Peak		1MHz	<u>.</u>	3MHz	Peak		
	Above Tariz		Peak	1MHz	<u>.</u>	10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	· · · L		Measuremen distance (m)		
	0.009MHz-0.490MHz	2	400/F(kHz)	-		-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	- Quasi-peak Quasi-peak		30		
	1.705MHz-30MHz		30	-			30		
	30MHz-88MHz		100	40.0			3		
	88MHz-216MHz		150	43.5			3		
	216MHz-960MHz		200	46.0	46.0 Quasi-peak		3		
	960MHz-1GHz		500	54.0	54.0 Quasi-pe		3		
	Above 1GHz 500		54.0 Aver		Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak rac frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the to peak emission level radiated by the device.						erage emission		
Test Setup:	-		-						



Report No.: SZEM140400190302

Page: 36 of 54






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is



Report No.: SZEM140400190302

Page: 37 of 54

	worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting with GFSK modulation. Transmitting mode, AC charge +Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode and AC charge +Transmitting mode, found the AC charge +Transmitting mode which it is worse case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass






Report No.: SZEM140400190302

Page: 38 of 54

Radiated Emission below 1GHz								
30MHz~1GHz (QP)								
Test mode:	AC charge +Transmitting mode	Vertical						

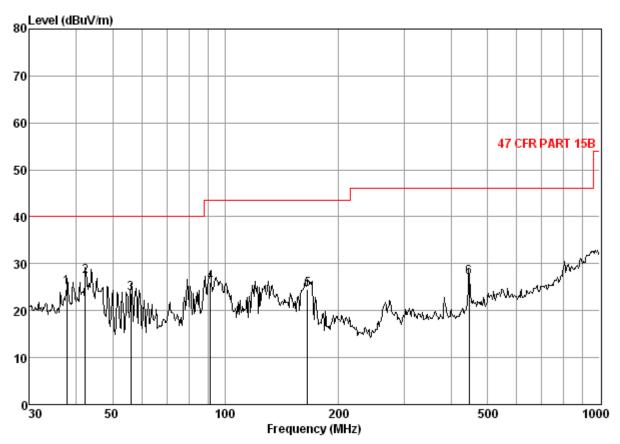

Condition: 47 CFR PART 15B 3m 3142C VERTICAL

Job No. : 1903RF

Mode : AC Charge+TX


	Freq	CableAntenna F Loss Factor F			Read Level		Limit Line	Over Limit
	MHz	d₿	dB/m	d B	dBuV	$\overline{\text{dBuV/m}}$	dBuV/m	dB
1 2 3 4 5 6	37. 76 42. 22 55. 99 91. 21 165. 53 446. 99	0.60 0.65 0.80 1.11 1.35 2.40	11.87 10.67 6.50 5.91 9.50 12.71	27. 33 27. 31 27. 28 27. 21 26. 83 27. 42	39. 72 43. 22 43. 70 46. 22 40. 56 39. 32	24. 86 27. 23 23. 72 26. 03 24. 58 27. 01	40.00 40.00 43.50 43.50	-15.14 -12.77 -16.28 -17.47 -18.92 -18.99



Report No.: SZEM140400190302

Page: 39 of 54

Test mode:	AC charge +Transmitting mode	Horizontal
------------	------------------------------	------------

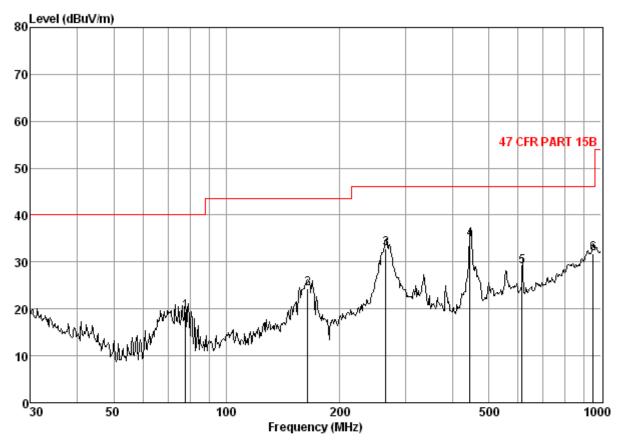

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 1903RF

Mode : AC Charge+TX

		CableAntenna F Loss Factor F					Limit Line	Over Limit
_	MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5	77. 61 164. 55 266. 35 446. 11 615. 02 952. 28	1.03 1.34 1.75 2.40 2.73 3.65	9.30 12.67 15.45	27. 23 26. 84 26. 49 27. 42 27. 52 26. 54	40.77 40.29 48.37 47.12 38.30 33.41	19. 44 24. 29 32. 93 34. 77 28. 96 31. 82	43.50 46.00 46.00 46.00	-20.56 -19.21 -13.07 -11.23 -17.04 -14.18



Report No.: SZEM140400190302

Page: 40 of 54

Transmitter Emission above 1GHz									
Test mode:	(GFSK	Test	channel:	Lowest		Rema	rk:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)		t Line IV/m)	Over Limit (dB)	Polarization
2980.327	5.05	33.35	40.28	45.09	43.21	7	'4	-30.79	Vertical
3873.749	6.28	33.66	40.94	45.59	44.59	7	' 4	-29.41	Vertical
4804.000	7.44	34.70	41.63	45.08	45.59	7	' 4	-28.41	Vertical
7206.000	8.72	35.88	39.87	44.41	49.14	7	' 4	-24.86	Vertical
9608.000	9.68	37.30	37.80	41.66	50.84	7	' 4	-23.16	Vertical
11633.540	11.02	38.54	38.13	41.63	53.06	7	' 4	-20.94	Vertical
2839.613	4.94	33.17	40.19	44.65	42.57	7	' 4	-31.43	Horizontal
3893.520	6.31	33.68	40.95	45.05	44.09	7	' 4	-29.91	Horizontal
4804.000	7.44	34.70	41.63	45.37	45.88	7	' 4	-28.12	Horizontal
7206.000	8.72	35.88	39.87	43.58	48.31	7	' 4	-25.69	Horizontal
9608.000	9.68	37.30	37.80	40.99	50.17	7	' 4	-23.83	Horizontal
11812.580	11.15	38.71	38.20	41.39	53.05	7	'4	-20.95	Horizontal

Test mode:	(GFSK	Test	channel:	Middle	Rema	ark:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
2972.750	5.04	33.35	40.28	45.24	43.35	74	-30.65	Vertical
3913.393	6.33	33.70	40.97	45.44	44.50	74	-29.50	Vertical
4880.000	7.48	34.59	41.68	45.74	46.13	74	-27.87	Vertical
7320.000	8.87	35.93	39.77	43.94	48.97	74	-25.03	Vertical
9760.000	9.74	37.46	37.66	40.55	50.09	74	-23.91	Vertical
11603.960	11.00	38.50	38.11	41.64	53.03	74	-20.97	Vertical
3049.394	5.12	33.38	40.34	45.16	43.32	74	-30.68	Horizontal
3883.622	6.31	33.68	40.95	45.66	44.70	74	-29.30	Horizontal
4880.000	7.48	34.59	41.68	45.09	45.48	74	-28.52	Horizontal
7320.000	8.87	35.93	39.77	43.30	48.33	74	-25.67	Horizontal
9760.000	9.74	37.46	37.66	40.84	50.38	74	-23.62	Horizontal
11903.140	11.21	38.80	38.24	41.09	52.86	74	-21.14	Horizontal



Report No.: SZEM140400190302

Page: 41 of 54

Test mode:	(GFSK	Test	channel:	Highest	Re	mark:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m	Over limit (dB)	Polarization
2942.635	5.01	33.31	40.26	45.94	44.00	74	-30.00	Vertical
3933.367	6.38	33.74	40.98	45.86	45.00	74	-29.00	Vertical
4960.000	7.53	34.46	41.74	45.21	45.46	74	-28.54	Vertical
7440.000	9.01	35.98	39.67	42.92	48.24	74	-25.76	Vertical
9920.000	9.81	37.63	37.53	40.62	50.53	74	-23.47	Vertical
12024.960	11.30	38.93	38.28	40.38	52.33	74	-21.67	Vertical
2935.153	5.01	33.31	40.26	45.42	43.48	74	-30.52	Horizontal
3953.443	6.41	33.76	41.00	45.55	44.72	74	-29.28	Horizontal
4960.000	7.53	34.46	41.74	46.21	46.46	74	-27.54	Horizontal
7440.000	9.01	35.98	39.67	43.67	48.99	74	-25.01	Horizontal
9920.000	9.81	37.63	37.53	40.41	50.32	74	-23.68	Horizontal
11933.470	11.24	38.83	38.24	41.08	52.91	74	-21.09	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM140400190302

Page: 42 of 54

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10 2009									
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
	Above IGHZ	74.0	Peak Value							
			·							
Test Setup:										






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Toot	Procedur	· ~ ·
1651	Frocedur	₩.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel



Report No.: SZEM140400190302

Page: 43 of 54

	 g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete. 				
Exploratory Test Mode:	Non-hopping transmitting with GFSK modulation. Transmitting mode, AC charge +Transmitting mode				
Final Test Mode:	Pretest the EUT at Transmitting mode and AC charge +Transmitting mode, found the AC charge +Transmitting mode which it is worse case. Only the worst case is recorded in the report.				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				




Report No.: SZEM140400190302

Page: 44 of 54

Test plot as follows:

Test mode: GFSK Test channel: Lowest Remark: Peak Vertical

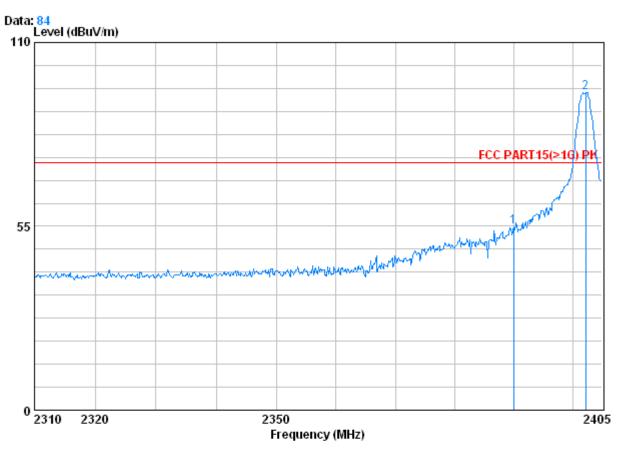

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1903RF Mode : 2402 BLE


			CableAntenna		na Preamp Read			Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	59.10	54.75	74.00	-19.25
2	X	2402.245	2.98	32.51	39.86	99.39	95.03	74.00	21.03



Report No.: SZEM140400190302

Page: 45 of 54

		Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Horizontal
--	--	------------	------	---------------	--------	---------	------	------------

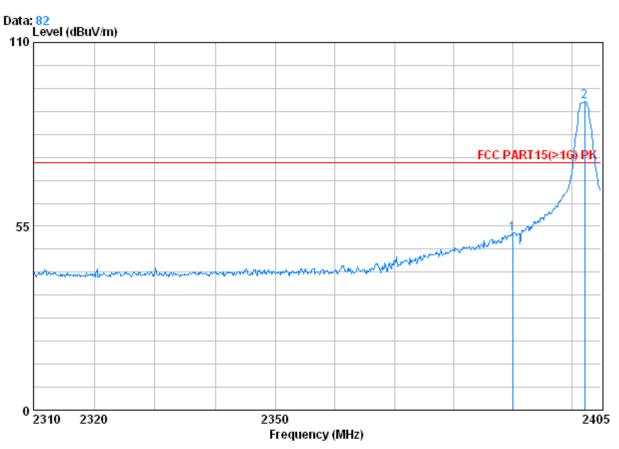

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2402 BLE


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	57.08	52.73	74.00	-21.27
2	X	2402.245	2.98	32.51	39.86	96.62	92.25	74.00	18.25



Report No.: SZEM140400190302

Page: 46 of 54

Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Vertical	
------------	------	---------------	--------	---------	---------	----------	--

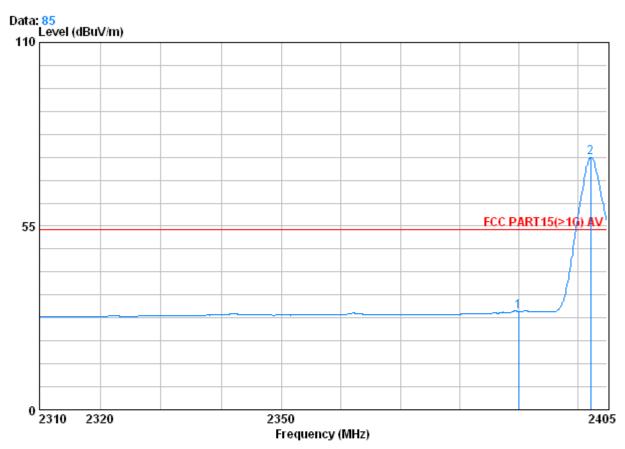

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1903RF Mode : 2402 BLE


	Freq			Preamp Factor	Read Level		Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2402.245			39.85 39.86				



Report No.: SZEM140400190302

Page: 47 of 54

Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Horizontal
------------	------	---------------	--------	---------	---------	------------

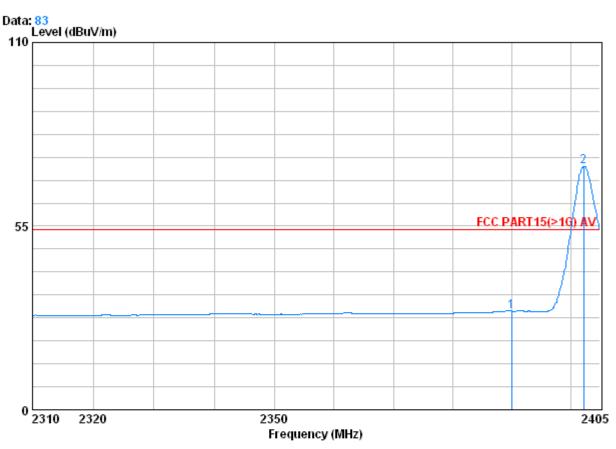

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2402 BLE

		Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
X		2390.000			39.85 39.86				






Report No.: SZEM140400190302

Page: 48 of 54

	Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Vertical
--	------------	------	---------------	---------	---------	------	----------

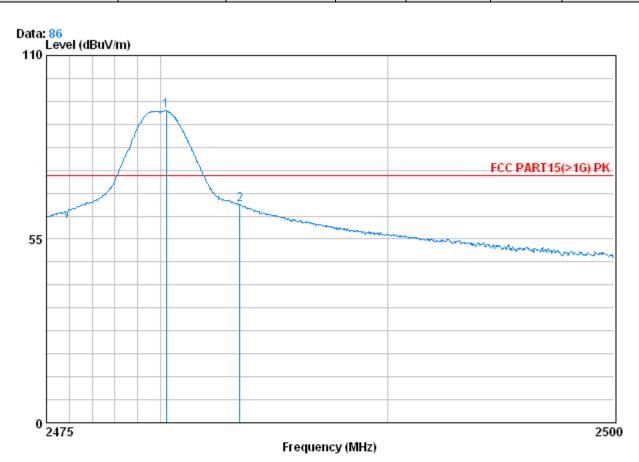

Condition : FCC PART15(>1G) PK 3m VERTICAL


Job No. : 1903RF Mode : 2480 BLE

			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2480.250	3.03	32.67	39.92	97.61	93.39	74.00	19.39
2		2483.500	3.03	32.67	39.92	69.55	65.33	74.00	-8.67



Report No.: SZEM140400190302

Page: 49 of 54

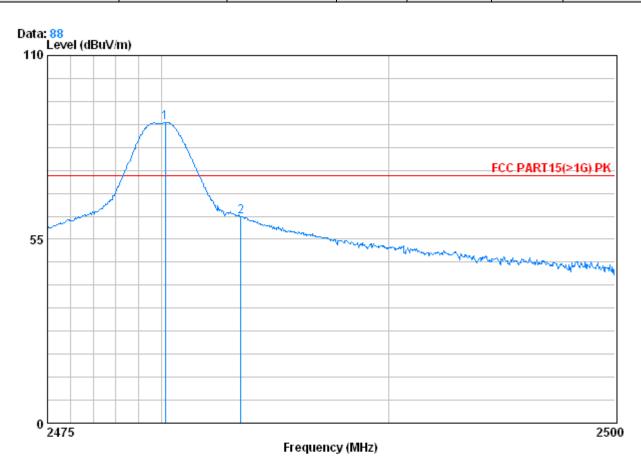

Condition : FCC PART15(>1G) PK 3m HORIZONTAL


Job No. : 1903RF Mode : 2480 BLE

			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2480.175	3.03	32.67	39.92	94.22	90.00	74.00	16.00
2		2483.500	3.03	32.67	39.92	66.02	61.80	74.00	-12.20



Report No.: SZEM140400190302

Page: 50 of 54

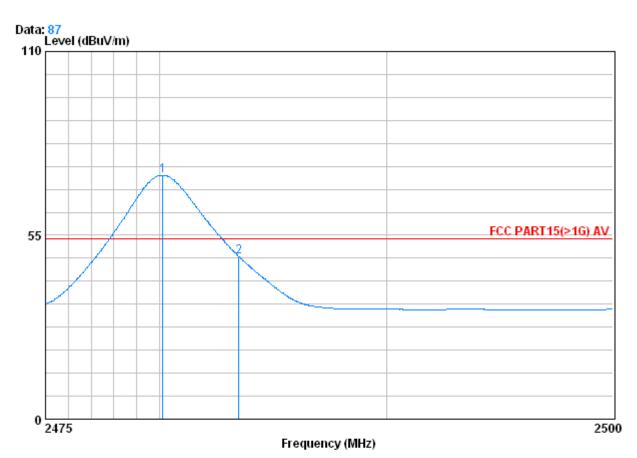

Condition : FCC PART15(>1G) AV 3m VERTICAL


Job No. : 1903RF Mode : 2480 BLE

	Limit Line			-			Freq		
dB	$\overline{\text{dBuV/m}}$	dBuV/m	dBuV	dB	dB/m	dB	MHz	_	
	54.00 54.00						480.150 483.500		1 X 2



Report No.: SZEM140400190302

Page: 51 of 54

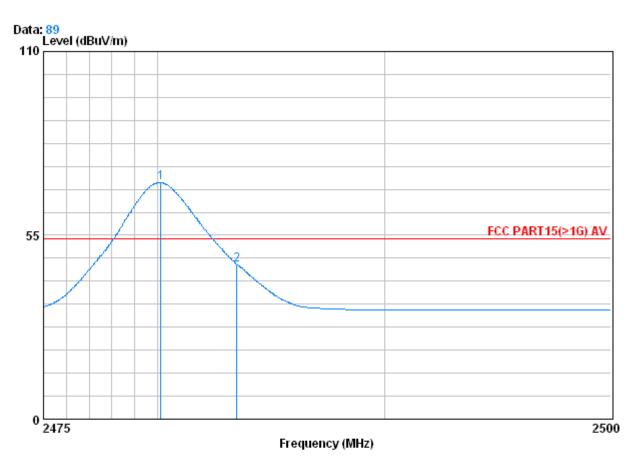

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2480 BLE

		Freq			Preamp Factor	Read Level		Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2480.150 2483.500			39.92 39.92				

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140400190302

Page: 52 of 54

7 Photographs - EUT Test Setup

Test model No.: MFC181

7.1 Conducted Emission



7.2 Radiated Emission





Report No.: SZEM140400190302

Page: 53 of 54

7.3 Radiated Spurious Emission





Report No.: SZEM140400190302

Page: 54 of 54

8 Photographs - EUT Constructional Details

Test model No.: MFC181

Refer to Report No. SZEM140400190301 for EUT external and internal photos.