

Report No.: SZEM140400190303

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 121

FCC REPORT

Application No: SZEM1404001903RF

Applicant: Lexibook America

Manufacturer: JungleTac Interactive Co., Ltd

Product Name: Lexibook Tablet – 8"

Model No.(EUT) MFC181

FCC ID: UU8-MFC10

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-05-04

Date of Test: 2014-05-04 to 2014-07-08

Date of Issue: 2014-07-21

Test Result: PASS *

. * In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140400190303

Page: 2 of 121

2 Version

Revision Record						
Version Chapter Date Modifier Remark						
00		2014-07-18		Original		

Authorized for issue by:		
Tested By	Owen 2hon	2014-06-28
	(Owen Zhou) /Project Engineer	Date
Prepared By	Mohrda Ii	2014-07-21
	(Molinda Li) /Clerk	Date
Checked By	Emen-Li	2014-07-25
	(Emen Li) /Reviewer	Date



Report No.: SZEM140400190303

Page: 3 of 121

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r01	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS



Report No.: SZEM140400190303

Page: 4 of 121

4 Contents

			Page
1	cov	ER PAGE	1
2	VER	SION	2
3	TES.	T SUMMARY	3
4	CON	TENTS	4
5	GEN	ERAL INFORMATION	5
Ī			
	5.1 5.2	CLIENT INFORMATION	
	5.2 5.3	GENERAL DESCRIPTION OF EUT	
	5.3 5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS.	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	
6	TES	T RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	12
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	6DB OCCUPY BANDWIDTH	
	6.5	POWER SPECTRAL DENSITY	35
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	43
	6.7	RF CONDUCTED SPURIOUS EMISSIONS	
	_	OT AS FOLLOWS:	
	6.8	RADIATED SPURIOUS EMISSIONS	
	6.8.1		
	6.8.2		
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	85
7	PHO	TOGRAPHS - EUT TEST SETUP	119
	7.1	RADIATED SPURIOUS EMISSION	119
	7.2	CONDUCTED EMISSION	120
8	РНО	TOGRAPHS - EUT CONSTRUCTIONAL DETAILS	121



Report No.: SZEM140400190303

Page: 5 of 121

5 General Information

5.1 Client Information

Applicant:	Lexibook America
Address of Applicant:	C/O NATXIS PRAMEX INTERNATIONAL – NORTH AMERICA 1251 avenue of the Americas 34 th floor
Manufacturer:	JungleTac Interactive Co., Ltd
Address of Manufacturer:	Room 17-18, 16/F., Parklane Centre, 25 Kin Wing Street, Tuen Mun, New Territories, Hong Kong

5.2 General Description of EUT

<u>-</u>				
Product Name:	Lexibook Tablet – 8"			
Model No.:	MFC181			
Operation Frequency:	IEEE 802.11b/g/	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz		
		T40): 2422MHz to 2452MHz		
Channel Numbers:	ı	, IEEE 802.11n HT20: 11 Channels		
	IEEE 802.11n H	T40: 7 Channels		
Channel Separation:	5MHz			
Type of Modulation:	IEEE for 802.11	b: DSSS(CCK,DQPSK,DBPSK)		
	IEEE for 802.11	g : OFDM(64QAM, 16QAM, QPSK, BPSK)		
	IEEE for 802.11	n(HT20 and HT40) : OFDM (64QAM, 16QAM,		
	QPSK,BPSK)			
Sample Type:	Portable produc	tion		
EUT Function:	Lexibook Master	r 8 inch Tablet		
Antenna Type:	Dedicated			
Antenna Gain:	0dBi			
Battery:	DC3.7V 5000m	A (Li-on Rechargeable Battery)		
AC Adapter:	Model:	BSYB050200UW		
	Input:	100-240V 50/60Hz 0.4A		
	Output: 5.0V 2.0A			
Cable:	USB Cable: 25cm (Unshielded two core)			
	DC Cable:	147cm (Unshielded two core)		
Test Voltage:	120V~60Hz			



Report No.: SZEM140400190303

Page: 6 of 121

Operation Frequency each of channel(802.11b/g/n HT20)												
Channel	Fre	equency	Channe	I Frequency	Channel	Fre	Frequency		quency Chan		nnel	Frequency
1	24	112MHz	4	2427MHz	7	244	2442MHz)	2457MHz		
2	24	117MHz	5	2432MHz	8	244	47MHz 11		1	2462MHz		
3	24	122MHz	6	2437MHz	9	245	2452MHz					
Operation F	requ	ency each	of channe	el(802.11n HT40)							
Channe		Frequ	ency	Channel	Frequen	су	Chan	nel	F	requency		
1		2422	ИНz	4	2437MF	łz	7			2452MHz		
2	·	2427	MHz	5	2442MF	lz						
3		2432	ИНz	6	2447MH	łz						

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

1	
Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz



Report No.: SZEM140400190303

Page: 7 of 121

5.3 Test Environment and Mode

Operating Environment:					
Temperature:	20.0 °C				
Humidity:	55 % RH				
Atmospheric Pressure:	1005 mbar				
Test mode:	Test mode:				
Charge + Transmitter mode:	: Keep the EUT charging and transmitting with modulation				
TX mode:	Keep the EUT transmitting with modulation				

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Earphone	Supply by SGS	N/A
TV	DELL	SP2208WFPt
HDMI cable	Supply by SGS	N/A

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.





Report No.: SZEM140400190303

Page: 8 of 121

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM140400190303

Page: 9 of 121

5.10Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16		
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16		



Report No.: SZEM140400190303

Page: 10 of 121

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04



Report No.: SZEM140400190303

Page: 11 of 121

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM140400190303

Page: 12 of 121

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

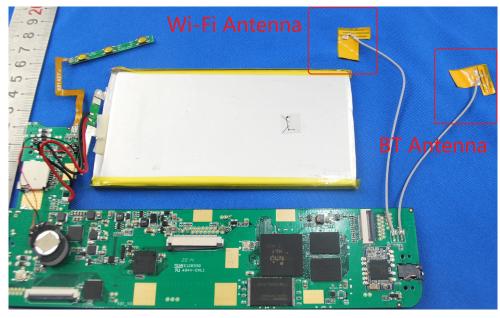



Report No.: SZEM140400190303

Page: 13 of 121


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.10: 2009					
Test Frequency Range:	150kHz to 30MHz					
Limit:	Francisco (MIII-)	Limit (dBuV)				
	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithm	n of the frequency.				
Test Procedure:	The mains terminal disturb room.	oance voltage test was	conducted in a shielded			
	 The mains terminal disturbance voltage test was conducted in a shielded room. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was no exceeded. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to 					



Report No.: SZEM140400190303

Page: 14 of 121

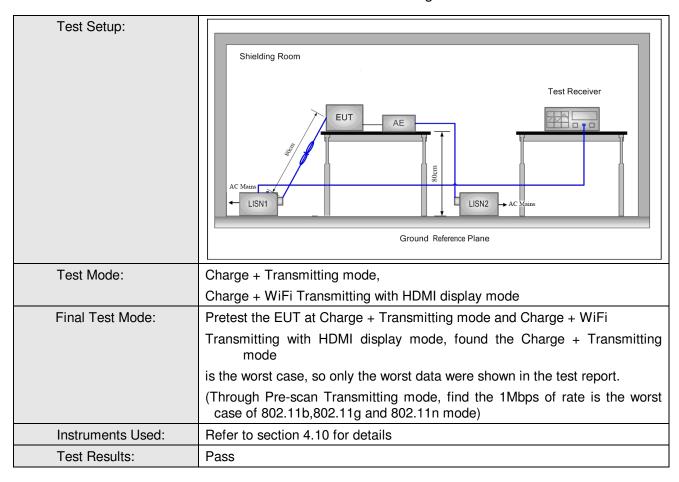



Report No.: SZEM140400190303


Page: 15 of 121

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



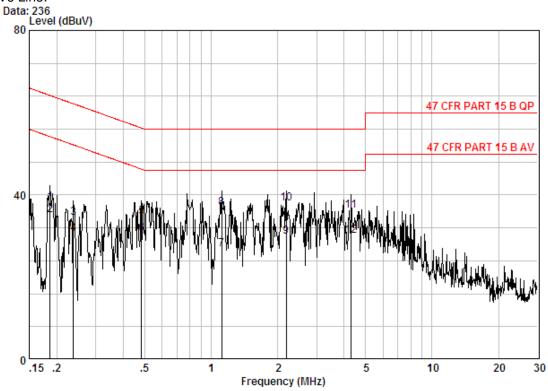

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 1903RF Test mode : Charge + TX

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18639	0.02	9.70	28.48	38.20	64.20	-26.00	QP
2	0.18639	0.02	9.70	25.48	35.20	54.20	-19.00	Average
3	0.23784	0.02	9.70	24.77	34.49	62.17	-27.68	QP
4	0.23784	0.02	9.70	20.77	30.49	52.17	-21.68	Average
5	0.48375	0.01	9.80	24.74	34.55	56.27	-21.72	QP
6	0.48375	0.01	9.80	20.74	30.55	46.27	-15.72	Average
7	1.117	0.02	9.80	17.07	26.89	46.00	-19.11	Average
8	1.117	0.02	9.80	27.07	36.89	56.00	-19.11	QP
9	2.190	0.02	9.81	20.06	29.89	46.00	-16.11	Average
10	2.190	0.02	9.81	28.06	37.89	56.00	-18.11	QP
11	4.315	0.01	9.88	26.21	36.11	56.00	-19.89	QP
12	4.315	0.01	9.88	20.21	30.11	46.00	-15.89	Average






Report No.: SZEM140400190303

Page: 16 of 121



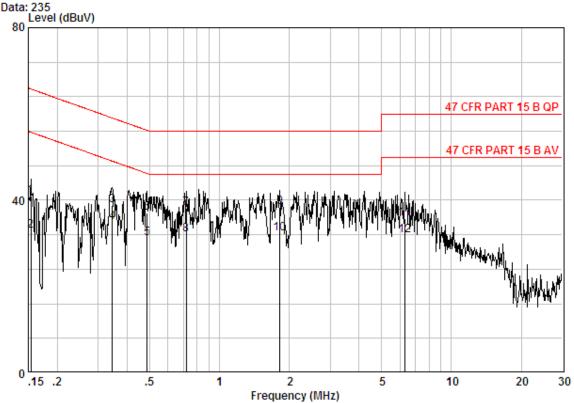

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 1903RF Test mode : Charge + TX

	Freq	Loss	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15403	0.02	9.70	31.17	40.89	65.78	-24.89	QP
2	0.15403	0.02	9.70	23.17	32.89	55.78	-22.89	Average
3	0.34463	0.01	9.75	29.14	38.90	59.09	-20.19	QP
4	0.34463	0.01	9.75	25.14	34.90	49.09	-14.19	Average
5	0.48890	0.01	9.80	21.32	31.13	46.19	-15.06	Average
6	0.48890	0.01	9.80	27.32	37.13	56.19	-19.06	QP
7	0.71977	0.02	9.80	28.33	38.15	56.00	-17.85	QP
8	0.71977	0.02	9.80	22.33	32.15	46.00	-13.85	Average
9	1.819	0.02	9.80	28.44	38.26	56.00	-17.74	QP
10 @	1.819	0.02	9.80	22.44	32.26	46.00	-13.74	Average
11	6.319	0.01	9.97	25.88	35.86	60.00	-24.14	QP
12	6.319	0.01	9.97	21.88	31.86	50.00	-18.14	Average

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140400190303

Page: 17 of 121

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)		
Test Method:	KDB558074 D01 v03r01		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.10 for details		
Exploratory Test Mode:	Charge + Transmitting mode		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)		
Limit:	30dBm		
Test Results:	Pass		





Report No.: SZEM140400190303

Page: 18 of 121

Measurement Data

Measurement Data					
	802.11b mo	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	17.40	30.00	Pass		
Middle	17.56	30.00	Pass		
Highest	17.64	30.00	Pass		
	802.11g mo	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	14.26	30.00	Pass		
Middle	14.69	30.00	Pass		
Highest	14.81	30.00	Pass		
	802.11n(HT20)	mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	14.24	30.00	Pass		
Middle	14.53	30.00	Pass		
Highest	14.75	30.00	Pass		
	802.11n(HT40)	mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	14.04	30.00	Pass		
Middle	14.25	30.00	Pass		
Highest	14.39	30.00	Pass		




Report No.: SZEM140400190303


Page: 19 of 121

Test plot as follows:

Test mode:	802.11b	Test channel:	Lowest
Test mode:	802.11b	Test channel:	Lowest

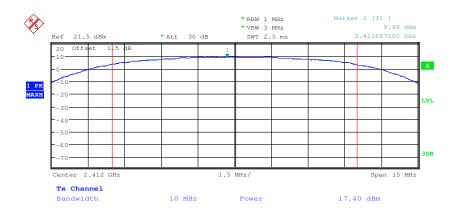



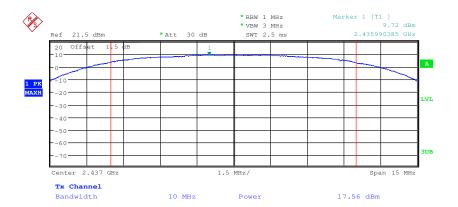





Report No.: SZEM140400190303

Page: 20 of 121

Test mode: 802.11b Test channel: Highest

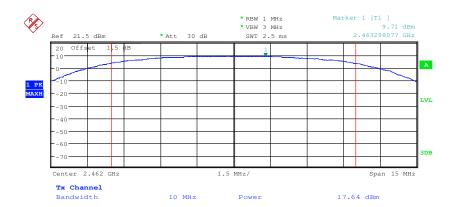

Test mode: 802.11g Test channel: Lowest

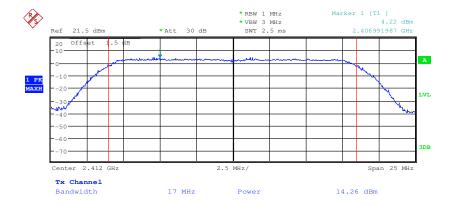





Report No.: SZEM140400190303

Page: 21 of 121

Test mode: 802.11g Test channel: Middle

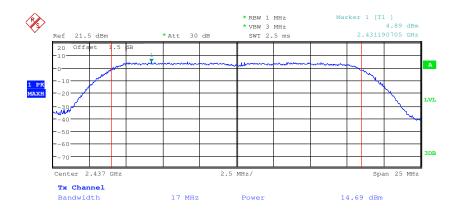

Test mode: 802.11g Test channel: Highest

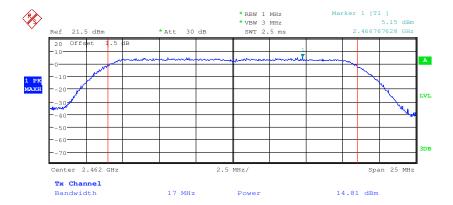





Report No.: SZEM140400190303

Page: 22 of 121

Test mode: 802.11n(HT20) Test channel: Lowest

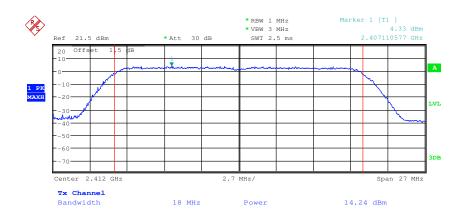

Test mode: 802.11n(HT20) Test channel: Middle

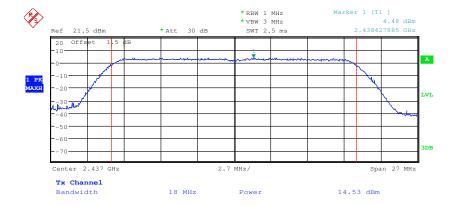





Report No.: SZEM140400190303

Page: 23 of 121

Test mode: 802.11n(HT20) Test channel: Highest

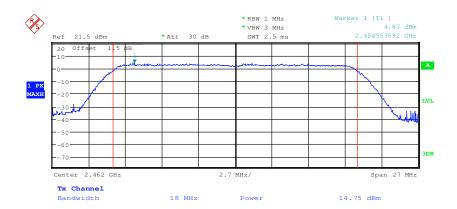

Test mode: 802.11n(HT40) Test channel: Lowest

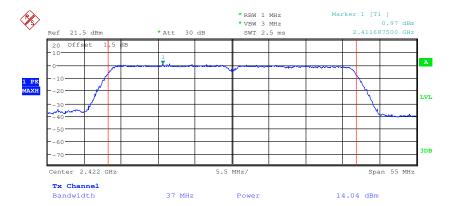





Report No.: SZEM140400190303

Page: 24 of 121

Test mode: 802.11n(HT40) Test channel: Middle

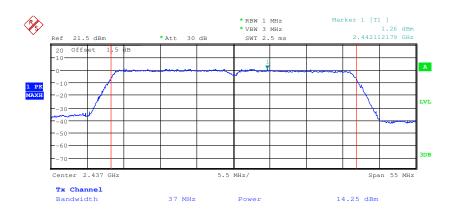

Test mode: 802.11n(HT40) Test channel: Highest

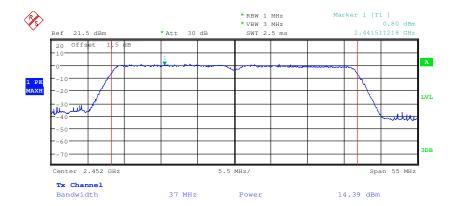




Report No.: SZEM140400190303

Page: 25 of 121

6.4 6dB Occupy Bandwidth

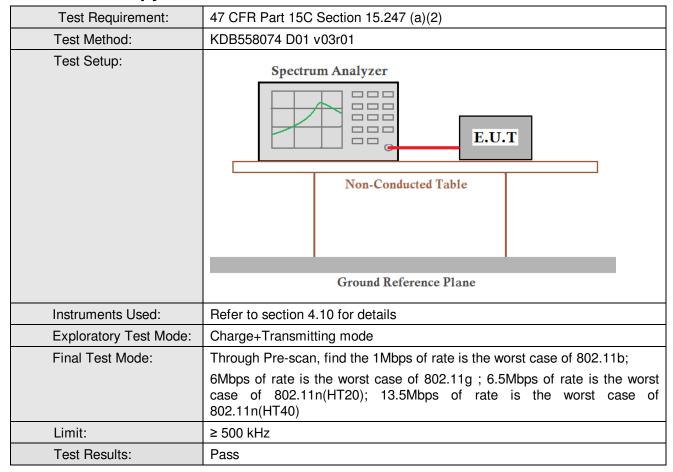



Report No.: SZEM140400190303

Page: 26 of 121

Measurement Data

802.11b mode					
6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
9.375	≥500	Pass			
9.375	≥500	Pass			
9.375	≥500	Pass			
802.11g mode					
6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
16.538	≥500	Pass			
16.538	≥500	Pass			
16.538	≥500	Pass			
802.11n(HT20) mode					
6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
17.836	≥500	Pass			
17.836	≥500	Pass			
17.836	≥500	Pass			
802.11n(HT40) mode					
6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
36.506	≥500	Pass			
36.522	≥500	Pass			
36.538	≥500	Pass			
	9.375 9.375 9.375 9.375 802.11g mode 6dB Occupy Bandwidth (MHz) 16.538 16.538 16.538 802.11n(HT20) mode 6dB Occupy Bandwidth (MHz) 17.836 17.836 17.836 802.11n(HT40) mode 6dB Occupy Bandwidth (MHz) 36.506 36.522	6dB Occupy Bandwidth (MHz) Limit (kHz) 9.375 ≥500 9.375 ≥500 802.11g mode Limit (kHz) 6dB Occupy Bandwidth (MHz) Limit (kHz) 16.538 ≥500 16.538 ≥500 802.11n(HT20) mode 6dB Occupy Bandwidth (MHz) Limit (kHz) 17.836 ≥500 17.836 ≥500 802.11n(HT40) mode EdB Occupy Bandwidth (MHz) Limit (kHz) 36.506 ≥500 36.522 ≥500			




Report No.: SZEM140400190303


Page: 27 of 121

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

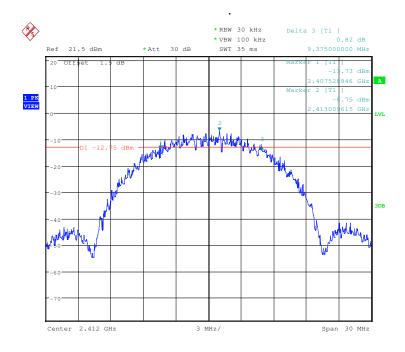

Test mode: 802.11b Test channel: Middle

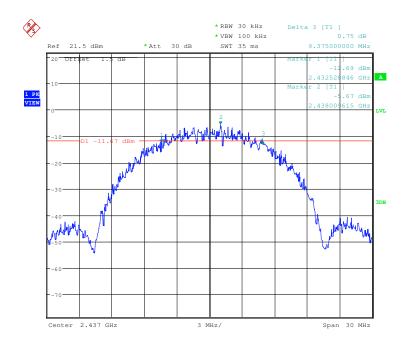







Report No.: SZEM140400190303

Page: 28 of 121

Test mode: 802.11b Test channel: Highest

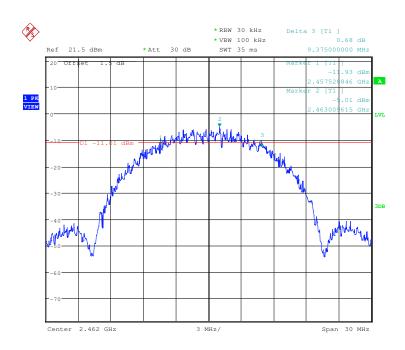

Test mode:	802.11g	Test channel:	Lowest
Test mode.	002.119	i est chamber.	LUWESI

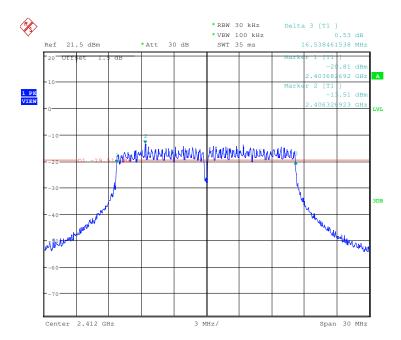




Report No.: SZEM140400190303

Page: 29 of 121

Test mode: 802.11g Test channel: Middle

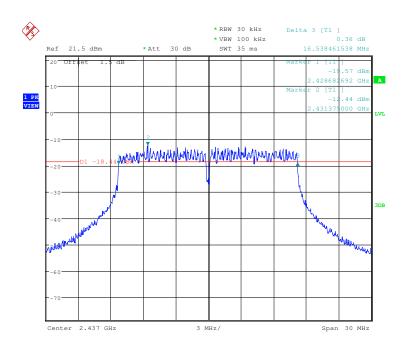




Report No.: SZEM140400190303

Page: 30 of 121

Test mode: 802.11g Test channel: Highest

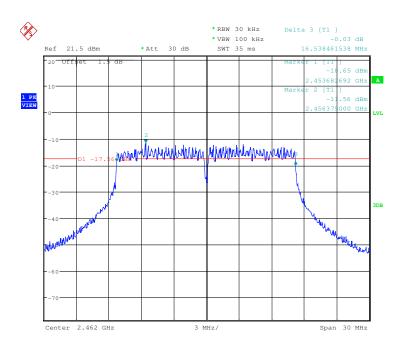





Report No.: SZEM140400190303

Page: 31 of 121

Test mode: 802.11n(HT20) Test channel: Lowest

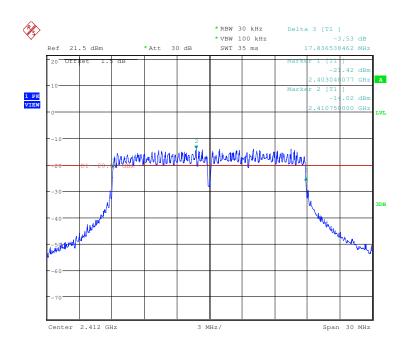



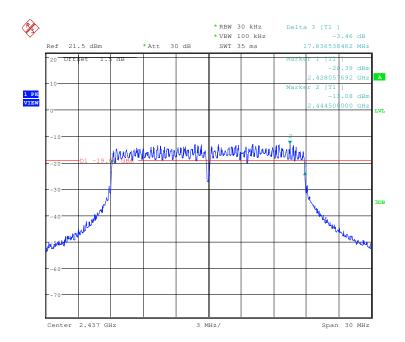




Report No.: SZEM140400190303

Page: 32 of 121

Test mode: 802.11n(HT20) Test channel: Highest

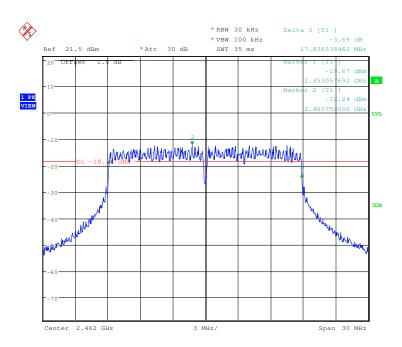





Report No.: SZEM140400190303

Page: 33 of 121

Test mode: 802.11n(HT40) Test channel: Lowest

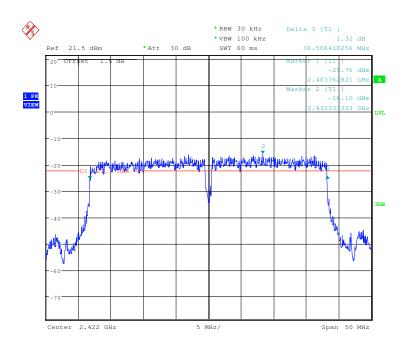

Test mode: 802.11n(HT40) Test channel: Middle

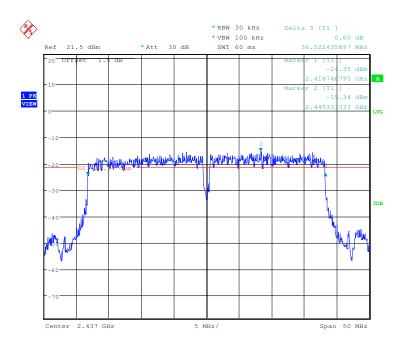




Report No.: SZEM140400190303

Page: 34 of 121

Test mode: 802.11n(HT40) Test channel: Highest

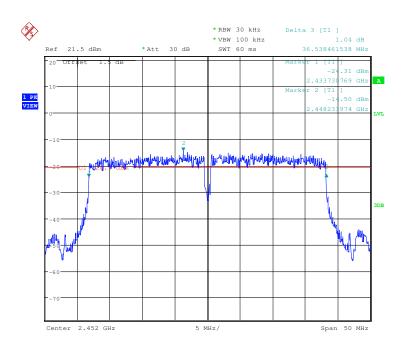



Report No.: SZEM140400190303

Page: 35 of 121

6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)		
Test Method:	KDB558074 D01 v03r01		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.10 for details		
Exploratory Test Mode:	Charge + Transmitting mode		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)		
Limit:	≤8.00dBm		
Test Results:	Pass		



Report No.: SZEM140400190303

Page: 36 of 121

Measurement Data

Wedsurement Data						
	802.11b mode					
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result			
Lowest	-15.63	≤8.00	Pass			
Middle	-14.41	≤8.00	Pass			
Highest	-13.67	≤8.00	Pass			
	802.11g mode					
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result			
Lowest	-23.36	≤8.00	Pass			
Middle	-22.29	≤8.00	Pass			
Highest	-21.56	≤8.00	Pass			
	802.11n (HT20) mode)				
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result			
Lowest	-23.83	≤8.00	Pass			
Middle	-23.01	≤8.00	Pass			
Highest	-22.27	≤8.00	Pass			
	802.11n(HT40) mode	4				
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result			
Lowest	-25.51	≤8.00	Pass			
Middle	-25.17	≤8.00	Pass			
Highest	-25.00	≤8.00	Pass			




Report No.: SZEM140400190303


Page: 37 of 121

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

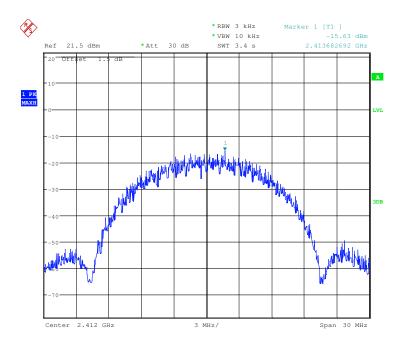

Test mode: 802.11b Test channel: Middle

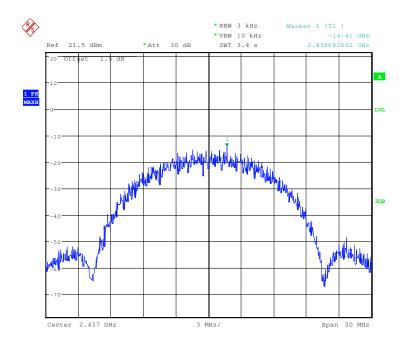







Report No.: SZEM140400190303

Page: 38 of 121

Test mode: 802.11b Test channel: Highest

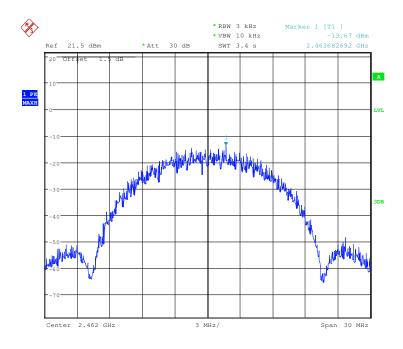



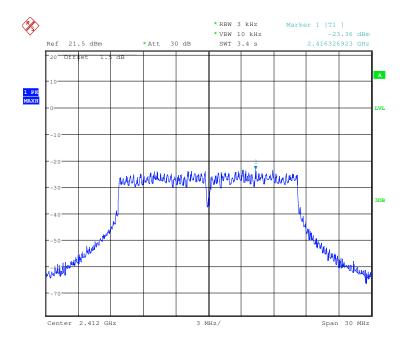





Report No.: SZEM140400190303

Page: 39 of 121

Test mode: 802.11g Test channel: Middle

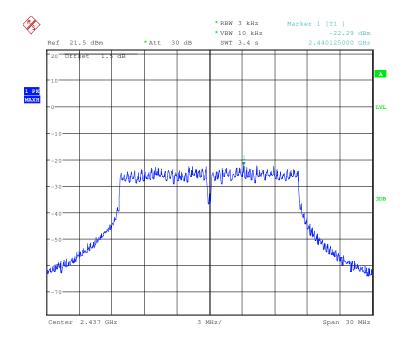

Test mode: 802.11g Test channel: Highest

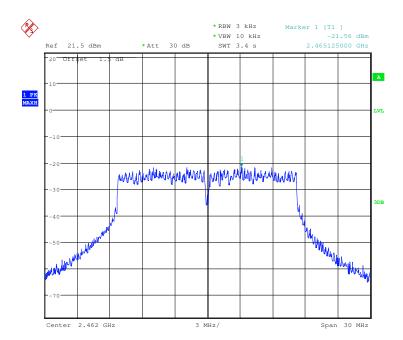





Report No.: SZEM140400190303

Page: 40 of 121

Test mode: 802.11n (HT20) Test channel: Lowest

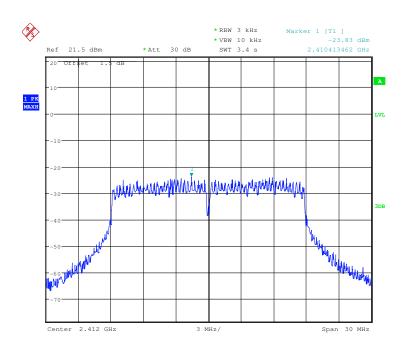



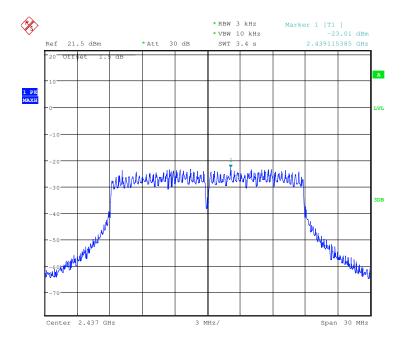






Report No.: SZEM140400190303

Page: 41 of 121

Test mode: 802.11n (HT20) Test channel: Highest

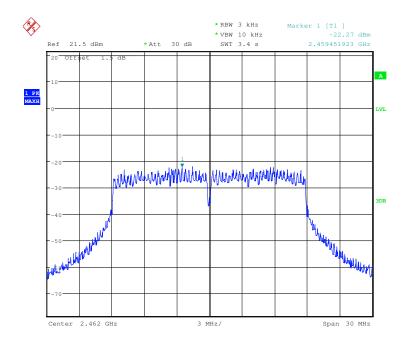



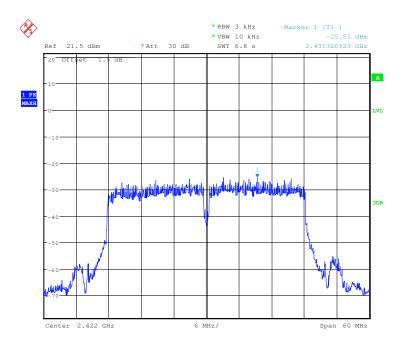





Report No.: SZEM140400190303

Page: 42 of 121

Test mode: 802.11n (HT40) Test channel: Middle

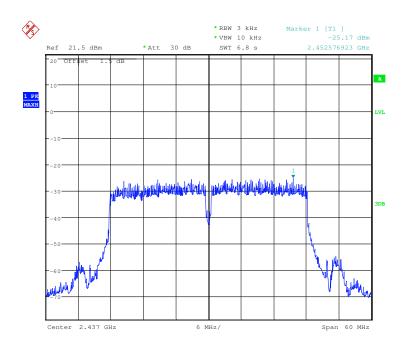

Test mode: 802.11n (HT40) Test channel: Highest

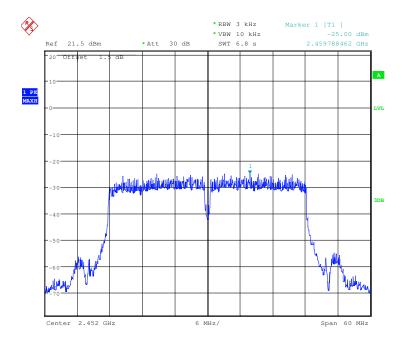



Report No.: SZEM140400190303

Page: 43 of 121

6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	KDB558074 D01 v03r01	
Test Setup:	Spectrum Analyzer Non-Conducted Table Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Exploratory Test Mode:	Charge+Transmitting mode	
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;	
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	




Report No.: SZEM140400190303


Page: 44 of 121

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

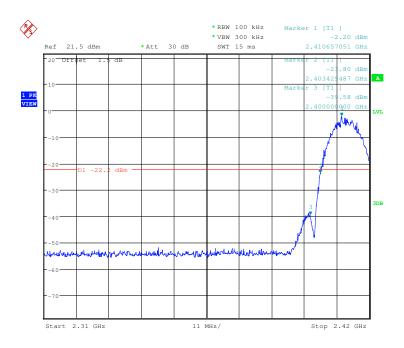



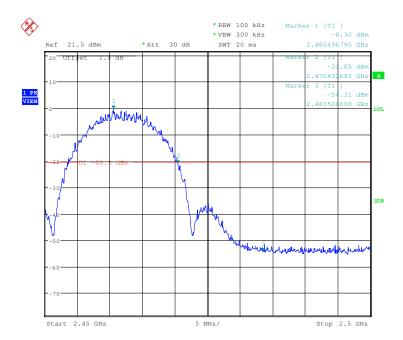





Report No.: SZEM140400190303

Page: 45 of 121

Test mode: 802.11g Test channel: Lowest

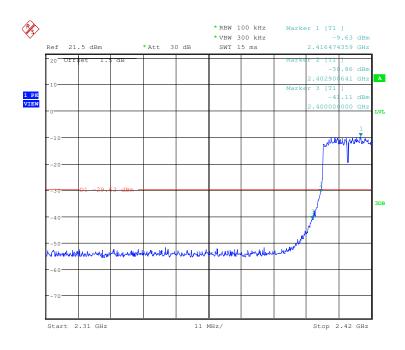



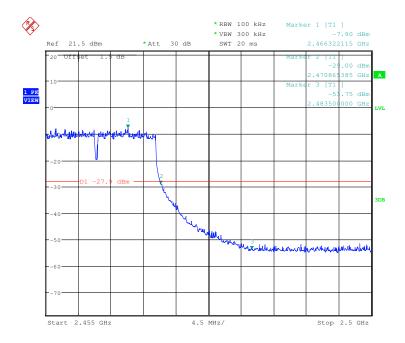





Report No.: SZEM140400190303

Page: 46 of 121

Test mode: 802.11n (HT20) Test channel: Lowest

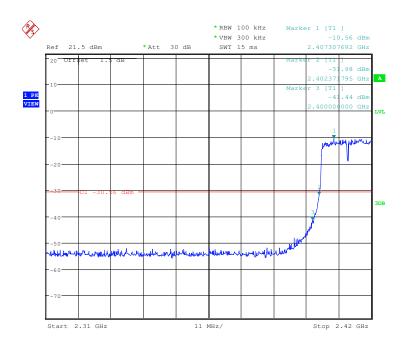



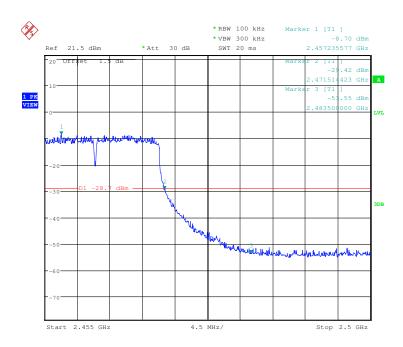





Report No.: SZEM140400190303

Page: 47 of 121

Test mode: 802.11n (HT40) Test channel: Lowest

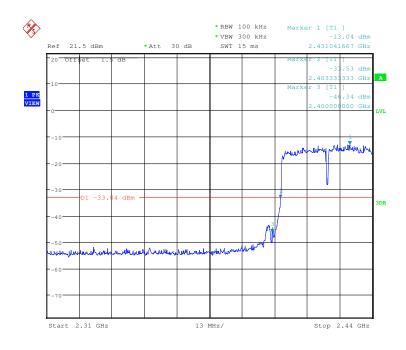

Test mode: 802.11n	(HT40) Test channel:	Highest
--------------------	----------------------	---------

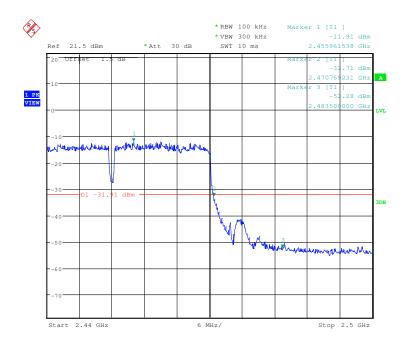





Report No.: SZEM140400190303

Page: 48 of 121

6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	KDB558074 D01 v03r01	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Exploratory Test Mode:	Charge + Transmitting mode	
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;	
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case	
129.	of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	





Report No.: SZEM140400190303

Page: 49 of 121

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

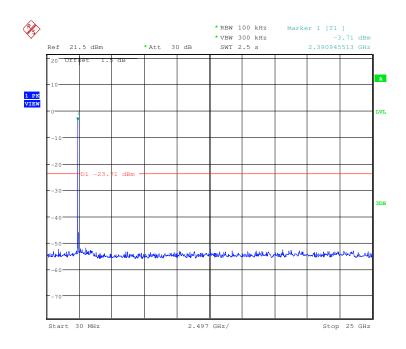


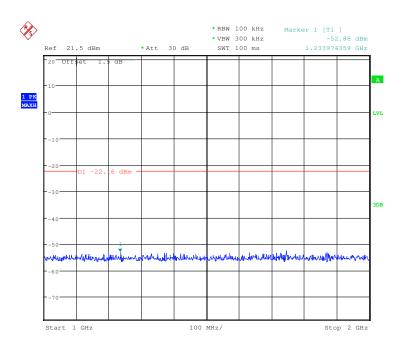




Report No.: SZEM140400190303

Page: 50 of 121

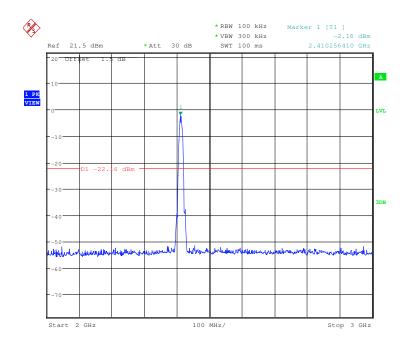

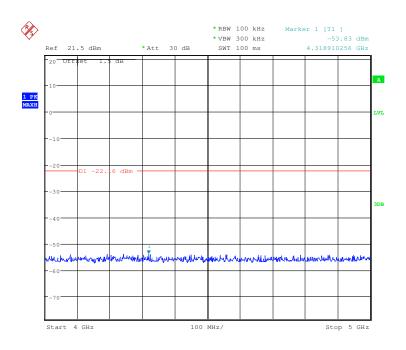





Report No.: SZEM140400190303

Page: 51 of 121

Test mode: 802.11b Test channel: Middle

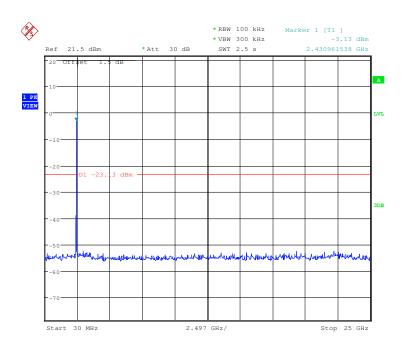


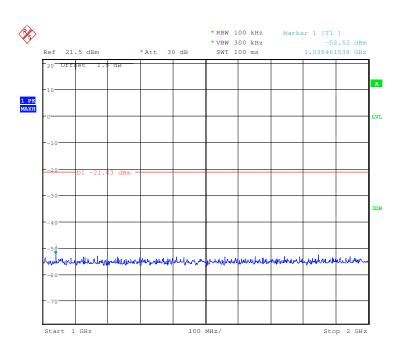




Report No.: SZEM140400190303

Page: 52 of 121

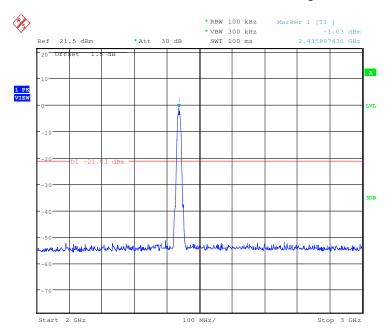

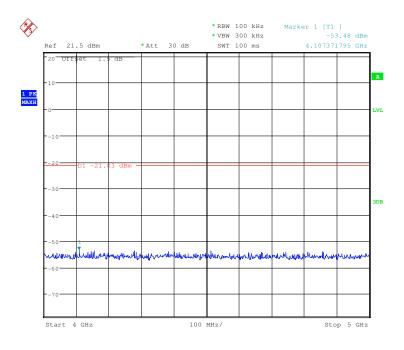





Report No.: SZEM140400190303

Page: 53 of 121

Test mode: 802.11b Test channel: Highest

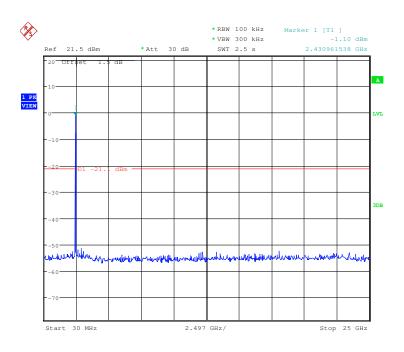


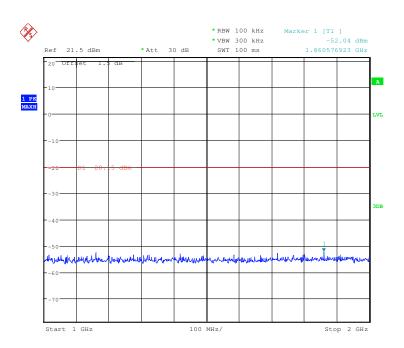




Report No.: SZEM140400190303

Page: 54 of 121

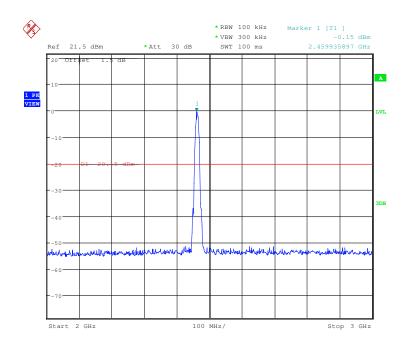

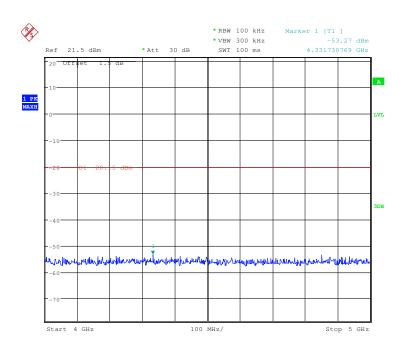





Report No.: SZEM140400190303

Page: 55 of 121

Test mode: 802.11g Test channel: Lowest

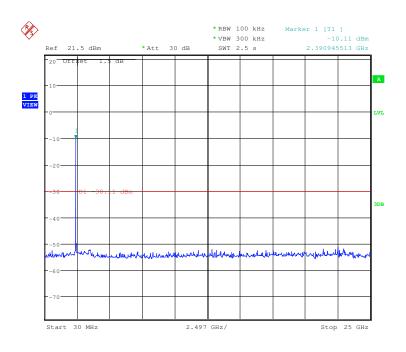


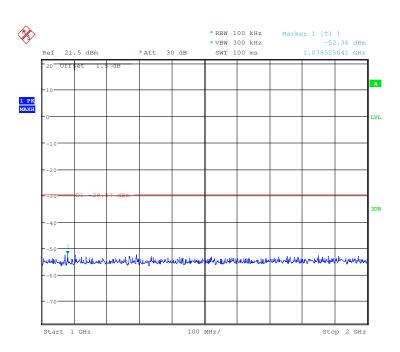




Report No.: SZEM140400190303

Page: 56 of 121

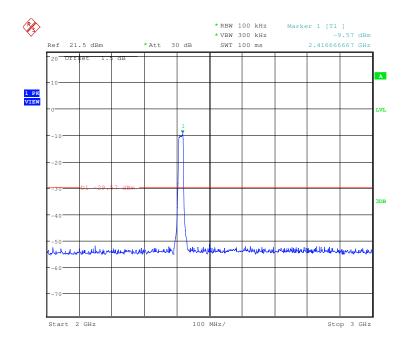

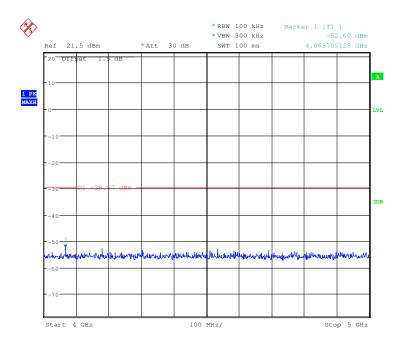





Report No.: SZEM140400190303

Page: 57 of 121

Test mode: 802.11g Test channel: Middle

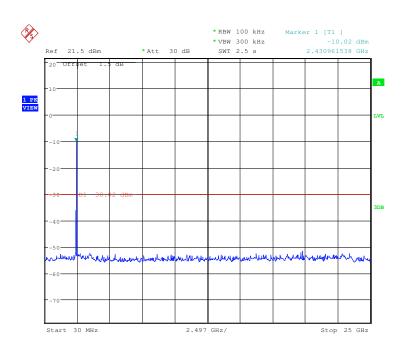

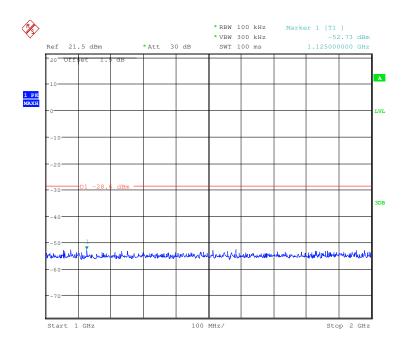







Report No.: SZEM140400190303

Page: 58 of 121

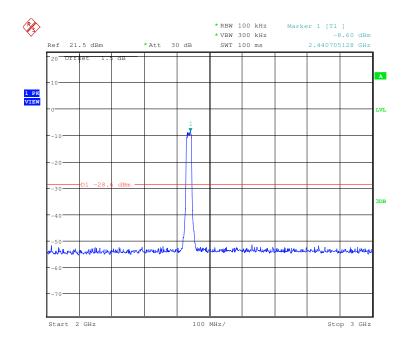

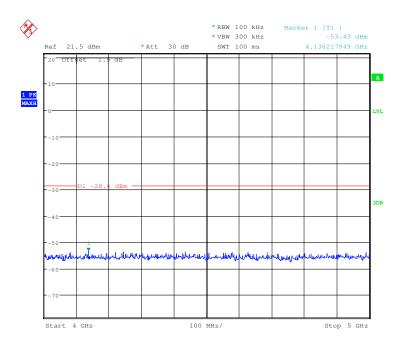





Report No.: SZEM140400190303

Page: 59 of 121

Test mode: 802.11g Test channel: Highest

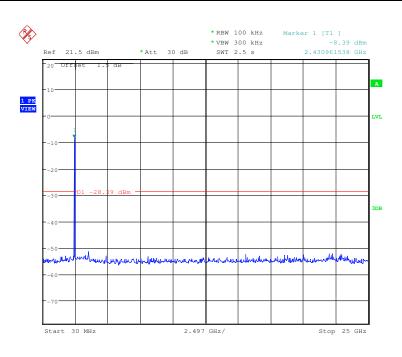


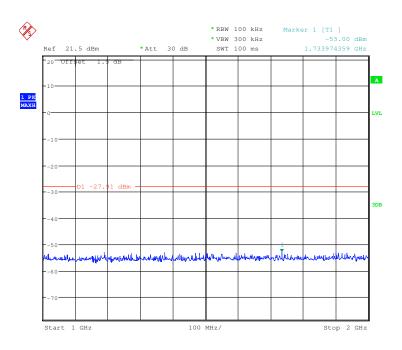




Report No.: SZEM140400190303

Page: 60 of 121

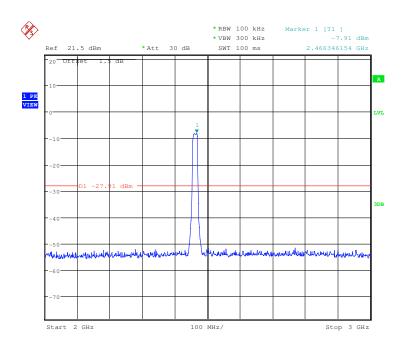

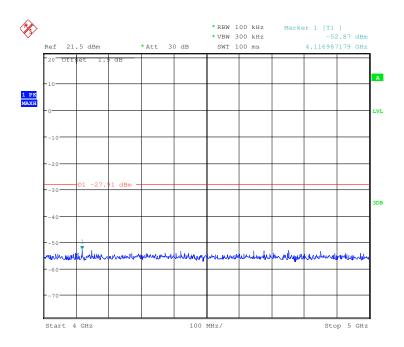





Report No.: SZEM140400190303

Page: 61 of 121

Test mode: 802.11n (HT20) Test channel: Lowest

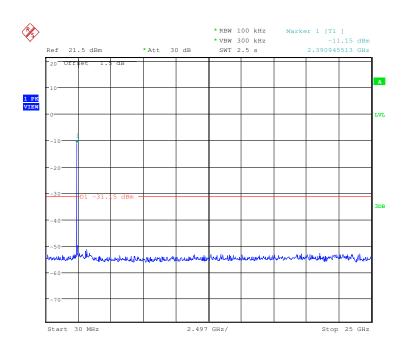


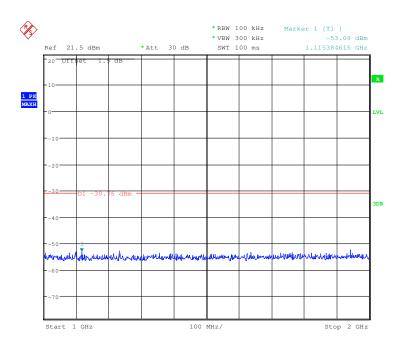




Report No.: SZEM140400190303

Page: 62 of 121

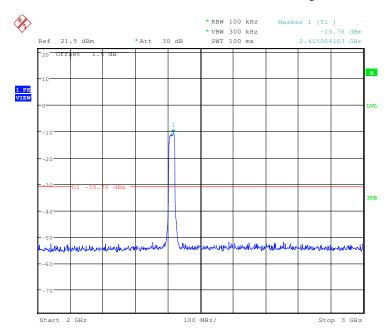

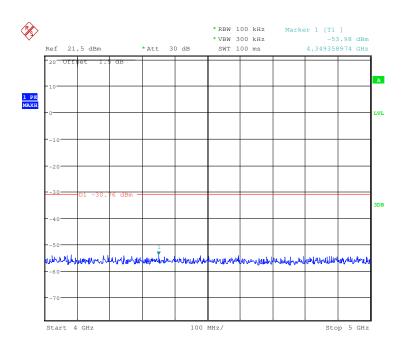





Report No.: SZEM140400190303

Page: 63 of 121

Test mode: 802.11n (HT20) Test channel: Middle

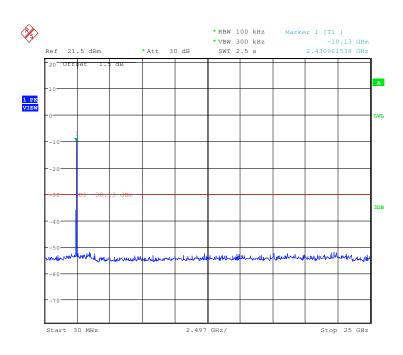


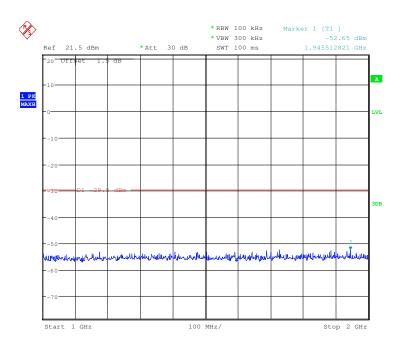




Report No.: SZEM140400190303

Page: 64 of 121

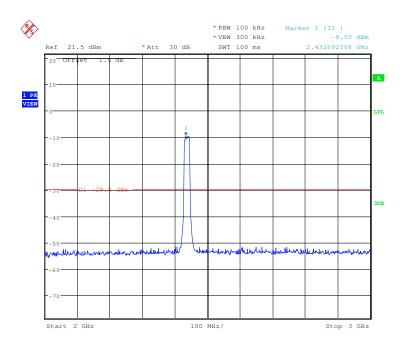

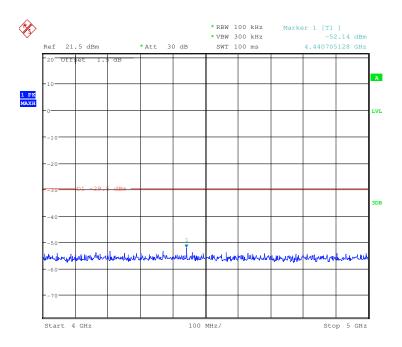





Report No.: SZEM140400190303

Page: 65 of 121

Test mode: 802.11n (HT20) Test channel: Highest

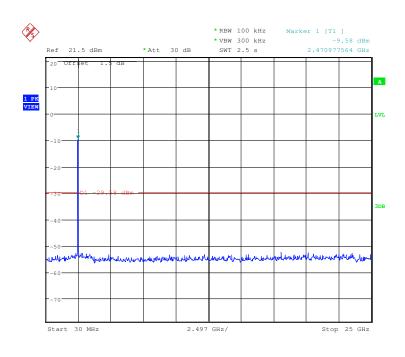


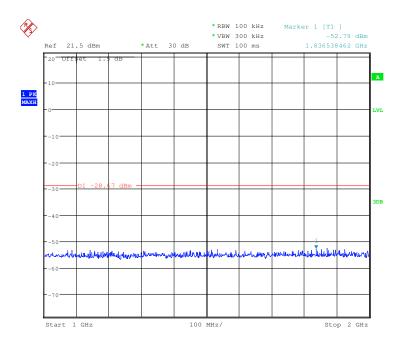




Report No.: SZEM140400190303

Page: 66 of 121

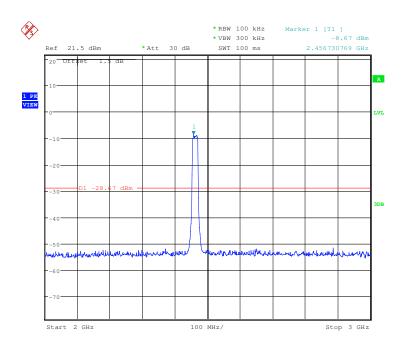

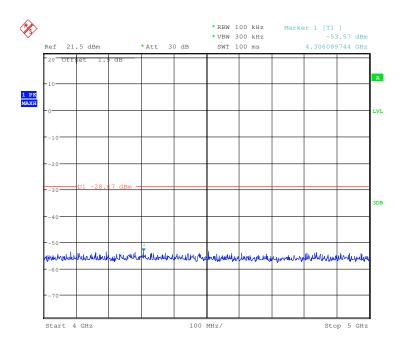





Report No.: SZEM140400190303

Page: 67 of 121

Test mode: 802.11n (HT40) Test channel: Lowest

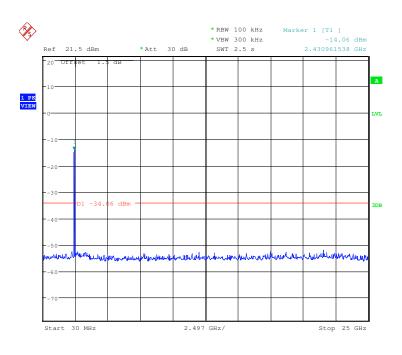

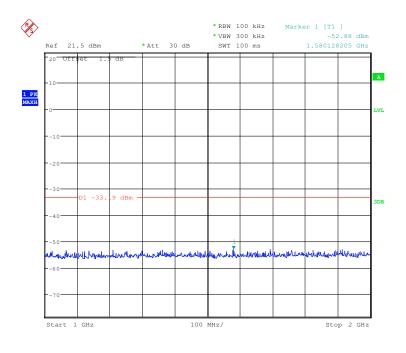







Report No.: SZEM140400190303

Page: 68 of 121

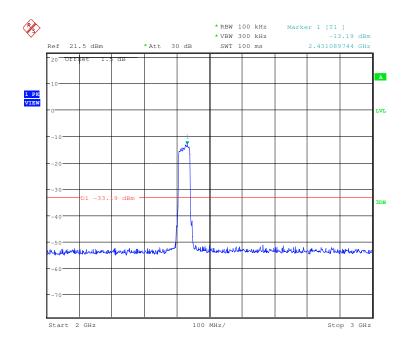

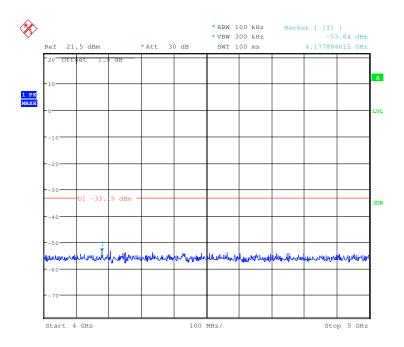





Report No.: SZEM140400190303

Page: 69 of 121

Test mode: 802.11n (HT40) Test channel: Middle

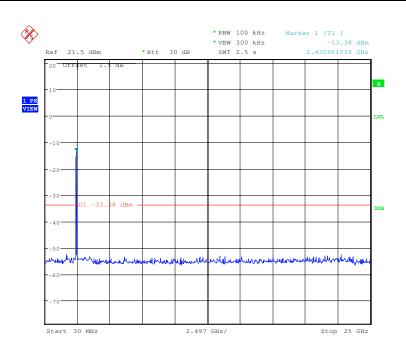


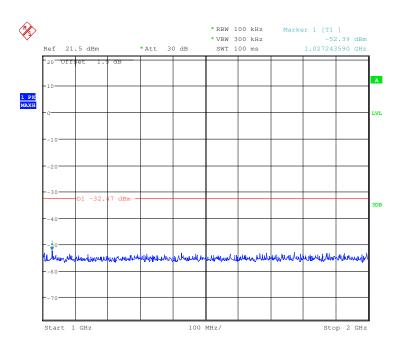




Report No.: SZEM140400190303

Page: 70 of 121

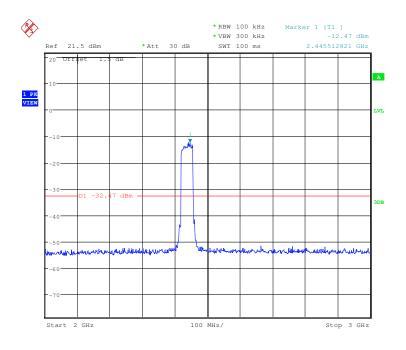

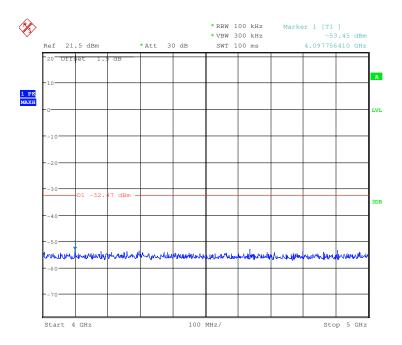





Report No.: SZEM140400190303

Page: 71 of 121

Test mode: 802.11n (HT40) Test channel: Highest

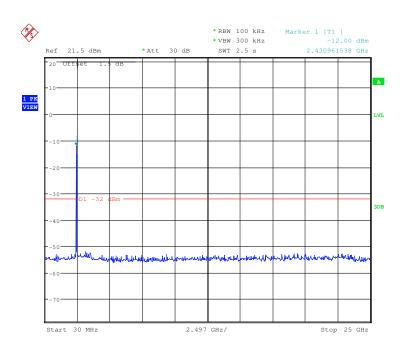


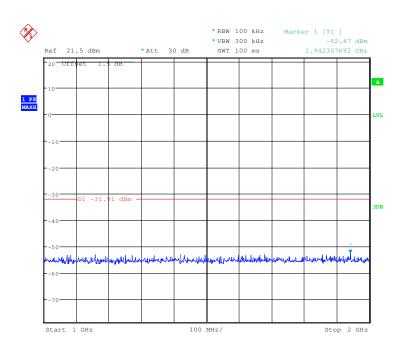




Report No.: SZEM140400190303

Page: 72 of 121

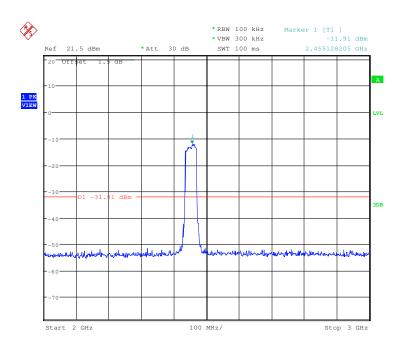

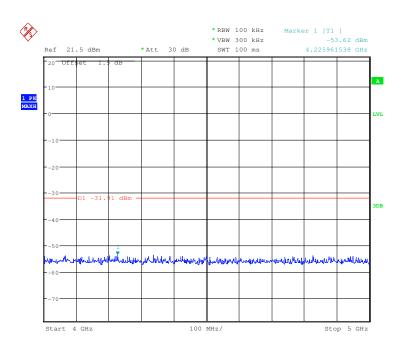

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.



Report No.: SZEM140400190303

Page: 73 of 121

6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance:	3m (Semi-Anecho	ic Chamber)						
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark				
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak				
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average				
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak				
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak				
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average				
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak				
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
	Above Idiiz	Peak	1MHz	10Hz	Average				
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)				
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30				
	1.705MHz-30MHz	30	-	-	30				
	30MHz-88MHz	100	40.0	Quasi-peak	3				
	88MHz-216MHz	150	43.5	Quasi-peak	3				
	216MHz-960MHz	200	46.0	Quasi-peak	3				
	960MHz-1GHz	500	54.0	Quasi-peak	3				
	Above 1GHz	500	54.0	Average	3				
	Note: 15.35(b), Unless of	herwise specified,	the limit on	peak radio fre	equency				
	emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								



Report No.: SZEM140400190303

Page: 74 of 121

Test Setup:

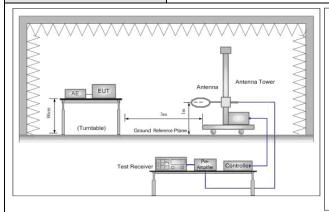

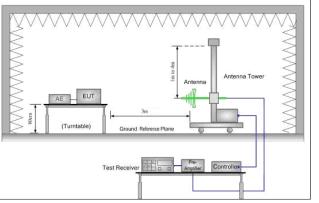


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

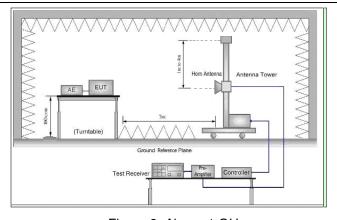


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average



Report No.: SZEM140400190303

Page: 75 of 121

	method on appointed and they reported in a data shoot					
	method as specified and then reported in a data sheet.					
	 g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel 					
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.					
	i. Repeat above procedures until all frequencies measured was complete.					
Test Mode:	Charge + Transmitting mode,					
	Charge + WiFi Transmitting with HDMI display mode					
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode and Charge + WiFi					
	Transmitting with HDMI display mode, found the Charge + Transmitting mode					
	is the worst case, so only the worst data were shown in the test report.					
	(Through Pre-scan Transmitting mode, find the 1Mbps of rate is the worst case of 802.11b,802.11g and 802.11n mode)					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					




Report No.: SZEM140400190303

Page: 76 of 121

6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	AC charge + Transmitting	Vertical

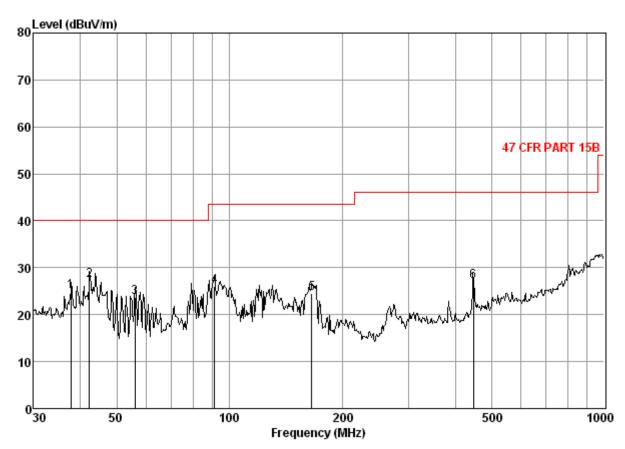

Condition: 47 CFR PART 15B 3m 3142C VERTICAL

Job No. : 1903RF

Mode : AC Charge+TX


.040			Intenna	Preamp Factor			Limit Line	Over Limit
	MHz	dB	_dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	d B
1 2 3 4 5	37. 76 42. 22 55. 99 91. 21 165. 53 446. 99	0.60 0.65 0.80 1.11 1.35 2.40	5. 91 9. 50	27.31	43.70 46.22 40.56	27. 23 23. 72 26. 03 24. 58	40.00 40.00 43.50 43.50	-16.28 -17.47 -18.92



Report No.: SZEM140400190303

Page: 77 of 121

Test mode: AC char	ge + Transmitting	Horizontal
--------------------	-------------------	------------

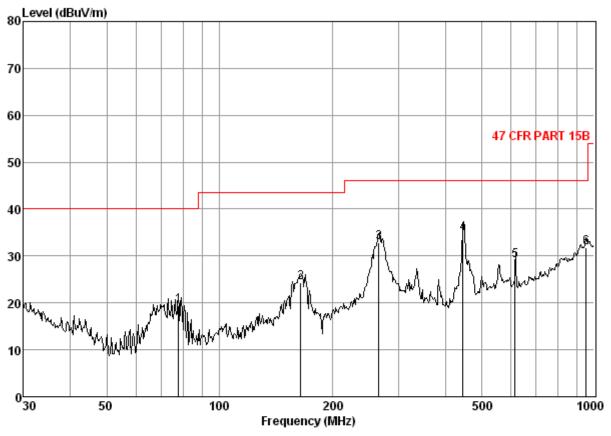

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 1903RF

Mode : AC Charge+TX

	Freq			Preamp Read Factor Level				Over Limit
_	MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5 6	77. 61 164. 55 266. 35 446. 11 615. 02 952. 28	1.03 1.34 1.75 2.40 2.73 3.65	4.87 9.50 9.30 12.67 15.45 21.30	26. 49 27. 42 27. 52	40.77 40.29 48.37 47.12 38.30 33.41	19. 44 24. 29 32. 93 34. 77 28. 96 31. 82	43.50 46.00 46.00 46.00	-20.56 -19.21 -13.07 -11.23 -17.04 -14.18





Report No.: SZEM140400190303

Page: 78 of 121

6.8.2Transmitter emission above 1GHz

Test mode:	802.	11b	Test cha	ınnel:	Lowest	Remark:	F	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2927.691	5.01	33.28	40.24	45.81	43.86	74	-30.14	Vertical	
3913.393	6.33	33.70	40.97	45.45	44.51	74	-29.49	Vertical	
4824.000	7.45	34.68	41.64	45.65	46.14	74	-27.86	Vertical	
7236.000	8.76	35.90	39.85	43.86	48.67	74	-25.33	Vertical	
9648.000	9.69	37.36	37.76	41.46	50.75	74	-23.25	Vertical	
11663.190	11.04	38.56	38.13	41.62	53.09	74	-20.91	Vertical	
2965.192	5.04	33.35	40.27	45.53	43.65	74	-30.35	Horizontal	
3893.520	6.31	33.68	40.95	45.73	44.77	74	-29.23	Horizontal	
4824.000	7.45	34.68	41.64	46.26	46.75	74	-27.25	Horizontal	
7236.000	8.76	35.90	39.85	43.78	48.59	74	-25.41	Horizontal	
9648.000	9.69	37.36	37.76	41.50	50.79	74	-23.21	Horizontal	
11963.890	11.26	38.87	38.26	41.10	52.97	74	-21.03	Horizontal	

Test mode: 802.11		.11b	Test ch	annel:	Middle	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
2905.419	4.98	33.26	40.23	45.17	43.18	74	-30.82	Vertical
3943.392	6.38	33.74	41.00	45.82	44.94	74	-29.06	Vertical
4874.000	7.48	34.59	41.68	45.82	46.21	74	-27.79	Vertical
7311.000	8.85	35.92	39.79	43.77	48.75	74	-25.25	Vertical
9748.000	9.74	37.46	37.68	41.27	50.79	74	-23.21	Vertical
12055.600	11.31	38.95	38.30	40.75	52.71	74	-21.29	Vertical
2927.691	5.01	33.28	40.24	45.16	43.21	74	-30.79	Horizontal
3893.520	6.31	33.68	40.95	45.63	44.67	74	-29.33	Horizontal
4874.000	7.48	34.59	41.68	45.29	45.68	74	-28.32	Horizontal
7311.000	8.85	35.92	39.79	43.46	48.44	74	-25.56	Horizontal
9748.000	9.74	37.46	37.68	41.38	50.90	74	-23.10	Horizontal
12055.600	11.31	38.95	38.30	40.80	52.76	74	-21.24	Horizontal



Report No.: SZEM140400190303

Page: 79 of 121

Test mode:	802.	11b	Test cha	ınnel:	Highest	Remark:	I	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2950.135	5.02	33.33	40.27	45.05	43.13	74	-30.87	Vertical	
3943.392	6.38	33.74	41.00	45.41	44.53	74	-29.47	Vertical	
4924.000	7.51	34.51	41.72	46.07	46.37	74	-27.63	Vertical	
7386.000	8.94	35.96	39.72	43.35	48.53	74	-25.47	Vertical	
9848.000	9.78	37.54	37.58	41.32	51.06	74	-22.94	Vertical	
11663.190	11.04	38.56	38.13	41.35	52.82	74	-21.18	Vertical	
2935.153	5.01	33.31	40.26	45.16	43.22	74	-30.78	Horizontal	
3863.900	6.28	33.63	40.94	45.96	44.93	74	-29.07	Horizontal	
4924.000	7.51	34.51	41.72	46.13	46.43	74	-27.57	Horizontal	
7386.000	8.94	35.96	39.72	43.32	48.50	74	-25.50	Horizontal	
9848.000	9.78	37.54	37.58	40.64	50.38	74	-23.62	Horizontal	
11663.190	11.04	38.56	38.13	41.33	52.80	74	-21.20	Horizontal	

Test mode:	802.	11g	Test cha	ınnel:	Lowest	Remark:	F	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3026.195	5.09	33.39	40.33	45.31	43.46	74	-30.54	Vertical	
3883.622	6.31	33.68	40.95	45.42	44.46	74	-29.54	Vertical	
4824.000	7.45	34.68	41.64	46.23	46.72	74	-27.28	Vertical	
7236.000	8.76	35.90	39.85	43.56	48.37	74	-25.63	Vertical	
9648.000	9.69	37.36	37.76	41.34	50.63	74	-23.37	Vertical	
11692.920	11.07	38.59	38.15	40.71	52.22	74	-21.78	Vertical	
2927.691	5.01	33.28	40.24	44.81	42.86	74	-31.14	Horizontal	
3923.367	6.36	33.72	40.98	45.39	44.49	74	-29.51	Horizontal	
4824.000	7.45	34.68	41.64	45.74	46.23	74	-27.77	Horizontal	
7236.000	8.76	35.90	39.85	43.50	48.31	74	-25.69	Horizontal	
9648.000	9.69	37.36	37.76	41.41	50.70	74	-23.30	Horizontal	
11663.190	11.04	38.56	38.13	41.62	53.09	74	-20.91	Horizontal	



Report No.: SZEM140400190303

Page: 80 of 121

Test mode:	802.	.11g	Test cha	ınnel:	Middle	Remark:	F	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2920.248	5.00	33.28	40.24	45.13	43.17	74	-30.83	Vertical	
3893.520	6.31	33.68	40.95	45.63	44.67	74	-29.33	Vertical	
4874.000	7.48	34.59	41.68	45.60	45.99	74	-28.01	Vertical	
7311.000	8.85	35.92	39.79	43.75	48.73	74	-25.27	Vertical	
9748.000	9.74	37.46	37.68	41.29	50.81	74	-23.19	Vertical	
11842.690	11.17	38.74	38.21	41.39	53.09	74	-20.91	Vertical	
2905.419	4.98	33.26	40.23	45.17	43.18	74	-30.82	Horizontal	
3943.392	6.38	33.74	41.00	45.82	44.94	74	-29.06	Horizontal	
4874.000	7.48	34.59	41.68	45.71	46.10	74	-27.90	Horizontal	
7311.000	8.85	35.92	39.79	43.64	48.62	74	-25.38	Horizontal	
9748.000	9.74	37.46	37.68	41.01	50.53	74	-23.47	Horizontal	
11994.380	11.28	38.90	38.28	40.76	52.66	74	-21.34	Horizontal	

Test mode:		802.	11g	Test cha	ınnel:	Н	lighest	Remark:		Pe	Peak	
Frequency (MHz)	Lo	ble ss B)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV		Level (dBuV/m)	Limit Line (dBuV/m)	Ove Lim (dB	it	Polarization	
2890.665	4.	98	33.24	40.23	44.72		42.71	74	-31.2	29	Vertical	
3943.392	6.	38	33.74	41.00	44.71		43.83	74	-30.1	17	Vertical	
4924.000	7.	51	34.51	41.72	45.50		45.80	74	-28.2	20	Vertical	
7386.000	8.	94	35.96	39.72	43.38		48.56	74	-25.4	14	Vertical	
9848.000	9.	78	37.54	37.58	40.53		50.27	74	-23.7	73	Vertical	
12148.020	11.	.35	39.06	38.34	40.64		52.71	74	-21.2	29	Vertical	
2965.192	5.	04	33.35	40.27	44.91		43.03	74	-30.9	97	Horizontal	
3943.392	6.	38	33.74	41.00	45.41		44.53	74	-29.4	17	Horizontal	
4924.000	7.	51	34.51	41.72	46.46		46.76	74	-27.2	24	Horizontal	
7386.000	8.9	94	35.96	39.72	43.59		48.77	74	-25.2	23	Horizontal	
9848.000	9.	78	37.54	37.58	40.82		50.56	74	-23.4	14	Horizontal	
11692.920	11.	.07	38.59	38.15	41.61		53.12	74	-20.8	38	Horizontal	



Report No.: SZEM140400190303

Page: 81 of 121

Test mode:	8	02.11g(HT20)	Test cha	ınnel:	Lowest	Remark:	F	Peak
Frequency (MHz)	Cable Loss (dB)	_	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2957.654	5.02	33.33	40.27	45.52	43.60	74	-30.40	Vertical
3933.367	6.38	33.74	40.98	45.34	44.48	74	-29.52	Vertical
4824.000	7.45	34.68	41.64	45.24	45.73	74	-28.27	Vertical
7236.000	8.76	35.90	39.85	44.05	48.86	74	-25.14	Vertical
9648.000	9.69	37.36	37.76	40.85	50.14	74	-23.86	Vertical
11872.880	11.20	38.78	38.22	40.74	52.50	74	-21.50	Vertical
3003.173	5.07	33.40	40.30	44.86	43.03	74	-30.97	Horizontal
3883.622	6.31	33.68	40.95	45.42	44.46	74	-29.54	Horizontal
4824.000	7.45	34.68	41.64	45.23	45.72	74	-28.28	Horizontal
7236.000	8.76	35.90	39.85	44.05	48.86	74	-25.14	Horizontal
9648.000	9.69	37.36	37.76	41.65	50.94	74	-23.06	Horizontal
11872.880	11.20	38.78	38.22	41.38	53.14	74	-20.86	Horizontal

Test mode:	802.	11g(HT20)	Test cha	ınnel:	Middle	Remark:	F	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2950.135	5.02	33.33	40.27	45.06	43.14	74	-30.86	Vertical
3943.392	6.38	33.74	41.00	45.82	44.94	74	-29.06	Vertical
4874.000	7.48	34.59	41.68	46.53	46.92	74	-27.08	Vertical
7311.000	8.85	35.92	39.79	43.94	48.92	74	-25.08	Vertical
9748.000	9.74	37.46	37.68	41.14	50.66	74	-23.34	Vertical
11722.720	11.08	38.62	38.16	40.76	52.30	74	-21.70	Vertical
2942.635	5.01	33.31	40.26	45.72	43.78	74	-30.22	Horizontal
3933.367	6.38	33.74	40.98	45.05	44.19	74	-29.81	Horizontal
4874.000	7.48	34.59	41.68	46.13	46.52	74	-27.48	Horizontal
7311.000	8.85	35.92	39.79	44.10	49.08	74	-24.92	Horizontal
9748.000	9.74	37.46	37.68	41.20	50.72	74	-23.28	Horizontal
11782.550	11.13	38.68	38.19	41.49	53.11	74	-20.89	Horizontal



Report No.: SZEM140400190303

Page: 82 of 121

Test mode:	80)2.11g(HT20)	Test cha	ınnel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2957.654	5.02	33.33	40.27	45.06	43.14	74	-30.86	Vertical
3913.393	6.33	33.70	40.97	45.66	44.72	74	-29.28	Vertical
4924.000	7.51	34.51	41.72	46.25	46.55	74	-27.45	Vertical
7386.000	8.94	35.96	39.72	43.48	48.66	74	-25.34	Vertical
9848.000	9.78	37.54	37.58	41.13	50.87	74	-23.13	Vertical
11370.050	10.84	38.43	38.02	41.11	52.36	74	-21.64	Vertical
2942.635	5.01	33.31	40.26	45.70	43.76	74	-30.24	Horizontal
3913.393	6.33	33.70	40.97	45.42	44.48	74	-29.52	Horizontal
4924.000	7.51	34.51	41.72	45.70	46.00	74	-28.00	Horizontal
7386.000	8.94	35.96	39.72	44.12	49.30	74	-24.70	Horizontal
9848.000	9.78	37.54	37.58	41.05	50.79	74	-23.21	Horizontal
11963.890	11.26	38.87	38.26	40.91	52.78	74	-21.22	Horizontal

Test mode:	802	.11g(HT40)	Test cha	ınnel:	Lowest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	
2957.654	5.02	33.33	40.27	46.52	44.60	74	-29.40) Vertical
3933.367	6.38	33.74	40.98	47.34	46.48	74	-27.52	2 Vertical
4844.000	7.46	34.65	41.65	48.15	48.61	74	-25.39	9 Vertical
7266.000	8.81	35.91	39.82	43.77	48.67	74	-25.33	3 Vertical
9688.000	9.71	37.39	37.73	41.33	50.70	74	-23.30) Vertical
11872.880	11.20	38.78	38.22	40.74	52.50	74	-21.50) Vertical
2965.192	5.04	33.35	40.27	45.53	43.65	74	-30.3	5 Horizontal
3943.392	6.38	33.74	41.00	45.61	44.73	74	-29.27	7 Horizontal
4844.000	7.46	34.65	41.65	46.29	46.75	74	-27.2	5 Horizontal
7266.000	8.81	35.91	39.82	43.99	48.89	74	-25.1°	I Horizontal
9688.000	9.71	37.39	37.73	41.30	50.67	74	-23.33	B Horizontal
11963.890	11.26	38.87	38.26	41.10	52.97	74	-21.03	B Horizontal



Report No.: SZEM140400190303

Page: 83 of 121

Test mode:	8	302.1	1g(HT40)	Test cha	nnel:	М	liddle	Remark:		Peak
Frequency (MHz)	Cabl Los: (dB	s	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)		Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t Polarization
2942.635	5.01	1	33.31	40.26	44.72		42.78	74	-31.2	2 Vertical
3933.367	6.38	3	33.74	40.98	45.05		44.19	74	-29.8	1 Vertical
4874.000	7.48	3	34.59	41.68	45.60		45.99	74	-28.0	1 Vertical
7311.000	8.85	5	35.92	39.79	44.10		49.08	74	-24.9	2 Vertical
9748.000	9.74	1	37.46	37.68	40.88		50.40	74	-23.6	0 Vertical
11722.720	11.0	8	38.62	38.16	41.48		53.02	74	-20.9	8 Vertical
2912.824	5.00)	33.28	40.24	45.61		43.65	74	-30.3	5 Horizontal
3963.520	6.4	1	33.76	41.01	45.46		44.62	74	-29.3	8 Horizontal
4874.000	7.48	3	34.59	41.68	45.60		45.99	74	-28.0	1 Horizontal
7311.000	8.85	5	35.92	39.79	43.54		48.52	74	-25.4	8 Horizontal
9748.000	9.74	1	37.46	37.68	40.90		50.42	74	-23.5	8 Horizontal
11752.600	11.1	1	38.66	38.17	41.60		53.20	74	-20.8	0 Horizontal

Test mode:	802.	11g(HT40)	Test cha	ınnel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2935.153	5.01	33.31	40.26	45.16	43.22	74	-30.78	8 Vertical
3943.392	6.38	33.74	41.00	45.71	44.83	74	-29.17	' Vertical
4904.000	7.49	34.54	41.70	45.67	46.00	74	-28.00	Vertical
7356.000	8.92	35.94	39.74	43.38	48.50	74	-25.50	Vertical
9808.000	9.76	37.51	37.61	40.84	50.50	74	-23.50	Vertical
11812.580	11.15	38.71	38.20	40.80	52.46	74	-21.54	Vertical
2950.135	5.02	33.33	40.27	45.05	43.13	74	-30.87	' Horizontal
3933.367	6.38	33.74	40.98	45.36	44.50	74	-29.50	Horizontal
4904.000	7.49	34.54	41.70	46.22	46.55	74	-27.45	6 Horizontal
7356.000	8.92	35.94	39.74	43.51	48.63	74	-25.37	' Horizontal
9808.000	9.76	37.51	37.61	40.98	50.64	74	-23.36	Horizontal
11722.720	11.08	38.62	38.16	41.63	53.17	74	-20.83	B Horizontal



Report No.: SZEM140400190303

Page: 84 of 121

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM140400190303

Page: 85 of 121

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10 2009									
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz 40.0 Quasi-peak Value									
	88MHz-216MHz 43.5 Quasi-peak Value									
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1011- 54.0 Average Value									
	Above 1GHz 74.0 Peak Value									
Test Setup:										

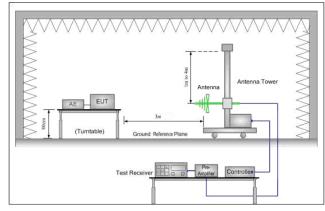

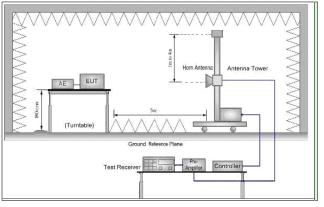


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM140400190303

Page: 86 of 121

Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	 The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel, the Highest channel
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
	 Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Charge +Transmitting mode
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM140400190303

Page: 87 of 121

Test plot as follows:

Worse case mode: b Test channel: Lowest Remark: Peak Vertical

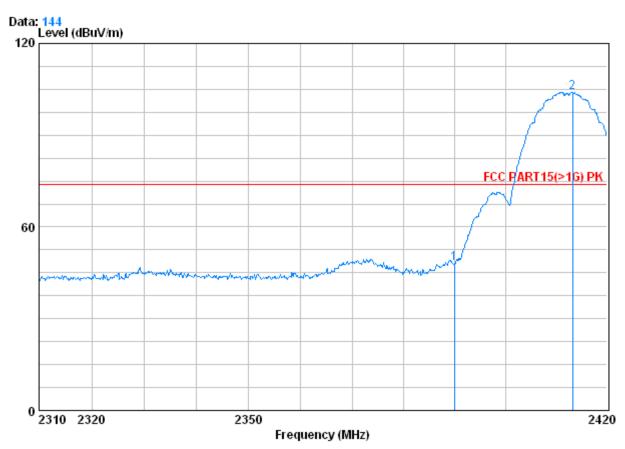

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1903RF Mode : 2412 B

		Freq			Preamp Factor	Read Level		Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3	X	2390.000 2413.180				52.39 108.41			






Report No.: SZEM140400190303

Page: 88 of 121

Worse case mode:	b	Test channel:	Lowest	Remark:	Peak	Horizontal

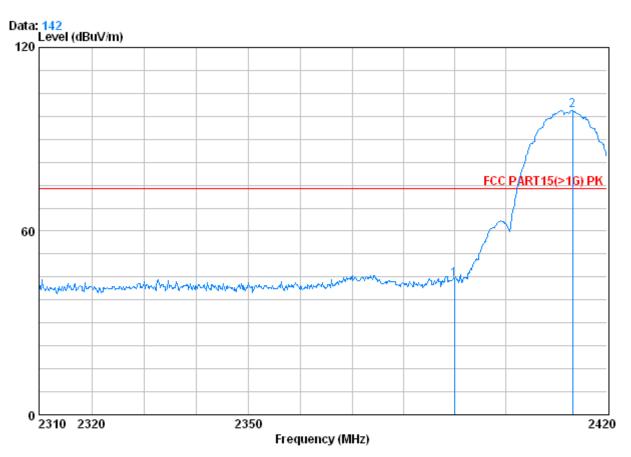

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2412 B


1046	. 2412 D	Freq		Antenna Factor	•			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2390.000 2413.180		32.51 32.54					



Report No.: SZEM140400190303

Page: 89 of 121

Worse case mode:	h	Test channel:	Lowest	Remark:	Average	Vertical
WOUSE Case mode.	D	i cot chamici.	LOWCSI	ricinant.	Avciago	Voitioai

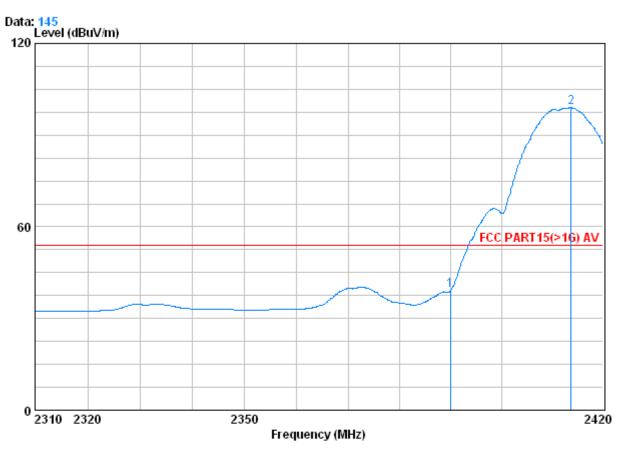

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1903RF Mode : 2412 B


.040	. 2-112 2	Freq			•	Read Level		Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @		2390.000 2413.730				43.45 103.26			



Report No.: SZEM140400190303

Page: 90 of 121

Worse case mode:	b	Test channel:	Lowest	Remark:	Average	Horizontal

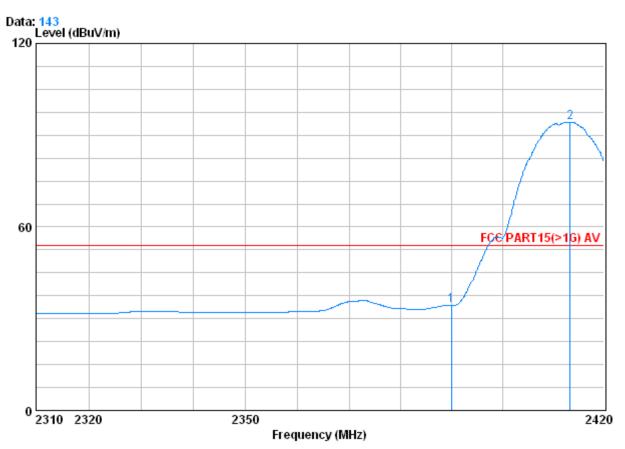

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2412 B


1046	. 2412 D	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	38.77	34.41	54.00	-19.59
2	0	2413.290	2.99	32.54	39.86	98.52	94.19	54.00	40.19



Report No.: SZEM140400190303

Page: 91 of 121

Worse case mode:	b	Test channel:	Highest	Remark:	Peak	Vertical

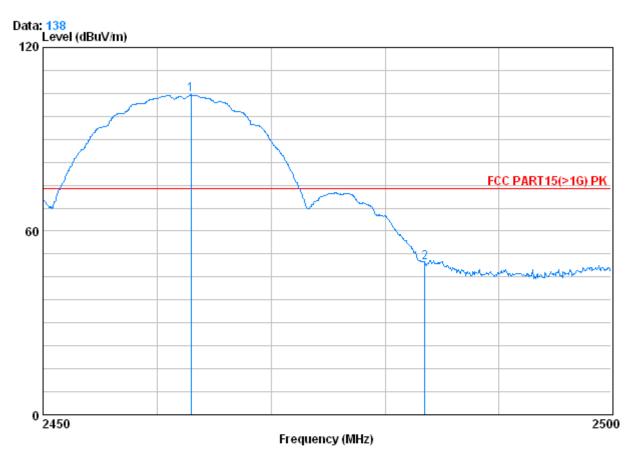

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1903RF Mode : 2462 B


1046	. 2402 D	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2		2462.950 2483.500			39.91 39.92				30.48 -24.14



Report No.: SZEM140400190303

Page: 92 of 121

Worse case mode:	b	Test channel:	Highest	Remark:	Peak	Horizontal
	-					

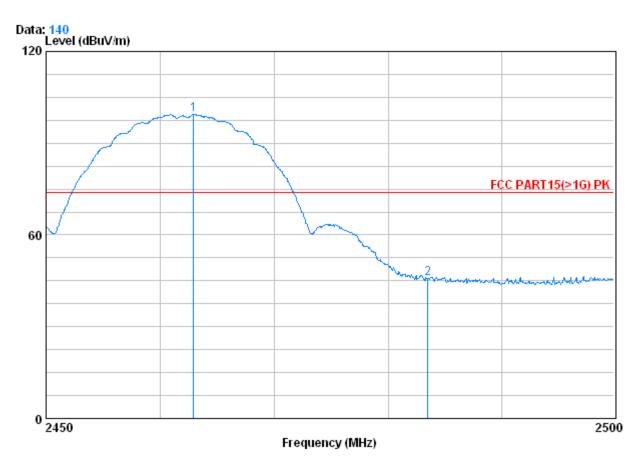

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2462 B


	. 2-02 1	, Freq		Antenna Factor	•			Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2462.900	3.02	32.64	39.91	103.72	99.48	74.00	25.48
2		2483.500	3.03	32.67	39.92	49.84	45.62	74.00	-28.38



Report No.: SZEM140400190303

Page: 93 of 121

Worse case mode:	b	Test channel:	Highest	Remark:	Average	Vertical

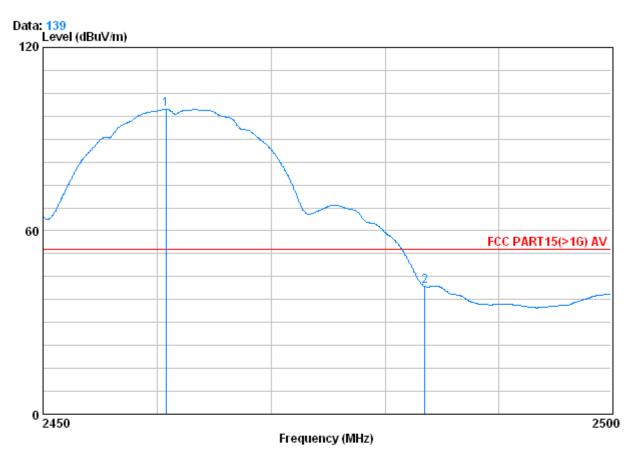

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1903RF Mode : 2462 B


	. 2402	Freq		Antenna Factor	-			Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0	2460.750	3.02	32.64	39.91	104.07	99.83	54.00	45.83
2		2483.500	3.03	32.67	39.92	46.11	41.89	54.00	-12.11



Report No.: SZEM140400190303

Page: 94 of 121

Worse case mode:	h	Test channel:	Highest	Remark:	Average	Horizontal
Worde dase mode.	D	i cot oriarii ci.	riigiicat	i tomant.	rworago	i ionzontai

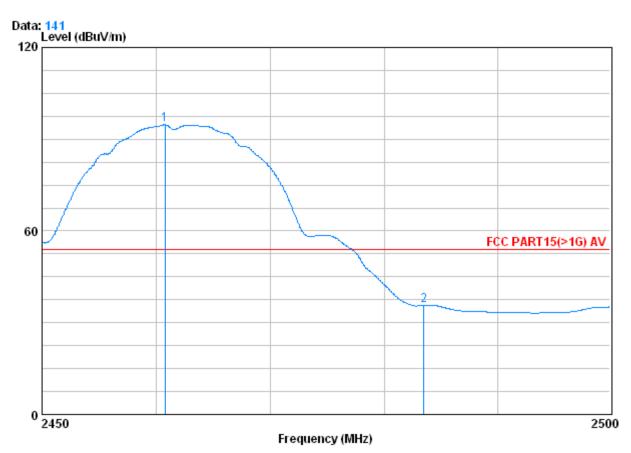

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2462 B


1046	. 2402 D	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0		2460.750	3.02	32.64	39.91	98.99	94.74	54.00	40.74
2		2483.500	3.03	32.67	39.92	39.87	35.65	54.00	-18.35



Report No.: SZEM140400190303

Page: 95 of 121

Worse case mode:	α	Test channel:	Lowest	Remark:	Peak	Vertical
Worse case mode.	19	i est chariner.	LUWESI	Heman.	i can	v Ci ticai

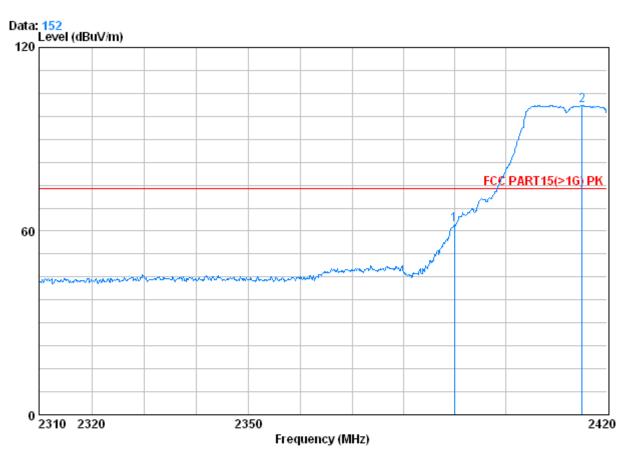

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1903RF Mode : 2412 G


ioue	. 2412 0	Freq			Preamp Factor			Limit Line	Over Limit
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 2	X	2390.000 2415.050							-11.85 27.06



Report No.: SZEM140400190303

Page: 96 of 121

Worse case mode:	a	Test channel:	Lowest	Remark:	Peak	Horizontal
Troice dade inicae.	. 9	1 000 0110111011		i toiliaitt	· Oait	1 1011 <u>-</u> 011ta

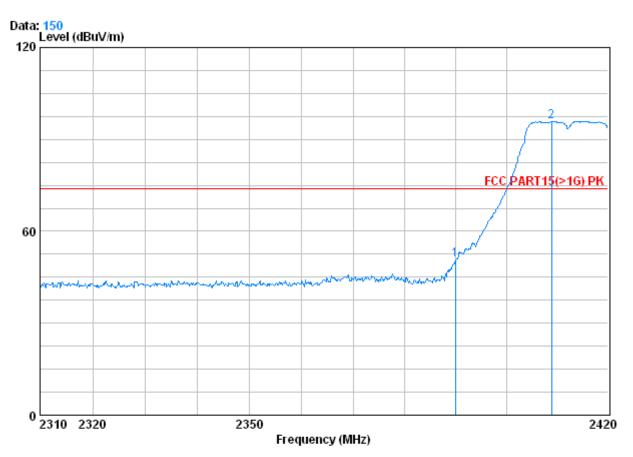

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2412 G


		Freq		Antenna Factor	•			Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	x	2390.000 2408.890		32.51 32.54					



Report No.: SZEM140400190303

Page: 97 of 121

Worse case mode:	n	Test channel:	Lowest	Remark:	Average	Vertical
110100 0000 111000.	9	1 Oot onamion.	_011001	i torriarit.	7 tv 01 ago	V OI LIOUI

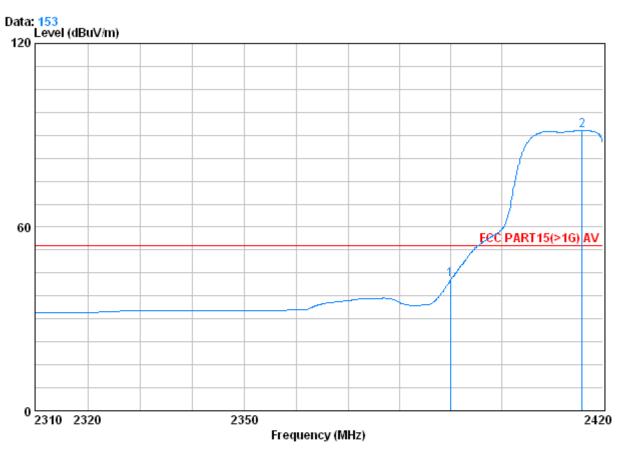

: FCC PART15(>1G) AV 3m VERTICAL Condition

: 1903RF Job No. · 2412 G Mode

.040	. 2412 0	Freq			Preamp Factor	Read Level		Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	——dB
1 2 @		2390.000 2415.930			39.85 39.88				






Report No.: SZEM140400190303

Page: 98 of 121

Worse case mode:	a	Test channel:	Lowest	Remark:	Average	Horizontal
Worse case mode.	1 9	Test Charmer.	LUWESI	rieman.	Average	Honzontai

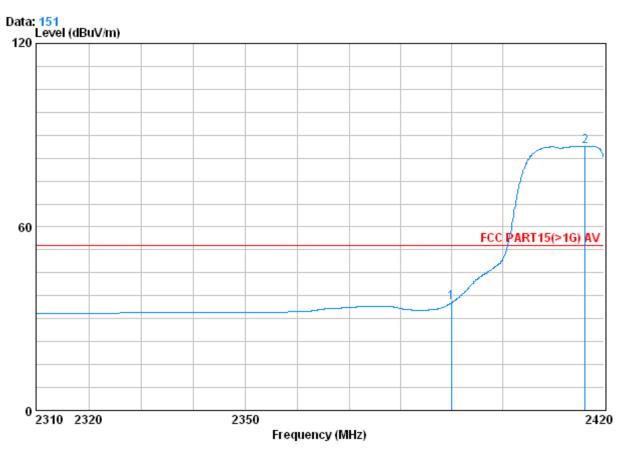

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2412 G


1040	. 2412 0	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	39.59	35.23	54.00	-18.77
2 (3	2416.260	2.99	32.54	39.88	90.82	86.48	54.00	32.48



Report No.: SZEM140400190303

Page: 99 of 121

Worse case mode:	~	Tost shannel:	Highest	Domark:	Dook	Vortical
Worse case mode.	g	l est channel:	nignesi	Remark:	Peak	Vertical

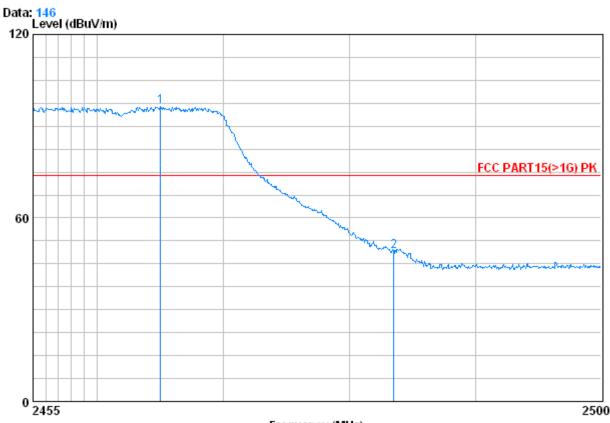

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1903RF Mode : 2462 G


.040	. 2 102 0	Freq			•	Read Level		Limit Line	Over Limit
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X		2465.035 2483.500							22.50 -25.08



Report No.: SZEM140400190303

Page: 100 of 121

Worse case mode:	α	Test channel:	Highest	Remark:	Peak	Horizontal
WOUSE CASE IIIOUE.	9	i est challiel.	i ligilest	riemaik.	i can	rionzoniai

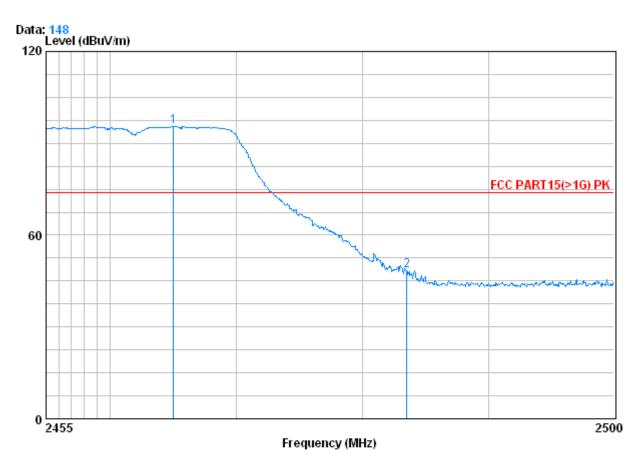

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2462 G


1046	. 2402 0	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	:	2465.035 2483.500			39.91 39.92				



Report No.: SZEM140400190303

Page: 101 of 121

Worse case mode:	a	Tost channel:	Highest	Remark:	Avorago	Vertical
Worse case mode.	l 9	l est channel:	riignesi	nemaik.	Average	Vertical

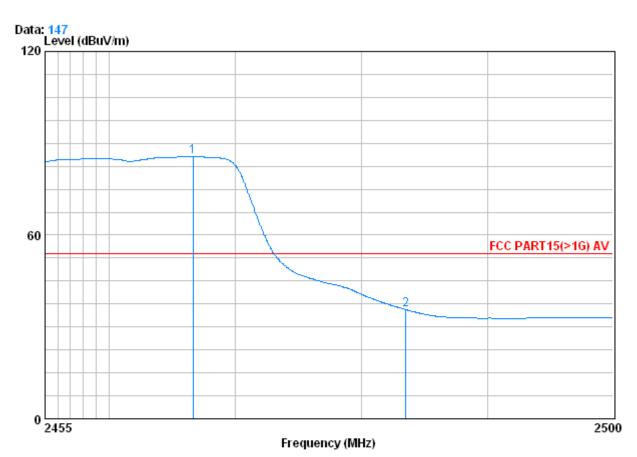

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1903RF Mode : 2462 G


1040	. 2402 0	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X		2466.655 2483.500			39.91 39.92				



Report No.: SZEM140400190303

Page: 102 of 121

Worse case mode:	a	Test channel:	Highest	Remark:	Average	Horizontal
Worse case mode.	1 9	rest chamber.	riigiicat	Heman.	Average	Horizoniai

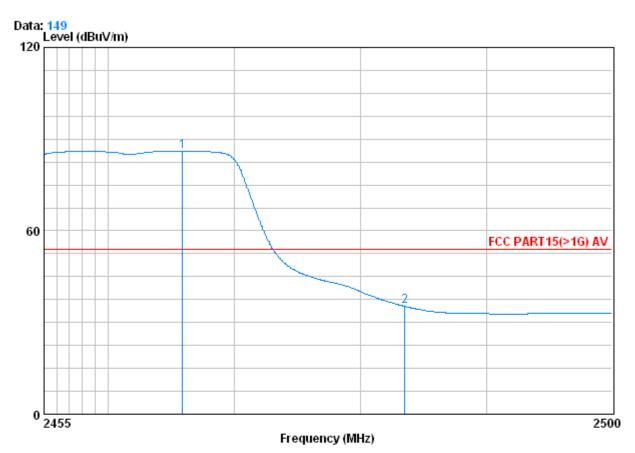

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2462 G


	. 2-102 0	Freq			Preamp Factor			Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2465.890	3.02	32.64	39.91	90.40	86.15	54.00	32.15
2		2483.500	3.03	32.67	39.92	39.52	35.30	54.00	-18.70



Report No.: SZEM140400190303

Page: 103 of 121

Worse case mode:	n	Toot oboppel:	Lowoot	Domork:	Dook	Vertical
Worse case mode.	11	l est channel:	Lowest	Remark:	Peak	Vertical

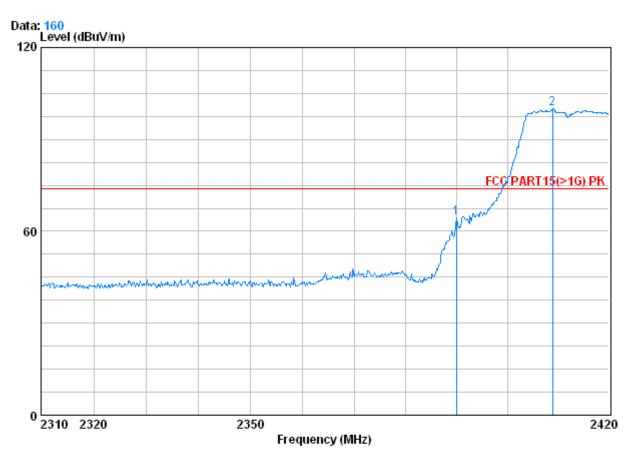

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2412 N


dode	. 2412 19	Freq		Antenna Factor	•			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X		2390.000 2408.890						74.00 74.00	



Report No.: SZEM140400190303

Page: 104 of 121

Г	Worse case mode:	n	Test channel:	Lowest	Remark:	Peak	Horizontal
	Worse case mode.	11	i est chamber.	LUWESI	memark.	ı can	Honzoniai

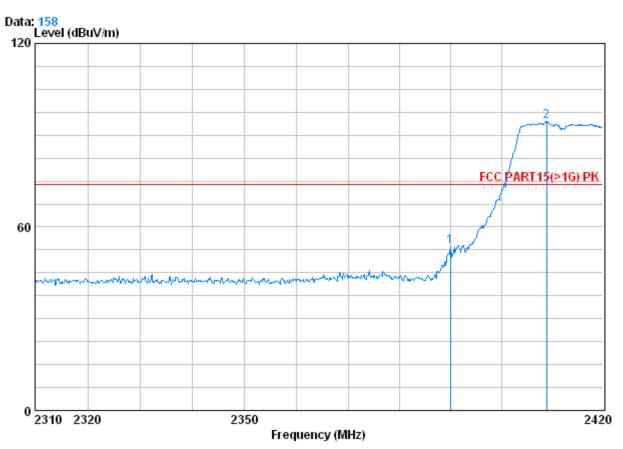

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2412 N


1046	. 2412 14	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X		2390.000 2408.890			39.85 39.86				



Report No.: SZEM140400190303

Page: 105 of 121

Worse case mode:	n	Test channel:	Lowest	Remark:	Average	Vertical
WOUSE Case mode.	!!	i cot chariner.	LOWCSI	ricinant.	Avciago	v Ci ticai

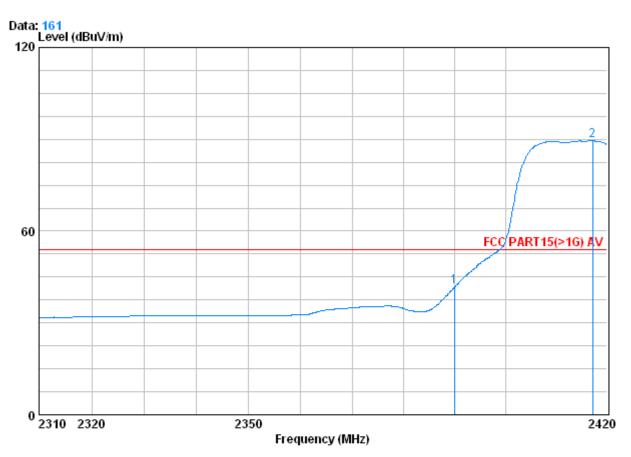

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2412 N


1046	. 2412 N	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	0	2390.000 2417.140			39.85 39.88				



Report No.: SZEM140400190303

Page: 106 of 121

Worse case mode:	n	Test channel:	Lowest	Remark:	Average	Horizontal
Worse case mode.	!!	i cot chamici.	LOWCSL	i icilialik.	Average	Honzontai

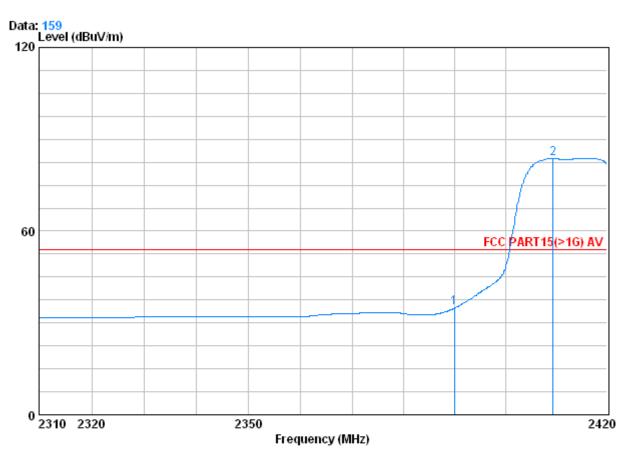

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2412 N


1040	. 2412 11	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2390.000 2409.330			39.85 39.86				



Report No.: SZEM140400190303

Page: 107 of 121

Worse case mode:	n	Test channel:	Highest	Remark:	Peak	Vertical
Worse case mode.	11	i est charmer.	riignesi	i itelliain.	I can	v C itiCai

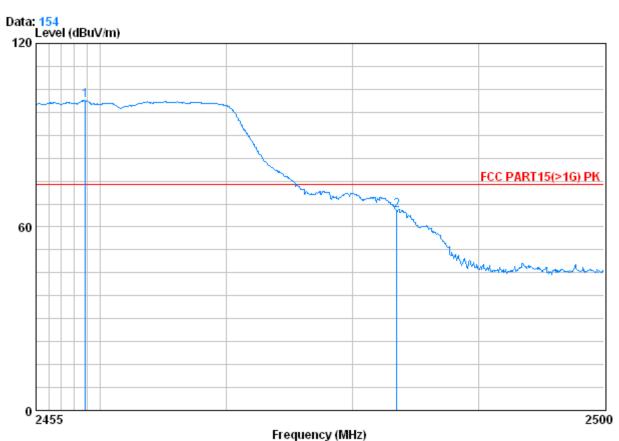

.

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1903RF Mode : 2462 N

	Freq	CableAntenna Loss Factor		•			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2458.870 2483.500						74.00	






Report No.: SZEM140400190303

Page: 108 of 121

Worse case mode:	n	Test channel:	Highest	Remark:	Peak	Horizontal
			9			

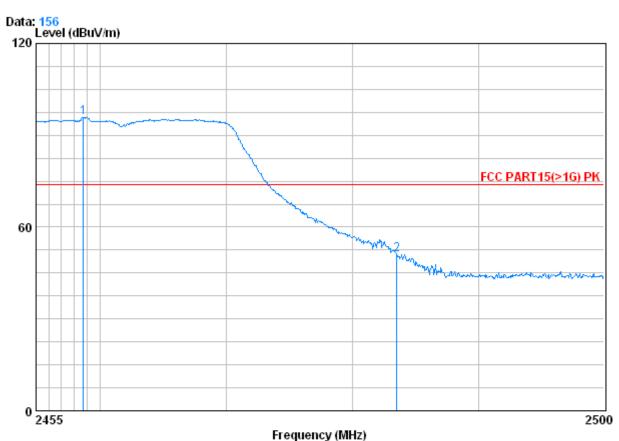

: FCC PART15(>1G) PK 3m HORIZONTAL

Condition Job No. :1903RF Mode

2


: 2462 N CableAntenna Preamp Read Limit Over Loss Factor Factor Level Freq Level Line Limit MHz dBuV dBuV/m dBuV/m dB dB/m dB dB 2458.735 32.64 39.91 100.09 95.85 1 X 3.02 74.00 21.85 2483.500 3.03 32.67 39.92 55.31 51.09 74.00 -22.91



Report No.: SZEM140400190303

Page: 109 of 121

Worse case mode:	n	Test channel:	Highest	Remark:	Average	Vertical
Worse case mode.	11	rest chamber.	riigiiest	rieman.	Average	v Gi ticai

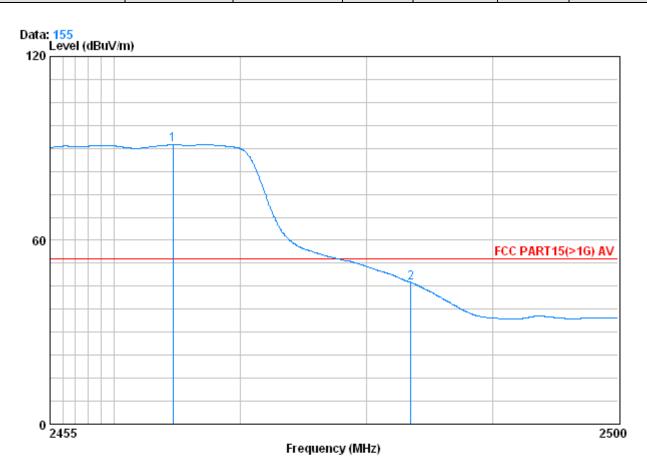

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1903RF Mode : 2462 N


1046	. 2402 11	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	0	2464.675 2483.500						54.00 54.00	



Report No.: SZEM140400190303

Page: 110 of 121

Worse case mode:	n(HT40)	Test channel:	Highest	Remark:	Average	Horizontal
					7 0. 4.90	

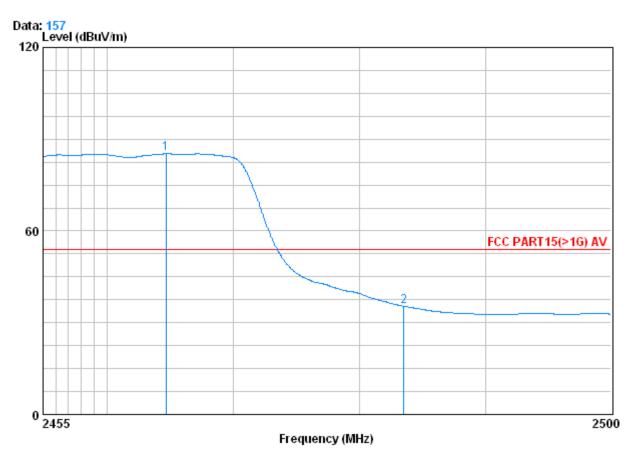

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2462 N


1040		Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	——dB
1	Х	2464.675	3.02	32.64	39.91	89.50	85.25	54.00	31.25
2		2483.500	3.03	32.67	39.92	39.63	35.41	54.00	-18.59



Report No.: SZEM140400190303

Page: 111 of 121

Worse case mode: n(HT40) Test channel: Lowest Remark: Peak Vertical

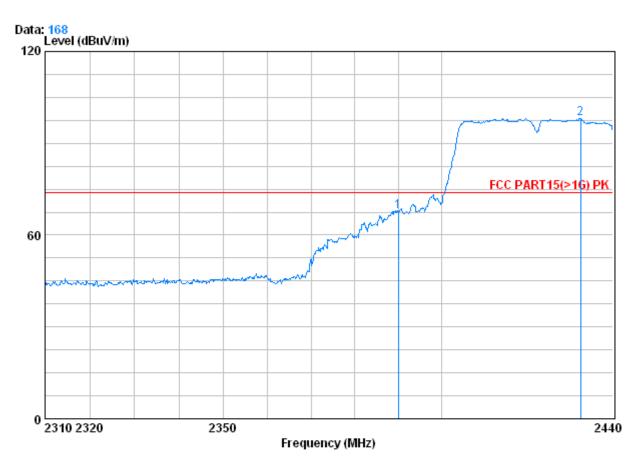

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2422 N Ht40


.040	. 2422 11 11040	Freq			•	Read Level		Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X		0.000 2.460						74.00 74.00	



Report No.: SZEM140400190303

Page: 112 of 121

Worse case mode: n(HT40) Test channel: Lowest Remark: Peak Horizontal

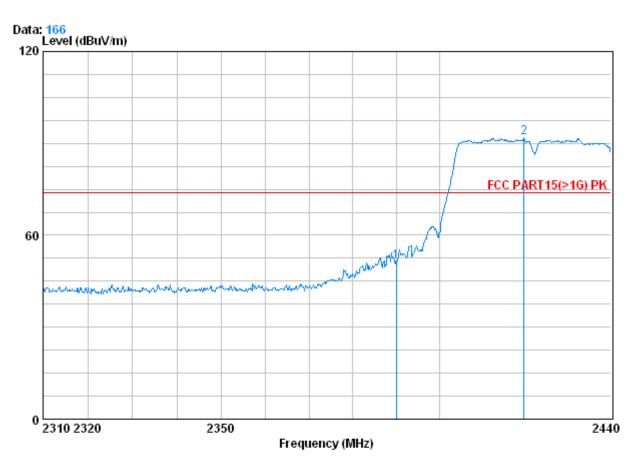

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2422 N Ht40


1040	. 2722 11 11070				Preamp Factor			Limit Line	Over Limit
	_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X		90.000 19.590			39.85 39.88				



Report No.: SZEM140400190303

Page: 113 of 121

Worse case mode:	n(HT40)	Test channel:	Lowest	Remark:	Average	Vertical
Worse case mode.	11(111 T U <i>)</i>	i cot chariner.	LOWCSL	i icilialik.	Avciago	v Ci tiCai

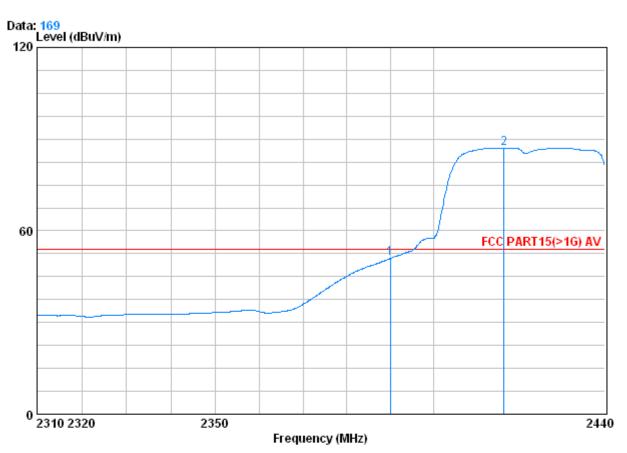

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2422 N Ht40


	 Freq			Preamp Factor			Limit Line	Over Limit
	 MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @	90.000			39.85 39.88				



Report No.: SZEM140400190303

Page: 114 of 121

Worse case mode:	n(HT40)	Test channel:	Lowest	Remark:	Average	Horizontal
WOODC CASC IIICAC.	II(III T O)	i cot oriaririor.	LOWCOL	i tomant.	/ w cruge	i ionzontai

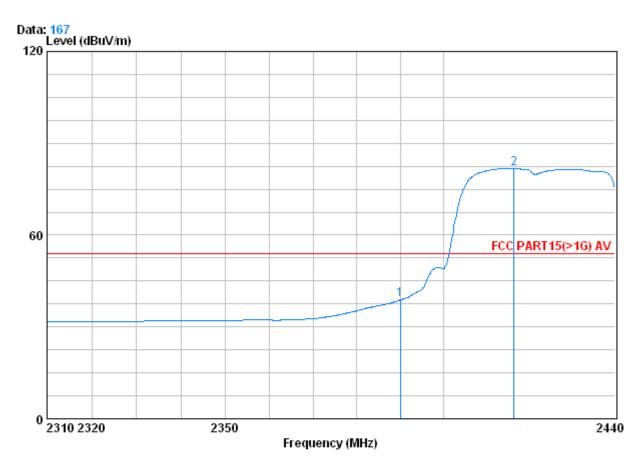

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2422 N Ht40


1040	. 2722 11 11				Preamp Factor	Read Level		Limit Line	
	_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2		2390.000 2416.340			39.85 39.88				



Report No.: SZEM140400190303

Page: 115 of 121

Worse case mode:	n(HT40)	Test channel:	Highest	Remark:	Peak	Vertical

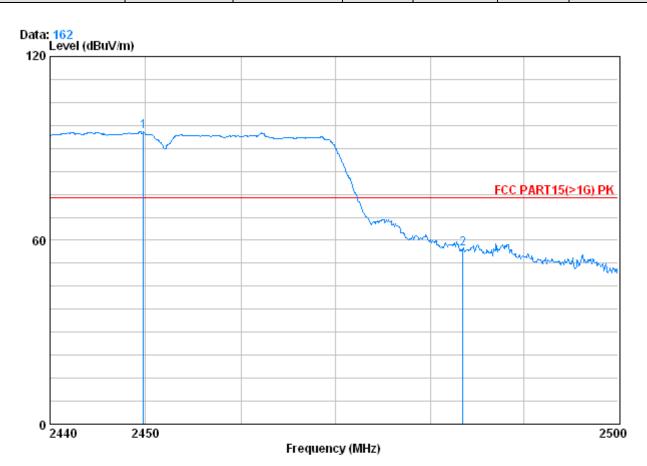

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2452 N Ht40


1040					Preamp Factor			Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	X	2449.780 2483.500			39.89 39.92				



Report No.: SZEM140400190303

Page: 116 of 121

Worse case mode:	n(HT40)	Test channel:	Highest	Remark:	Peak	Horizontal
TTOIGG GAGG IIIGAG.	11(11110)	1 oot onamion.	riigiioot	i tomant.	i ouit	110112011141

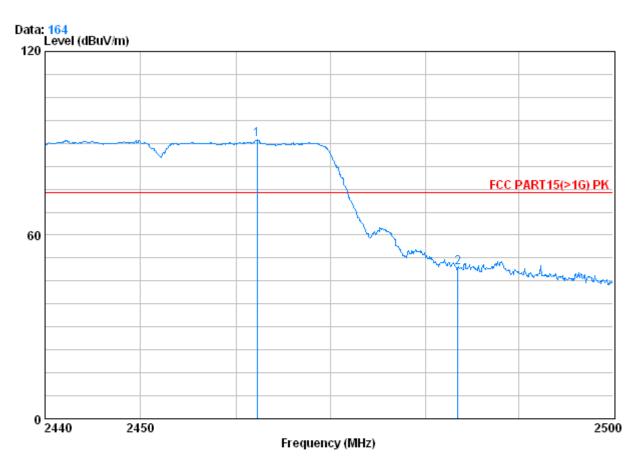

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1903RF Mode : 2452 N Ht40


.040	. 2402 11 110				Preamp Factor			Limit Line	
	_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	_	462.260 483.500			39.91 39.92				



Report No.: SZEM140400190303

Page: 117 of 121

Worse case mode: n(HT4	0) Test channel:	Highest Rer	mark: Average	Vertical
------------------------	------------------	-------------	---------------	----------

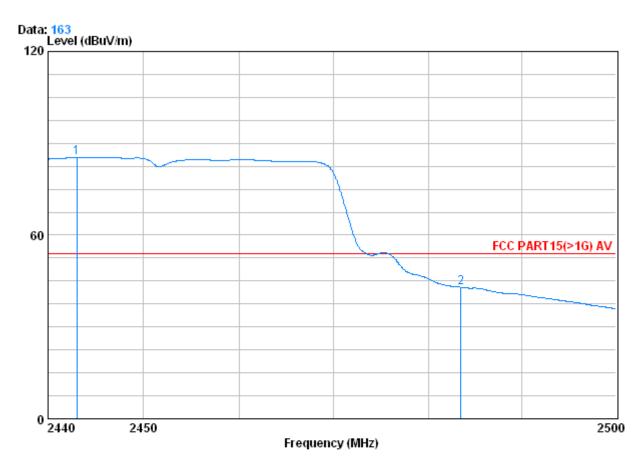

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2452 N Ht40

Over Limit	Limit Line		Read Level	Preamp Factor			Freq	. 2-52 11 110-0	.040
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	——dB	MHz		
				39.89 39.92			443.000 483.500		1 X 2






Report No.: SZEM140400190303

Page: 118 of 121

Worse case mode:	n(HT40)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	---------	---------------	---------	---------	---------	------------

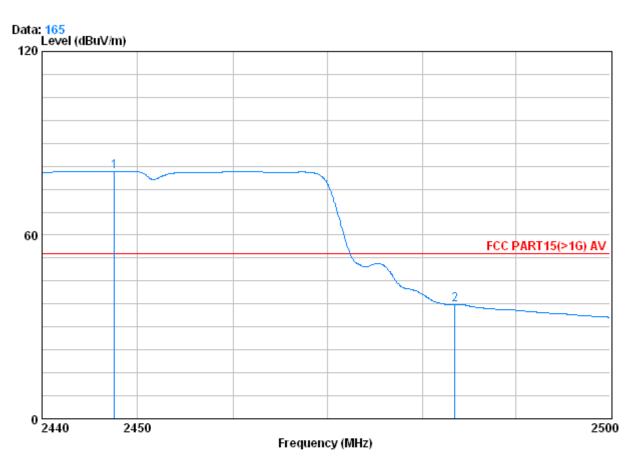

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1903RF Mode : 2452 N Ht40

1046	. 2492 N 1104				Preamp Factor			Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2		47.560 83.500			39.89 39.92				26.92 -16.77

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM140400190303

Page: 119 of 121

7 Photographs - EUT Test Setup

Test model No.: MFC181

7.1 Radiated Spurious Emission

Below 1GHz










Report No.: SZEM140400190303

Page: 120 of 121

7.2 Conducted Emission

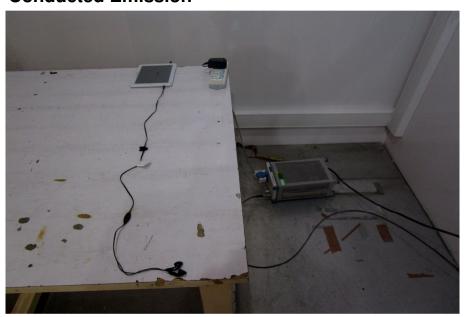



Report No.: SZEM140400190303

Page: 121 of 121

8 Photographs - EUT Constructional Details

Test model No.: MFC181

Refer to Report No. SZEM140400190301 for EUT external and internal photos.