

Report No.: SZEM140300130801

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 118

FCC REPORT

Application No.: SZEM1403001308RF

Applicant: Lexibook America

Manufacturer: Jungletac Interactive Co., Ltd.
Factory: Jungletac Interactive Co., Ltd.
Product Name: Lexibook Pocket Master – 4.3"

Model No.(EUT): MFC144
Add Model No.: MFC143
FCC ID: UU8-MFC11

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-04-23

Date of Test: 2014-04-24 to 2014-05-20

Date of Issue: 2014-07-31

Test Result: PASS *

. * In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140300130801

Page: 2 of 118

2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2014-07-31		Original			

Authorized for issue by:		
Tested By	(Owen Zhou) /Project Engineer	2014-05-20 Date
Prepared By	(Linlin Lv)/Clerk	2014-07-31 Date
Checked By	Emen _ Lı` (Emen Li) /Reviewer	2014-08-12 Date



Report No.: SZEM140300130801

Page: 3 of 118

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r02	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r02	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r02	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: MFC144, MFC143

Only the Model MFC144 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. with difference being item number, casing color and cosmetic.



Report No.: SZEM140300130801

Page: 4 of 118

4 Contents

			Page
1	CO	VER PAGE	1
2	VEF	RSION	2
3	TES	ST SUMMARY	3
4	COI	NTENTS	4
5	GEI	NERAL INFORMATION	5
6	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9	CLIENT INFORMATION	
7	TES	ST RESULTS AND MEASUREMENT DATA	12
	7.1 7.2 7.3 7.4 7.5 7.6 7.7 7.8 <i>7.8</i> . <i>7.8</i> .	2 Transmitter emission above 1GHz	
	7.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	Y85-118



Report No.: SZEM140300130801

Page: 5 of 118

5 General Information

5.1 Client Information

Applicant:	Lexibook America
Address of Applicant:	C/O NATXIS PRAMEX INTERNATIONAL – NORTH AMERICA 1251 avenue of the Americas 34 th floor
Manufacturer:	Jungletac Interactive Co., Ltd.
Address of Manufacturer:	Rm 17-18, 16/F., Parklane Centre, 25 Kin Wing Street, Tuen Mun, New Territories, Hong Kong
Factory:	Jungletac Interactive Co., Ltd.
Address of Factory:	Rm 17-18, 16/F., Parklane Centre, 25 Kin Wing Street, Tuen Mun, New Territories, Hong Kong

5.2 General Description of EUT

Product Name:	Lexibook Pocket Master – 4.3"	
Model No.:	MFC144, MFC143	
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz	
	IEEE 802.11n(HT40): 2422MHz to 2452MHz	
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels	
	IEEE 802.11n HT40: 7 Channels	
Channel Separation:	5MHz	
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40): OFDM (64QAM, 16QAM, QPSK,BPSK)	
Sample Type:	Portable production	
Test Software of EUT:	Realtek MP Tool (manufacturer declare)	
Modulation Type:	DSSS	
Antenna Type and Gain:	Type : Integral antenna	
	Gain: 1.56dBi	
EUT Power Supply:	USB charge	
Battery:	DC 3.7V 1000mAh (Li-ion rechargeable battery)	
Test Voltage:	AC 120V 60Hz	
USB Cable:	25cm (Unshielded, two core)	



Report No.: SZEM140300130801

Page: 6 of 118

Operation Frequency each of channel(802.11b/g/n HT20)														
Channel	Fr	equency	Channe	I Frequency	Channel	Fre	quency Char		nnel	Frequency				
1	24	112MHz	4	2427MHz	7	244	2442MHz		2442MHz		12MHz)	2457MHz
2	24	417MHz	5	2432MHz	8	244	17MHz 11		1	2462MHz				
3	24	122MHz	6	2437MHz	9	245	2452MHz							
Operation F	requ	ency each	of channe	el(802.11n HT40)									
Channe		Freque	ency	Channel	Frequen	су	Chan	nel	F	Frequency				
1		2422	ИНz	4	2437MF	lz	7		7			2452MHz		
2		2427	MHz	5	2442MF	lz								
3		2432	ИНz	6	2447MH	lz								

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

, ,	
Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz



Report No.: SZEM140300130801

Page: 7 of 118

5.3 Test Environment and Mode

Operating Environment:				
Temperature:	24.0 °C			
Humidity:	52 % RH			
Atmospheric Pressure:	1010 mbar			
Test mode:				
Charge + Transmitting mode:	Keep the EUT charging and transmitting with modulation			
Transmitting mode:	Keep the EUT transmitting with modulation			

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
earphone	Supply by SGS	N/A
Adapter	Supply by SGS	N/A

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.





Report No.: SZEM140300130801

Page: 8 of 118

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM140300130801

Page: 9 of 118

6 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16		
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16		



Report No.: SZEM140300130801

Page: 10 of 118

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	I 8447D I		2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04



Report No.: SZEM140300130801

Page: 11 of 118

	RF connected test				
Item	Test Equipment	Manufacturer Model No.		Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM140300130801

Page: 12 of 118

7 Test results and Measurement Data

7.1 Antenna Requirement

Standard 47 CFR Part 15C Section 15.203 /247(c) requirement:


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

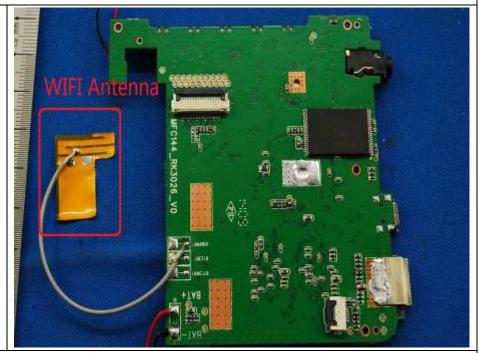

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.56 dBi.



Report No.: SZEM140300130801

Page: 13 of 118


7.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.10: 2009					
Test Frequency Range:	150kHz to 30MHz					
Limit:	Francisco (MIII-)	Limit (c	lBuV)			
	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithm	n of the frequency.				
Test Procedure:	The mains terminal disturb room.	oance voltage test was	conducted in a shielded			
	2) The EUT was connected to Impedance Stabilization linear impedance. The power connected to a second reference plane in the semeasured. A multiple soon power cables to a single exceeded. 3) The tabletop EUT was pland ground reference plane. was placed on the horizon of the EUT shall be 0.4 mean vertical ground reference plane. The LISN unit under test and bonded mounted on top of the ground between the closest points the EUT and associated en the EUT and associated en the equipment and all of the in ANSI C63.10: 2009 on contract to the EUT and contract to the equipment and all of the in ANSI C63.10: 2009 on contract to the end of the end	Network) which proviver cables of all other under cables of all other under cables are way as the LISC captured as a same way as the LISC captured as a captured and for floor-standing tal ground reference plane was bonded to the same was bonded to the same was placed 0.8 m from the vertical ground reference plane. To sof the LISN 1 and the quipment was at least out the same captured as a captured to the same captured to the s	des a 50Ω/50μH + 5Ω units of the EUT were bonded to the ground SN 1 for the unit being used to connect multiple ing of the LISN was not cable 0.8m above the arrangement, the EUT ane, ference plane. The rear and reference plane. The me horizontal ground om the boundary of the plane for LISNs his distance was EUT. All other units of 0.8 m from the LISN 2. We positions of e changed according to			



Report No.: SZEM140300130801

Page: 14 of 118

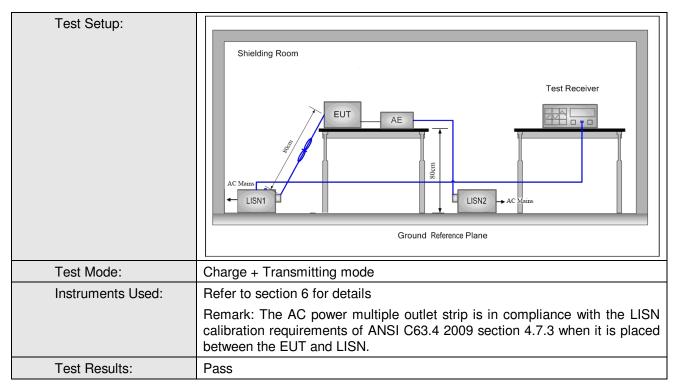

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM140300130801

Page: 15 of 118

Live Line:

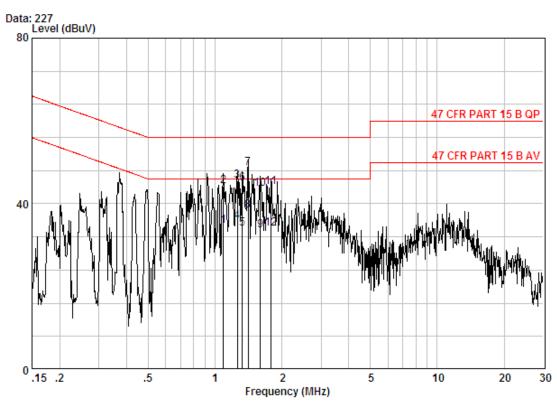

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 1308RF Test mode : Charge + TX


		Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	@	1.088	0.02	9.80	24.75	34.57	46.00	-11.43	Average
2	@	1.088	0.02	9.80	34.54	44.36	56.00	-11.64	QP
3	@	1.262	0.02	9.80	35.83	45.65	56.00	-10.35	QP
4	@	1.262	0.02	9.80	25.93	35.75	46.00	-10.25	Average
5	@	1.324	0.02	9.80	24.17	33.99	46.00	-12.01	Average
6	@	1.324	0.02	9.80	34.99	44.81	56.00	-11.19	QP
7	@	1.411	0.02	9.80	38.88	48.70	56.00	-7.30	QP
8	@	1.411	0.02	9.80	28.64	38.46	46.00	-7.54	Average
9	@	1.602	0.02	9.80	23.73	33.55	46.00	-12.45	Average
10	@	1.602	0.02	9.80	33.75	43.57	56.00	-12.43	QP
11	@	1.790	0.02	9.80	34.11	43.93	56.00	-12.07	QP
12	@	1.790	0.02	9.80	24.17	33.99	46.00	-12.01	Average



Report No.: SZEM140300130801

Page: 16 of 118

Neutral Line:

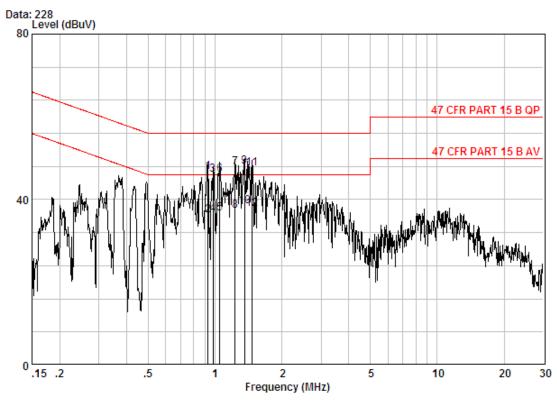

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 1308RF Test mode : Charge + TX

		Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	@	0.92821	0.02	9.80	36.90	46.72	56.00	-9.28	QP
2	@	0.92821	0.02	9.80	26.37	36.19	46.00	-9.81	Average
3	@	0.97871	0.02	9.80	36.13	45.95	56.00	-10.05	QP
4	@	0.97871	0.02	9.80	26.65	36.47	46.00	-9.53	Average
5	@	1.049	0.02	9.80	26.82	36.64	46.00	-9.36	Average
6	@	1.049	0.02	9.80	36.21	46.03	56.00	-9.97	QP
7	@	1.229	0.02	9.80	37.88	47.70	56.00	-8.30	QP
8	@	1.229	0.02	9.80	27.41	37.23	46.00	-8.77	Average
9	@	1.359	0.02	9.80	38.05	47.87	56.00	-8.13	QP
10	@	1.359	0.02	9.80	28.64	38.46	46.00	-7.54	Average
11	@	1.472	0.02	9.80	37.77	47.59	56.00	-8.41	QP
12	@	1.472	0.02	9.80	27.87	37.69	46.00	-8.31	Average

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140300130801

Page: 17 of 118

7.3 Conducted Peak Output Power & Average Output power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	KDB558074 D01 v03r02
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Test Instruments:	Refer to section 6 for details
Description of tests:	Peak output power (a) Connect EUT test port to spectrum analyzer. (b) Set the EUT to transmit maximum output power at 2.4GHz, (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately. Average power (a) Connect EUT test port to spectrum analyzer. (b) Set the EUT to transmit maximum output power at 2.4GHz, (c) Then set the EUT to transmit at high, middle and low frequency and measure the Average power separately.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20);13.5Mbps of rate is the worst case of 802.11n(HT40)
Limit:	30dBm
Test Results:	Pass





Report No.: SZEM140300130801

Page: 18 of 118

Conducted Peak output power

Pre-scan under all rate at lowest channel 1									
Mode		802	.11b						
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
Power (dBm)	16.85	16.81	16.77	16.74					
Mode				802	2.11g				
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Power (dBm)	14.37	14.34	14.31	14.26	14.28	14.25	14.23	14.20	
Mode				802.11	n(HT20)				
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
Power (dBm)	14.36	14.30	14.33	14.25	14.27	14.22	14.19	14.15	
Mode		802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps	
Power (dBm)	14.16	14.15	14.13	14.11	14.08	14.05	14.02	14.01	

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).



Report No.: SZEM140300130801

Page: 19 of 118

Conducted Peak output power

Measurement Data

	802.11b mode							
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result					
Lowest	16.85	30.00	Pass					
Middle	17.32	30.00	Pass					
Highest	17.78	30.00	Pass					
	802.11g mo	de						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result					
Lowest	14.37	30.00	Pass					
Middle	14.90	30.00	Pass					
Highest	15.35	30.00	Pass					
	802.11n(HT20)	mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result					
Lowest	14.36	30.00	Pass					
Middle	14.86	30.00	Pass					
Highest	15.33	30.00	Pass					
	802.11n(HT40)	mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result					
Lowest	14.16	30.00	Pass					
Middle	14.41	30.00	Pass					
Highest	14.72	30.00	Pass					



Report No.: SZEM140300130801

Page: 20 of 118

Conducted Average Output power

Wi-Fi	Average Power (dBm) for Data Rates (Mbps)								
2450MHz	Channel	1	2	5.5	11	/	/	/	/
	1	14.78	13.73	13.68	13.51	/	/	/	/
802.11b	6	14.66	13.52	13.49	13.36	/	/	/	/
	11	14.15	13.38	13.29	13.22	/	/	/	/
	Channel	6	9	12	18	24	36	48	54
000 11 ~	1	12.31	12.43	12.59	11.99	12.84	12.47	12.52	12.73
802.11g	6	12.15	12.23	12.32	11.72	12.55	12.14	12.22	12.44
	11	11.96	12.06	12.11	11.5	12.37	11.93	12.09	12.15
	Channel	6.5	13	19.5	26	39	52	58.5	65
802.11n	1	12.43	12.21	12.17	12.11	12.24	12.37	12.39	12.42
(HT20)	6	12.19	11.93	11.95	11.9	12.06	12.13	12.09	12.19
	11	11.94	11.66	11.77	11.66	11.83	11.95	11.86	11.83
	Channel	13.5	27	40.5	54	81	108	121.5	135
802.11n	3	11.79	11.61	11.65	11.77	11.93	12.25	12.14	11.95
(HT40)	6	11.64	11.49	11.44	11.53	11.73	12.04	11.83	11.76
	9	11.39	11.18	11.23	11.22	11.51	11.91	11.57	11.56





Report No.: SZEM140300130801

Page: 21 of 118

Test plot as follows(Conducted Peak Output Power):

Test mode:	802.11b	Test channe	I: Lov	vest
Ref 21.5 dBm	*Att 30 dB	* RBW 1 MH2 * VBW 3 MH2 SWT 2.5 ms	Marker 1 [T1] 9.48 (2.412538462 (
20 Offset 1.	5 dB	1		A
1 PK MAXH20				LVL
30 40 50				
60 70				3DB
Center 2.412 GF Tx Channel Bandwidth	z 1.6	5 MHz/ Power	Span 16 I	MHz



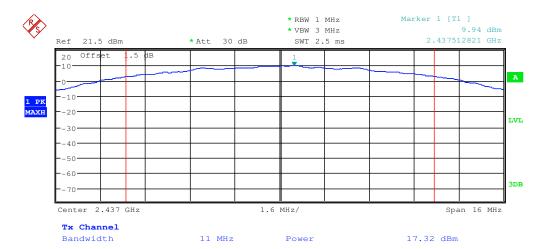





Report No.: SZEM140300130801

Page: 22 of 118

Test mode: 802.11b Test channel: Highest

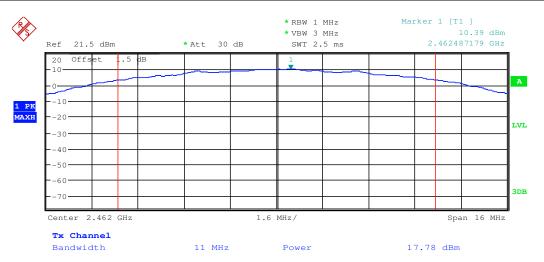

Test mode: 802.11g Test channel: Lowest

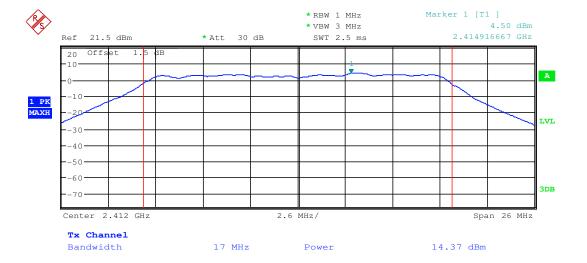





Report No.: SZEM140300130801

Page: 23 of 118

Test mode: 802.11g Test channel: Middle

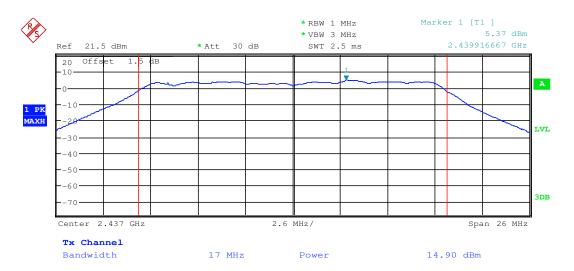



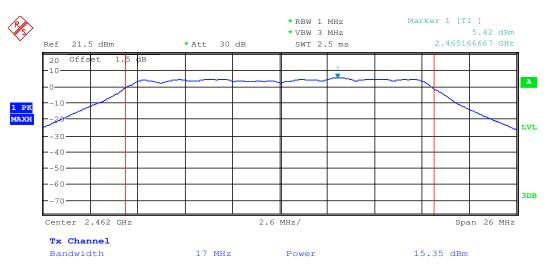





Report No.: SZEM140300130801

Page: 24 of 118

Test mode: 802.11 n(HT20) Test channel: Lowest

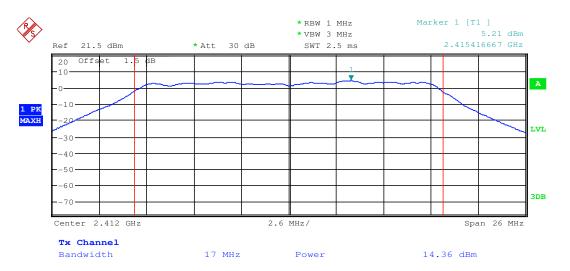



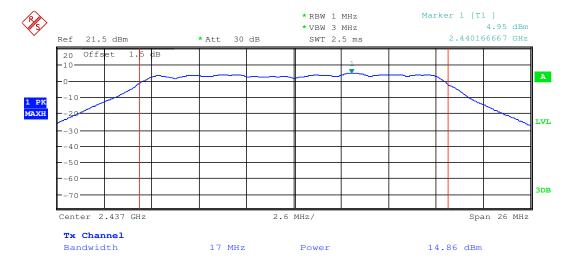





Report No.: SZEM140300130801

Page: 25 of 118

Test mode: 802.11 n(HT20) Test channel: Highest

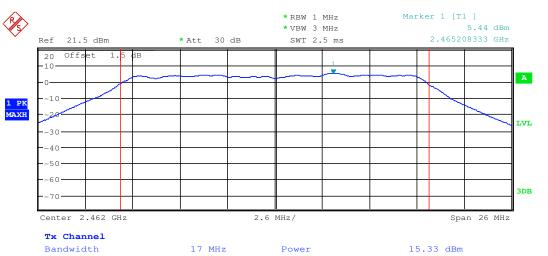

Test mode: 802.11 n(HT40) Test channel: Lowest

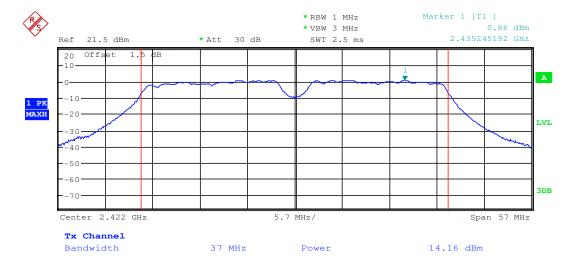





Report No.: SZEM140300130801

Page: 26 of 118

Test mode: 802.11 n(HT40) Test channel: Middle

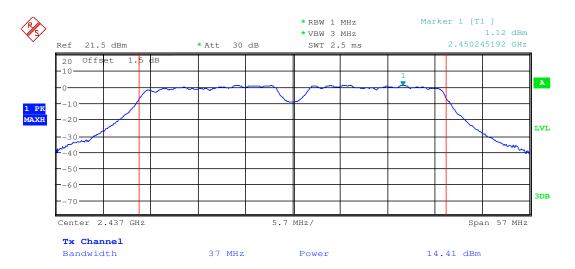



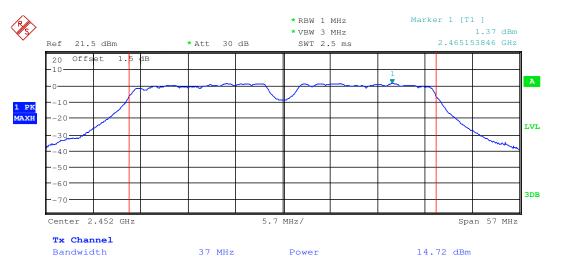



Report No.: SZEM140300130801

Page: 27 of 118

7.4 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)			
Test Method:	KDB558074 D01 v03r02			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Instruments Used:	Refer to section 6 for details			
Exploratory Test Mode:	Transmitting mode			
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20);13.5Mbps of rate is the worst case of 802.11n(HT40)			
Limit:	≥ 500 kHz			
Test Results:	Pass			





Report No.: SZEM140300130801

Page: 28 of 118

Measurement Data

measurement bata									
	802.11b mode								
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result						
Lowest	9.471153846	≥500	Pass						
Middle	9.471153846	≥500	Pass						
Highest	9.519230769	≥500	Pass						
	802.11g mode								
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result						
Lowest	16.586538462	≥500	Pass						
Middle	16.586538462	≥500	Pass						
Highest	16.586538462	≥500	Pass						
	802.11n(HT20) mode								
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result						
Lowest	17.836538462	≥500	Pass						
Middle	17.884615385	≥500	Pass						
Highest	17.884615385	≥500	Pass						
	802.11n(HT40)mode								
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result						
Lowest	36.458333333	≥500	Pass						
Middle	36.522435897	≥500	Pass						
Highest	36.426282051	≥500	Pass						




Report No.: SZEM140300130801


Page: 29 of 118

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

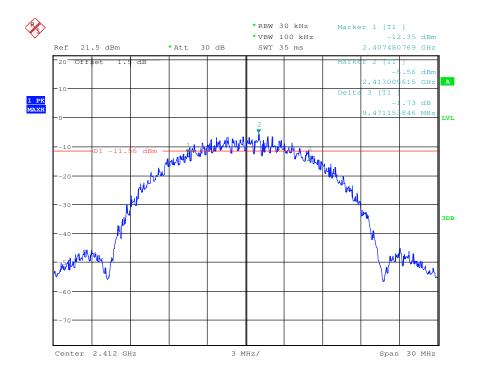

Test mode: 802.11b Test channel: Middle

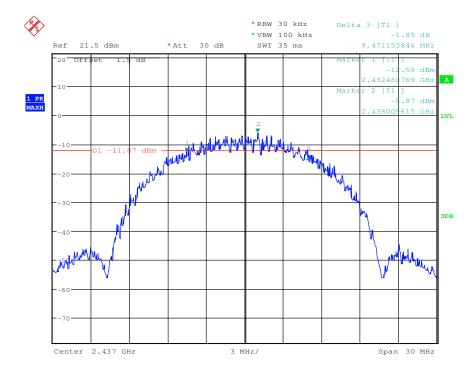





Report No.: SZEM140300130801

Page: 30 of 118

Test mode: 802.11b Test channel: Highest

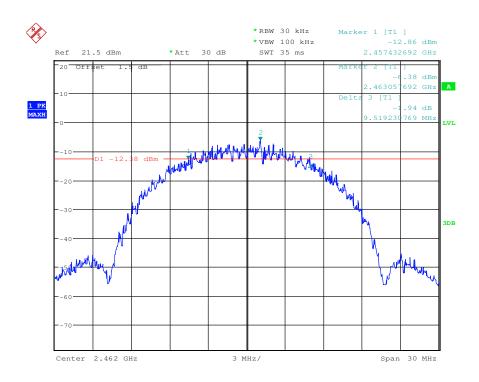

Test mode: 802.11g Test channel: Lowest

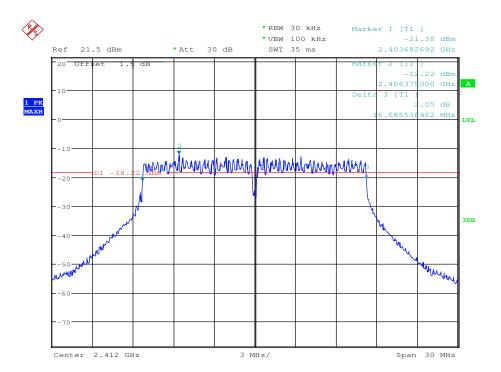





Report No.: SZEM140300130801

Page: 31 of 118

Test mode: 802.11g Test channel: Middle

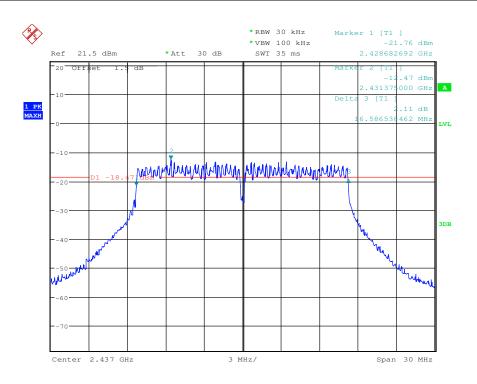

Test mode: 802.11g Test channel: Highest

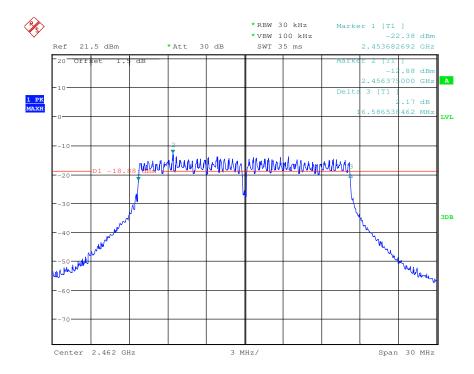





Report No.: SZEM140300130801

Page: 32 of 118

Test mode: 802.11n(HT20) Test channel: Lowest

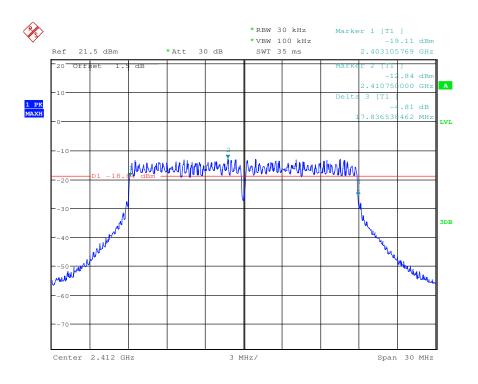

Test mode: 802.11n(HT20) Test channel: Middle

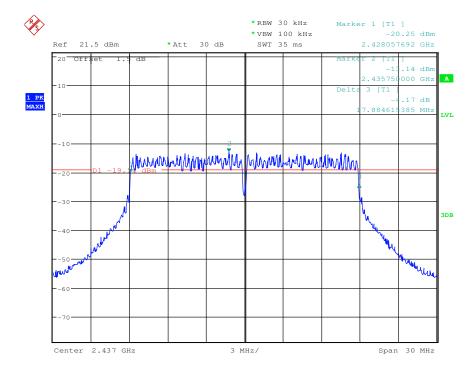





Report No.: SZEM140300130801

Page: 33 of 118

Test mode: 802.11n(HT20) Test channel: Highest

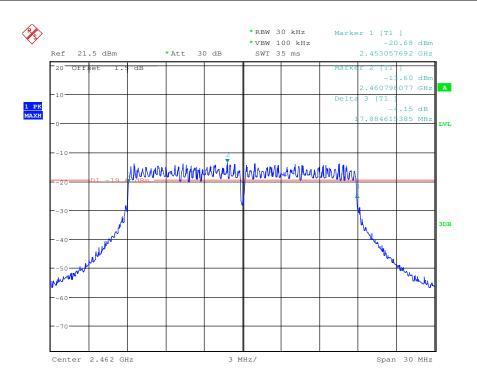

Test mode: 802.11n(HT40) Test channel: Lowest

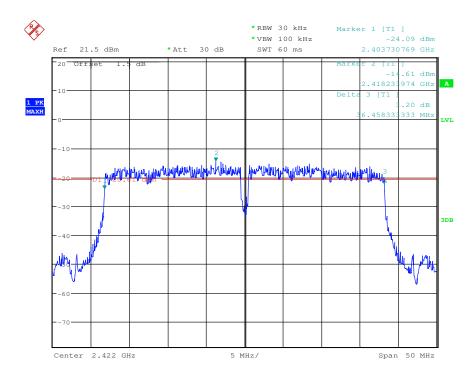





Report No.: SZEM140300130801

Page: 34 of 118

Test mode: 802.11n(HT40) Test channel: Middle

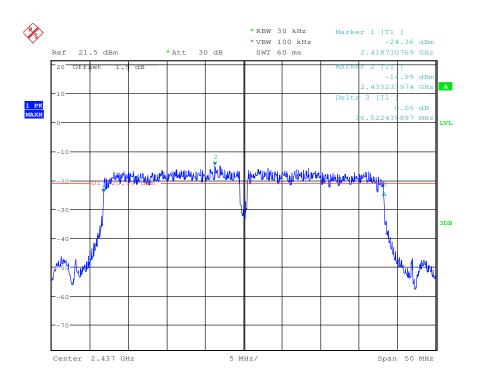

Test mode: 802.11n(HT40) Test channel: Highest

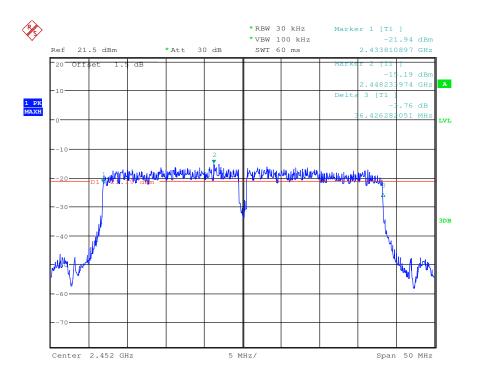



Report No.: SZEM140300130801

Page: 35 of 118

7.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)		
Test Method:	KDB558074 D01 v03r02		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 6 for details		
Exploratory Test Mode:	Transmitting mode		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)		
Limit:	≤8.00dBm		
Test Results:	Pass		



Report No.: SZEM140300130801

Page: 36 of 118

Measurement Data

802.11b mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-14.40	≤8.00	Pass
Middle	-14.74	≤8.00	Pass
Highest	-15.33	≤8.00	Pass
802.11g mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-22.45	≤8.00	Pass
Middle	-23.07	≤8.00	Pass
Highest	-23.47	≤8.00	Pass
802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-22.84	≤8.00	Pass
Middle	-23.18	≤8.00	Pass
Highest	-23.67	≤8.00	Pass
802.11n(HT40) mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-24.85	≤8.00	Pass
Middle	-25.13	≤8.00	Pass
Highest	-25.25	≤8.00	Pass




Report No.: SZEM140300130801


Page: 37 of 118

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

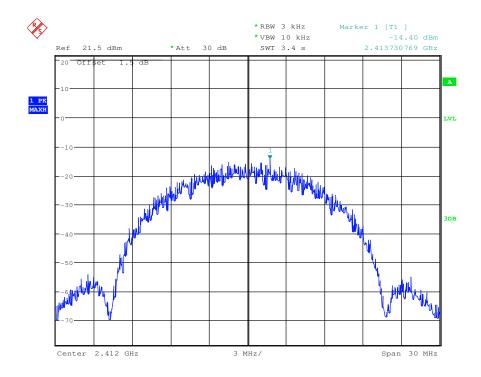

Test mode: 802.11b Test channel: Middle

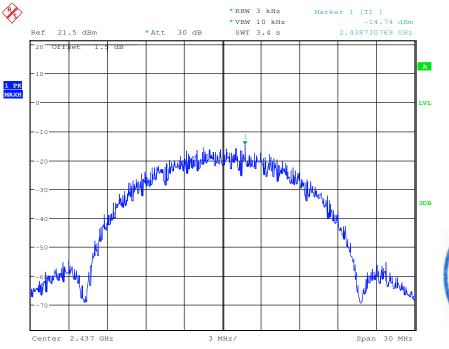







Report No.: SZEM140300130801

Page: 38 of 118

Test mode: 802.11b Test channel: Highest

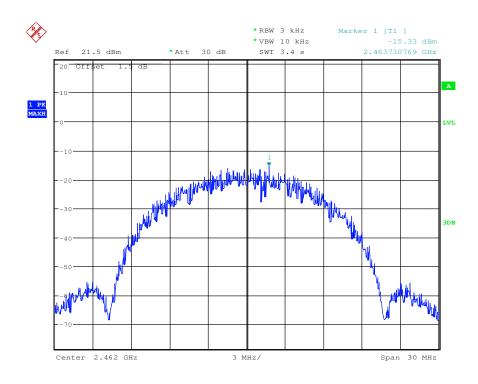

Test mode: 802.11g Test channel: Lowest

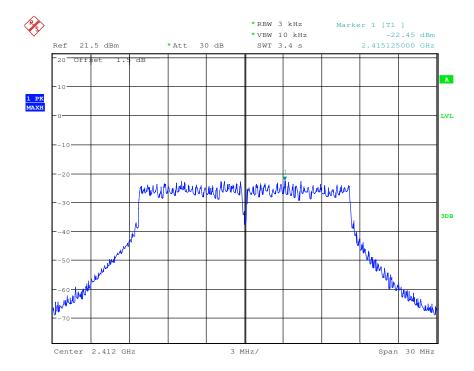





Report No.: SZEM140300130801

Page: 39 of 118

Test mode: 802.11g Test channel: Middle

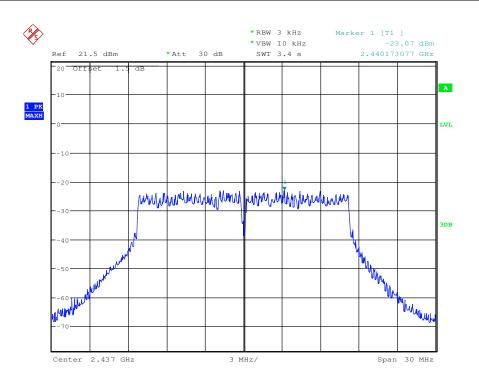



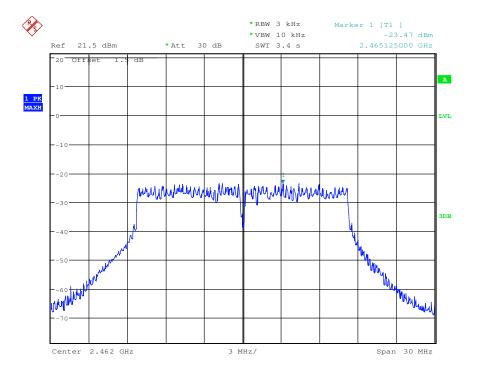





Report No.: SZEM140300130801

Page: 40 of 118

Test mode: 802.11n(HT20) Test channel: Lowest

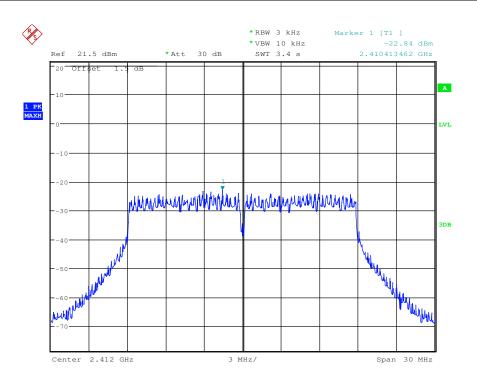

Test mode: 802.11n(HT20) Test channel: Middle

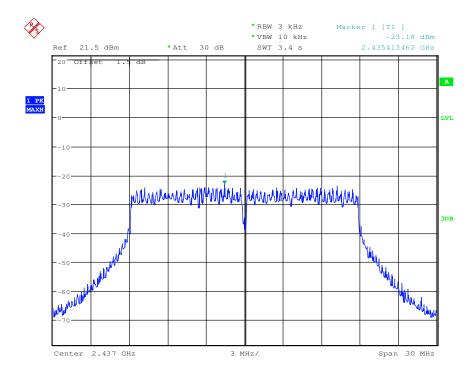





Report No.: SZEM140300130801

Page: 41 of 118

Test mode: 802.11n(HT20) Test channel: Highest

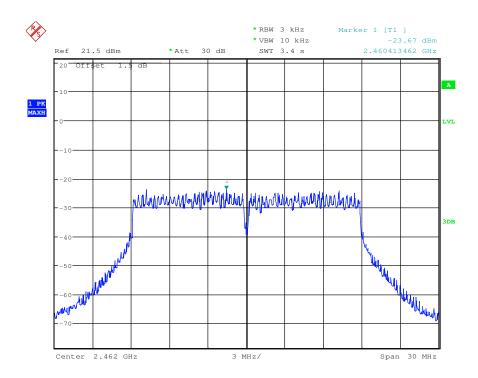



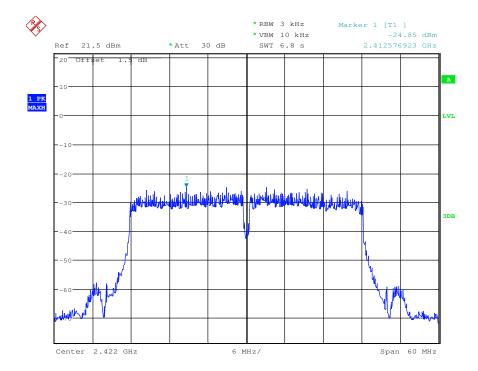





Report No.: SZEM140300130801

Page: 42 of 118

Test mode: 802.11n(HT40) Test channel: Middle

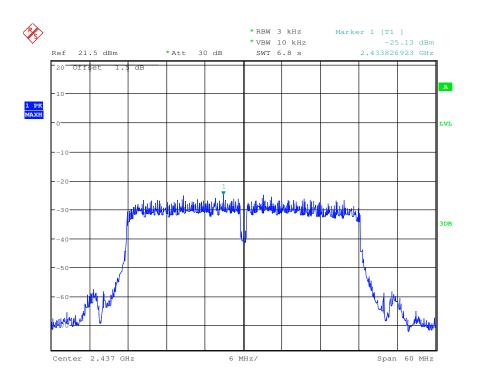

Test mode: 802.11n(HT40) Test channel: Highest

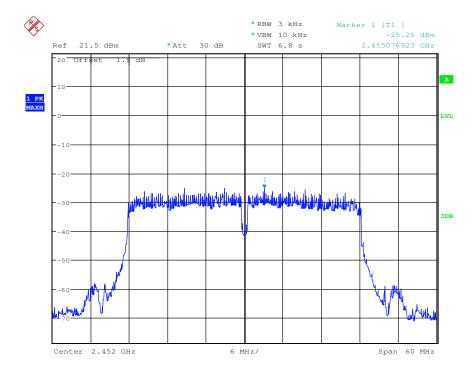



Report No.: SZEM140300130801

Page: 43 of 118

7.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01 v03r02
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread
	spectrum intentional radiator is operating, the radio frequency power that is
	produced by the intentional radiator shall be at least 20 dB below that in the
	100 kHz bandwidth within the band that contains the highest level of the
	desired power, based on either an RF conducted or a radiated
	measurement.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass




Report No.: SZEM140300130801


Page: 44 of 118

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

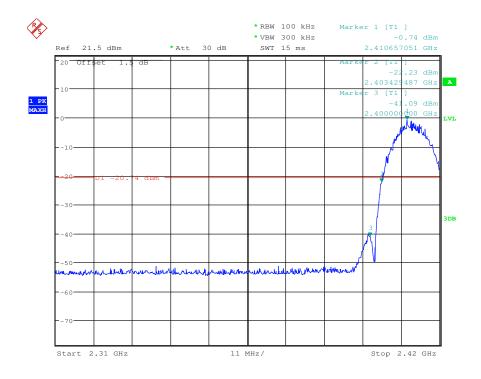

Test mode: 802.11b Test channel: Highest

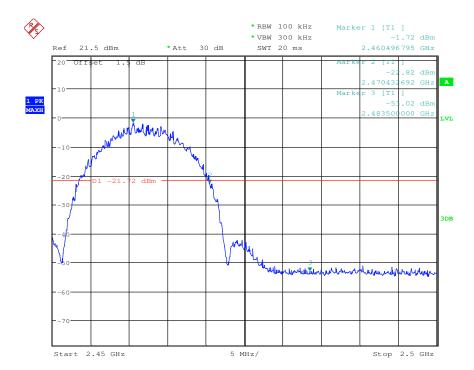





Report No.: SZEM140300130801

Page: 45 of 118

Test mode: 802.11g Test channel: Lowest

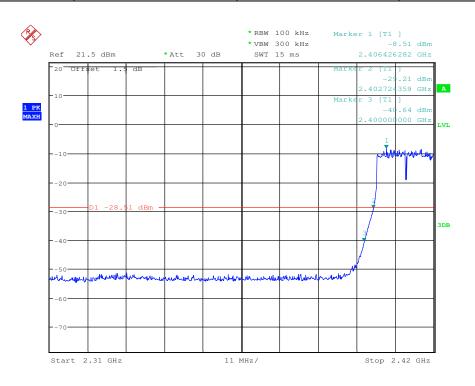



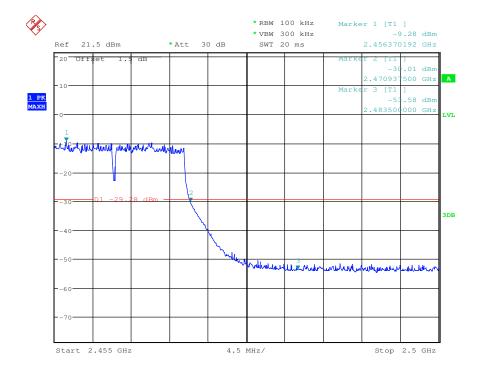





Report No.: SZEM140300130801

Page: 46 of 118

Test mode: 802.11n(HT20) Test channel: Lowest

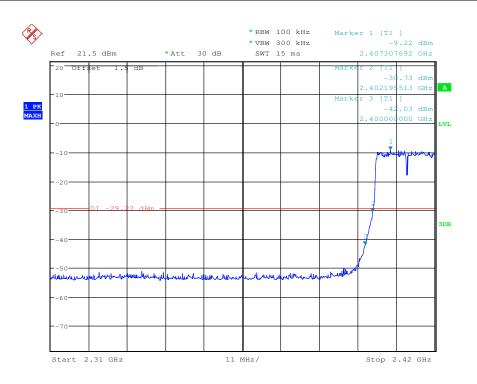

Test mode: 802.11n(HT20) Test channel: Highest

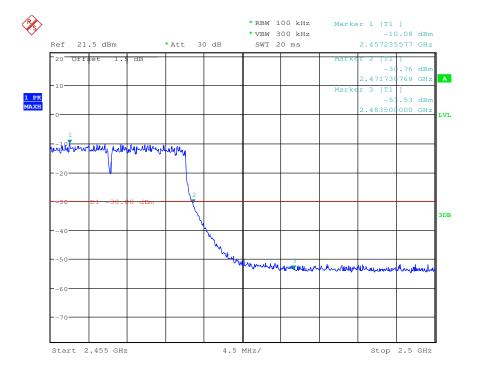





Report No.: SZEM140300130801

Page: 47 of 118

Test mode: 802.11n(HT40) Test channel: Lowest

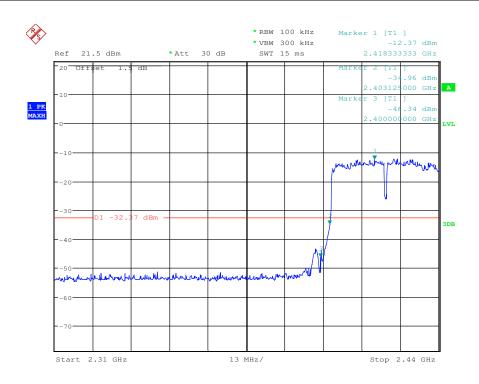

Test mode: 802.11n(HT40) Test channel: Highest

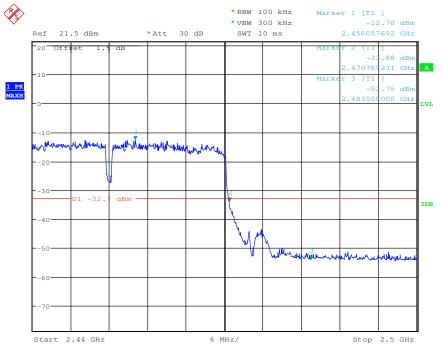





Report No.: SZEM140300130801

Page: 48 of 118

7.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01 v03r02
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread
	spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the
	100 kHz bandwidth within the band that contains the highest level of the
	desired power, based on either an RF conducted or a radiated
	measurement.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass





Report No.: SZEM140300130801

Page: 49 of 118

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

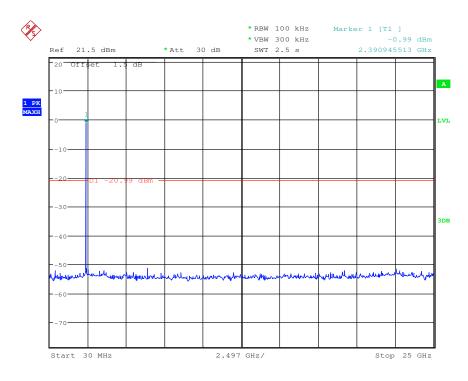


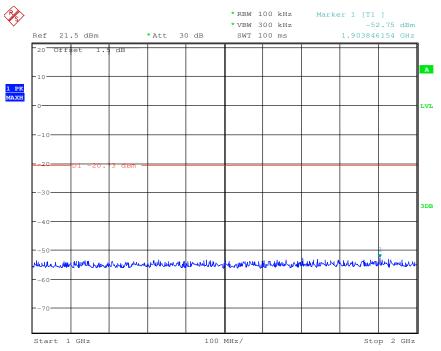




Report No.: SZEM140300130801

Page: 50 of 118

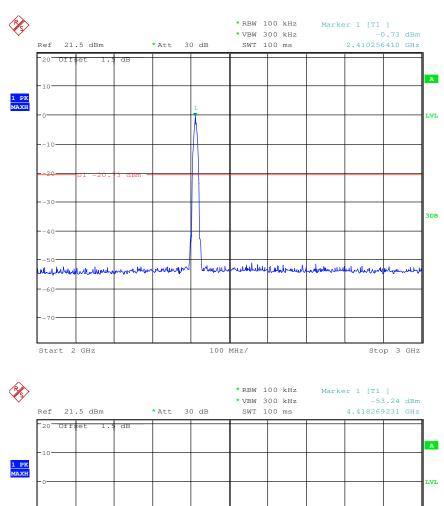

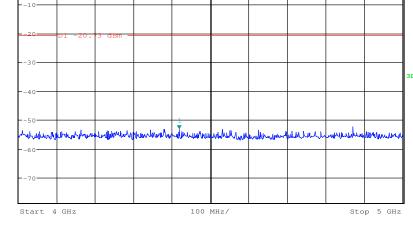





Report No.: SZEM140300130801

Page: 51 of 118

Test mode: 802.11b Test channel: Middle

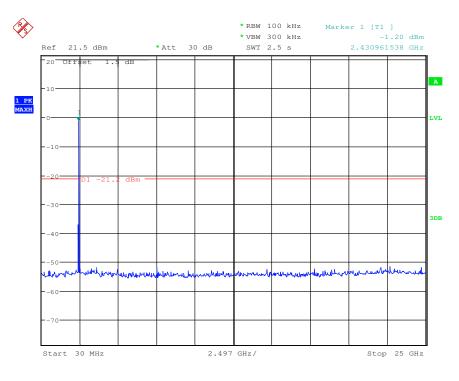

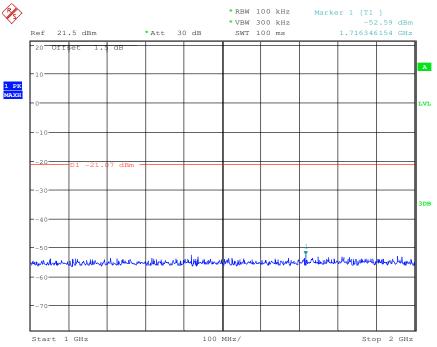




Report No.: SZEM140300130801

Stop 5 GHz

Page: 52 of 118

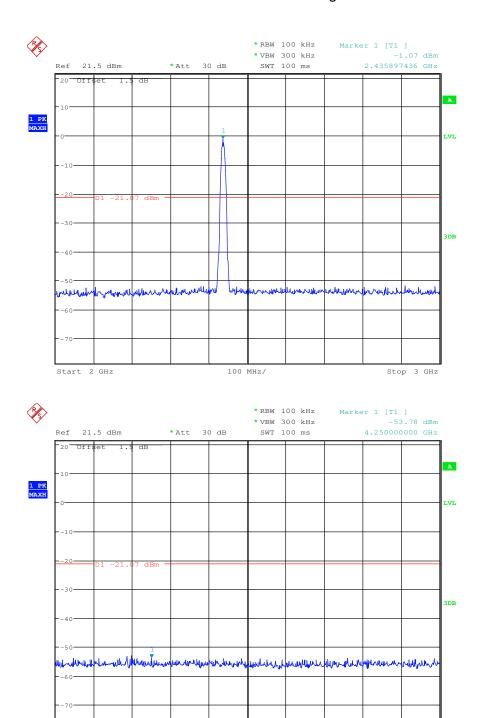

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 MHz/


Start 4 GHz




Report No.: SZEM140300130801

Page: 53 of 118

Test mode: 802.11b Test channel: Highest

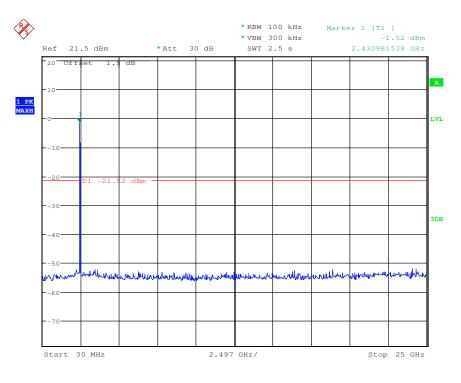


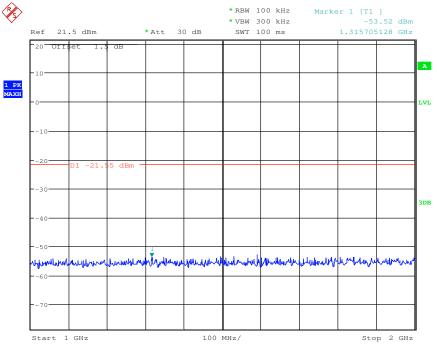




Report No.: SZEM140300130801

Page: 54 of 118

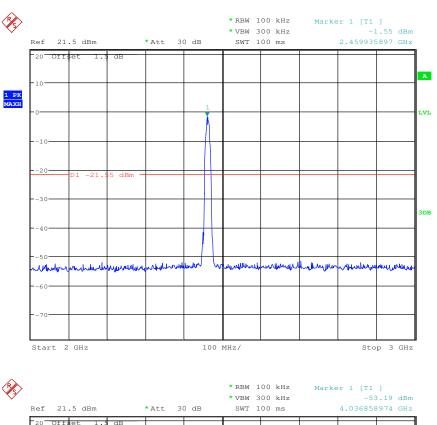

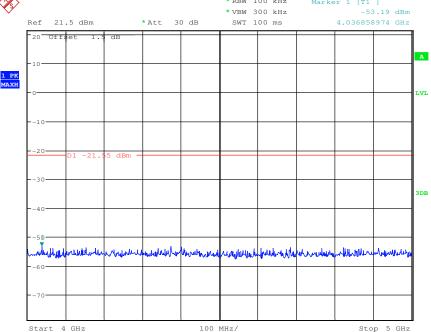





Report No.: SZEM140300130801

Page: 55 of 118

Test mode: 802.11g Test channel: Lowest

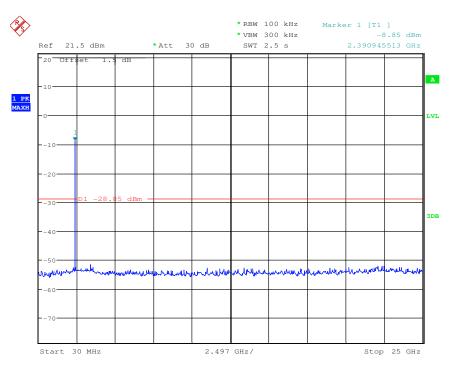

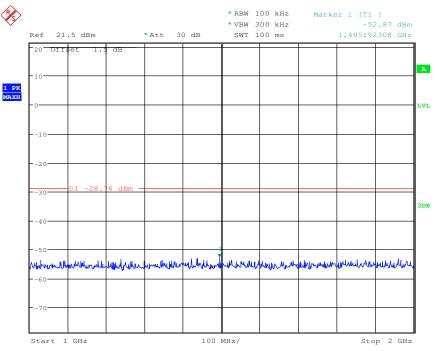




Report No.: SZEM140300130801

Stop 5 GHz

Page: 56 of 118

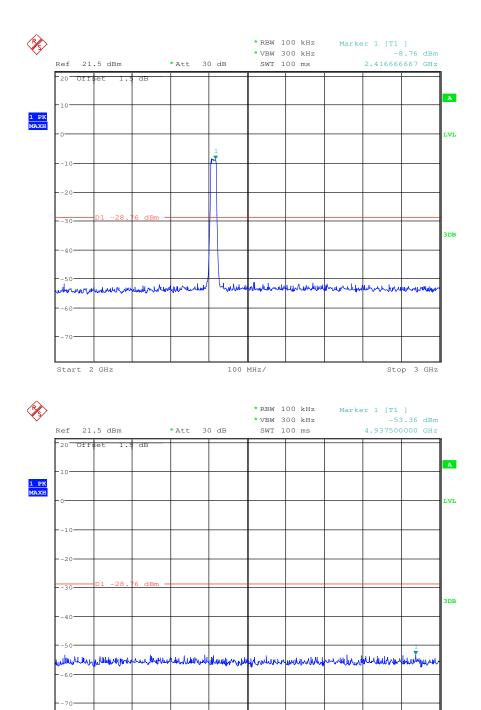

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 MHz/


Start 4 GHz




Report No.: SZEM140300130801

Page: 57 of 118

Test mode: 802.11g Test channel: Middle

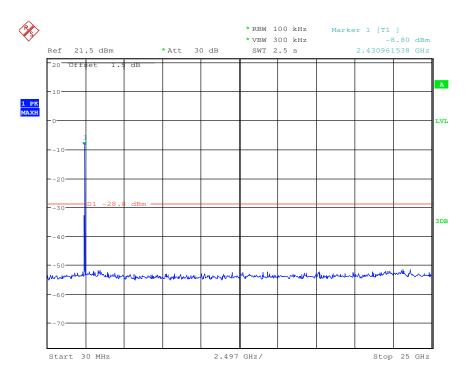

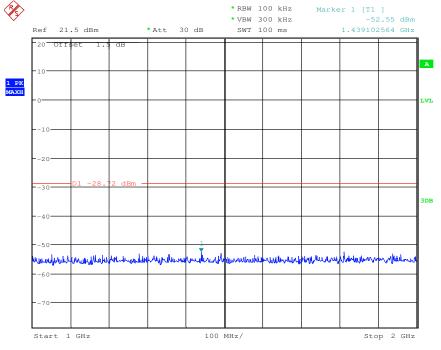






Report No.: SZEM140300130801

Stop 5 GHz

Page: 58 of 118

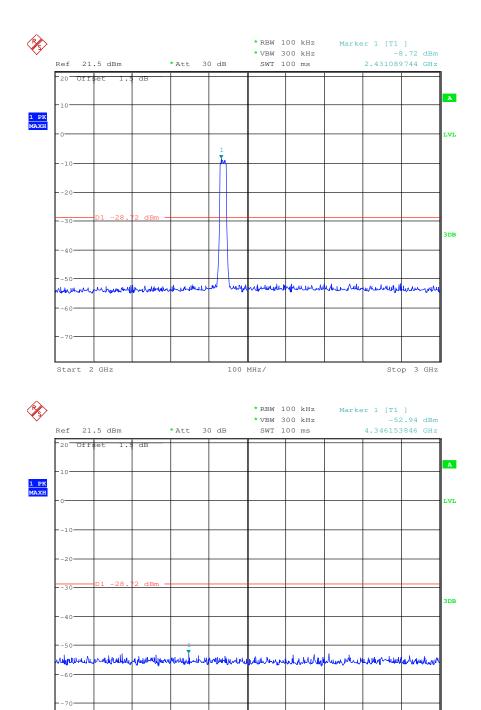

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 MHz/


Start 4 GHz




Report No.: SZEM140300130801

Page: 59 of 118

Test mode: 802.11g Test channel: Highest

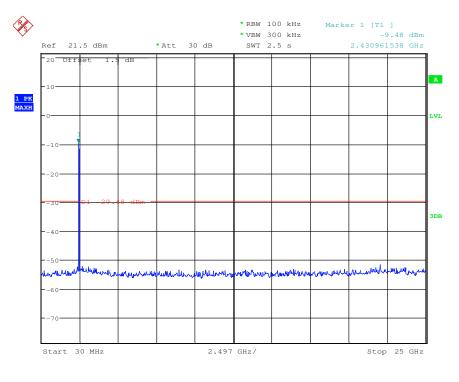


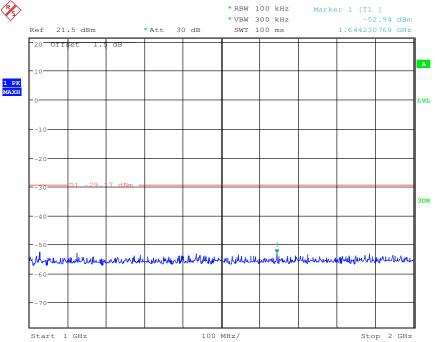



Report No.: SZEM140300130801

Page: 60 of 118

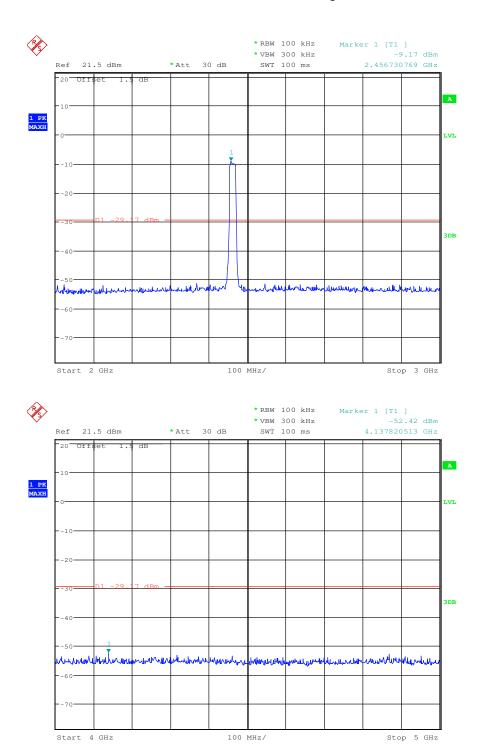





Report No.: SZEM140300130801

Page: 61 of 118

Test mode: 802.11n(HT20) Test channel: Lowest

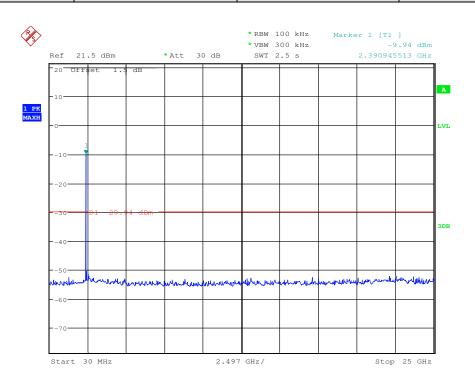

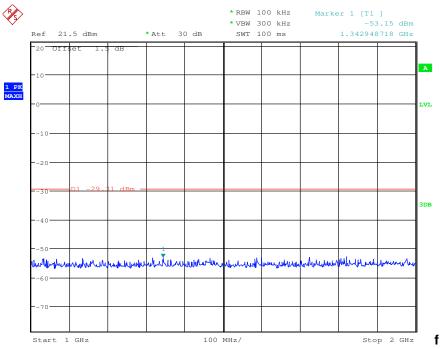




Report No.: SZEM140300130801

Stop 5 GHz

Page: 62 of 118

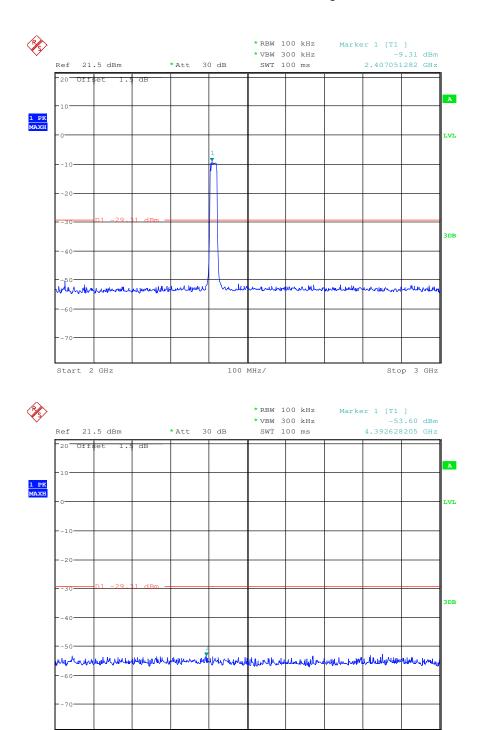

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 MHz/


Start 4 GHz




Report No.: SZEM140300130801

Page: 63 of 118

Test mode: 802.11n(HT20) Test channel: Middle

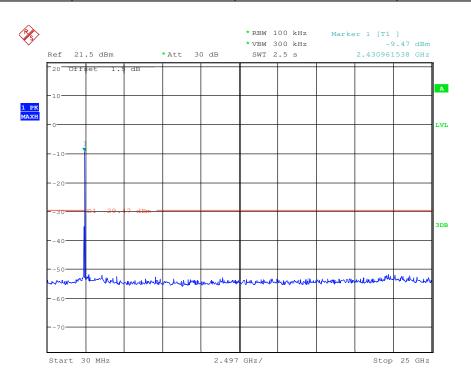


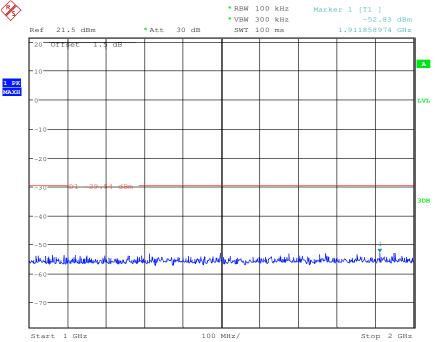



Report No.: SZEM140300130801

Page: 64 of 118

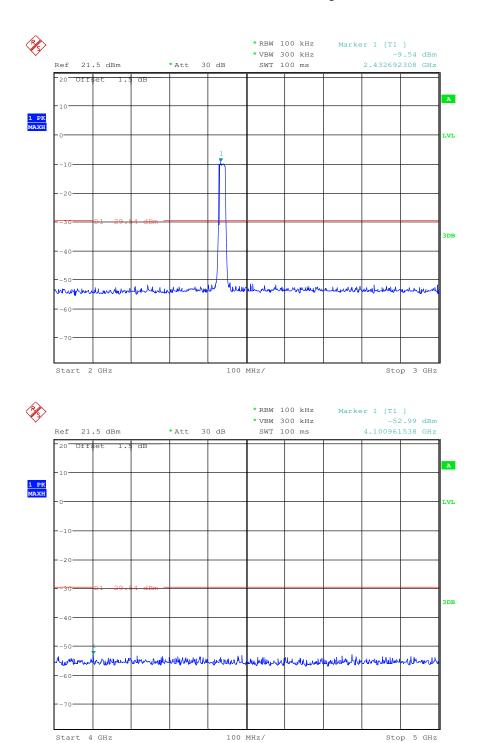





Report No.: SZEM140300130801

Page: 65 of 118

Test mode: 802.11n(HT20) Test channel: Highest

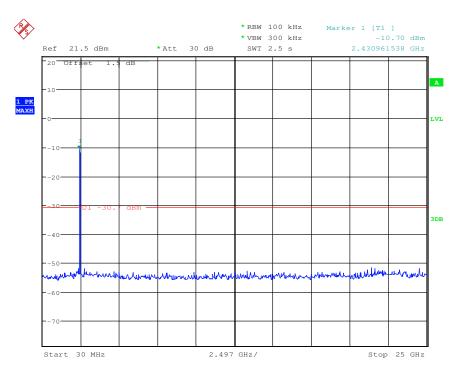


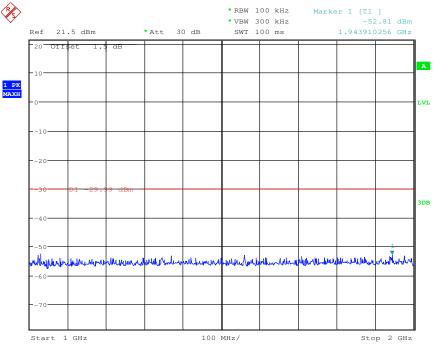




Report No.: SZEM140300130801

Page: 66 of 118

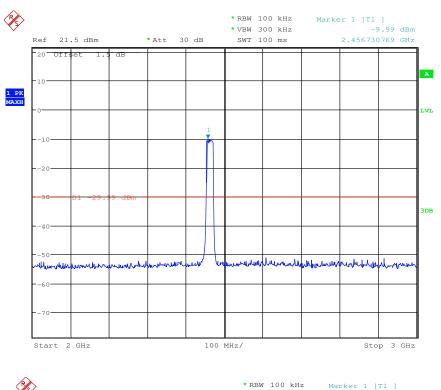

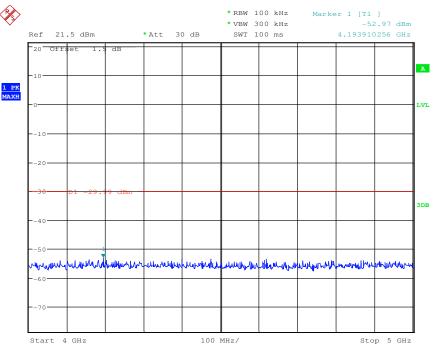





Report No.: SZEM140300130801

Page: 67 of 118

Test mode: 802.11n(HT40) Test channel: Lowest

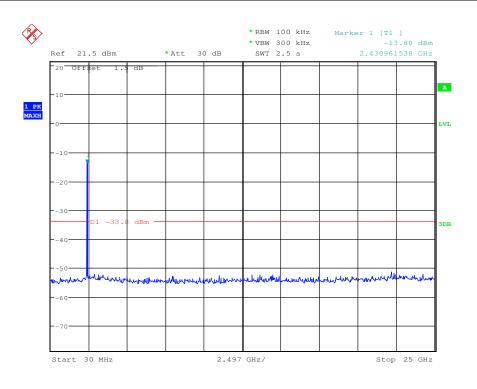

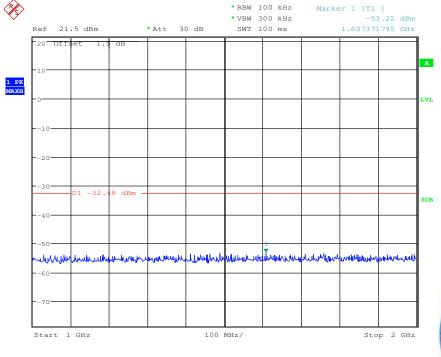






Report No.: SZEM140300130801

Stop 5 GHz

Page: 68 of 118

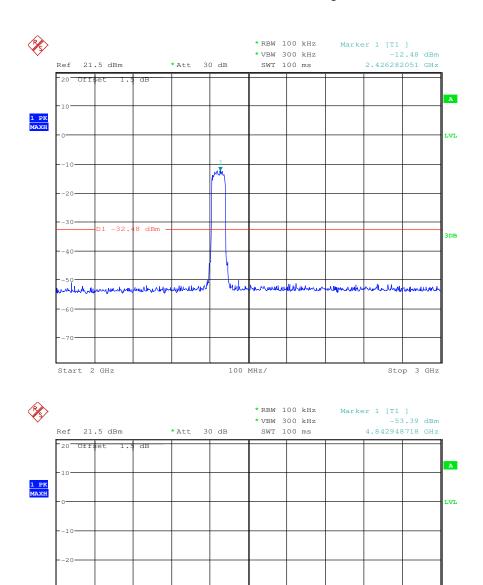

D1 -32.

Start 4 GHz

8 dBm

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


100 MHz/




Report No.: SZEM140300130801

Page: 69 of 118

Test mode: 802.11n(HT40) Test channel: Middle

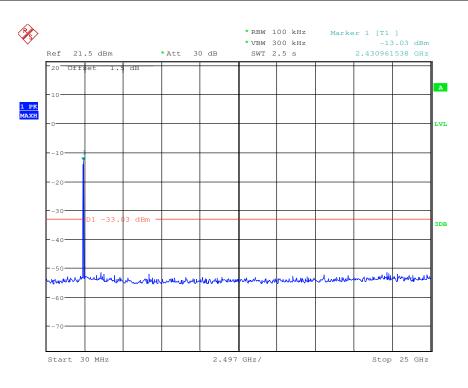

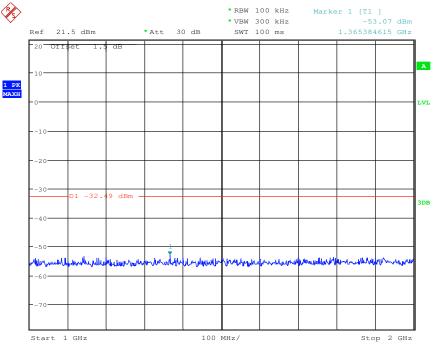




Report No.: SZEM140300130801

Stop 5 GHz

Page: 70 of 118

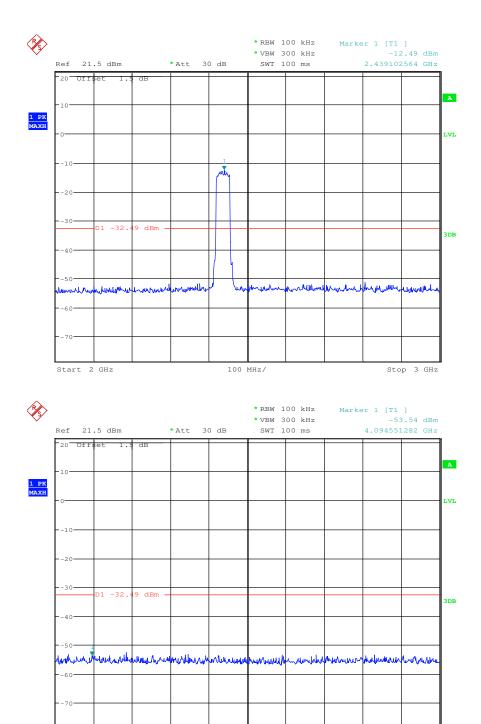

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 MHz/


Start 4 GHz




Report No.: SZEM140300130801

Page: 71 of 118

Test mode: 802.11n(HT40) Test channel: Highest

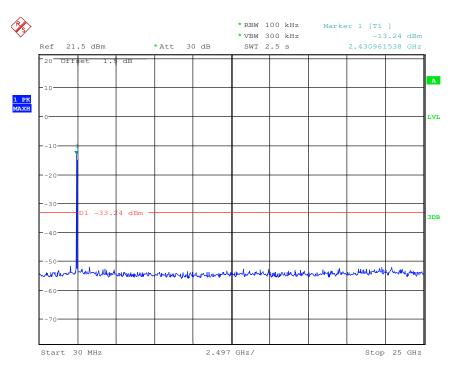


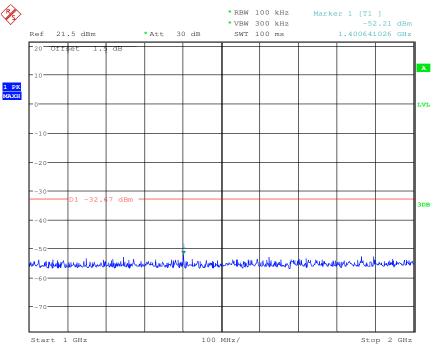



Report No.: SZEM140300130801

Page: 72 of 118

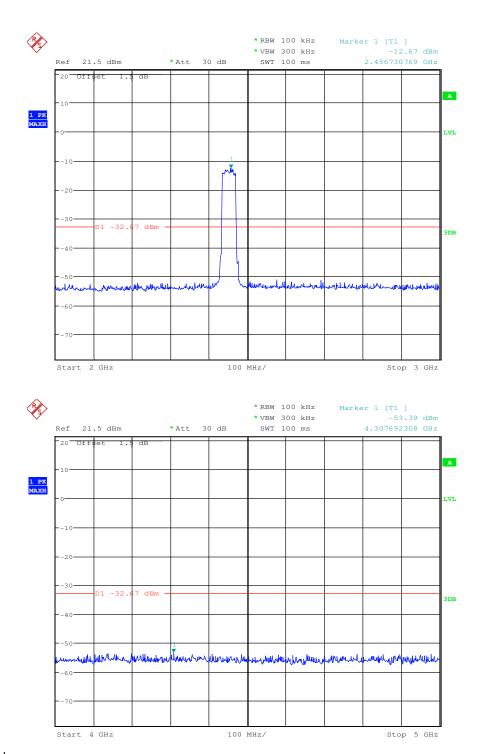

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM140300130801

Page: 73 of 118

7.8 Radiated Spurious Emissions


surement Distance: Frequency .009MHz-0.090MHz .009MHz-0.110MHz .110MHz-0.490MHz	3m (Semi-Anechoi Detector Peak Average Quasi-peak Peak	RBW 10kHz 10kHz	VBW 30kHz 30kHz	Remark Peak						
Frequency .009MHz-0.090MHz .009MHz-0.090MHz .090MHz-0.110MHz .110MHz-0.490MHz	Detector Peak Average Quasi-peak	RBW 10kHz 10kHz	30kHz							
.009MHz-0.090MHz .009MHz-0.090MHz .090MHz-0.110MHz .110MHz-0.490MHz	Peak Average Quasi-peak	10kHz 10kHz	30kHz							
.009MHz-0.090MHz .090MHz-0.110MHz .110MHz-0.490MHz	Average Quasi-peak	10kHz		Peak						
.090MHz-0.110MHz .110MHz-0.490MHz	Quasi-peak		30kH-2							
.110MHz-0.490MHz	•		JUNITZ	Average						
	Pook	10kHz	30kHz	Quasi-peak						
.110MHz-0.490MHz	reak	10kHz	30kHz	Peak						
	Average	10kHz	30kHz	Average						
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak						
30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak						
Above 1GHz	Peak	1MHz	3MHz	Peak						
Above TGHZ	Peak	1MHz	10Hz	Average						
Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)						
09MHz-0.490MHz	2400/F(kHz)	-	-	300						
90MHz-1.705MHz	24000/F(kHz)	-	-	30						
.705MHz-30MHz	30	-	-	30						
30MHz-88MHz	100	40.0	Quasi-peak	3						
88MHz-216MHz	150	43.5	Quasi-peak	3						
16MHz-960MHz	200	46.0	Quasi-peak	3						
960MHz-1GHz	500	54.0	Quasi-peak	3						
	500	54.0	Average	3						
Above 1GHz	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the tot peak emission level radiated by the device.									
	90MHz-1.705MHz .705MHz-30MHz 30MHz-88MHz 38MHz-216MHz 16MHz-960MHz 960MHz-1GHz	90MHz-1.705MHz 24000/F(kHz) .705MHz-30MHz 30 .30MHz-88MHz 100 .88MHz-216MHz 150 .16MHz-960MHz 200 .960MHz-1GHz 500	90MHz-1.705MHz 24000/F(kHz)705MHz-30MHz 3030MHz-88MHz 100 40.0 .38MHz-216MHz 150 43.5 .16MHz-960MHz 200 46.0 .960MHz-1GHz 500 54.0 .Above 1GHz 500 54.0	90MHz-1.705MHz 24000/F(kHz)						



Report No.: SZEM140300130801

Page: 74 of 118

Test Setup:

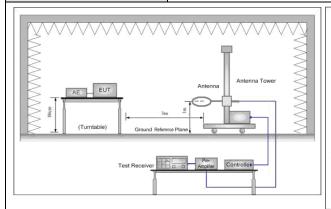

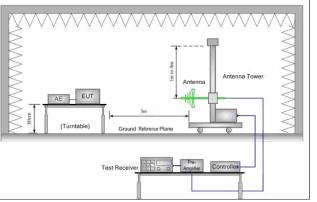


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

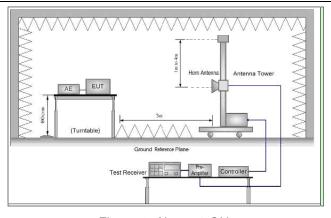


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average



Report No.: SZEM140300130801

Page: 75 of 118

	method as specified and then reported in a data sheet.				
	 g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel 				
	h. Repeat above procedures until all frequencies measured was complete.				
Exploratory Test Mode:	Charge + Transmitting				
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)				
	Only the worst case is recorded in the report.				
Instruments Used:	Refer to section 6 for details				
Test Results:	Pass				




Report No.: SZEM140300130801

Page: 76 of 118

7.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge + Transmitting	Vertical

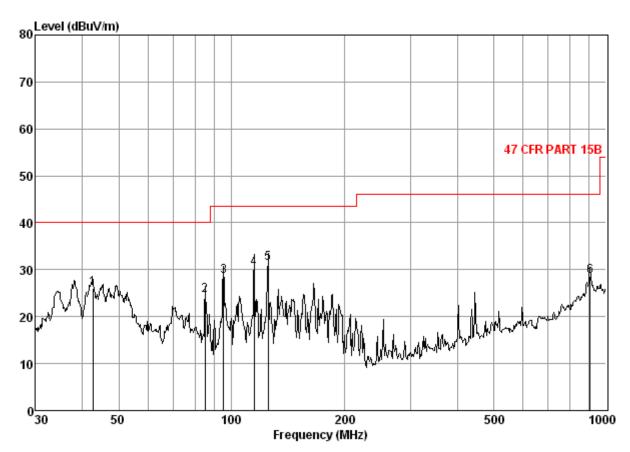

Condition: 47 CFR PART 15B 3m 3142C VERTICAL

Job No. : 1308RF Mode : Charge+TX


040				Preamp Factor			Limit Line	Over Limit
-	MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5	42.60 85.00 95.09 114.92 125.01 906.48	0.66 1.10 1.15 1.24 1.26 3.61	10.60 5.90 5.40 7.51 7.90 20.27	27. 31 27. 22 27. 21 27. 10 27. 04 26. 75	42. 01 44. 72 49. 27 48. 61 49. 35 31. 42		40.00 43.50 43.50 43.50	



Report No.: SZEM140300130801

Page: 77 of 118

Test mode: Charge + Transmitting Horizontal

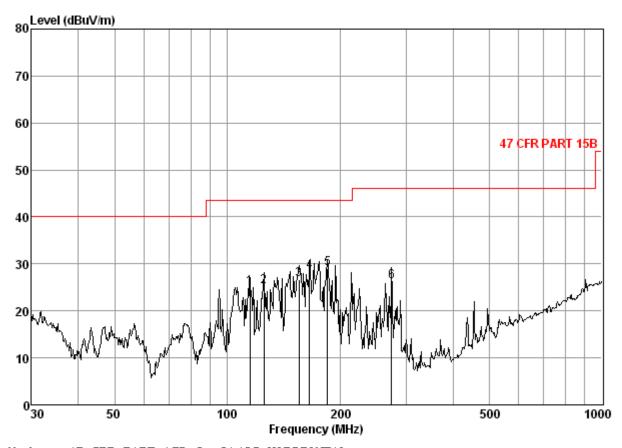

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 1308RF Mode : Charge+TX

	Freq	CableAr Loss F		Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	d₿	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
2 3 4 5	114.92 125.01 155.36 165.49 185.14 274.19	1. 24 1. 26 1. 33 1. 35 1. 38 1. 79	7.51 7.90 9.60 9.50 6.70 9.14	27. 10 27. 04 26. 88 26. 83 26. 75 26. 47	43.35 43.06 42.54 44.43 47.59 41.86	25. 00 25. 18 26. 59 28. 45 28. 92 26. 32	43.50 43.50 43.50 43.50	-18.50 -18.32 -16.91 -15.05 -14.58 -19.68





Report No.: SZEM140300130801

Page: 78 of 118

7.8.2 Transmitter emission above 1GHz

Test mode:	802	.11b	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3049.394	5.12	33.38	40.34	44.95	43.11	74	-30.89	Vertical
3933.367	6.38	33.74	40.98	46.74	45.88	74	-28.12	Vertical
4824.000	7.45	34.68	41.64	46.39	46.88	74	-27.12	Vertical
7236.000	8.76	35.90	39.85	44.19	49.00	74	-25.00	Vertical
9648.000	9.69	37.36	37.76	40.89	50.18	74	-23.82	Vertical
12055.600	11.31	38.95	38.30	40.94	52.90	74	-21.10	Vertical
2957.654	5.02	33.33	40.27	45.75	43.83	74	-30.17	Horizontal
3913.393	6.33	33.70	40.97	46.09	45.15	74	-28.85	Horizontal
4824.000	7.45	34.68	41.64	45.99	46.48	74	-27.52	Horizontal
7236.000	8.76	35.90	39.85	44.00	48.81	74	-25.19	Horizontal
9648.000	9.69	37.36	37.76	41.02	50.31	74	-23.69	Horizontal
12055.600	11.31	38.95	38.30	40.72	52.68	74	-21.32	Horizontal

Test mode:	802	.11b	Test ch	annel:	Middle	Remark	(:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2890.665	4.98	33.24	40.23	45.22	43.21	74	-30.79	Vertical
3933.367	6.38	33.74	40.98	45.39	44.53	74	-29.47	Vertical
4874.000	7.48	34.59	41.68	45.77	46.16	74	-27.84	Vertical
7311.000	8.85	35.92	39.79	44.77	49.75	74	-24.25	Vertical
9748.000	9.74	37.46	37.68	40.69	50.21	74	-23.79	Vertical
11933.470	11.24	38.83	38.24	40.71	52.54	74	-21.46	Vertical
2942.635	5.01	33.31	40.26	45.94	44.00	74	-30.00	Horizontal
3943.392	6.38	33.74	41.00	45.97	45.09	74	-28.91	Horizontal
4874.000	7.48	34.59	41.68	47.49	47.88	74	-26.12	Horizontal
7311.000	8.85	35.92	39.79	44.52	49.50	74	-24.50	Horizontal
9748.000	9.74	37.46	37.68	41.68	51.20	74	-22.80	Horizontal
11994.380	11.28	38.90	38.28	41.16	53.06	74	-20.94	Horizontal



Report No.: SZEM140300130801

Page: 79 of 118

Test mode:	802	.11b	Test cha	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3010.828	5.07	33.40	40.31	43.91	42.07	74	-31.93	Vertical
3983.750	6.43	33.80	41.02	45.48	44.69	74	-29.31	Vertical
4924.000	7.51	34.51	41.72	46.50	46.80	74	-27.20	Vertical
7386.000	8.94	35.96	39.72	43.64	48.82	74	-25.18	Vertical
9848.000	9.78	37.54	37.58	40.60	50.34	74	-23.66	Vertical
11933.470	11.24	38.83	38.24	41.21	53.04	74	-20.96	Vertical
3041.641	5.12	33.39	40.33	45.43	43.61	74	-30.39	Horizontal
3943.392	6.38	33.74	41.00	45.88	45.00	74	-29.00	Horizontal
4924.000	7.51	34.51	41.72	46.07	46.37	74	-27.63	Horizontal
7386.000	8.94	35.96	39.72	43.67	48.85	74	-25.15	Horizontal
9848.000	9.78	37.54	37.58	40.56	50.30	74	-23.70	Horizontal
11963.890	11.26	38.87	38.26	40.24	52.11	74	-21.89	Horizontal

Test mode:	802	.11g	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3026.195	5.09	33.39	40.33	44.55	42.70	74	-31.30	Vertical
3933.367	6.38	33.74	40.98	45.66	44.80	74	-29.20	Vertical
4824.000	7.45	34.68	41.64	46.15	46.64	74	-27.36	Vertical
7236.000	8.76	35.90	39.85	43.50	48.31	74	-25.69	Vertical
9648.000	9.69	37.36	37.76	41.52	50.81	74	-23.19	Vertical
12086.330	11.32	38.99	38.31	41.04	53.04	74	-20.96	Vertical
3041.641	5.12	33.39	40.33	45.76	43.94	74	-30.06	Horizontal
3963.520	6.41	33.76	41.01	46.34	45.50	74	-28.50	Horizontal
4824.000	7.45	34.68	41.64	45.84	46.33	74	-27.67	Horizontal
7236.000	8.76	35.90	39.85	43.31	48.12	74	-25.88	Horizontal
9648.000	9.69	37.36	37.76	40.84	50.13	74	-23.87	Horizontal
11603.960	11.00	38.50	38.11	41.03	52.42	74	-21.58	Horizontal



Report No.: SZEM140300130801

Page: 80 of 118

Test mode:	802	.11g	Test cha	annel:	Middle	Remark	-	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2995.538	5.05	33.38	40.30	44.77	42.90	74	-31.10	Vertical
3903.444	6.33	33.70	40.97	45.31	44.37	74	-29.63	Vertical
4874.000	7.48	34.59	41.68	45.44	45.83	74	-28.17	Vertical
7311.000	8.85	35.92	39.79	43.30	48.28	74	-25.72	Vertical
9748.000	9.74	37.46	37.68	41.06	50.58	74	-23.42	Vertical
12024.960	11.30	38.93	38.28	40.69	52.64	74	-21.36	Vertical
3010.828	5.07	33.40	40.31	45.47	43.63	74	-30.37	Horizontal
3963.520	6.41	33.76	41.01	45.77	44.93	74	-29.07	Horizontal
4874.000	7.48	34.59	41.68	46.57	46.96	74	-27.04	Horizontal
7311.000	8.85	35.92	39.79	43.35	48.33	74	-25.67	Horizontal
9748.000	9.74	37.46	37.68	40.97	50.49	74	-23.51	Horizontal
11752.600	11.11	38.66	38.17	40.66	52.26	74	-21.74	Horizontal

Test mode:	802	.11g	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3018.502	5.09	33.39	40.31	44.70	42.87	74	-31.13	Vertical
3943.392	6.38	33.74	41.00	45.87	44.99	74	-29.01	Vertical
4924.000	7.51	34.51	41.72	46.29	46.59	74	-27.41	Vertical
7386.000	8.94	35.96	39.72	43.08	48.26	74	-25.74	Vertical
9848.000	9.78	37.54	37.58	41.15	50.89	74	-23.11	Vertical
11812.580	11.15	38.71	38.20	41.36	53.02	74	-20.98	Vertical
3033.908	5.12	33.39	40.33	45.49	43.67	74	-30.33	Horizontal
3943.392	6.38	33.74	41.00	45.08	44.20	74	-29.80	Horizontal
4924.000	7.51	34.51	41.72	45.06	45.36	74	-28.64	Horizontal
7386.000	8.94	35.96	39.72	43.54	48.72	74	-25.28	Horizontal
9848.000	9.78	37.54	37.58	40.66	50.40	74	-23.60	Horizontal
11933.470	11.24	38.83	38.24	40.70	52.53	74	-21.47	Horizontal



Report No.: SZEM140300130801

Page: 81 of 118

Test mode:	802	.11 n(HT20)) Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3018.502	5.09	33.39	40.31	45.38	43.55	74	-30.45	Vertical
3933.367	6.38	33.74	40.98	45.36	44.50	74	-29.50	Vertical
4824.000	7.45	34.68	41.64	45.94	46.43	74	-27.57	Vertical
7236.000	8.76	35.90	39.85	43.68	48.49	74	-25.51	Vertical
9648.000	9.69	37.36	37.76	41.15	50.44	74	-23.56	Vertical
12086.330	11.32	38.99	38.31	40.61	52.61	74	-21.39	Vertical
3010.828	5.07	33.40	40.31	44.52	42.68	74	-31.32	Horizontal
3963.520	6.41	33.76	41.01	44.86	44.02	74	-29.98	Horizontal
4824.000	7.45	34.68	41.64	45.79	46.28	74	-27.72	Horizontal
7236.000	8.76	35.90	39.85	43.31	48.12	74	-25.88	Horizontal
9648.000	9.69	37.36	37.76	41.70	50.99	74	-23.01	Horizontal
11722.720	11.08	38.62	38.16	40.84	52.38	74	-21.62	Horizontal

Test mode:	802	.11 n(HT20)	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3018.502	5.09	33.39	40.31	45.68	43.85	74	-30.15	Vertical
3903.444	6.33	33.70	40.97	45.44	44.50	74	-29.50	Vertical
4874.000	7.48	34.59	41.68	45.82	46.21	74	-27.79	Vertical
7311.000	8.85	35.92	39.79	43.65	48.63	74	-25.37	Vertical
9748.000	9.74	37.46	37.68	40.58	50.10	74	-23.90	Vertical
11963.890	11.26	38.87	38.26	40.86	52.73	74	-21.27	Vertical
3049.394	5.12	33.38	40.34	44.64	42.80	74	-31.20	Horizontal
3933.367	6.38	33.74	40.98	45.81	44.95	74	-29.05	Horizontal
4874.000	7.48	34.59	41.68	46.36	46.75	74	-27.25	Horizontal
7311.000	8.85	35.92	39.79	43.22	48.20	74	-25.80	Horizontal
9748.000	9.74	37.46	37.68	40.87	50.39	74	-23.61	Horizontal
12024.960	11.30	38.93	38.28	40.40	52.35	74	-21.65	Horizontal



Report No.: SZEM140300130801

Page: 82 of 118

Test mode:	802	.11 n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2980.327	5.05	33.35	40.28	45.07	43.19	74	-30.81	Vertical
3963.520	6.41	33.76	41.01	45.02	44.18	74	-29.82	Vertical
4924.000	7.51	34.51	41.72	45.90	46.20	74	-27.80	Vertical
7386.000	8.94	35.96	39.72	43.86	49.04	74	-24.96	Vertical
9848.000	9.78	37.54	37.58	40.42	50.16	74	-23.84	Vertical
12024.960	11.30	38.93	38.28	40.89	52.84	74	-21.16	Vertical
3026.195	5.09	33.39	40.33	44.63	42.78	74	-31.22	Horizontal
3923.367	6.36	33.72	40.98	45.01	44.11	74	-29.89	Horizontal
4924.000	7.51	34.51	41.72	45.73	46.03	74	-27.97	Horizontal
7386.000	8.94	35.96	39.72	43.36	48.54	74	-25.46	Horizontal
9848.000	9.78	37.54	37.58	40.36	50.10	74	-23.90	Horizontal
11933.470	11.24	38.83	38.24	40.93	52.76	74	-21.24	Horizontal

Test mode:	802	.11 n(HT40)	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3033.908	5.12	33.39	40.33	44.30	42.48	74	-31.52	Vertical
3963.520	6.41	33.76	41.01	45.22	44.38	74	-29.62	Vertical
4844.000	7.46	34.65	41.65	46.12	46.58	74	-27.42	Vertical
7266.000	8.81	35.91	39.82	44.02	48.92	74	-25.08	Vertical
9688.000	9.71	37.39	37.73	41.16	50.53	74	-23.47	Vertical
11692.920	11.07	38.59	38.15	41.52	53.03	74	-20.97	Vertical
3080.601	5.17	33.37	40.37	45.33	43.50	74	-30.50	Horizontal
3933.367	6.38	33.74	40.98	44.98	44.12	74	-29.88	Horizontal
4844.000	7.46	34.65	41.65	45.76	46.22	74	-27.78	Horizontal
7266.000	8.81	35.91	39.82	43.62	48.52	74	-25.48	Horizontal
9688.000	9.71	37.39	37.73	41.65	51.02	74	-22.98	Horizontal
11963.890	11.26	38.87	38.26	41.13	53.00	74	-21.00	Horizontal



Report No.: SZEM140300130801

Page: 83 of 118

Test mode:	802	.11 n(HT40)	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3010.828	5.07	33.40	40.31	44.67	42.83	74	-31.17	Vertical
3953.443	6.41	33.76	41.00	45.45	44.62	74	-29.38	Vertical
4874.000	7.48	34.59	41.68	45.76	46.15	74	-27.85	Vertical
7311.000	8.85	35.92	39.79	43.21	48.19	74	-25.81	Vertical
9748.000	9.74	37.46	37.68	41.04	50.56	74	-23.44	Vertical
12086.330	11.32	38.99	38.31	41.09	53.09	74	-20.91	Vertical
3026.195	5.09	33.39	40.33	43.89	42.04	74	-31.96	Horizontal
3983.750	6.43	33.80	41.02	44.93	44.14	74	-29.86	Horizontal
4874.000	7.48	34.59	41.68	45.64	46.03	74	-27.97	Horizontal
7311.000	8.85	35.92	39.79	44.08	49.06	74	-24.94	Horizontal
9748.000	9.74	37.46	37.68	40.84	50.36	74	-23.64	Horizontal
12055.600	11.31	38.95	38.30	40.61	52.57	74	-21.43	Horizontal

Test mode:	802	.11 n(HT40)	Test ch	annel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3018.502	5.09	33.39	40.31	43.96	42.13	74	-31.87	Vertical
3943.392	6.38	33.74	41.00	44.93	44.05	74	-29.95	Vertical
4904.000	7.49	34.54	41.70	45.74	46.07	74	-27.93	Vertical
7356.000	8.92	35.94	39.74	44.38	49.50	74	-24.50	Vertical
9808.000	9.76	37.51	37.61	40.62	50.28	74	-23.72	Vertical
12024.960	11.30	38.93	38.28	40.56	52.51	74	-21.49	Vertical
3026.195	5.09	33.39	40.33	44.59	42.74	74	-31.26	Horizontal
3963.520	6.41	33.76	41.01	45.51	44.67	74	-29.33	Horizontal
4904.000	7.49	34.54	41.70	46.47	46.80	74	-27.20	Horizontal
7356.000	8.92	35.94	39.74	43.32	48.44	74	-25.56	Horizontal
9808.000	9.76	37.51	37.61	41.29	50.95	74	-23.05	Horizontal
12055.600	11.31	38.95	38.30	40.46	52.42	74	-21.58	Horizontal



Report No.: SZEM140300130801

Page: 84 of 118

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM140300130801

Page: 85 of 118

7.9 Restricted bands around fundamental frequency

Test Requirement:	17 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10 2009	NSI C63.10 2009								
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz 43.5 Quasi-peak Val									
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz 54.0 Average Value									
	Above 1GH2 74.0 Peak Value									
Test Setup:										



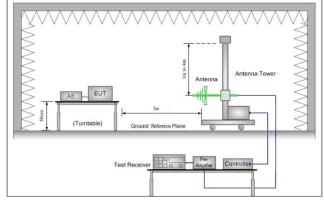

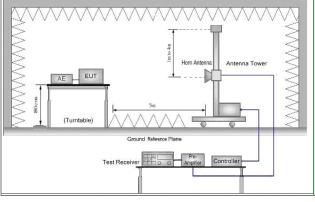


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM140300130801

Page: 86 of 118

Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel, the Highest channel
	h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20);13.5Mbps of rate is the worst case of 802.11n(HT40)
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass




Report No.: SZEM140300130801

Page: 87 of 118

Test plot as follows:

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Vertical

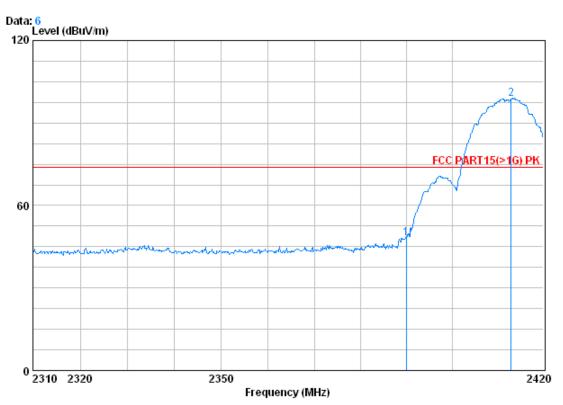

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1308RF Mode : 2412 B

> CableAntenna Preamp Read Limit Over Loss Factor Factor Freq Level Level Line Limit MHzdB dB/m dB dBuV dBuV/m dBuV/m 1 2390.000 2.98 32.51 39.85 52.52 48.17 74.00 -25.83 2.99 32.54 39.86 103.20 98.87 74.00 24.87 2412.960






Report No.: SZEM140300130801

Page: 88 of 118

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Horizontal

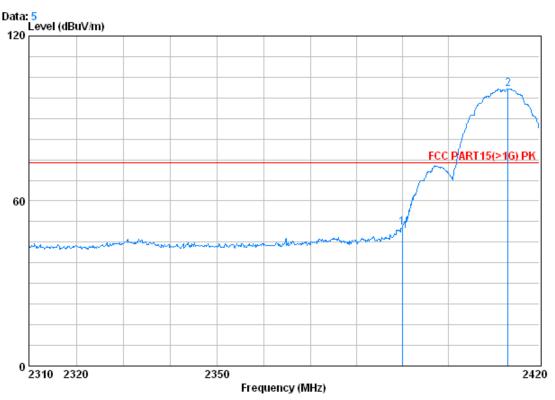

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1308RF Mode : 2412 B

MHz dB dB/m dB dBuV dBuV/m dBuV/m		Freq		Antenna Factor	•			Limit Line		
		MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	dBuV/m	dB	
1 2390.000 2.98 32.51 39.85 54.69 50.34 74.00 -23. 2 2413.070 2.99 32.54 39.86 105.12 100.79 74.00 26.	1									



Report No.: SZEM140300130801

Page: 89 of 118

Worse case mode: 802.11b Test channel: Lowest Remark: Average Vertical



Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1308RF Mode : 2412 B


		Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @		2390.000 2413.730			39.85 39.86				



Report No.: SZEM140300130801

Page: 90 of 118

Worse case mode: 802.11b Test channel: Lowest Remark: Average Horizontal

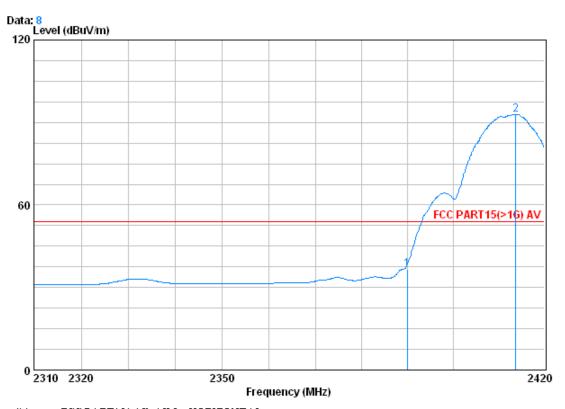

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1308RF Mode : 2412 B


		Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @		2390.000 2413.730			39.85 39.86				



Report No.: SZEM140300130801

Page: 91 of 118

Worse case mode: 802.11b Test channel: Highest Remark: Peak Vertical

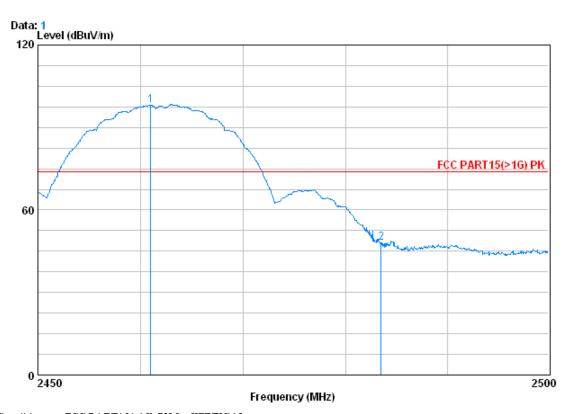

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1308RF Mode : 2462 B


	Freq		Antenna Factor	-			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2460.950 2483.500		32.64 32.67					



Report No.: SZEM140300130801

Page: 92 of 118

Worse case mode: 802.11b Test channel: Highest Remark: Peak Horizontal

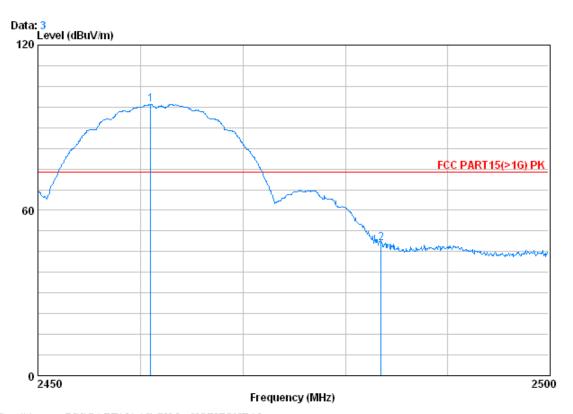

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1308RF Mode : 2462 B

	Freq		Antenna Factor	•				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2460.950 2483.500							



Report No.: SZEM140300130801

Page: 93 of 118

Worse case mode: 802.11b Test channel: Highest Remark: Average Vertical



Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1308RF Mode : 2462 B


	. 2 . 9 . 2	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0		2460.750	3.02	32.64	39.91	97.64	93.39	54.00	39.39
2		2483.500	3.03	32.67	39.92	42.53	38.31	54.00	-15.69



Report No.: SZEM140300130801

Page: 94 of 118

Worse case mode: 802.11b Test channel: Highest Remark: Average Horizontal

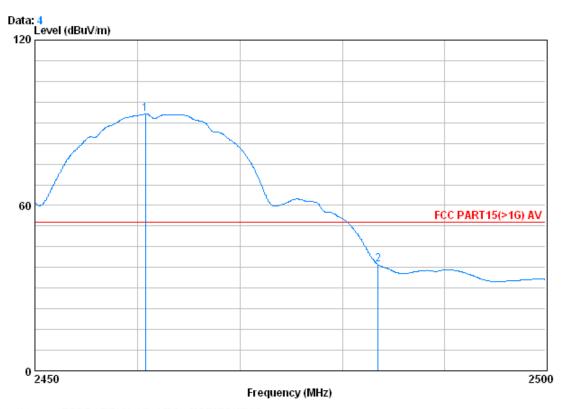

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1308RF Mode : 2462 B


		Cable	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2460.750	3.02	32.64	39.91	97.51	93.26	54.00	39.26
2	2483.500	3.03	32.67	39.92	42.81	38.59	54.00	-15.41



Report No.: SZEM140300130801

Page: 95 of 118

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Vertical

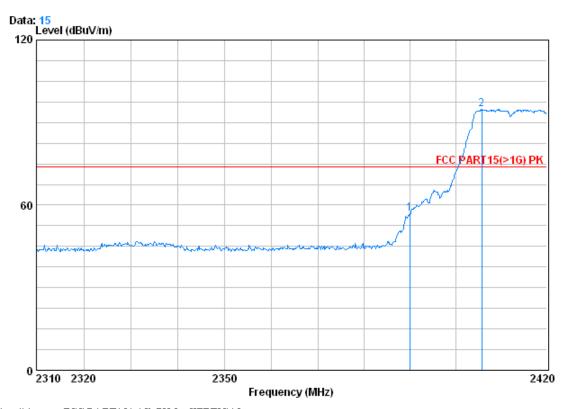

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1308RF Mode : 2412 G

		Cable	ıntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	——dB
						,	,	
1	2390.000	2 98	32 51	39.85	61 12	56 77	74 00	-17 23
_	2050.000	0.50	00.01	05.00	01.10	00		1
20	2405.680	2.99	32.54	39.86	99.20	94.87	74.00	20.87


ν



Report No.: SZEM140300130801

Page: 96 of 118

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Horizontal

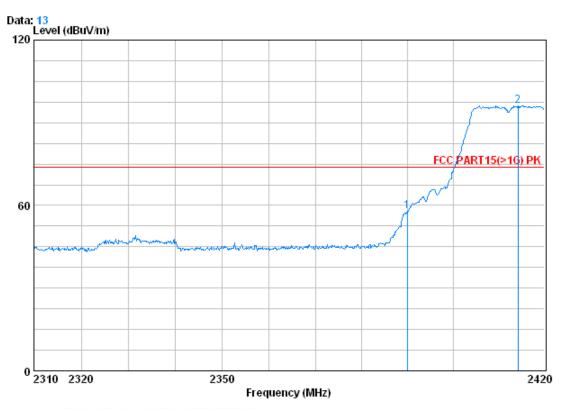

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1308RF Mode : 2412 G


			CableAntenna		Preamp	Read		Over	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		_							
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
				,			,	,	
1		2390.000	2 08	32 51	30 85	62.33	57 08	74 00	_16 02
_		2390.000	2.50	32.31	35.03	02.33	57.50	74.00	-10.02
2	0	2414.170	2.99	32.54	39.86	100.32	95.99	74.00	21.99



Report No.: SZEM140300130801

Page: 97 of 118

Worse case mode: 802.11g Test channel: Lowest Remark: Average Vertical

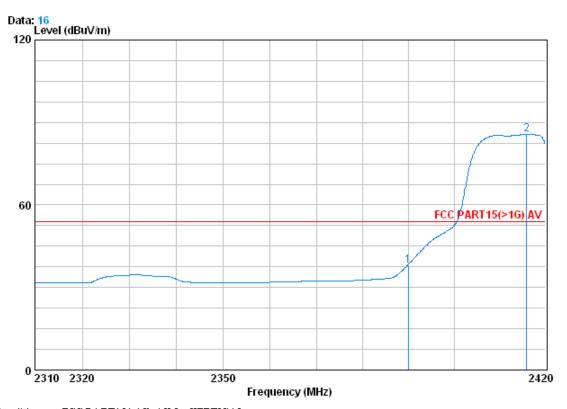

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1308RF Mode : 2412 G

	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @	2390.000 2415.930			39.85 39.88				






Report No.: SZEM140300130801

Page: 98 of 118

Worse case mode: 802.11g Test channel: Lowest Remark: Average Horizontal

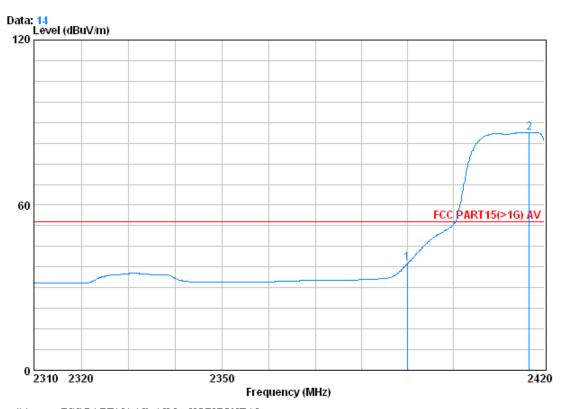

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1308RF Mode : 2412 G


		Cable	Antenna	Preamp	Read		Limit	Over
	Fre	eq Loss	Factor	Factor	Level	Level	Line	Limit
	M:	Iz di	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.0	00 2.98	32.51	39.85	43.12	38.76	54.00	-15.24
2	@ 2416.70	00 2.99	32.54	39.88	90.74	86.40	54.00	32.40



Report No.: SZEM140300130801

Page: 99 of 118

Worse case mode: 802.11g Test channel: Highest Remark: Peak Vertical

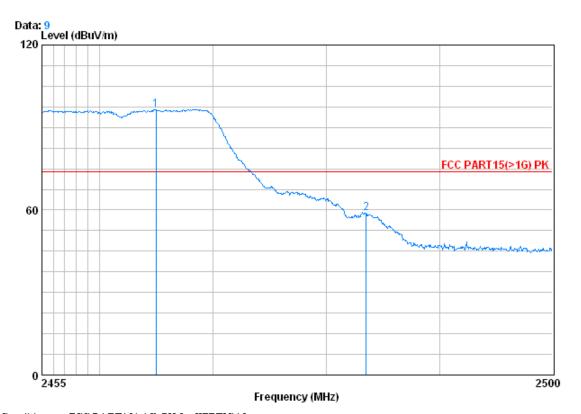

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1308RF Mode : 2462 G


	Freq	CableAntenna Preamp Freq Loss Factor Factor					Limit Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 0	2464.990 2483.500							22.49	



Report No.: SZEM140300130801

Page: 100 of 118

Worse case mode: 802.11g Test channel: Highest Remark: Peak Horizontal

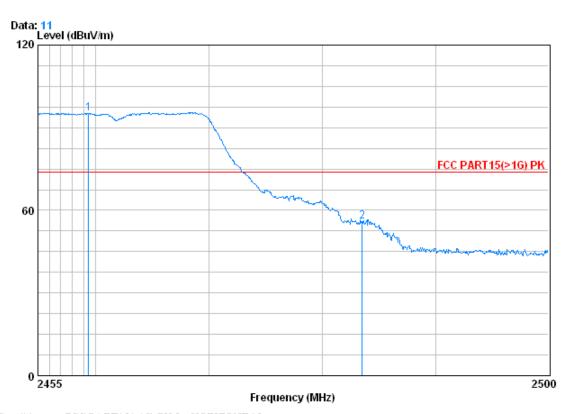

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1308RF Mode : 2462 G


	. 2 102 0	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0		2459.410			39.91				
2		2483.500	3.03	32.67	39.92	60.14	55.92	74.00	-18.08



Report No.: SZEM140300130801

Page: 101 of 118

Worse case mode: 802.11g Test channel: Highest Remark: Average Vertical

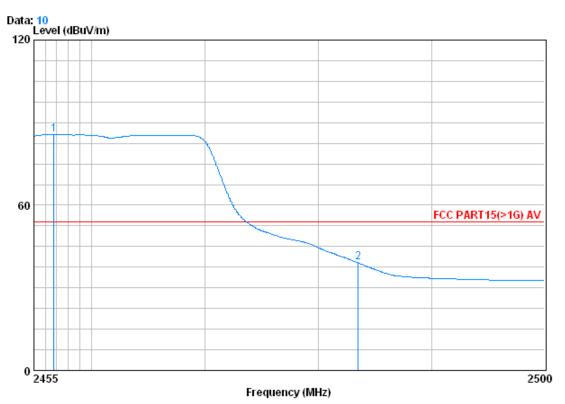

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1308RF Mode : 2462 G


	. 2 102 0	Freq			Preamp Factor			Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 () 2		2456.755 2483.500							



Report No.: SZEM140300130801

Page: 102 of 118

Worse case mode: 802.11g Test channel: Highest Remark: Average Horizontal

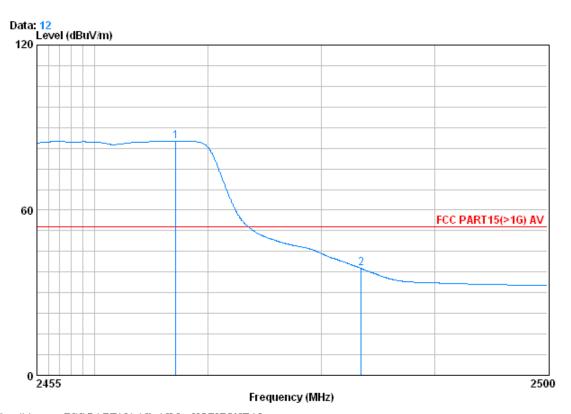

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1308RF Mode : 2462 G


	. 2 102 0	Freq			Preamp Factor			Limit Line	
	_	MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	dBuV/m	dB
1 @ 2		2467.150 2483.500			39.91 39.92				



Report No.: SZEM140300130801

Page: 103 of 118

Worse case mode: 802.11 n(HT20) Test channel: Lowest Remark: Peak Vertical

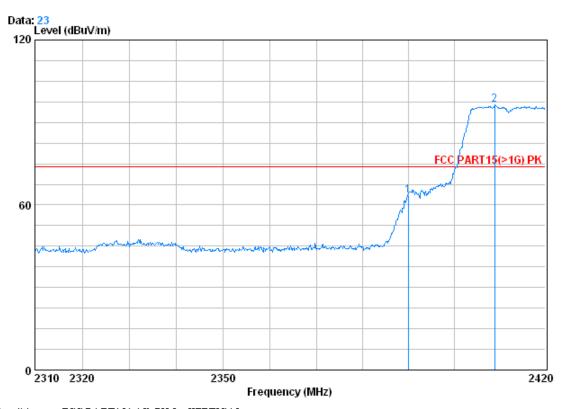

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1308RF Mode : 2412N


		Freq		Antenna Factor	•				
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000							
2	0	2408.890	2.99	32.54	39.86	100.75	96.42	74.00	22.42



Report No.: SZEM140300130801

Page: 104 of 118

Worse case mode: 802.11 n(HT20) Test channel: Lowest Remark: Peak Horizontal

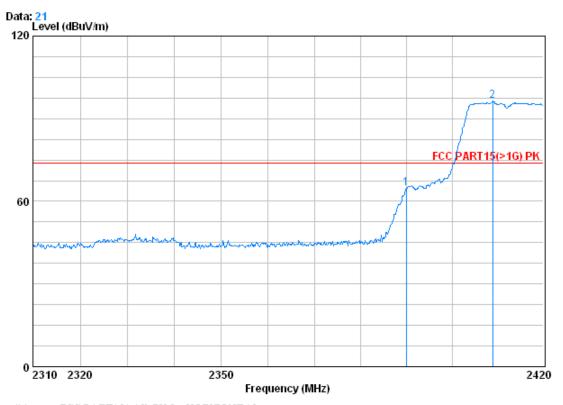

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1308RF Mode : 2412N


		CableAntenna		Preamp	Read	Limit		Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	69.01	64.66	74.00	-9.34
2 0	2408.890	2.99	32.54	39.86	100.70	96.38	74.00	22.38



Report No.: SZEM140300130801

Page: 105 of 118

Worse case mode: 802.11 n(HT20) Test channel: Lowest Remark: Average Vertical

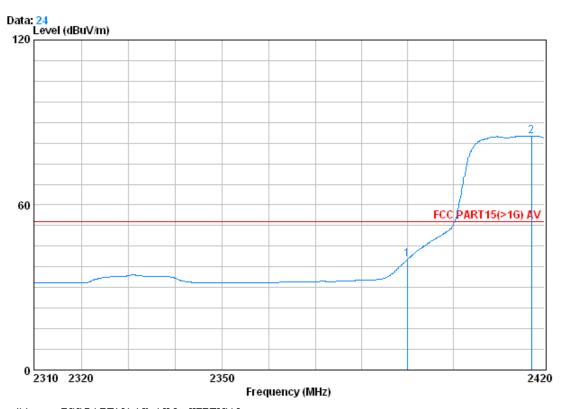

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1308RF Mode : 2412N


	 Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @	2390.000 2417.140			39.85 39.88				



Report No.: SZEM140300130801

Page: 106 of 118

Worse case mode: 802.11 n(HT20) Test channel: Lowest Remark: Average Horizontal

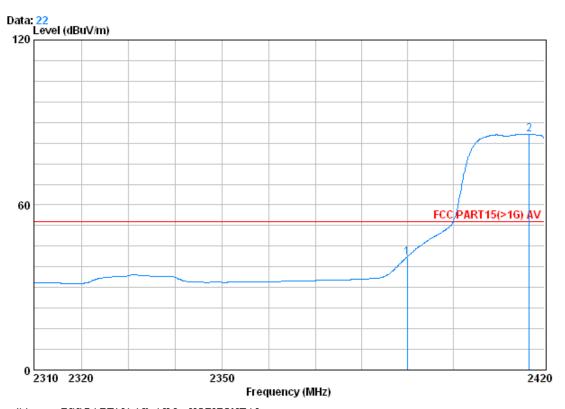

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1308RF Mode : 2412N


	Freq			Preamp Factor			Limit Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2 @	2390.000 2416.700			39.85 39.88					



Report No.: SZEM140300130801

Page: 107 of 118

Worse case mode: 802.11 n(HT20) Test channel: Highest Remark: Peak Vertical

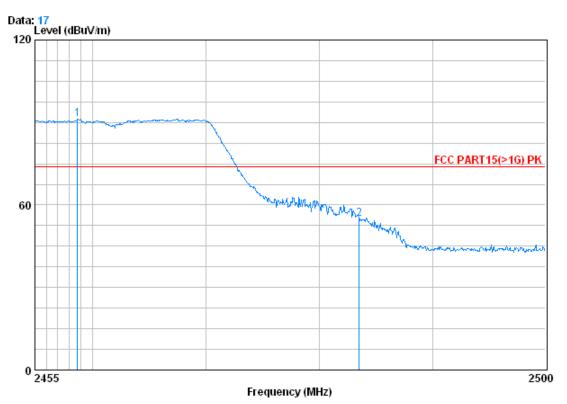

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1308RF Mode : 2462N

	 Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2458.735	3.02	32.64	39.91	95.44	91.19	74.00	17.19
2	2483.500	3.03	32.67	39.92	59.21	54.99	74.00	-19.01






Report No.: SZEM140300130801

Page: 108 of 118

Worse case mode: 802.11 n(HT20) Test channel: Highest Remark: Peak Horizontal

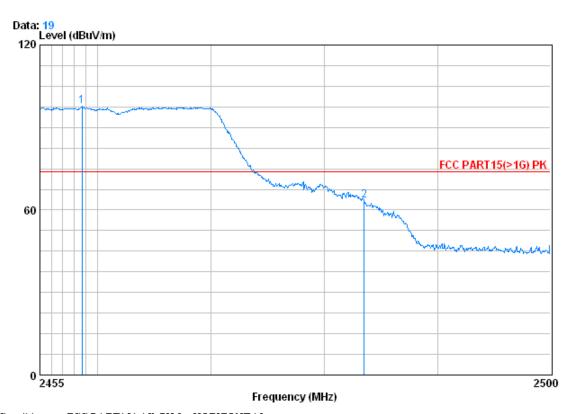

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1308RF Mode : 2462N


	Freq		Antenna Factor	-			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @ 2	2458.690 2483.500							23.77 -10.71



Report No.: SZEM140300130801

Page: 109 of 118

Worse case mode: 802.11 n(HT20) Test channel: Highest Remark: Average Vertical

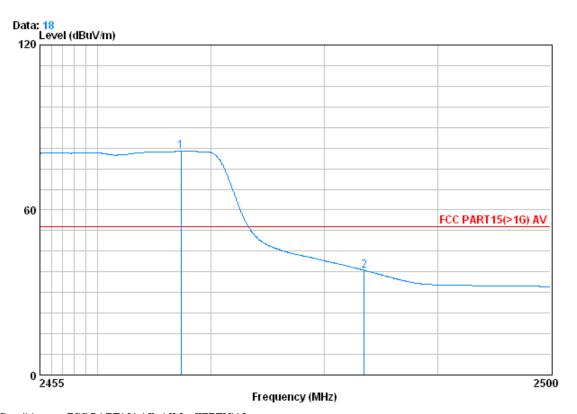

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1308RF Mode : 2462N


	Freq			Preamp Factor			Over Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2467.375	3.02	32.64	39.91	85.62	81.37	54.00	27.37
2	2483.500	3.03	32.67	39.92	42.30	38.08	54.00	-15.92



Report No.: SZEM140300130801

Page: 110 of 118

Worse case mode: 802.11 n(HT20) Test channel: Highest Remark: Average Horizontal

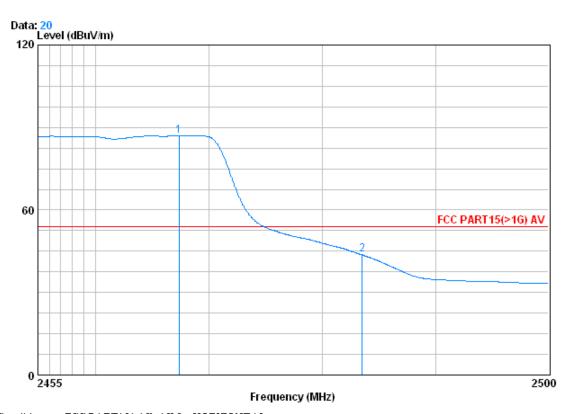

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1308RF Mode : 2462N


	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2467.375 2483.500							



Report No.: SZEM140300130801

Page: 111 of 118

Worse case mode: 802.11 n(HT40) Test channel: Lowest Remark: Peak Vertical

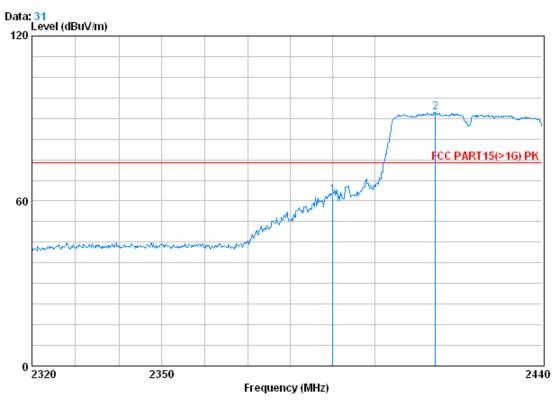

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1308RF Mode : 2422 NHT40


	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2414.320			39.85 39.86				



Report No.: SZEM140300130801

Page: 112 of 118

Worse case mode: | 802.11 n(HT40) | Test channel: | Lowest | Remark: | Peak | Horizontal

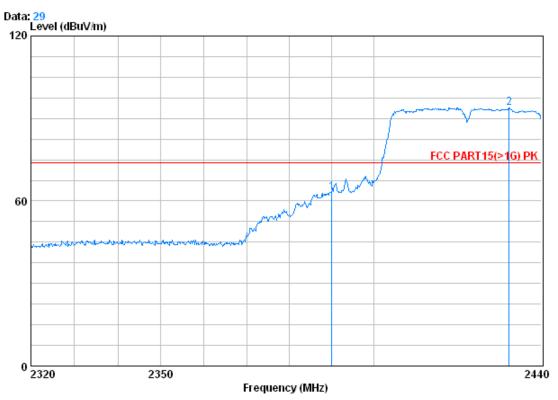

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1308RF Mode : 2422 NHT40


Freq Loss Factor Factor Level Level Line	Limit
MHz dB dB/m dB dBuV dBuV/m dBuV/m	dB
1 2390.000 2.98 32.51 39.85 67.49 63.13 74.00 -: 2 @ 2432.200 3.00 32.58 39.88 98.25 93.95 74.00	



Report No.: SZEM140300130801

Page: 113 of 118

Worse case mode: 802.11 n(HT40) Test channel: Lowest Remark: Average Vertical

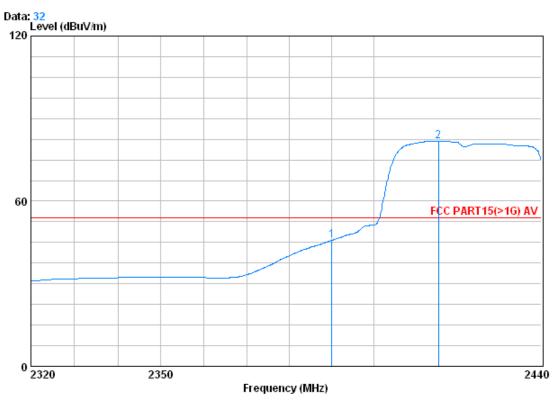

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1308RF Mode : 2422 NHT40


		Cable	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	50.15	45.79	54.00	-8.21
2 @	2415.280	2.99	32.54	39.86	86.02	81.70	54.00	27.70



Report No.: SZEM140300130801

Page: 114 of 118

Worse case mode: | 802.11 n(HT40) | Test channel: | Lowest | Remark: | Average | Horizontal

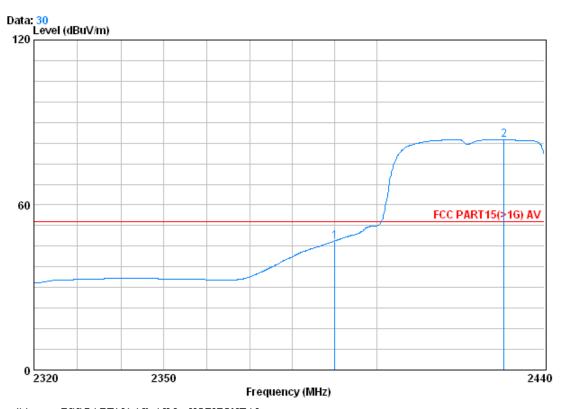

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1308RF Mode : 2422 NHT40


		Cablei	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	51.13	46.78	54.00	-7.22
_	2000.000							
20	2430.280	3.00	32.58	39.88	88.09	83.79	54.00	29.79



Report No.: SZEM140300130801

Page: 115 of 118

Worse case mode: 802.11 n(HT40) Test channel: Highest Remark: Peak Vertical

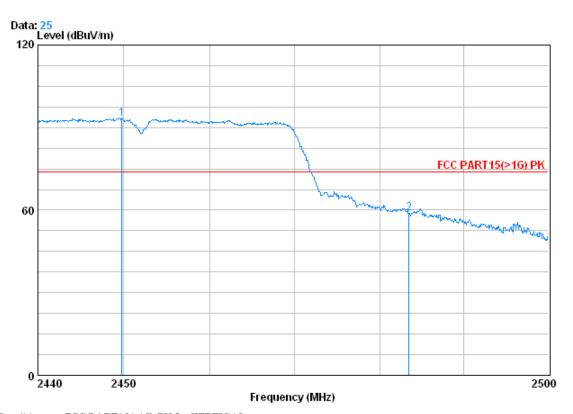

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1308RF Mode : 2452 NHT40


	. 2 12 2 1 1 1 1	Freq			Preamp Factor			Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @ 2		9.780 3.500			39.89 39.92				



Report No.: SZEM140300130801

Page: 116 of 118

Worse case mode: 802.11 n(HT40) Test channel: Highest Remark: Peak Horizontal

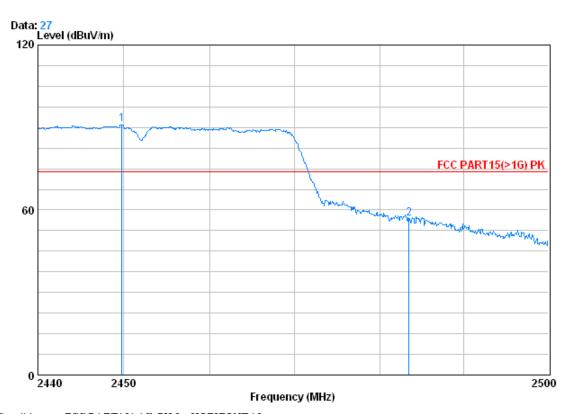

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1308RF Mode : 2452 NHT40


	Freq	Cableintenna Preamp Freq Loss Factor Factor					Limit Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 X	2449.780	3.01	32.61	39.89	95.35	91.08	74.00	17.08	
2	2483.500	3.03	32.67	39.92	61.17	56.95	74.00	-17.05	



Report No.: SZEM140300130801

Page: 117 of 118

Worse case mode: 802.11 n(HT40) Test channel: Highest Remark: Average Vertical

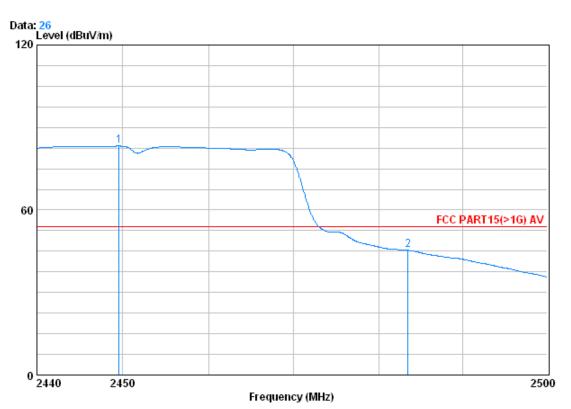

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1308RF Mode : 2452 NHT40

		Freq			Preamp Factor			Limit Line	Over Limit	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 0	2449	9.540	3.01	32.61	39.89	87.51	83.23	54.00	29.23	
2	2483	3.500	3.03	32.67	39.92	49.52	45.30	54.00	-8.70	






Report No.: SZEM140300130801

Page: 118 of 118

Worse case mode: | 802.11 n(HT40) | Test channel: | Highest | Remark: | Average | Horizontal

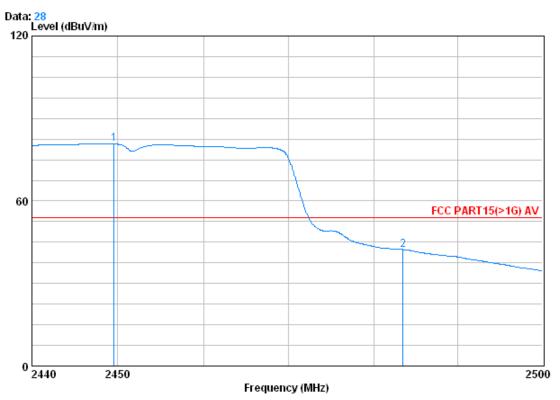

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1308RF Mode : 2452 NHT40

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 1 @ 2449.540 3.01 32.61 39.89 84.98 80.70 54.00 26.70	 	Freq			Preamp Factor			Limit Line	
1 @ 2449.540 3.01 32.61 39.89 84.98 80.70 54.00 26.70		 MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
2 2483.500 3.03 32.67 39.92 46.56 42.34 54.00 -11.66	0	 							

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor