



RADIO TEST REPORT

Test Report No. : 27BE0182-HO-E-1


Applicant : Konica Minolta Business Technologies, Inc.
Type of Equipment : Authentication Unit
Model No. : AU-201
Test standard : FCC Part 15 Subpart C : 2006
Section 15.207 and 15.225
FCC ID : UUA-A09N
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.

Date of test:


September 15 and October 30, 2006

Tested by:


Yutaka Yoshida
EMC Services


Makoto Kosaka
EMC Services

Approved
by :


Naoki Sakamoto
Assistant Manager of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

CONTENTS	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Conducted emission	9
SECTION 6: Radiated emission (Fundamental , Spurious Emission and Spectrum Mask)	10
SECTION 7: -20dB Bandwidth	11
SECTION 8: Frequency Tolerance	11
SECTION 9: 99% Occupied Bandwidth	11
APPENDIX 1: Photographs of test setup	12
Conducted emission	12
Radiated emission	13
Worst Case Position (X-axis)	14
APPENDIX 2: Data of EMI test	15
Conducted emission	15
Radiated emission (Fundamental emission and Spectrum Mask)	19
Radiated emission (Spurious emission : below 30MHz)	20
Radiated emission (Spurious emission: above 30MHz)	21
-20dB Bandwidth	22
99% Occupied Bandwidth	23
Frequency Tolerance	24
APPENDIX 3: Test instruments	25

SECTION 1: Client information

Company Name : Konica Minolta Business Technologies, Inc.
Address : 3-22-1 Honohara, Toyokawa-Shi, Aichi 442-8503, Japan
Telephone Number : +81-533-89-7019
Facsimile Number : +81-533-89-7979
Contact Person : Shingo Suzuki

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Authentication Unit
Model No. : AU-201
Serial No. : 064000295, 064000296
Rating : DC5.0V (supplied by USB I/F)
Country of Manufacture : Japan
Receipt Date of Sample : October 6, 2006
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

2.2 Product Description

Model No: AU-201 (referred to as the EUT in this report) is the Authentication Unit.

Clock frequency(ies) in the system : 16MHz
Equipment Type : Transceiver
Frequency of Operation : 13.56MHz
Modulation : ASK
Power Supply (inner) : DC 4.0V
Antenna Type : Pattern antenna
Antenna Connector Type : Not applicable

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C : 2006
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.225 : Operation within the band 13.110-14.010MHz

FCC 15.31 (e)

This EUT (Authentication Unit) is provided with voltage (DC5.0V) via USB I/F from PC.
DC4.0V is constantly converted into the RF Module part through regulator regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements <IC>RSS-Gen 7.2.2	Section 15.207 <IC>RSS-Gen 7.2.2	-	N/A	3.4dB QP, L 0.53490MHz	Complied
2	Electric Field Strength of Fundamental Emission	ANSI C63.4:2003 13. Measurement of intentional radiators <IC>RSS-Gen 4.6	Section 15.225(a) <IC>RSS-210 A2.6	Radiated	N/A	50.0dB 13.56MHz 90deg.C.	Complied
3	Spectrum Mask	ANSI C63.4:2003 13. Measurement of intentional radiators <IC>RSS-Gen 4.7	Section 15.225(b)(c) <IC> RSS-210 A2.6	Radiated	N/A	See data	Complied
4	-20dB Bandwidth	ANSI C63.4:2003 13. Measurement of intentional radiators <IC>- *	Section 15.215(c) <IC>- *	Radiated	N/A	See data	Complied
5	Electric Field Strength of Spurious Emission	ANSI C63.4:2003 13. Measurement of intentional radiators <IC>RSS-Gen 4.7	Section 15.209, Section 15.225 (d) <IC>RSS-210 A2.6	Radiated	N/A	2.1dB 40.677MHz Vertical, QP	Complied
6	Frequency Tolerance	ANSI C63.4:2003 13. Measurement of intentional radiators <IC>RSS-Gen 4.5	Section 15.225(e) <IC> RSS-210 A2.6	Radiated	N/A	See data	Complied

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15

*These tests were performed without any deviations from test procedure except for additions or exclusions.

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	RSS-Gen 4.4.1	RSS-Gen 4.4.1	Radiated	N/A	N/A	Complied

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.4 Uncertainty

Conducted Emission

The measurement uncertainty (with a 95% confidence level) for this test is ± 2.6 dB.
The data listed in this report meets the limits unless the uncertainty is taken into consideration.
The data listed in this test report has enough margin, more than the site margin.

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Loop antenna is ± 4.41 dB(3m)/ ± 4.39 dB(10m).
The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.59 dB(3m)/ ± 4.58 dB(10m).
The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 4.62 dB(3m)/ ± 4.60 dB(10m).
The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 5.27 dB.
The data listed in this report meets the limits unless the uncertainty is taken into consideration.
The data listed in this test report has enough margin, more than the site margin.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is ± 3.0 dB.
The data listed in this report meets the limits unless the uncertainty is taken into consideration.
The data listed in this test report has enough margin, more than the site margin.

3.5 Confirmation

UL Apex Co., Ltd. hereby confirms that E.U.T., in the configuration tested, complies with the specifications
FCC Part 15 Subpart C: 2006 Section 15.225.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.6 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	655103	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247A-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247A-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	-
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	N/A	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	2.0 x 2.0 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 5.4 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3 and No.4 semi-anechoic chambers and No.7 shielded room.

3.7 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 4: Operation of E.U.T. during testing


4.1 Operating Modes

The mode is used : Communication mode (Transmitting) Antenna attached
/ Antenna unattached (only for conducted emission)
Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

Frequency Tolerance:

Temperature for the extreme tests : -20 deg.C.(minimum) to + 50deg.C.(maximum)
Voltage for the extreme tests : DC 5.0V
This EUT (Authentication Unit) is provided with voltage (DC5.0V) via USB I/F from PC.
DC4.0V is constantly converted into the RF Module part through regulator regardless of input voltage.
Therefore, the testing was performed with normal voltage only

4.2 Configuration and peripherals

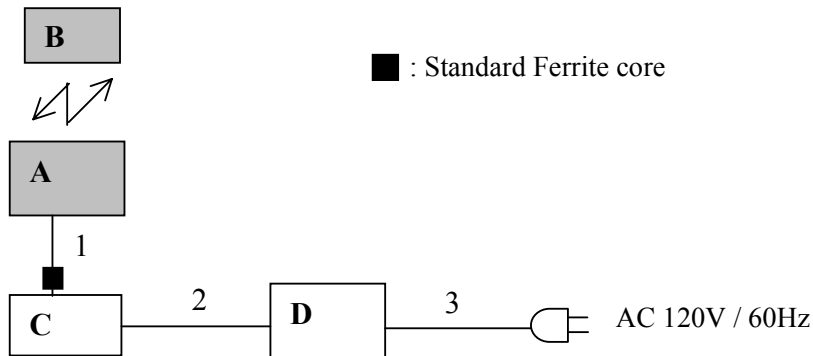

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Authentication Unit	AU-201	064000295, 064000296 *1	SAXA	EUT
B	IC Card	TN2-TMP	25	SAXA	EUT
C	Personal Computer	TYPE2672-CBJ	99-FWDWY	IBM	-
D	AC Adaptor	02K6808	11S02K6808Z1Z89H29NG4	IBM	-

*1) 064000295: Antenna attached, 064000296: Antenna is terminated in antenna port.

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	USB Cable	1.5	Unshielded	Unshielded
2	DC Cable	1.8	Unshielded	Unshielded
3	AC Cable	1.0	Unshielded	Unshielded

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 5: Conducted emission

5.1 Operating environment

Test place : No.2 semi anechoic chamber
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 0.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT and its peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN/AMN and excess AC cable was bundled in center. I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/ an AMN to the input power source. All unused 50ohm connectors of the LISN/ AMN were resistively terminated in 50ohm when not connected to the measuring equipment. A drawing of the set up is shown in the photos of APPENDIX 1.

5.3 Test conditions

Frequency range : 0.15MHz – 30MHz
EUT position : Table top
EUT operation mode : See Clause 4.1

5.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage had been measured with the EUT in the semi Anechoic Chamber. The EUT was connected to a Line Impedance Stabilization Network (LISN)/ Artificial Mains Network (AMN).

An overview sweep with peak detection has been performed.

The measurements had been performed with a quasi-peak detector and if required, with an average detector.

The conducted emission measurements were made with the following detector function of the test receiver.

Detector Type : QP and AV
IF Bandwidth : 9kHz

5.5 Test result

Summary of the test results : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 6: Radiated emission (Fundamental , Spurious Emission and Spectrum Mask)

6.1 Operating environment

The test was carried out in a No.2 semi Anechoic Chamber

Temperature : See data
Humidity : See data

6.2 Test Procedure

The Radiated Electric Field Strength intensity has been measured in a semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9kHz to 30MHz at distance 3m

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for each antenna angle 0deg. , 45deg. and 90deg.

Frequency : From 30MHz to 1GHz at distance 3m

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz
Detector Type	PK/AV	QP	PK/AV	QP	QP
IF Bandwidth	200Hz	200Hz	9kHz	9kHz	120kHz

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

* Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

9kHz – 490kHz [Limit at 3m]=[Limit at 300m]-40log (3[m]/300[m])

490kHz – 30MHz[Limit at 3m]=[Limit at 30m]-40log (3[m]/30[m])

6.3 Test result

Summary of the test results : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 7: -20dB Bandwidth

Test Procedure

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Frequency Tolerance

Test Procedure

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test data : APPENDIX 2
Test result : Pass

SECTION 9: 99% Occupied Bandwidth

Test Procedure

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test data : APPENDIX 2
Test result : Pass