



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Fon US Inc.
Applicant Address	39 Wooster St, 3rd Floor New York, NY 10013
FCC ID	UVAFON2501
Manufacturer's company	Fon US Inc.
Manufacturer Address	39 Wooster St, 3rd Floor New York, NY 10013

Product Name	Fonera Accel
Brand Name	FON
Model No.	FON2501B
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Apr. 18, 2013
Final Test Date	May 23, 2013
Submission Type	Original Equipment



Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03 and KDB 662911 D01 v02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details	3
3.2. Accessories	5
3.3. Table for Filed Antenna	6
3.4. Table for Carrier Frequencies.....	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	10
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting.....	11
3.9. EUT Operation during Test	11
3.10. Duty Cycle	12
3.11. Test Configurations	16
4. TEST RESULT	18
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. Maximum Conducted Output Power Measurement	22
4.3. Power Spectral Density Measurement	25
4.4. 6dB Spectrum Bandwidth Measurement	33
4.5. Radiated Emissions Measurement.....	40
4.6. Emissions Measurement	66
4.7. Chain Requirements	90
5. LIST OF MEASURING EQUIPMENTS.....	91
6. TEST LOCATION	93
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A8
APPENDIX B. TEST PHOTOS	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~ C5
APPENDIX D. CO-LOCATION REPORT	D1 ~ D3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR341843-01AA	Rev. 01	Initial issue of report	Aug. 07, 2013



1. CERTIFICATE OF COMPLIANCE

Product Name : Fonera Accel
Brand Name : FON
Model No. : FON2501B
Applicant : Fon US Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 18, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.22 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	7.89 dB
4.3	15.247(e)	Power Spectral Density	Complies	12.61 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.04 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.10 dB
4.7	15.203	Chain Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	For 2.4GHz Band: 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth For 5GHz Band: 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	For 2.4GHz Band: MCS0 (20MHz): 17.62 MHz ; MCS0 (40MHz): 36.15 MHz For 5GHz Band: MCS0 (20MHz): 18.97 MHz ; MCS0 (40MHz): 58.46 MHz
Maximum Conducted Output Power	For 2.4GHz Band: MCS0 (20MHz): 20.18 dBm ; MCS0 (40MHz): 14.94 dBm For 5GHz Band: MCS0 (20MHz): 20.90 dBm ; MCS0 (40MHz): 22.11 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

802.11a/b/g

Items	Description
Product Type	802.11 b: WLAN (1TX, 1RX) 802.11a/g: WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 10.12 MHz ; 11g: 16.98 MHz ; 11a: 17.62 MHz
Maximum Conducted Output Power	11b: 16.96 dBm ; 11g: 20.68 dBm ; 11a: 21.12 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Chain	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
IEEE 802.11a	X	X	V	X
IEEE 802.11b	V	X	X	X
IEEE 802.11g	X	X	V	X
IEEE 802.11n	X	X	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n		

3.2. Accessories

Power	Brand	Model	Rating
Adpater	DVE	DSA-12G-12 FUS 120120	INPUT: 100-240V~50/60Hz 0.3A OUTPUT: +12V, 1A

3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)			
					2.4GHz		5GHz	
1	Arcadyan	WG8013H22-FO	Dipole Antenna	NA	Chain 1	3.26	-	
					Chain 2	1.44	-	
2	Arcadyan	WG8013H22-FO	Dipole Antenna	NA	-		Chain 3	3.09
					-		Chain 4	3.26

Note: The EUT has four Chains.

<For 2.4GHz Band>

For IEEE 802.11b mode (1TX/1RX):

Only Chain 1 can be used as transmitting/receiving Chain.

For IEEE 802.11n/g mode (2TX/2RX):

Chain 1 and Chain 2 can be used as transmitting/receiving Chains.


Chain 1 and Chain 2 could transmit/receive simultaneously.

<For 5GHz Band>

For IEEE 802.11a/n mode (2TX/2RX):

Chain 3 and Chain 4 can be used as transmitting/receiving Chains.

Chain 3 and Chain 4 could transmit/receive simultaneously.

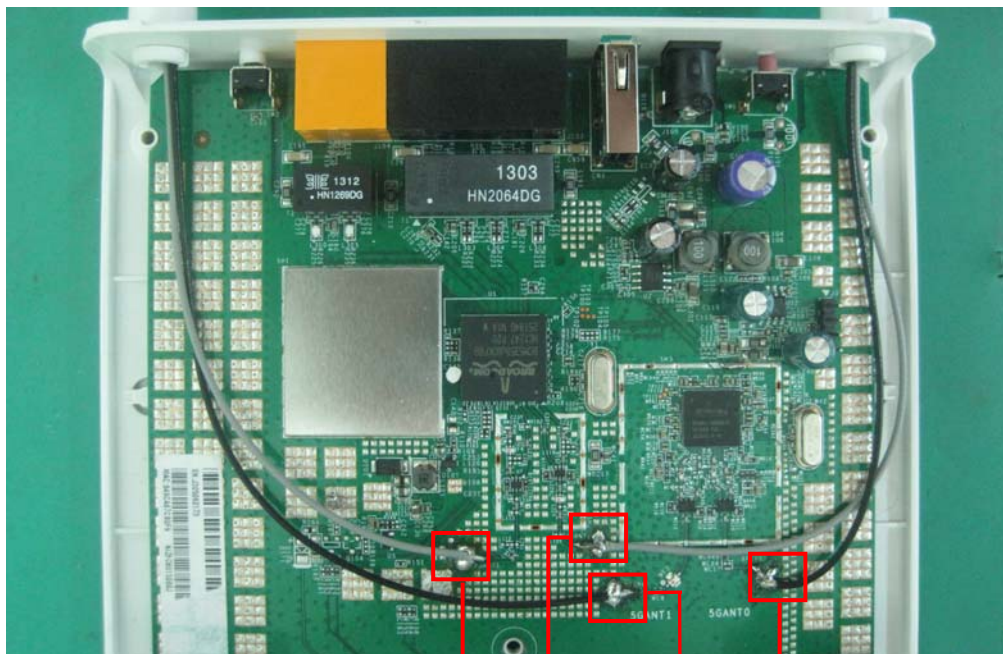

Chain 2 (2.4G) Chain 1 (2.4G) Chain 3 (5G) Chain 4 (5G)

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

For IEEE 802.11b/g, use Channel 1~Channel 11.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

For IEEE 802.11a, use Channel 149, 153, 157, 161, 165.

There are two bandwidth systems for IEEE 802.11n.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz
	151	5755 MHz
	153	5765 MHz
	157	5785 MHz
	159	5795 MHz
	161	5805 MHz
	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2
Power Spectral Density	11n 20MHz	MCS0	1/6/11	1&2
	11n 40MHz	MCS0	3/6/9	1&2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1&2
6dB Spectrum Bandwidth	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2
Band Edge Emissions	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2

For 5GHz Band

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	149/157/165	3+4
	11n 40MHz	MCS0	151/159	3+4
	11a/BPSK	6 Mbps	149/157/165	3+4
Power Spectral Density	11n 20MHz	MCS0	149/157/165	3&4
	11n 40MHz	MCS0	151/159	3&4
	11a/BPSK	6 Mbps	149/157/165	3&4
6dB Spectrum Bandwidth	11n 20MHz	MCS0	149/157/165	3+4
	11n 40MHz	MCS0	151/159	3+4
	11a/BPSK	6 Mbps	149/157/165	3+4
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	149/157/165	3+4
	11n 40MHz	MCS0	151/159	3+4
	11a/BPSK	6 Mbps	149/157/165	3+4
Band Edge Emissions	11n 20MHz	MCS0	149/157/165	3+4
	11n 40MHz	MCS0	151/159	3+4
	11a/BPSK	6 Mbps	149/157/165	3+4

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link

For Radiated Emission test:

Mode 1. Laying of EUT

Mode 2. Stand of EUT

Mode 3. Wall-hanging of EUT

Due to Mode 2 generated the worst test result, it was recorded in this report.

<For MPE and Co-location Test>:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix C) and Co-location (please refer to Appendix D) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

For Test Site No : CO01-CB / 03CH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	QDS-BRCM1049LE
NB	DELL	E6430	QDS-BRCM1049LE
NB	DELL	E6430	QDS-BRCM1049LE
NB	DELL	E6430	QDS-BRCM1049LE
Flash Disk3.0	ADATA	C103	DoC

For Test Site No : TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	E2KWM3945ABG

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Manual Tool Version 1.0.0.10		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	48	68	47

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Manual Tool Version 1.0.0.10		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	37	46	36

Power Parameters of IEEE 802.11b/g

Test Software Version	Manual Tool Version 1.0.0.10		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	65	65	64
IEEE 802.11g	49	70	49

For 5GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Manual Tool Version 1.0.0.10		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0 20MHz	68	67	67

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Manual Tool Version 1.0.0.10	
Frequency	5755 MHz	5795 MHz
MCS0 40MHz	61	70

Power Parameters of IEEE 802.11a


Test Software Version	Manual Tool Version 1.0.0.10		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	67	66	65

3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.10. Duty Cycle

IEEE 802.11n MCS0 20MHz / For 2.4GHz Band

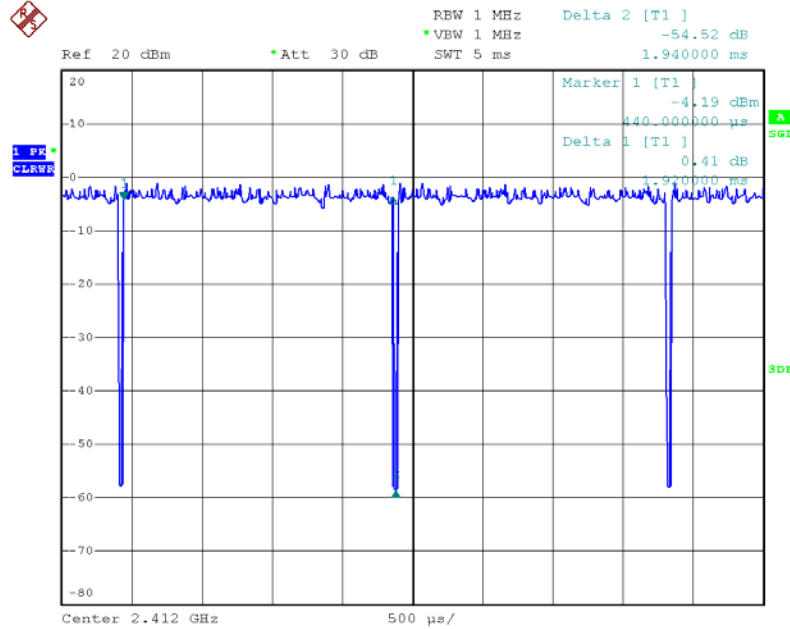


Date: 7.MAY.2013 21:32:11

IEEE 802.11n MCS0 40MHz / For 2.4GHz Band

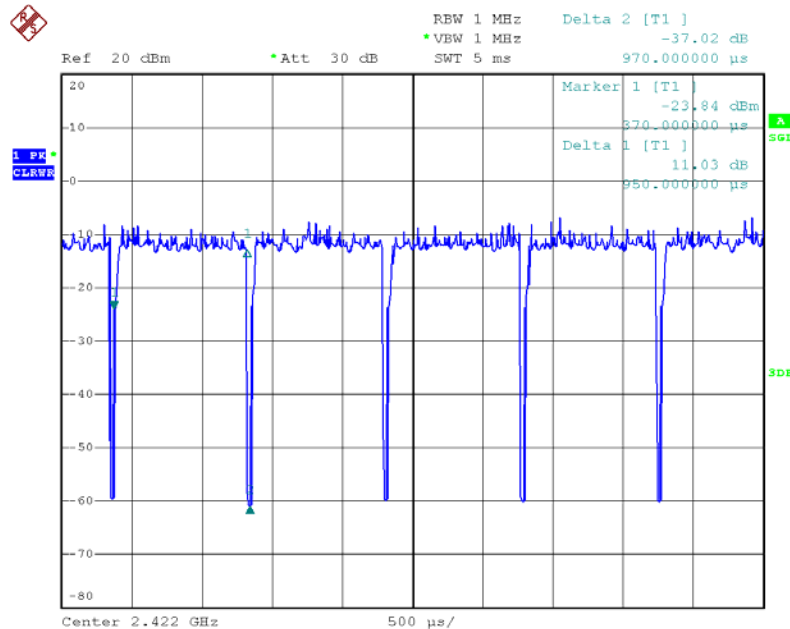


Date: 7.MAY.2013 21:33:19

IEEE 802.11n MCS0 20MHz / For 5GHz Band

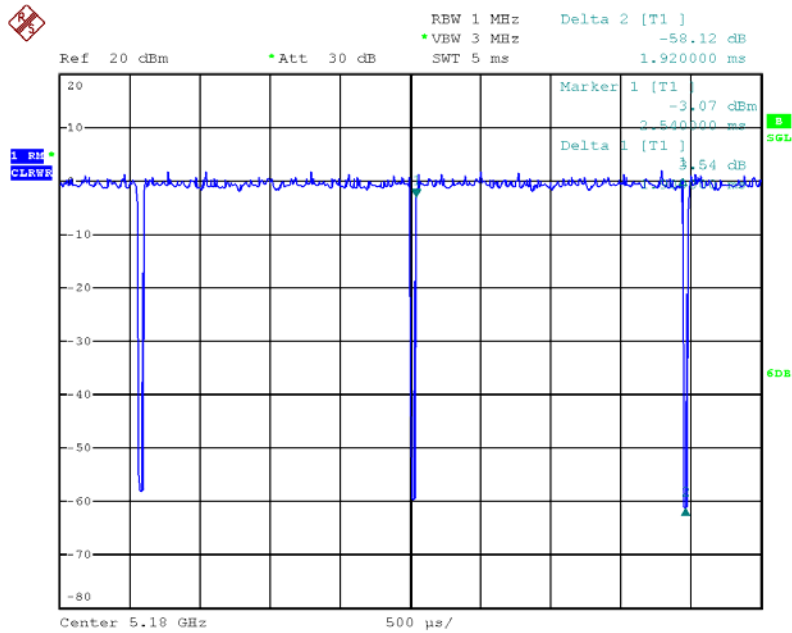


Date: 19.MAY.2013 12:14:08

IEEE 802.11n MCS0 40MHz / For 5GHz Band

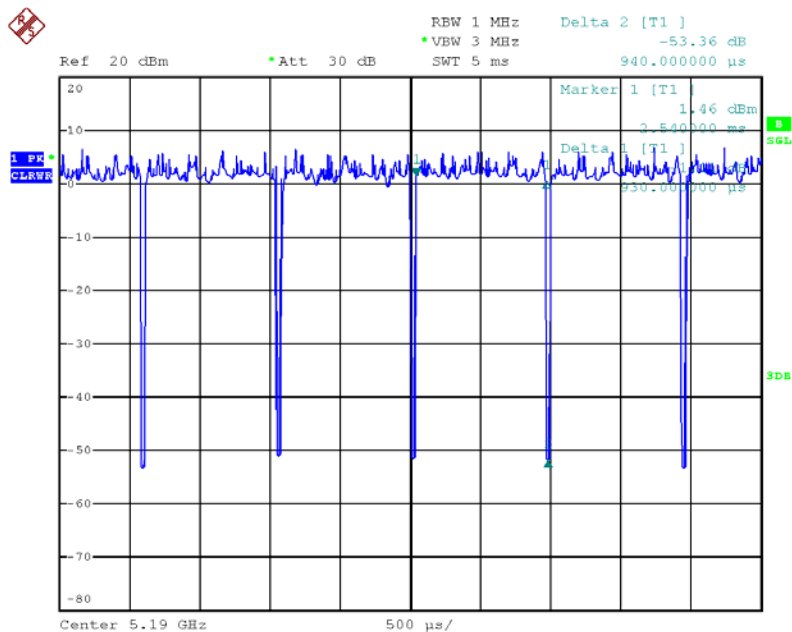


Date: 19.MAY.2013 12:21:34

IEEE 802.11b

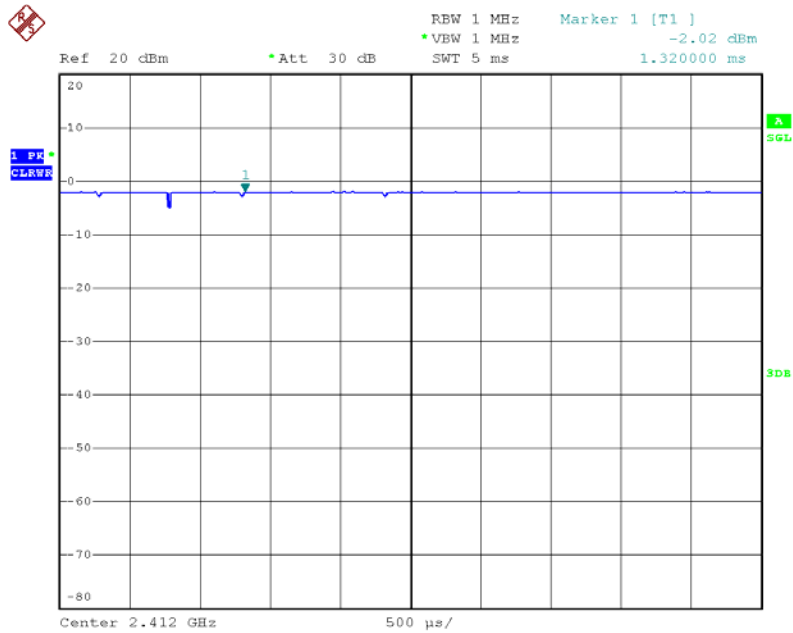


Date: 7.MAY.2013 21:29:48

IEEE 802.11g

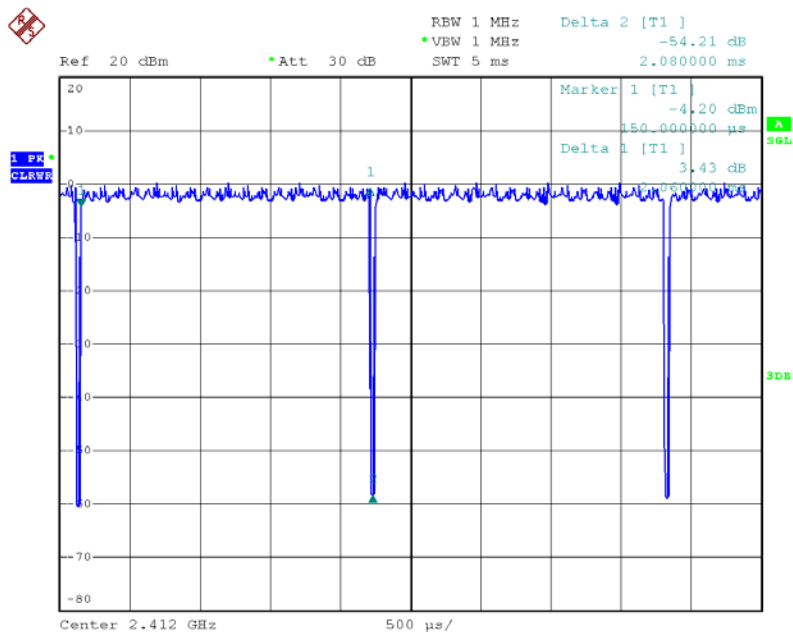

Date: 7.MAY.2013 21:31:11


IEEE 802.11a

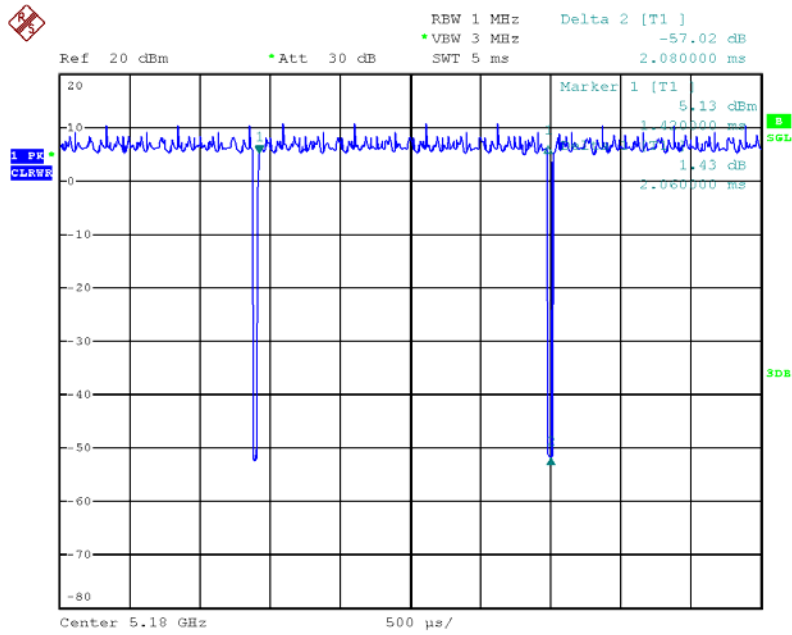

Date: 19.MAY.2013 11:52:28

3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions and Radiation Emissions (30MHz~1GHz) Test Configuration

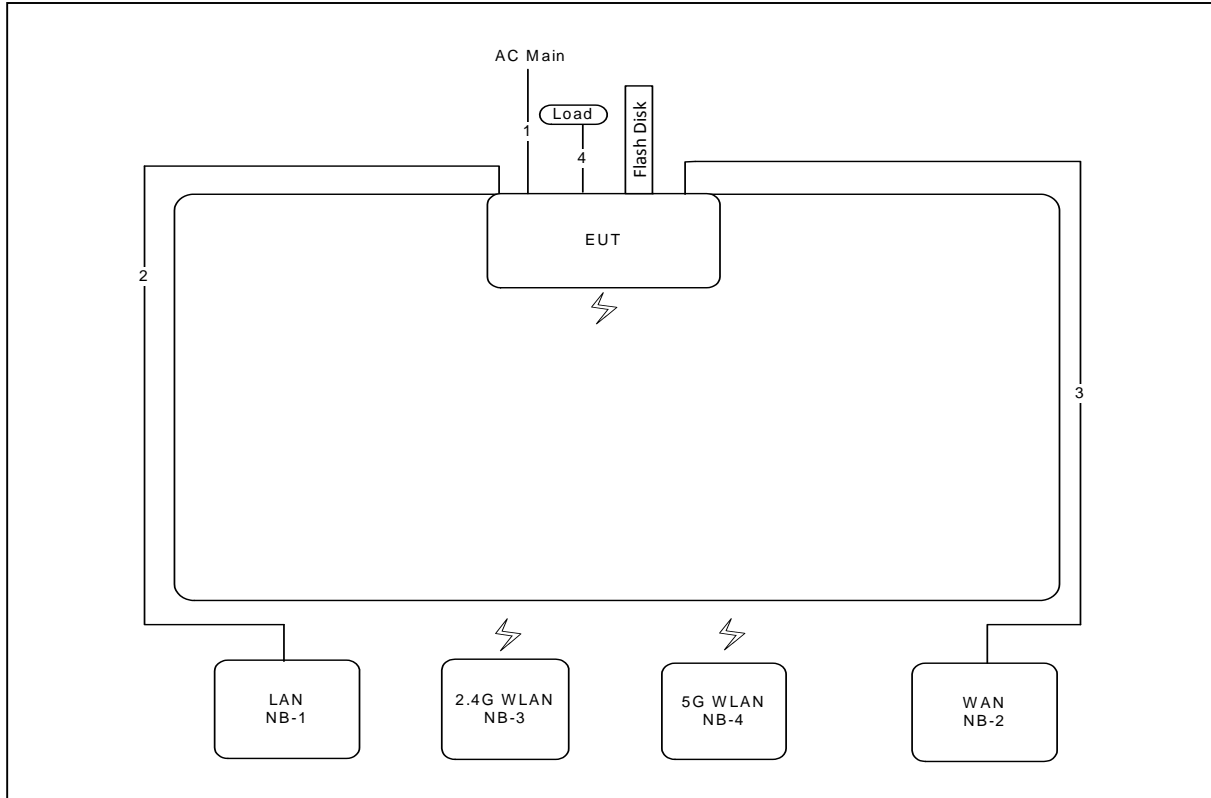

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

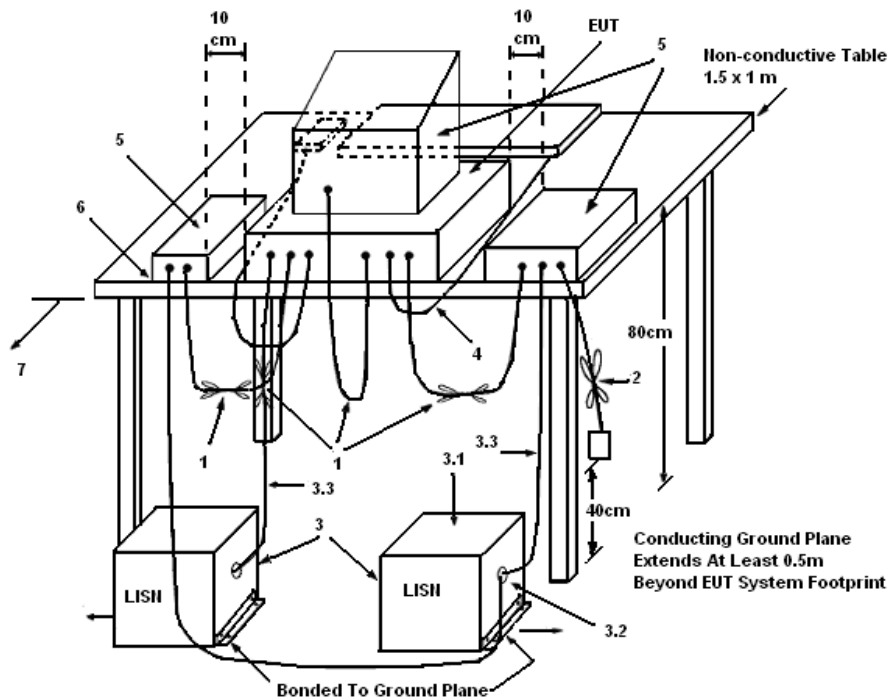

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	65%
Test Engineer	Ryo Fan	Phase	Line
Configuration	Mode 1		

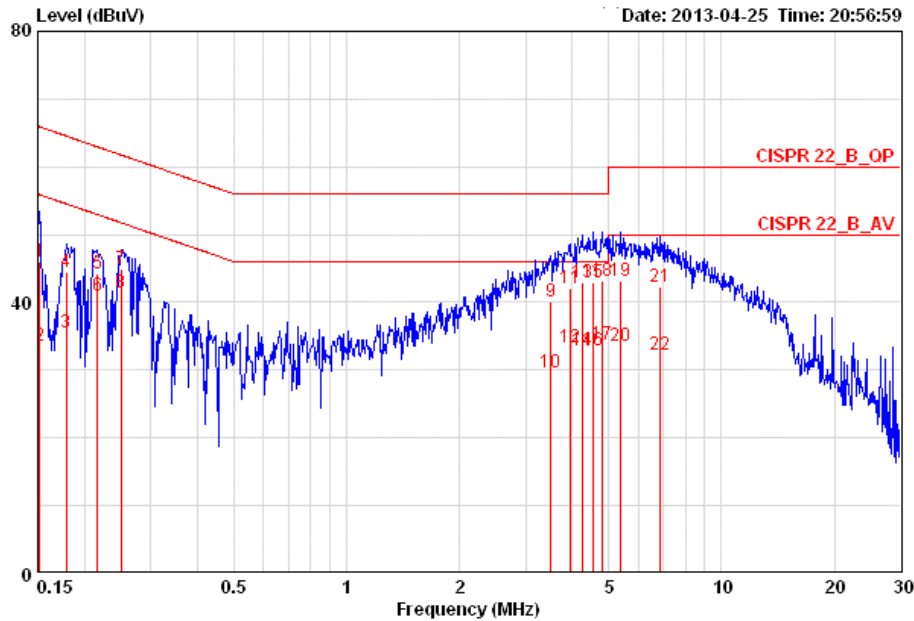

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15160	45.99	-19.92	65.91	45.65	0.16	0.18	LINE	QP
2	0.15160	33.49	-22.42	55.91	33.15	0.16	0.18	LINE	AVERAGE
3	0.17866	35.46	-19.09	54.55	35.12	0.15	0.19	LINE	AVERAGE
4	0.17866	44.56	-19.99	64.55	44.22	0.15	0.19	LINE	QP
5	0.21620	44.35	-18.61	62.96	44.00	0.15	0.20	LINE	QP
6	0.21620	40.98	-11.98	52.96	40.63	0.15	0.20	LINE	AVERAGE
7	0.25078	44.80	-16.93	61.73	44.45	0.15	0.20	LINE	QP
8	0.25078	41.51	-10.22	51.73	41.16	0.15	0.20	LINE	AVERAGE
9	3.509	40.12	-15.88	56.00	39.63	0.21	0.28	LINE	QP
10	3.509	29.59	-16.41	46.00	29.10	0.21	0.28	LINE	AVERAGE
11	3.943	42.07	-13.93	56.00	41.55	0.22	0.30	LINE	QP
12	3.943	33.43	-12.57	46.00	32.91	0.22	0.30	LINE	AVERAGE
13	4.247	42.99	-13.01	56.00	42.46	0.22	0.31	LINE	QP
14	4.247	32.89	-13.11	46.00	32.36	0.22	0.31	LINE	AVERAGE
15	4.549	43.02	-12.98	56.00	42.48	0.23	0.31	LINE	QP
16	4.549	32.99	-13.01	46.00	32.45	0.23	0.31	LINE	AVERAGE
17	4.797	33.68	-12.32	46.00	33.13	0.24	0.32	LINE	AVERAGE
18	4.797	43.20	-12.80	56.00	42.65	0.24	0.32	LINE	QP
19	5.362	43.09	-16.91	60.00	42.52	0.25	0.32	LINE	QP
20	5.362	33.59	-16.41	50.00	33.02	0.25	0.32	LINE	AVERAGE
21	6.841	42.29	-17.71	60.00	41.71	0.28	0.30	LINE	QP
22	6.841	32.29	-17.71	50.00	31.71	0.28	0.30	LINE	AVERAGE

Temperature	22°C	Humidity	65%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	Mode 1		

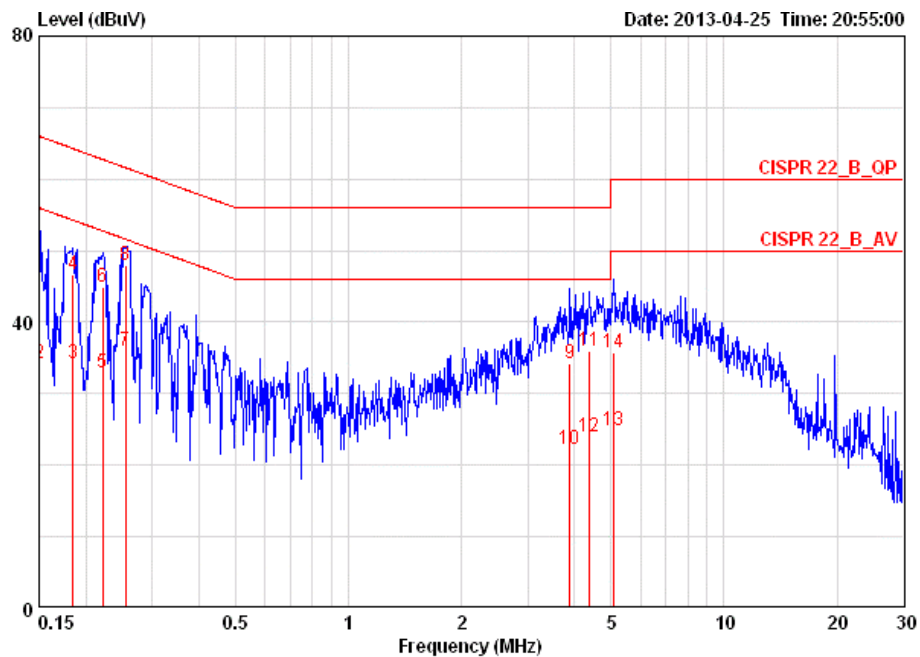

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	49.21	-16.79	66.00	48.95	0.08	0.18	NEUTRAL	QP
2	0.15000	34.13	-21.87	56.00	33.87	0.08	0.18	NEUTRAL	AVERAGE
3	0.18443	34.24	-20.04	54.28	33.97	0.08	0.19	NEUTRAL	AVERAGE
4	0.18443	46.75	-17.53	64.28	46.48	0.08	0.19	NEUTRAL	QP
5	0.22201	32.84	-19.90	52.74	32.56	0.08	0.20	NEUTRAL	AVERAGE
6	0.22201	44.99	-17.75	62.74	44.71	0.08	0.20	NEUTRAL	QP
7	0.25480	35.96	-15.64	51.60	35.68	0.08	0.20	NEUTRAL	AVERAGE
8	0.25480	47.94	-13.66	61.60	47.66	0.08	0.20	NEUTRAL	QP
9	3.881	34.25	-21.75	56.00	33.83	0.13	0.29	NEUTRAL	QP
10	3.881	22.29	-23.71	46.00	21.87	0.13	0.29	NEUTRAL	AVERAGE
11	4.361	35.96	-20.04	56.00	35.52	0.14	0.31	NEUTRAL	QP
12	4.361	24.05	-21.95	46.00	23.61	0.14	0.31	NEUTRAL	AVERAGE
13	5.085	24.89	-25.11	50.00	24.42	0.15	0.32	NEUTRAL	AVERAGE
14	5.085	35.77	-24.23	60.00	35.30	0.15	0.32	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the Chain exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3dB that the directional gain of the Chain exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting Chains with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

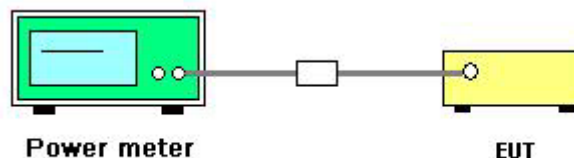

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	23°C	Humidity	63%
Test Engineer	Sean Ku	Configurations	IEEE 802.11n
Test Date	May 17, 2013		

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2			
1	2412 MHz	11.65	11.62	14.65	30.00	Complies
6	2437 MHz	16.86	17.46	20.18	30.00	Complies
11	2462 MHz	12.14	11.93	15.05	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2			
3	2422 MHz	9.71	9.68	12.71	30.00	Complies
6	2437 MHz	11.95	11.91	14.94	30.00	Complies
9	2452 MHz	9.45	9.42	12.45	30.00	Complies

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 3 + Chain 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 3	Chain 4			
149	5745 MHz	17.25	18.44	20.90	30.00	Complies
157	5785 MHz	16.89	18.25	20.63	30.00	Complies
165	5825 MHz	16.52	18.05	20.36	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 3 + Chain 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 3	Chain 4			
151	5755 MHz	15.33	16.67	19.06	30.00	Complies
159	5795 MHz	17.75	20.12	22.11	30.00	Complies

Temperature	23°C	Humidity	63%
Test Engineer	Sean Ku	Configurations	IEEE 802.11a/b/g
Test Date	May 17, 2013		

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.89	30.00	Complies
6	2437 MHz	16.96	30.00	Complies
11	2462 MHz	16.71	30.00	Complies

Configuration IEEE 802.11g / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2			
1	2412 MHz	12.52	12.49	15.52	30.00	Complies
6	2437 MHz	17.44	17.88	20.68	30.00	Complies
11	2462 MHz	12.48	12.41	15.46	30.00	Complies

Configuration IEEE 802.11a / Chain 3 + Chain 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 3	Chain 4			
149	5745 MHz	17.39	18.72	21.12	30.00	Complies
157	5785 MHz	17.15	18.38	20.82	30.00	Complies
165	5825 MHz	16.85	18.15	20.56	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the Chain shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03 section 10.2 Method PKPSD (peak PSD) & KDB 662911 D01 v02 section In-Band Power Spectral Density (PSD) Measurements option (2) Measure and add 10 log(NANT) dB.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

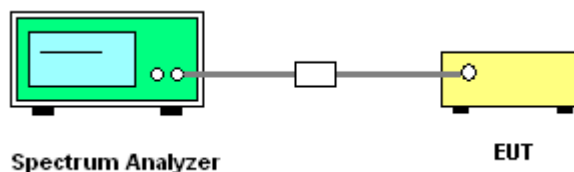

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	63%
Test Engineer	Sean Ku	Configurations	IEEE 802.11n

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 & Chain 2

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 1	Chain 2		
1	2412 MHz	-14.38	-15.25	4.99	Complies
6	2437 MHz	-10.13	-10.94	4.99	Complies
11	2462 MHz	-15.55	-15.02	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 & Chain 2

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 1	Chain 2		
3	2422 MHz	-18.86	-19.90	4.99	Complies
6	2437 MHz	-16.76	-17.93	4.99	Complies
9	2452 MHz	-18.09	-19.39	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 3	Chain 4		
149	5745 MHz	-8.23	-7.62	4.99	Complies
157	5785 MHz	-8.29	-8.97	4.99	Complies
165	5825 MHz	-9.05	-8.61	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Configuration IEEE 802.11n MCS0 40MHz / Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 3	Chain 4		
151	5755 MHz	-12.29	-11.60	4.99	Complies
159	5795 MHz	-9.61	-9.14	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Temperature	23°C	Humidity	63%
Test Engineer	Sean Ku	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-9.63	8.00	Complies
6	2437 MHz	-10.04	8.00	Complies
11	2462 MHz	-10.61	8.00	Complies

Configuration IEEE 802.11g / Chain 1 & Chain 2

Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 1	Chain 2		
3	2422 MHz	-14.20	-15.42	4.99	Complies
6	2437 MHz	-10.04	-9.66	4.99	Complies
9	2452 MHz	-14.76	-15.56	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Configuration IEEE 802.11a / Chain 3 + Chain 4


Channel	Frequency	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Chain 3	Chain 4		
149	5745 MHz	-9.14	-8.63	4.99	Complies
157	5785 MHz	-8.86	-8.62	4.99	Complies
165	5825 MHz	-9.45	-9.36	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 2437 MHz

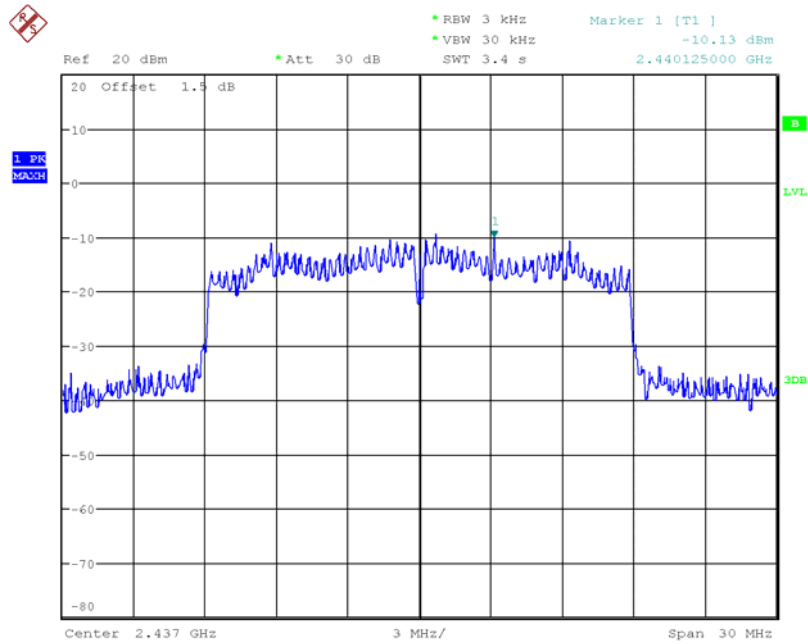


Date: 17.MAY.2013 23:05:44

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 2437 MHz

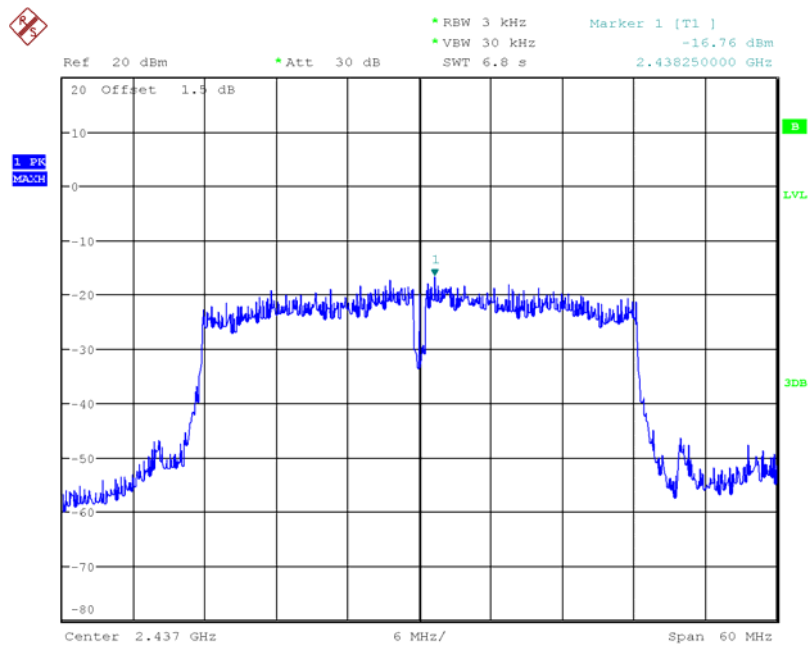


Date: 17.MAY.2013 23:43:07

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 4 / 5745 MHz

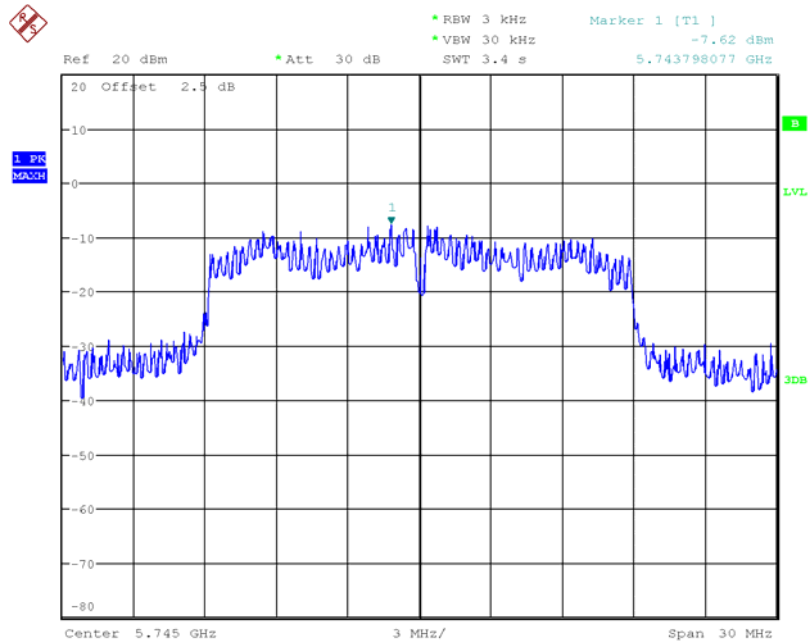


Date: 18.MAY.2013 00:36:27

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 4 / 5795 MHz

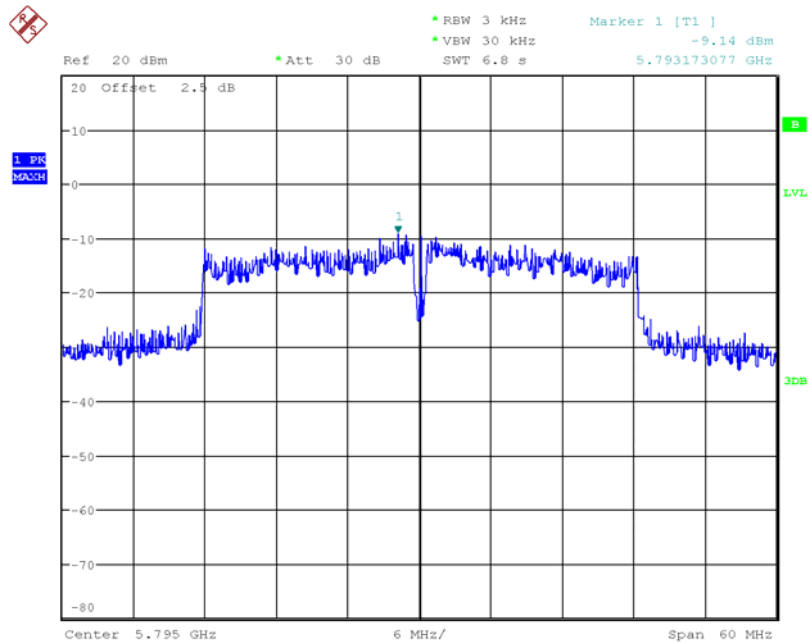


Date: 18.MAY.2013 01:06:21

Power Density Plot on Configuration IEEE 802.11b / Chain 1 / 2412 MHz

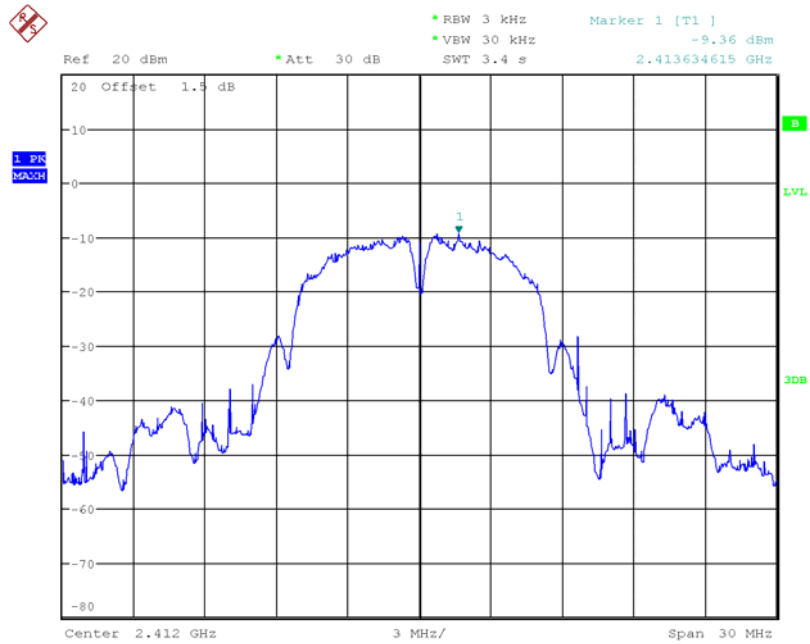


Date: 17.MAY.2013 22:47:42

Power Density Plot on Configuration IEEE 802.11g / Chain 2 / 2437 MHz

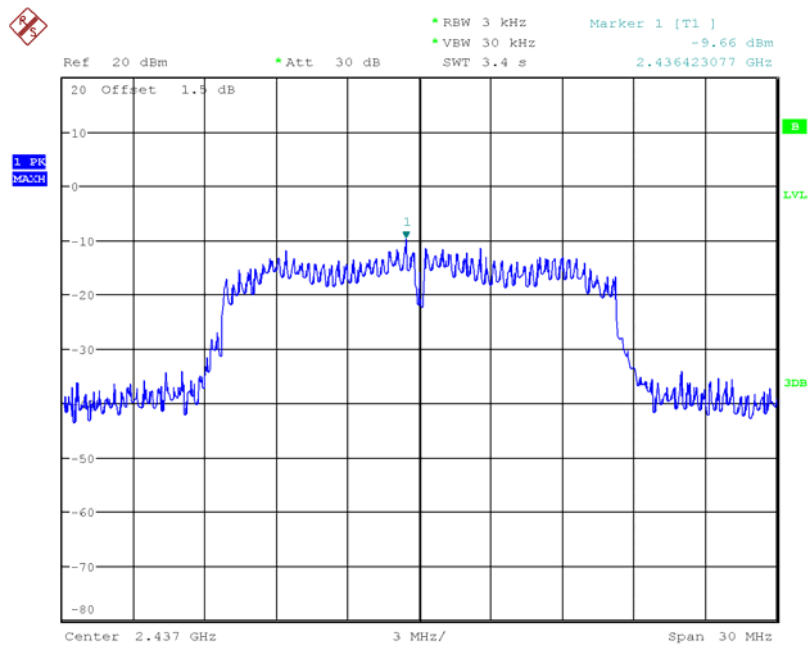

Date: 17.MAY.2013 22:56:19

Power Density Plot on Configuration IEEE 802.11a / Chain 4 / 5785 MHz

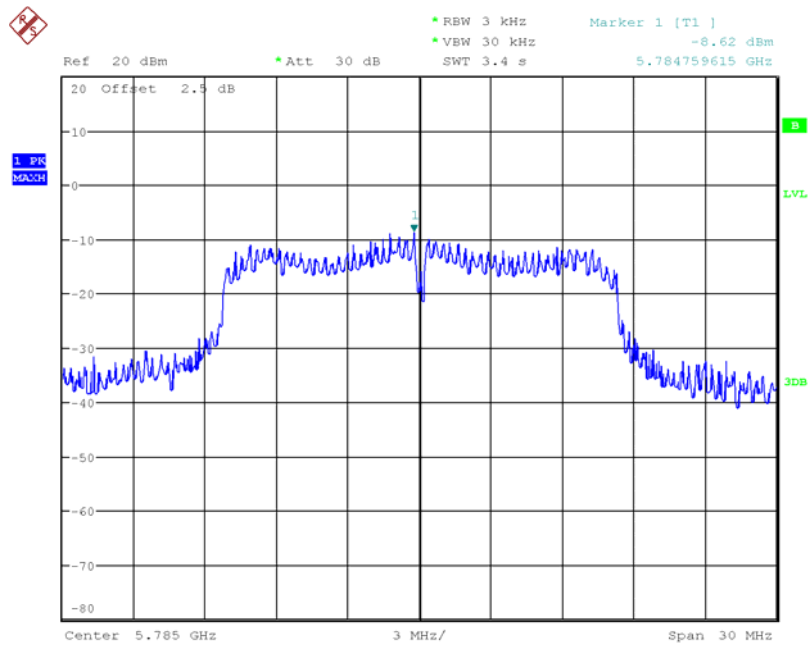

Date: 18.MAY.2013 00:19:47

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (Chain port) was connected to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
3. Multiple Chain system was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

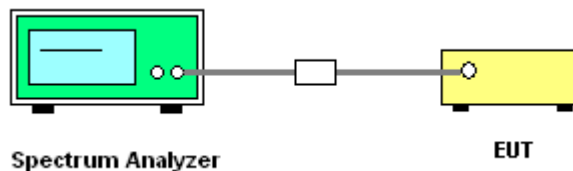

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	23°C	Humidity	63%
Test Engineer	Sean Ku	Configurations	IEEE 802.11n

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.64	16.85	500	Complies
6	2437 MHz	15.12	17.62	500	Complies
11	2462 MHz	15.00	16.85	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	32.94	36.15	500	Complies
6	2437 MHz	32.56	36.15	500	Complies
9	2452 MHz	35.12	36.02	500	Complies

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 3 + Chain 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.32	18.97	500	Complies
157	5785 MHz	15.70	18.39	500	Complies
165	5825 MHz	15.70	18.33	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 3 + Chain 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.76	36.53	500	Complies
159	5795 MHz	36.64	58.46	500	Complies

Temperature	23°C	Humidity	63%
Test Engineer	Sean Ku	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.07	10.06	500	Complies
6	2437 MHz	8.07	10.12	500	Complies
11	2462 MHz	8.01	10.12	500	Complies

Configuration IEEE 802.11g / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.30	15.83	500	Complies
6	2437 MHz	11.92	16.98	500	Complies
11	2462 MHz	12.88	15.70	500	Complies


Configuration IEEE 802.11a / Chain 3 + Chain 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	12.82	17.62	500	Complies
157	5785 MHz	11.92	17.11	500	Complies
165	5825 MHz	11.85	17.56	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 2462 MHz

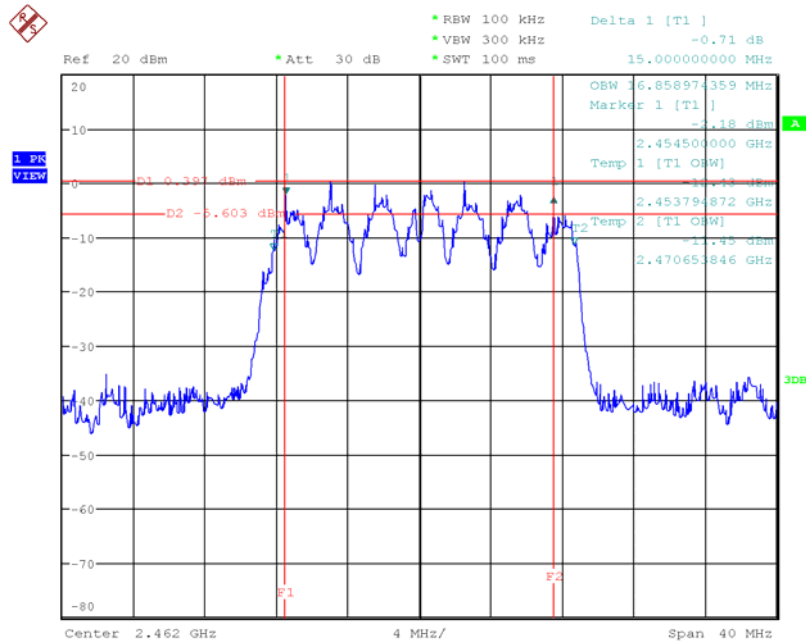


Date: 18.MAY.2013 02:34:23

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 2437 MHz

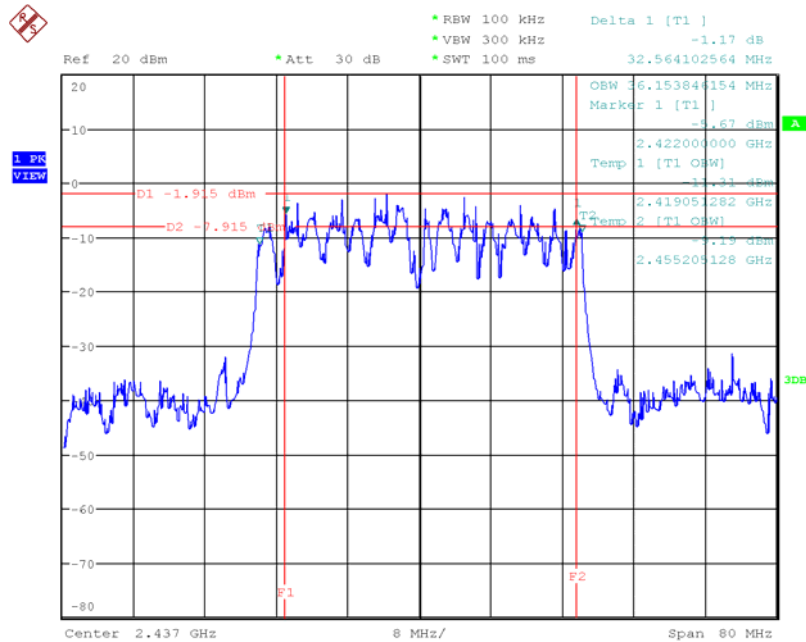


Date: 18.MAY.2013 02:37:13

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 3 + Chain 4 / 5745 MHz

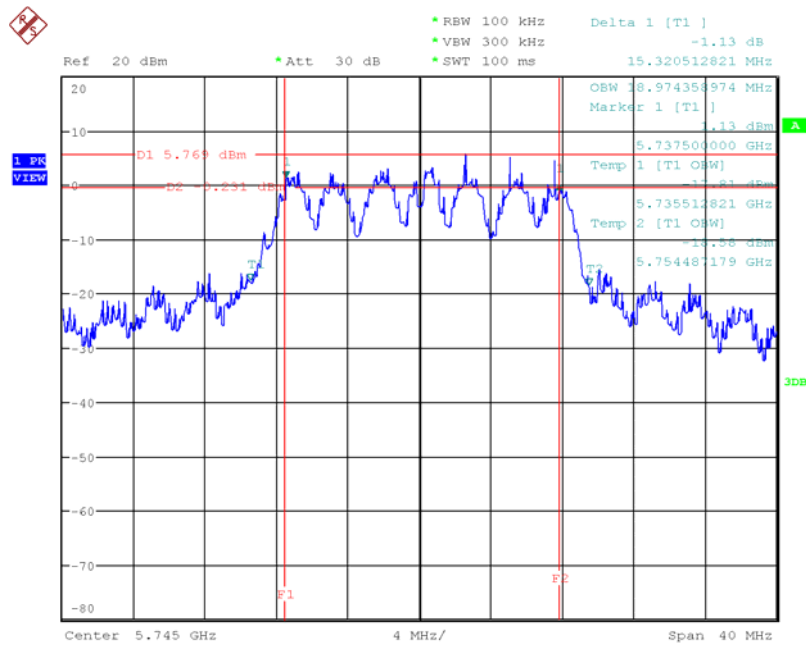


Date: 18.MAY.2013 01:24:30

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 3 + Chain 4 / 5755MHz

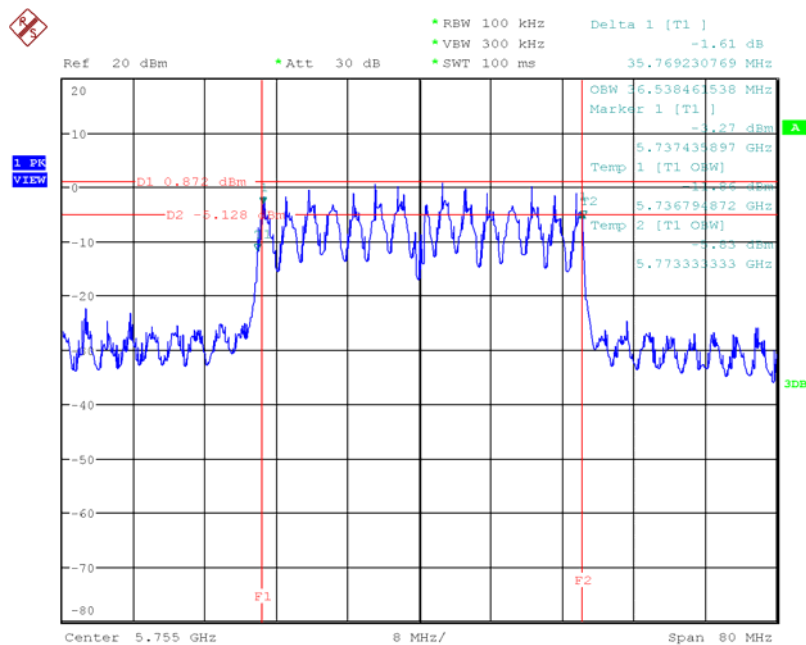


Date: 18.MAY.2013 01:21:01

6 dB Bandwidth Plot on Configuration IEEE 802.11b / Chain 1 / 2462 MHz

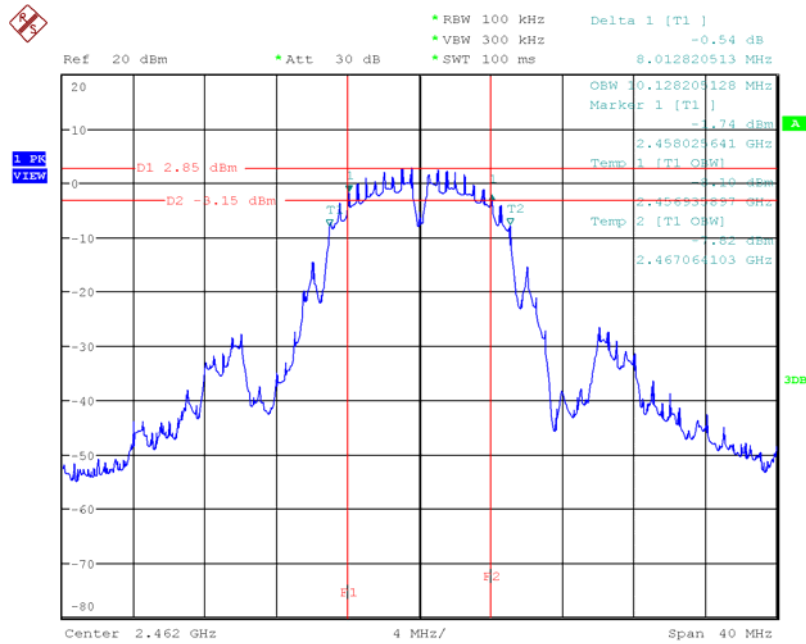


Date: 18.MAY.2013 02:27:22

6 dB Bandwidth Plot on Configuration IEEE 802.11g / Chain 1+ Chain 2 / 2437 MHz

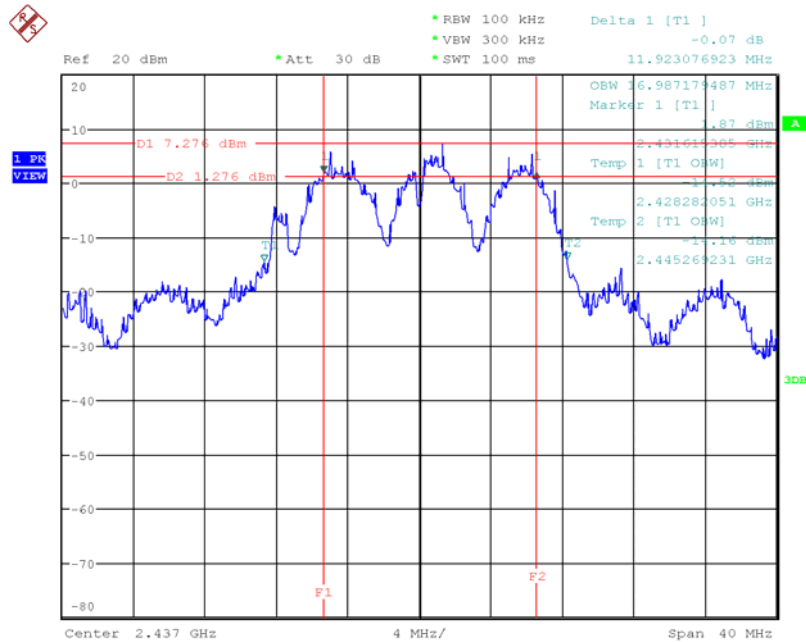

Date: 18.MAY.2013 02:30:12

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 3 + Chain 4 / 5825 MHz

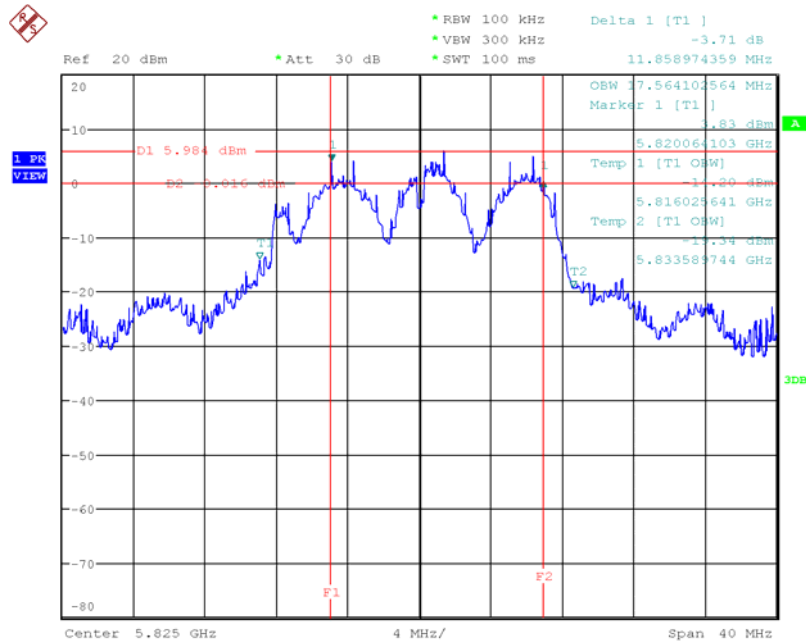

Date: 18.MAY.2013 01:39:46

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving Chain mounted on the top of a height-variable Chain tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving Chain was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the Chain tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop Chain has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 1GHz

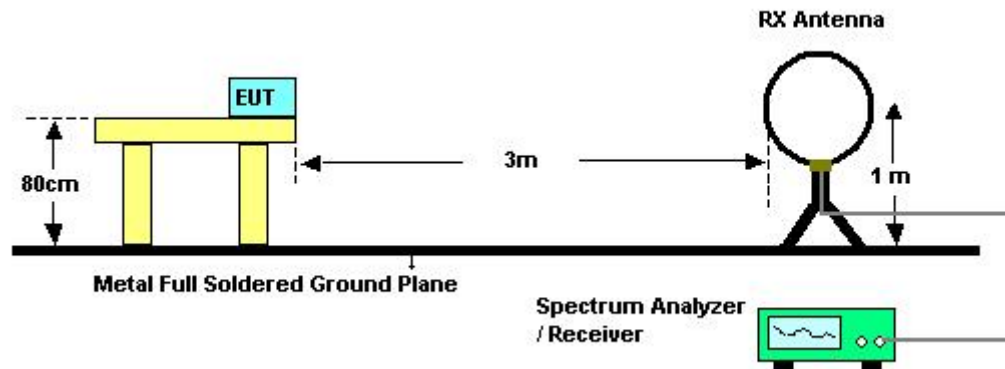

For radiated emissions above 1GHz

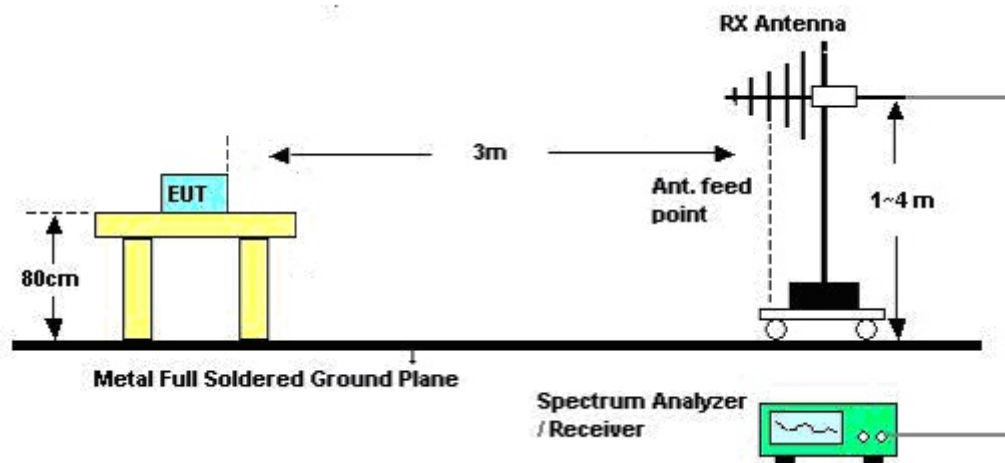

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	Normal Link
Test Date	May 23, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	Mode 2

Horizontal

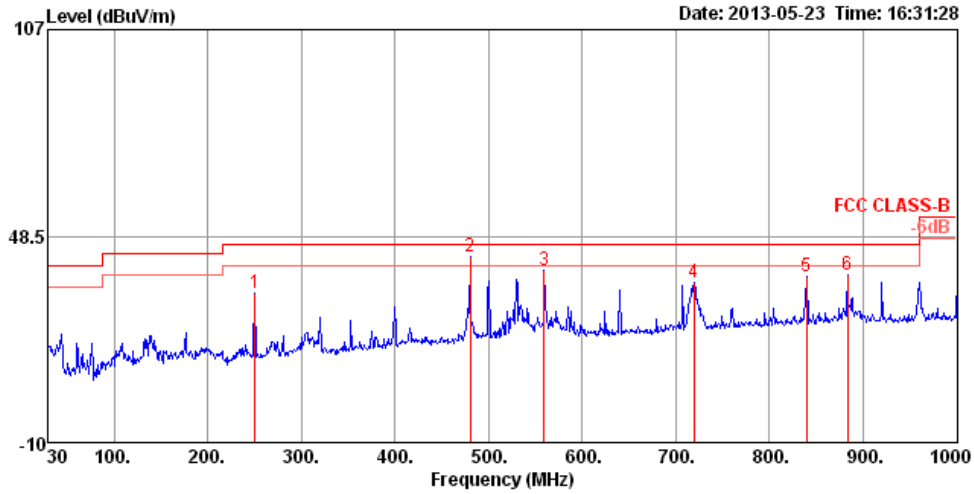

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	250.19	32.24	46.00	-13.76	49.92	1.90	11.91	31.49	125	237	HORIZONTAL Peak
2	480.08	42.49	46.00	-3.51	54.16	2.72	16.81	31.20	125	212	HORIZONTAL Peak
3	559.62	38.94	46.00	-7.06	48.85	2.96	18.38	31.25	100	27	HORIZONTAL Peak
4	719.67	35.31	46.00	-10.69	43.82	3.45	19.28	31.24	100	312	HORIZONTAL Peak
5	839.95	37.20	46.00	-8.80	44.40	3.77	20.25	31.22	125	271	HORIZONTAL Peak
6	883.60	37.40	46.00	-8.60	44.22	3.93	20.39	31.14	125	360	HORIZONTAL Peak

Vertical

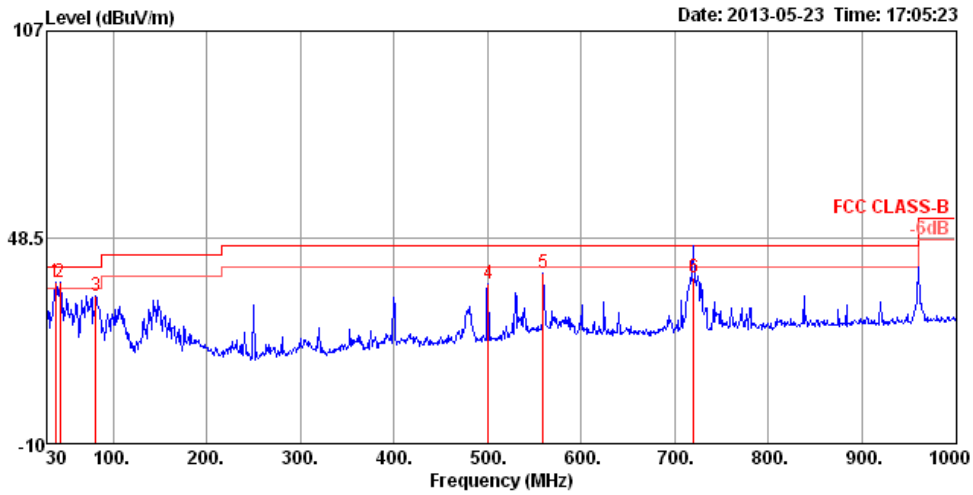

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	38.73	35.64	40.00	-4.36	53.69	0.73	13.10	31.88	100	179	VERTICAL Peak
2 !	43.58	35.57	40.00	-4.43	56.38	0.78	10.25	31.84	100	93	VERTICAL Peak
3	81.41	32.03	40.00	-7.97	55.71	1.05	6.98	31.71	100	262	VERTICAL Peak
4	500.45	35.24	46.00	-10.76	46.91	2.82	16.92	31.41	125	141	VERTICAL Peak
5	559.62	38.23	46.00	-7.77	48.14	2.96	18.38	31.25	100	116	VERTICAL Peak
6 qp	720.00	37.19	46.00	-8.81	45.70	3.45	19.28	31.24	100	30	VERTICAL QP

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Chain Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.32	34.64	54.00	-19.36	31.50	5.68	32.76	35.30	100	184	HORIZONTAL	Average
2 pk	4833.44	43.97	74.00	-30.03	40.80	5.70	32.77	35.30	100	184	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4826.52	32.62	54.00	-21.38	29.46	5.69	32.77	35.30	100	93	VERTICAL	Average
2 pk	4827.48	42.83	74.00	-31.17	39.67	5.69	32.77	35.30	100	93	VERTICAL	Peak



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.52	42.18	54.00	-11.82	38.94	5.75	32.80	35.31	137	96	HORIZONTAL	Average
2	4874.64	54.62	74.00	-19.38	51.38	5.75	32.80	35.31	137	96	HORIZONTAL	Peak
3	pk 7308.88	63.03	74.00	-10.97	54.21	7.06	37.12	35.36	133	121	HORIZONTAL	Peak
4	7311.48	49.33	54.00	-4.67	40.51	7.06	37.12	35.36	133	121	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.88	56.93	74.00	-17.07	53.69	5.75	32.80	35.31	138	208	VERTICAL	Peak
2	4873.24	42.85	54.00	-11.15	39.61	5.75	32.80	35.31	138	208	VERTICAL	Average
3	pk 7308.64	67.31	74.00	-6.69	58.49	7.06	37.12	35.36	153	188	VERTICAL	Peak
4	7311.68	50.30	54.00	-3.70	41.48	7.06	37.12	35.36	153	188	VERTICAL	Average



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz Ch11 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.20	37.10	54.00	-16.90	33.79	5.81	32.83	35.33	100	205	HORIZONTAL	Average
2	4923.92	47.40	74.00	-26.60	44.08	5.81	32.84	35.33	100	205	HORIZONTAL	Peak
3 pk	7389.04	51.59	74.00	-22.41	42.65	7.09	37.16	35.31	100	115	HORIZONTAL	Peak
4	7389.24	39.35	54.00	-14.65	30.41	7.09	37.16	35.31	100	115	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.80	38.16	54.00	-15.84	34.84	5.81	32.84	35.33	100	280	VERTICAL	Average
2	4925.20	48.51	74.00	-25.49	45.19	5.81	32.84	35.33	100	280	VERTICAL	Peak
3 pk	7381.88	53.35	74.00	-20.65	44.43	7.08	37.16	35.32	100	179	VERTICAL	Peak
4	7384.80	40.28	54.00	-13.72	31.35	7.09	37.16	35.32	100	179	VERTICAL	Average



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4836.24	44.14	74.00	-29.86	40.97	5.70	32.77	35.30	100	344	HORIZONTAL	Peak
2	4843.68	33.45	54.00	-20.55	30.26	5.71	32.78	35.30	100	344	HORIZONTAL	Average
3 pk	7266.16	49.31	74.00	-24.69	40.55	7.04	37.11	35.39	100	234	HORIZONTAL	Peak
4	7275.48	37.03	54.00	-16.97	28.25	7.04	37.12	35.38	100	234	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.60	35.55	54.00	-18.45	32.36	5.71	32.78	35.30	100	271	VERTICAL	Average
2	4847.52	43.83	74.00	-30.17	40.65	5.71	32.78	35.31	100	271	VERTICAL	Peak
3 pk	7266.40	49.65	74.00	-24.35	40.89	7.04	37.11	35.39	100	144	VERTICAL	Peak
4	7271.72	36.76	54.00	-17.24	27.99	7.04	37.11	35.38	100	142	VERTICAL	Average

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.36	32.00	54.00	-22.00	28.76	5.75	32.80	35.31	100	249	HORIZONTAL	Average
2	4878.80	45.85	74.00	-28.15	42.62	5.75	32.80	35.32	100	249	HORIZONTAL	Peak
3 pk	7292.52	51.33	74.00	-22.67	42.53	7.05	37.12	35.37	100	189	HORIZONTAL	Peak
4	7304.28	37.55	54.00	-16.45	28.74	7.05	37.12	35.36	100	189	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.40	31.55	54.00	-22.45	28.31	5.75	32.80	35.31	100	126	VERTICAL	Average
2	4890.72	45.16	74.00	-28.84	41.90	5.77	32.81	35.32	100	126	VERTICAL	Peak
3	7296.92	37.83	54.00	-16.17	29.03	7.05	37.12	35.37	100	77	VERTICAL	Average
4 pk	7297.96	49.81	74.00	-24.19	41.01	7.05	37.12	35.37	100	77	VERTICAL	Peak

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4908.32	44.35	74.00	-29.65	41.07	5.79	32.82	35.33	100	117	HORIZONTAL	Peak
2	4917.36	32.03	54.00	-21.97	28.73	5.80	32.83	35.33	100	117	HORIZONTAL	Average
3 pk	7363.44	50.55	74.00	-23.45	41.65	7.08	37.15	35.33	100	178	HORIZONTAL	Peak
4	7368.64	38.40	54.00	-15.60	29.50	7.08	37.15	35.33	100	178	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4896.56	44.21	74.00	-29.79	40.94	5.77	32.82	35.32	100	194	VERTICAL	Peak
2	4904.32	32.71	54.00	-21.29	29.44	5.78	32.82	35.33	100	194	VERTICAL	Average
3 pk	7369.52	50.63	74.00	-23.37	41.73	7.08	37.15	35.33	100	94	VERTICAL	Peak
4	7373.52	38.35	54.00	-15.65	29.44	7.08	37.15	35.32	100	94	VERTICAL	Average

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 149 / Chain 3 + Chain 4
Test Date	May 08, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11489.98	64.63	74.00	-9.37	54.21	6.74	34.82	38.50	Peak	295	119	HORIZONTAL
2 a	11490.36	50.23	54.00	-3.77	39.81	6.74	34.82	38.50	Average	295	119	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11489.93	63.45	74.00	-10.55	53.03	6.74	34.82	38.50	Peak	321	127	VERTICAL
2 a	11490.25	47.74	54.00	-6.26	37.32	6.74	34.82	38.50	Average	321	127	VERTICAL



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 157 / Chain 3 + Chain 4
Test Date	May 08, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11569.93	65.96	74.00	-8.04	55.54	6.77	34.85	38.50	Peak	292	119	HORIZONTAL
2 a	11570.31	50.61	54.00	-3.39	40.19	6.77	34.85	38.50	Average	292	119	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11569.96	62.16	74.00	-11.84	51.74	6.77	34.85	38.50	Peak	322	195	VERTICAL
2 a	11570.27	46.91	54.00	-7.09	36.49	6.77	34.85	38.50	Average	322	195	VERTICAL

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 165 / Chain 3 + Chain 4
Test Date	May 08, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11649.78	66.19	74.00	-7.81	55.76	6.80	34.87	38.50	Peak	296	122	HORIZONTAL
2 a	11650.32	50.89	54.00	-3.11	40.46	6.80	34.87	38.50	Average	296	122	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11649.94	64.44	74.00	-9.56	54.01	6.80	34.87	38.50	Peak	13	160	VERTICAL
2 a	11650.40	49.22	54.00	-4.78	38.79	6.80	34.87	38.50	Average	13	160	VERTICAL



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz CH 151 / Chain 3 + Chain 4
Test Date	May 08, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11510.20	60.03	74.00	-13.97	49.60	6.75	34.82	38.50	Peak	293	121	HORIZONTAL
2 a	11510.26	46.58	54.00	-7.42	36.15	6.75	34.82	38.50	Average	293	121	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	11510.20	42.70	54.00	-11.30	32.27	6.75	34.82	38.50	Average	324	190	VERTICAL
2 p	11510.29	56.36	74.00	-17.64	45.93	6.75	34.82	38.50	Peak	324	190	VERTICAL

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz CH 159 / Chain 3 + Chain 4
Test Date	May 08, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	11590.21	50.94	54.00	-3.06	40.51	6.78	34.85	38.50	Average	294	121	HORIZONTAL
2 p	11590.32	65.42	74.00	-8.58	54.99	6.78	34.85	38.50	Peak	294	121	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	11590.28	48.07	54.00	-5.93	37.64	6.78	34.85	38.50	Average	320	128	VERTICAL
2 p	11590.32	61.94	74.00	-12.06	51.51	6.78	34.85	38.50	Peak	320	128	VERTICAL



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11b CH 1 / Chain 1
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4824.00	49.34	54.00	-4.66	46.19	5.69	32.76	35.30	172	332	HORIZONTAL Average
2 pk	4824.02	52.90	74.00	-21.10	49.75	5.69	32.76	35.30	172	332	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 pk	4823.95	48.51	74.00	-25.49	45.36	5.69	32.76	35.30	100	107	VERTICAL Peak
2	4824.00	42.78	54.00	-11.22	39.63	5.69	32.76	35.30	100	107	VERTICAL Average



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11b CH 6 / Chain 1
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.03	50.96	54.00	-3.04	47.72	5.75	32.80	35.31	155	324	HORIZONTAL Average
2 pk	4874.03	53.65	74.00	-20.35	50.41	5.75	32.80	35.31	155	324	HORIZONTAL Peak
3	7310.31	44.15	54.00	-9.85	35.33	7.06	37.12	35.36	148	167	HORIZONTAL Average
4	7310.69	53.54	74.00	-20.46	44.72	7.06	37.12	35.36	148	167	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.92	52.38	74.00	-21.62	49.14	5.75	32.80	35.31	100	179	VERTICAL Peak
2 !	4874.01	48.60	54.00	-5.40	45.36	5.75	32.80	35.31	100	179	VERTICAL Average
3	7311.76	48.76	54.00	-5.24	39.94	7.06	37.12	35.36	122	195	VERTICAL Average
4 pk	7311.92	56.60	74.00	-17.40	47.78	7.06	37.12	35.36	122	195	VERTICAL Peak

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11b CH 11 / Chain 1
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4924.00	50.71	54.00	-3.29	47.39	5.81	32.84	35.33	118	343	HORIZONTAL Average
2 pk	4924.08	55.40	74.00	-18.60	52.08	5.81	32.84	35.33	118	343	HORIZONTAL Peak
3	7385.12	39.64	54.00	-14.36	30.71	7.09	37.16	35.32	100	285	HORIZONTAL Average
4	7385.38	52.01	74.00	-21.99	43.08	7.09	37.16	35.32	100	285	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4924.01	50.14	54.00	-3.86	46.82	5.81	32.84	35.33	144	335	VERTICAL Average
2 pk	4924.02	54.36	74.00	-19.64	51.04	5.81	32.84	35.33	144	335	VERTICAL Peak
3	7385.61	39.43	54.00	-14.57	30.50	7.09	37.16	35.32	100	250	VERTICAL Average
4	7386.30	52.05	74.00	-21.95	43.12	7.09	37.16	35.32	100	250	VERTICAL Peak



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1 pk	4822.04	44.13	74.00	-29.87	40.99	5.68	32.76	35.30	100	131 HORIZONTAL	Peak
2	4822.76	32.02	54.00	-21.98	28.88	5.68	32.76	35.30	100	131 HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4824.32	33.87	54.00	-20.13	30.72	5.69	32.76	35.30	100	60 VERTICAL	Average
2 pk	4825.08	43.86	74.00	-30.14	40.70	5.69	32.77	35.30	100	60 VERTICAL	Peak

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.84	52.40	74.00	-21.60	49.16	5.75	32.80	35.31	126	99	HORIZONTAL	Peak
2	4874.40	39.64	54.00	-14.36	36.40	5.75	32.80	35.31	126	99	HORIZONTAL	Average
3 pk	7306.52	63.14	74.00	-10.86	54.33	7.05	37.12	35.36	128	123	HORIZONTAL	Peak
4	7306.88	49.02	54.00	-4.98	40.21	7.05	37.12	35.36	128	123	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.32	44.04	54.00	-9.96	40.80	5.75	32.80	35.31	144	340	VERTICAL	Average
2	4879.24	56.07	74.00	-17.93	52.84	5.75	32.80	35.32	144	340	VERTICAL	Peak
3 pk	7306.48	63.64	74.00	-10.36	54.83	7.05	37.12	35.36	104	185	VERTICAL	Peak
4	7312.64	50.76	54.00	-3.24	41.94	7.06	37.12	35.36	104	185	VERTICAL	Average



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4919.56	45.58	74.00	-28.42	42.28	5.80	32.83	35.33	100	37	HORIZONTAL	Peak
2	4924.24	35.45	54.00	-18.55	32.13	5.81	32.84	35.33	100	37	HORIZONTAL	Average
3	7384.72	38.62	54.00	-15.38	29.69	7.09	37.16	35.32	100	207	HORIZONTAL	Average
4 pk	7389.56	51.88	74.00	-22.12	42.94	7.09	37.16	35.31	100	207	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4922.48	37.57	54.00	-16.43	34.26	5.81	32.83	35.33	100	172	VERTICAL	Average
2	4927.88	45.91	74.00	-28.09	42.59	5.81	32.84	35.33	100	172	VERTICAL	Peak
3	7384.40	40.88	54.00	-13.12	31.96	7.08	37.16	35.32	100	256	VERTICAL	Average
4 pk	7388.44	52.34	74.00	-21.66	43.40	7.09	37.16	35.31	100	256	VERTICAL	Peak

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11a CH 149 / Chain 3 + Chain 4
Test Date	May 08, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11489.92	64.04	74.00	-9.96	53.62	6.74	34.82	38.50	Peak	292	120	HORIZONTAL
2 a	11490.32	50.57	54.00	-3.43	40.15	6.74	34.82	38.50	Average	292	120	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11490.12	62.84	74.00	-11.16	52.42	6.74	34.82	38.50	Peak	320	122	VERTICAL
2 a	11490.40	49.61	54.00	-4.39	39.19	6.74	34.82	38.50	Average	320	122	VERTICAL



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11a CH 157 / Chain 3 + Chain 4
Test Date	May 08, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	11570.44	50.91	54.00	-3.09	40.49	6.77	34.85	38.50	Average	296	121	HORIZONTAL
2 p	11576.12	65.19	74.00	-8.81	54.77	6.77	34.85	38.50	Peak	296	121	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	11570.28	47.56	54.00	-6.44	37.14	6.77	34.85	38.50	Average	322	196	VERTICAL
2 p	11571.16	61.10	74.00	-12.90	50.68	6.77	34.85	38.50	Peak	322	196	VERTICAL



Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11a CH 165 / Chain 3 + Chain 4
Test Date	May 08, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 a	11650.16	50.80	54.00	-3.20	40.37	6.80	34.87	38.50	Average	296	125	HORIZONTAL
2 p	11651.12	64.46	74.00	-9.54	54.03	6.80	34.87	38.50	Peak	296	125	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	11650.08	63.46	74.00	-10.54	53.03	6.80	34.87	38.50	Peak	10	160	VERTICAL
2 a	11650.44	49.21	54.00	-4.79	38.78	6.80	34.87	38.50	Average	10	160	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Chain Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Conducted Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Conducted Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.4.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2
Test date	May 03, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 !	2390.00	52.59	54.00	-1.41	21.01	3.68	27.90	0.00	100	203	VERTICAL	Average
2 !	2390.00	72.65	74.00	-1.35	41.07	3.68	27.90	0.00	100	203	VERTICAL	Peak
3	2412.60	100.57			68.98	3.69	27.90	0.00	100	203	VERTICAL	Average
4 pk	2412.80	111.11			79.52	3.69	27.90	0.00	100	203	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.40	65.40	74.00	-8.60	33.82	3.68	27.90	0.00	100	147	VERTICAL	Peak
2 !	2389.20	50.13	54.00	-3.87	18.55	3.68	27.90	0.00	100	147	VERTICAL	Average
3	2435.80	105.70			74.09	3.71	27.90	0.00	100	147	VERTICAL	Average
4 pk	2435.80	117.03			85.42	3.71	27.90	0.00	100	147	VERTICAL	Peak
5 !	2483.90	52.41	54.00	-1.59	20.78	3.73	27.90	0.00	100	147	VERTICAL	Average
6 !	2483.90	71.66	74.00	-2.34	40.03	3.73	27.90	0.00	100	147	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	2461.40	110.67			79.05	3.72	27.90	0.00	100	177	VERTICAL	Peak
2	2461.60	100.93			69.31	3.72	27.90	0.00	100	177	VERTICAL	Average
3 !	2483.50	52.60	54.00	-1.40	20.97	3.73	27.90	0.00	100	177	VERTICAL	Average
4 !	2484.10	72.45	74.00	-1.55	40.82	3.73	27.90	0.00	100	177	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2
Test date	May 03, 2013		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 !	2388.40	52.78	54.00	-1.22	21.20	3.68	27.90	0.00	100	339	VERTICAL	Average
2 !	2388.80	70.22	74.00	-3.78	38.64	3.68	27.90	0.00	100	339	VERTICAL	Peak
3	2420.40	95.56			63.96	3.70	27.90	0.00	100	339	VERTICAL	Average
4 pk	2420.40	107.48			75.88	3.70	27.90	0.00	100	339	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2384.40	65.24	74.00	-8.76	33.66	3.68	27.90	0.00	100	38	VERTICAL	Peak
2 !	2388.80	50.23	54.00	-3.77	18.65	3.68	27.90	0.00	100	38	VERTICAL	Average
3	2435.40	97.89			66.29	3.70	27.90	0.00	100	38	VERTICAL	Average
4 pk	2435.40	109.28			77.68	3.70	27.90	0.00	100	38	VERTICAL	Peak
5 !	2483.50	52.67	54.00	-1.33	21.04	3.73	27.90	0.00	100	38	VERTICAL	Average
6 !	2485.50	70.63	74.00	-3.37	39.00	3.73	27.90	0.00	100	38	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2450.40	94.87			63.26	3.71	27.90	0.00	100	146	VERTICAL	Average
2 pk	2450.40	106.17			74.56	3.71	27.90	0.00	100	146	VERTICAL	Peak
3 !	2485.10	52.83	54.00	-1.17	21.20	3.73	27.90	0.00	100	146	VERTICAL	Average
4 !	2487.50	71.23	74.00	-2.77	39.60	3.73	27.90	0.00	100	146	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Chain Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
Test Date	May 03, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 !	2390.00	52.90	54.00	-1.10	21.32	3.68	27.90	0.00	100	175	VERTICAL	Average
2	2390.00	62.67	74.00	-11.33	31.09	3.68	27.90	0.00	100	175	VERTICAL	Peak
3	2411.20	107.68			76.09	3.69	27.90	0.00	100	175	VERTICAL	Average
4 pk	2413.00	111.64			80.05	3.69	27.90	0.00	100	175	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.60	59.03	74.00	-14.97	27.45	3.68	27.90	0.00	100	350	VERTICAL	Peak
2	2390.00	45.52	54.00	-8.48	13.94	3.68	27.90	0.00	100	350	VERTICAL	Average
3	2436.20	106.85			75.24	3.71	27.90	0.00	100	350	VERTICAL	Average
4 pk	2436.20	110.74			79.13	3.71	27.90	0.00	100	350	VERTICAL	Peak
5	2483.50	43.88	54.00	-10.12	12.25	3.73	27.90	0.00	100	350	VERTICAL	Average
6	2487.50	56.20	74.00	-17.80	24.57	3.73	27.90	0.00	100	350	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2461.20	107.00			75.38	3.72	27.90	0.00	100	175	VERTICAL	Average
2 pk	2461.20	110.86			79.24	3.72	27.90	0.00	100	175	VERTICAL	Peak
3 !	2483.50	52.65	54.00	-1.35	21.02	3.73	27.90	0.00	100	175	VERTICAL	Average
4	2483.70	61.62	74.00	-12.38	29.99	3.73	27.90	0.00	100	175	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2
Test Date	May 03, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 !	2389.40	72.26	74.00	-1.74	40.68	3.68	27.90	0.00	100	183	VERTICAL	Peak
2 !	2390.00	52.53	54.00	-1.47	20.95	3.68	27.90	0.00	100	183	VERTICAL	Average
3	2411.60	103.99			72.40	3.69	27.90	0.00	100	183	VERTICAL	Average
4 pk	2411.60	113.30			81.71	3.69	27.90	0.00	100	183	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 !	2390.00	52.74	54.00	-1.26	21.16	3.68	27.90	0.00	100	180	VERTICAL	Average
2 !	2390.00	68.82	74.00	-5.18	37.24	3.68	27.90	0.00	100	180	VERTICAL	Peak
3 pk	2436.20	116.75			85.14	3.71	27.90	0.00	100	180	VERTICAL	Peak
4	2436.60	107.08			75.47	3.71	27.90	0.00	100	180	VERTICAL	Average
5 !	2483.50	50.52	54.00	-3.48	18.89	3.73	27.90	0.00	100	180	VERTICAL	Average
6 !	2483.90	68.11	74.00	-5.89	36.48	3.73	27.90	0.00	100	180	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.


Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	2461.20	112.29			80.67	3.72	27.90	0.00	100	180	VERTICAL	Peak
2	2461.40	102.44			70.82	3.72	27.90	0.00	100	180	VERTICAL	Average
3 !	2483.50	52.76	54.00	-1.24	21.13	3.73	27.90	0.00	100	180	VERTICAL	Average
4 !	2485.90	70.68	74.00	-3.32	39.05	3.73	27.90	0.00	100	180	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

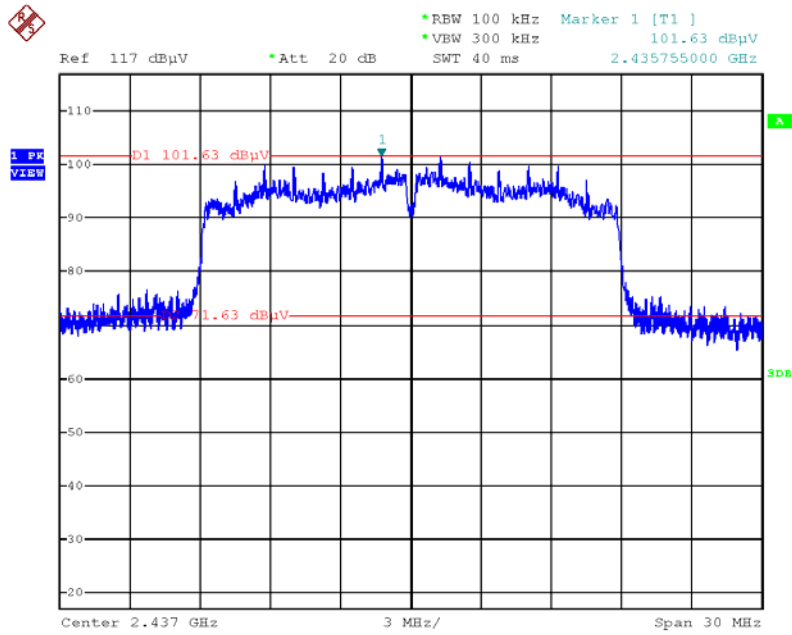


Date: 8.MAY.2013 16:40:15

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

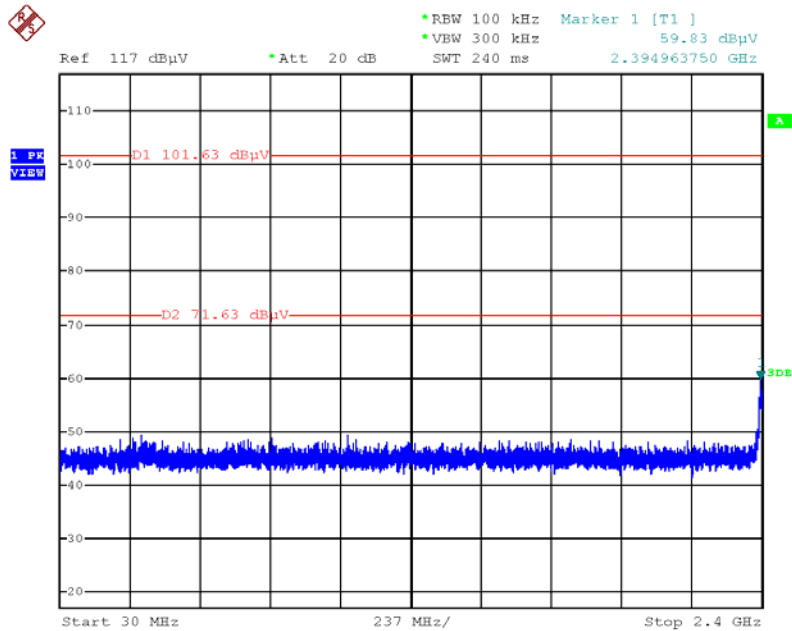


Date: 8.MAY.2013 16:42:56

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)

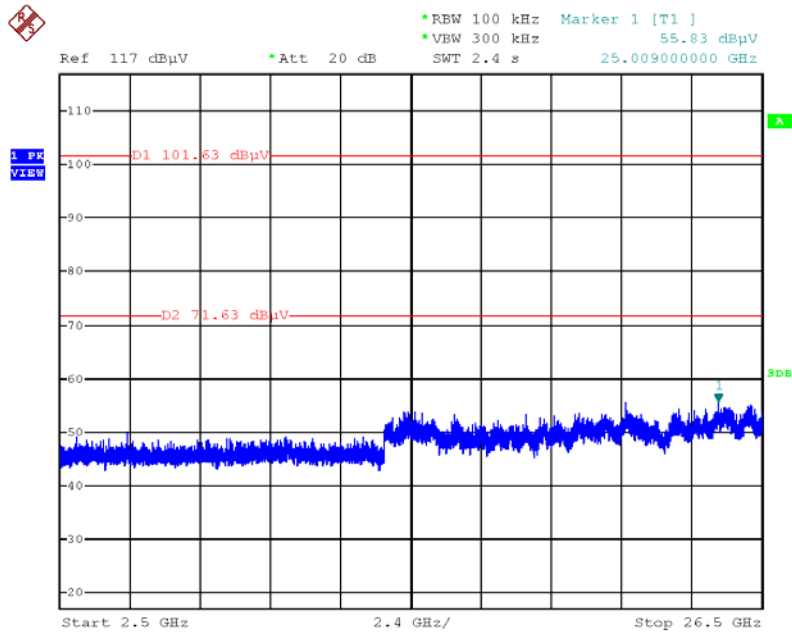


Date: 8.MAY.2013 16:42:21

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)

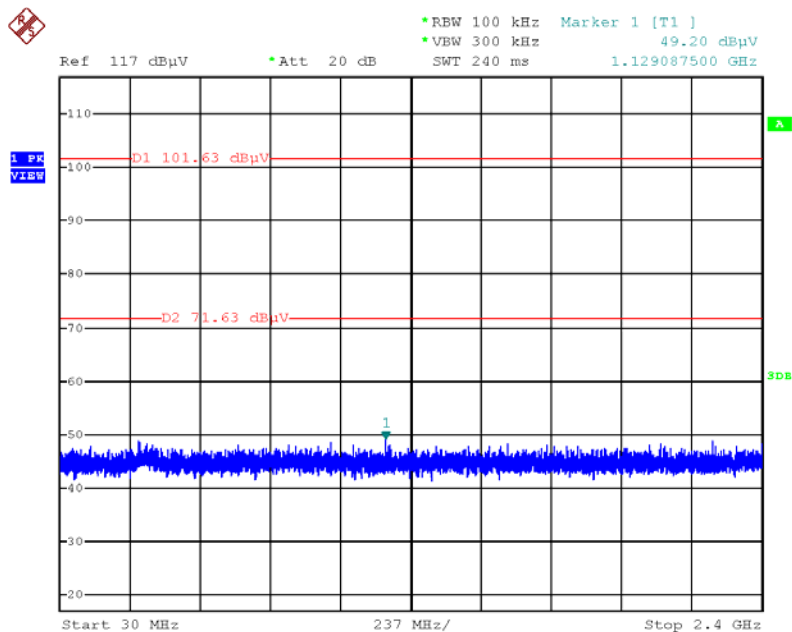


Date: 8.MAY.2013 16:41:08

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)

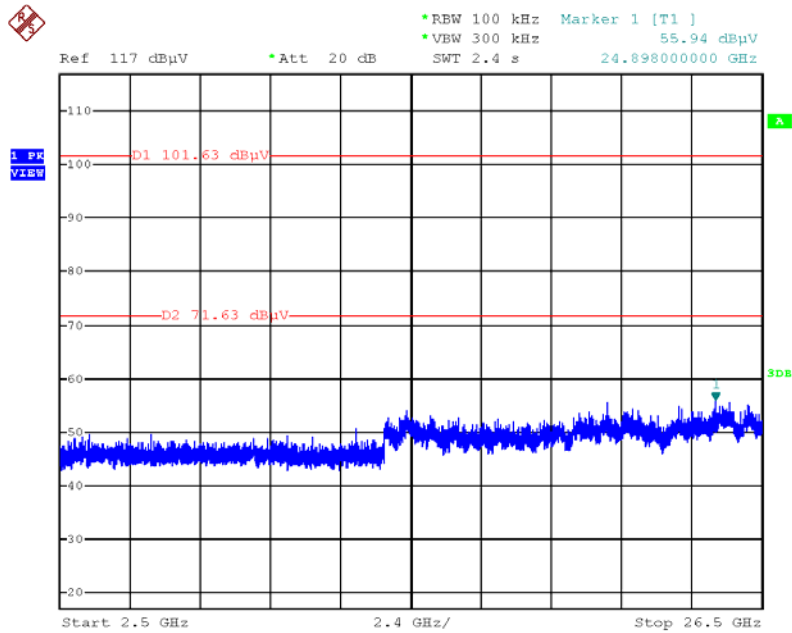


Date: 8.MAY.2013 16:41:46

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

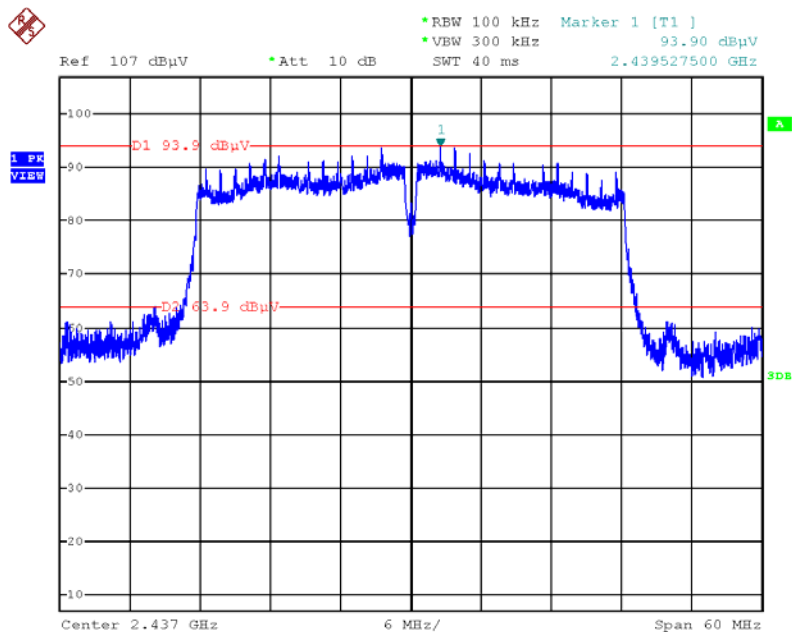


Date: 8.MAY.2013 16:33:37

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc)

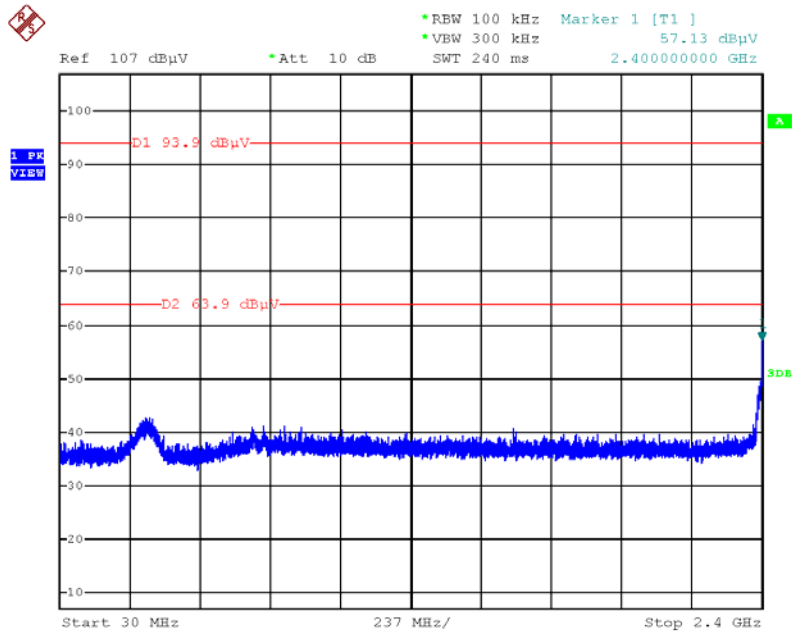


Date: 8.MAY.2013 16:35:24

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)

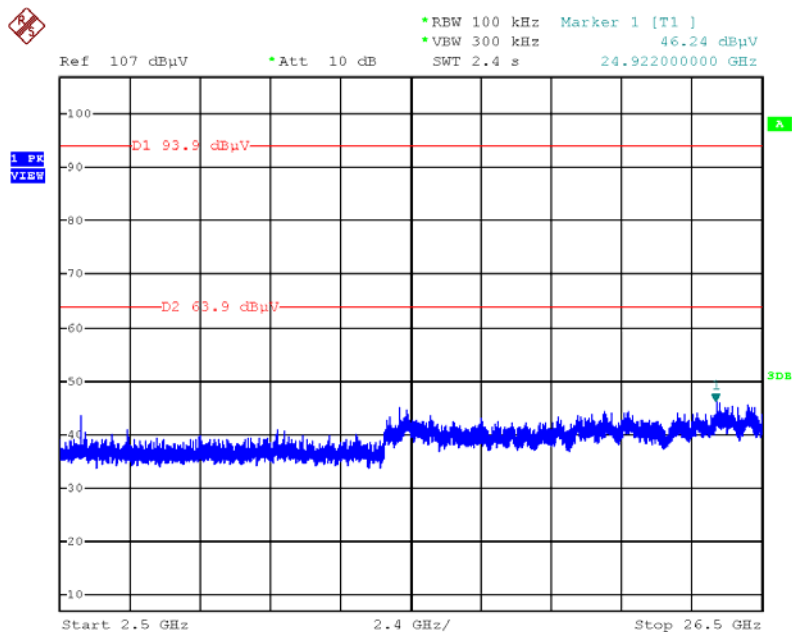


Date: 8.MAY.2013 16:36:12

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)

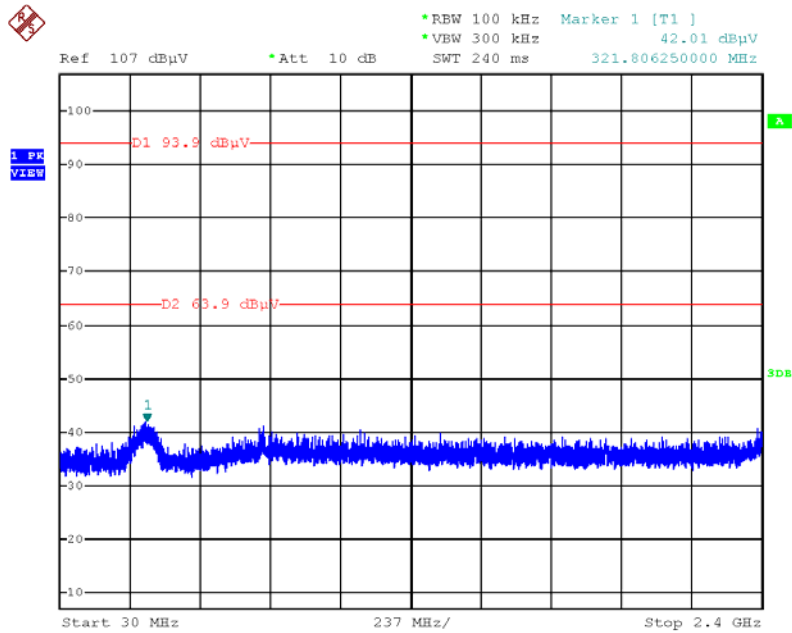


Date: 8.MAY.2013 16:37:48

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)

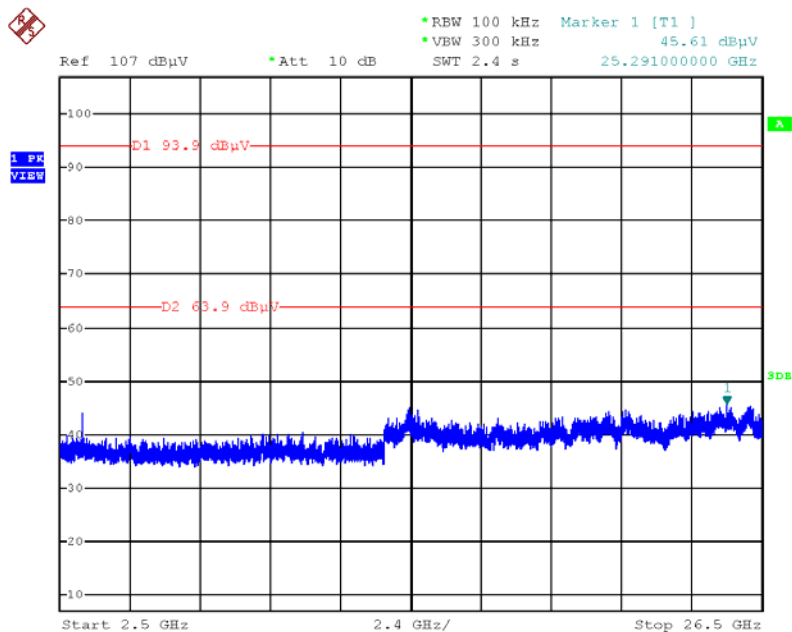


Date: 8.MAY.2013 16:37:07

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

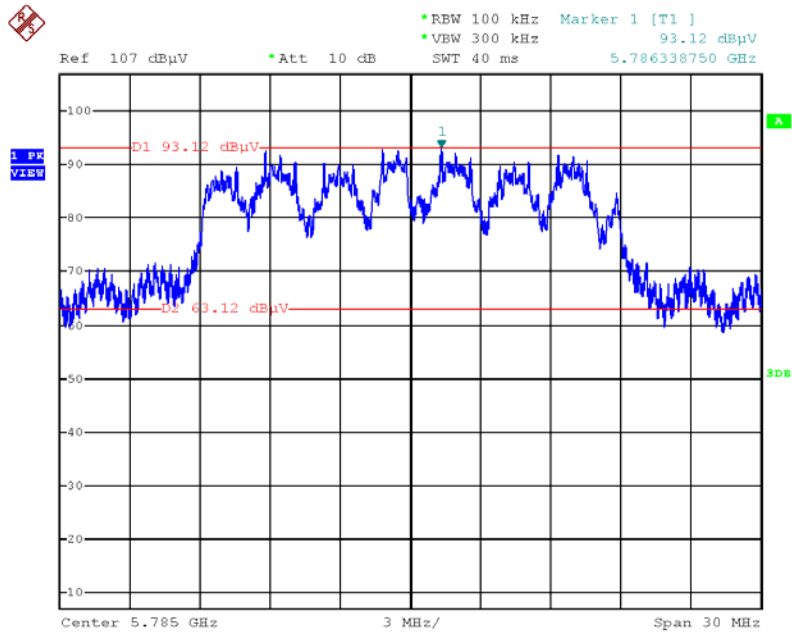


Date: 8.MAY.2013 16:20:43

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc)

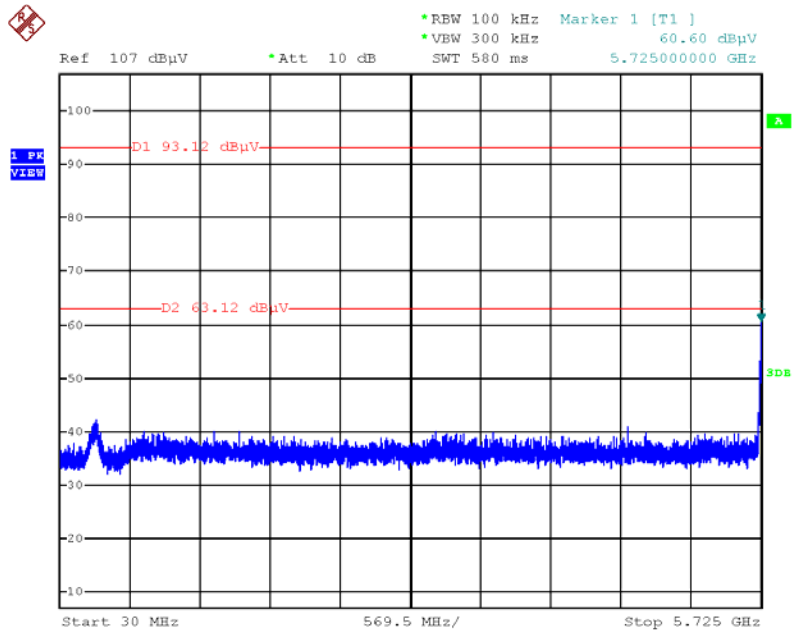


Date: 8.MAY.2013 16:23:06

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

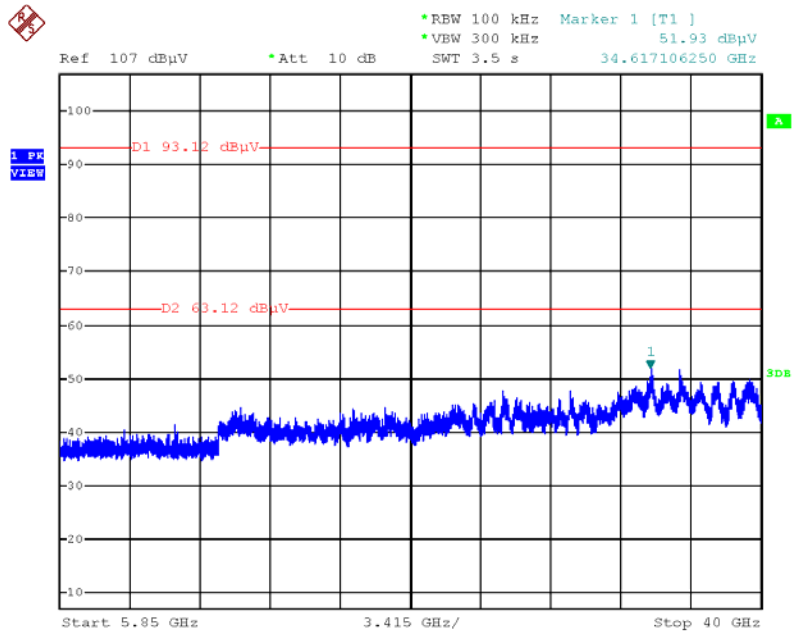


Date: 8.MAY.2013 16:23:43

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)

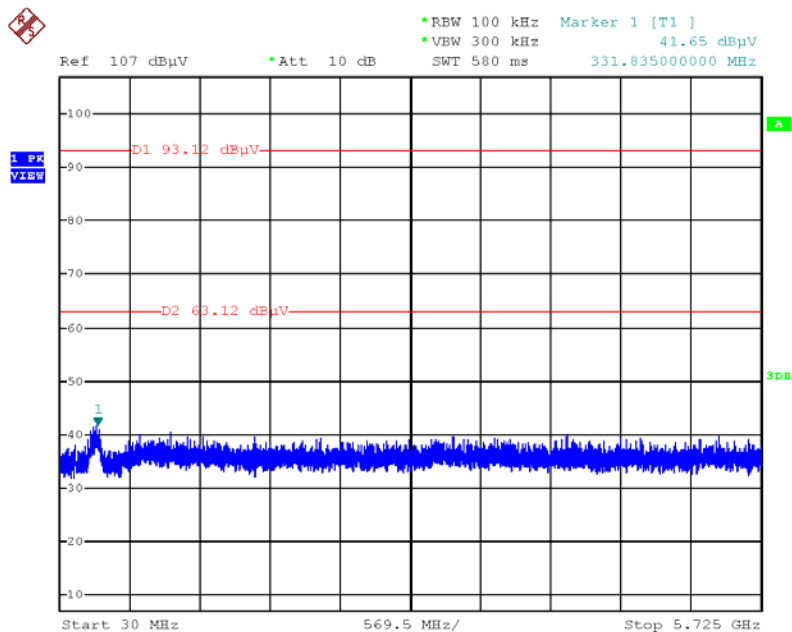


Date: 8.MAY.2013 16:22:25

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc)

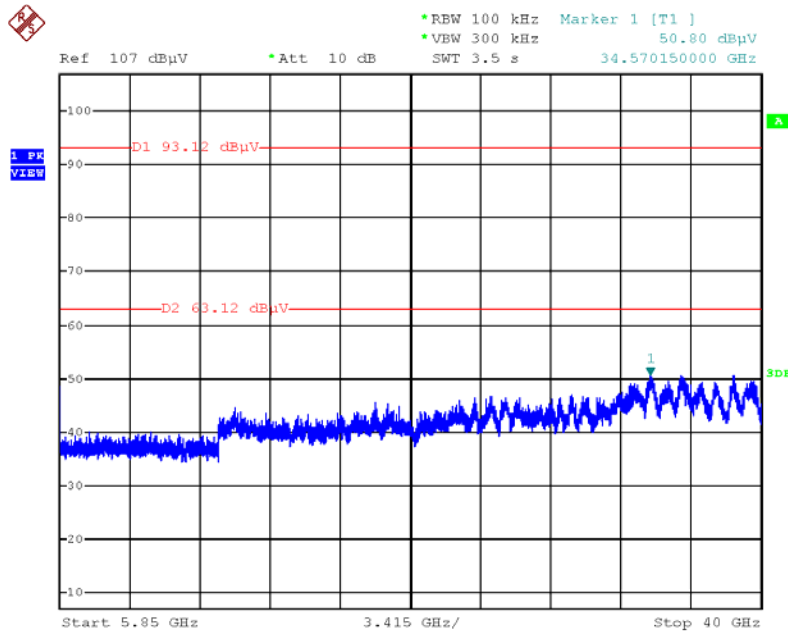


Date: 8.MAY.2013 16:21:40

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

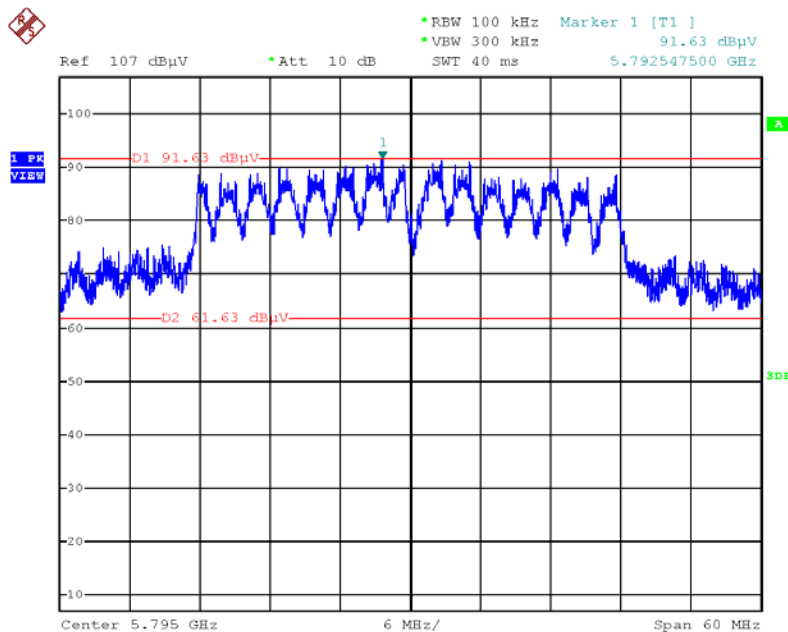


Date: 8.MAY.2013 16:15:55

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)

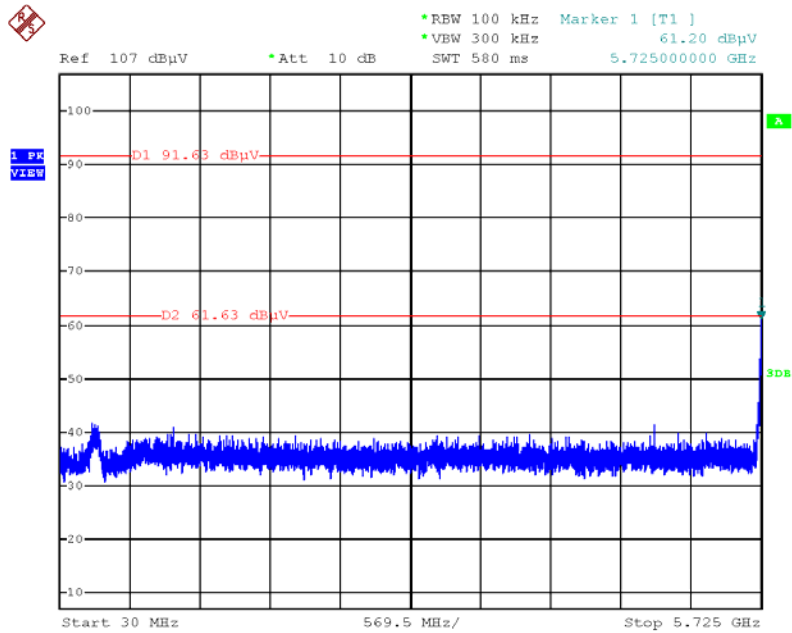


Date: 8.MAY.2013 16:17:49

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

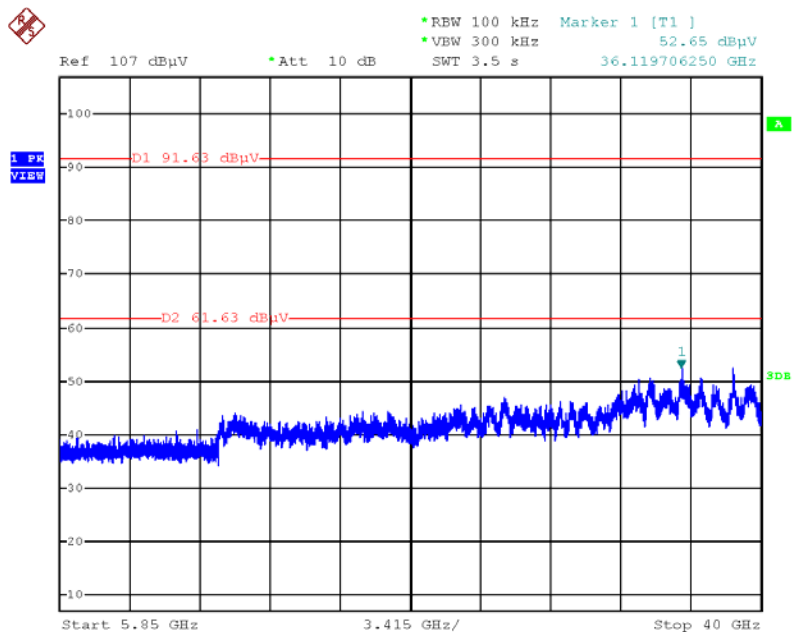


Date: 8.MAY.2013 16:18:34

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)

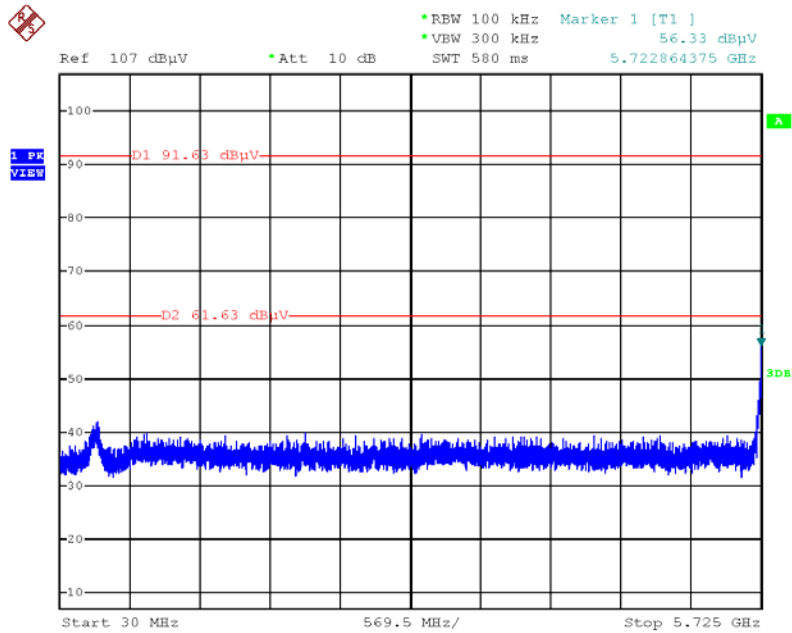


Date: 8.MAY.2013 16:17:00

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

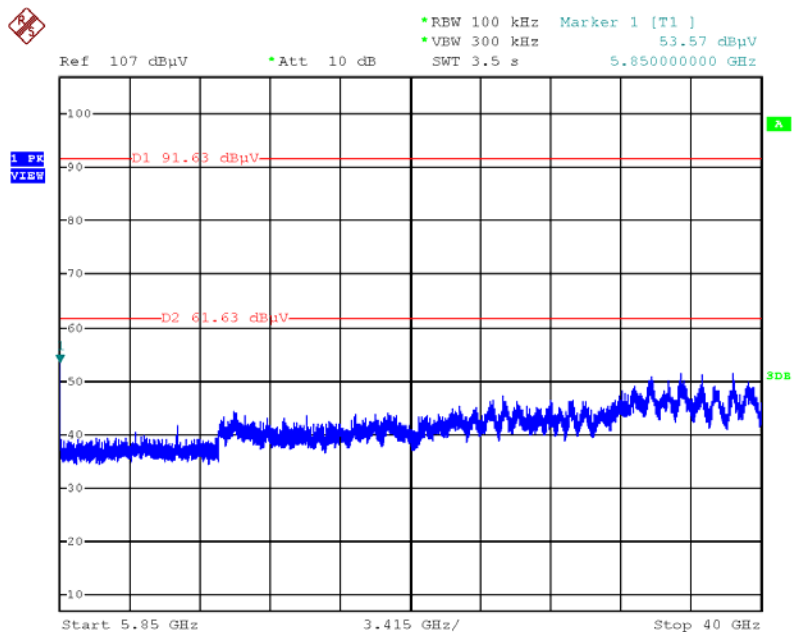


Date: 8.MAY.2013 16:16:29

Plot on Configuration IEEE 802.11b / Reference Level

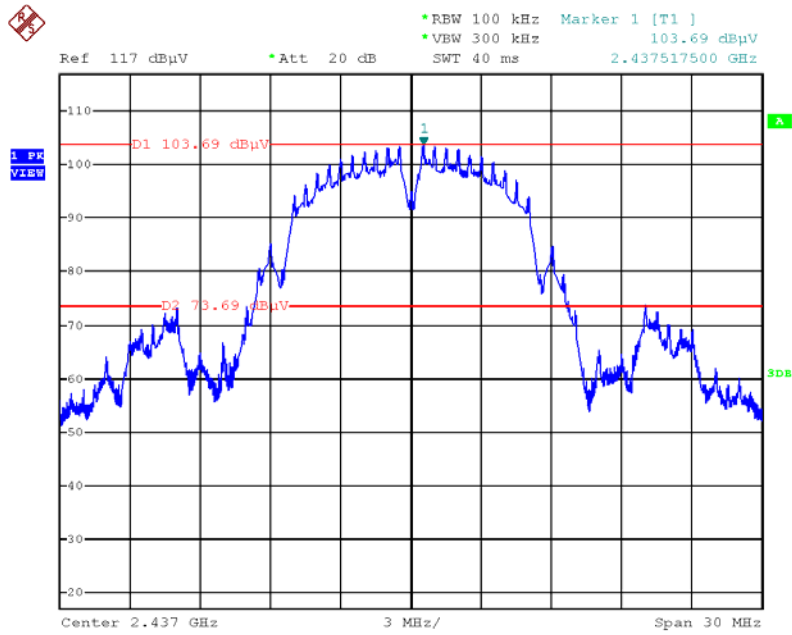


Date: 8.MAY.2013 16:50:14

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

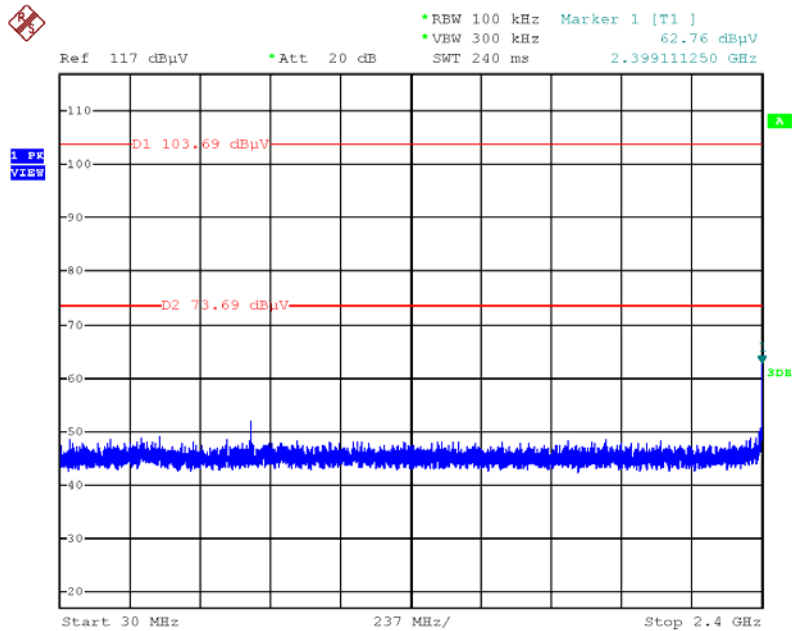


Date: 8.MAY.2013 16:52:25

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

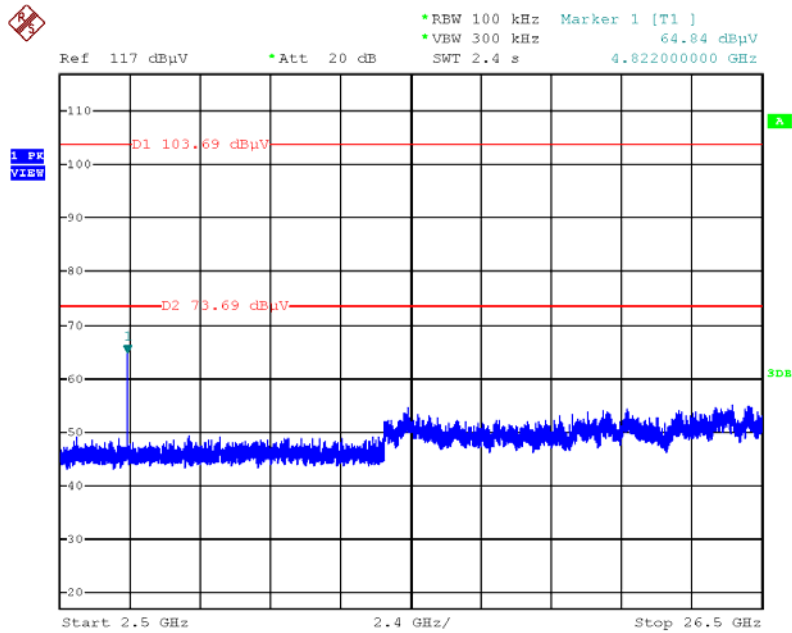


Date: 8.MAY.2013 16:53:01

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

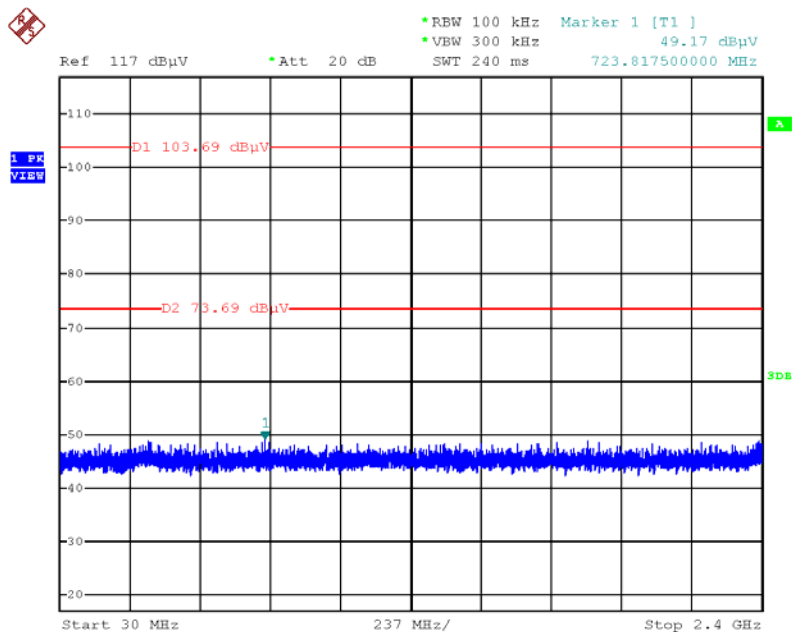


Date: 8.MAY.2013 16:54:25

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

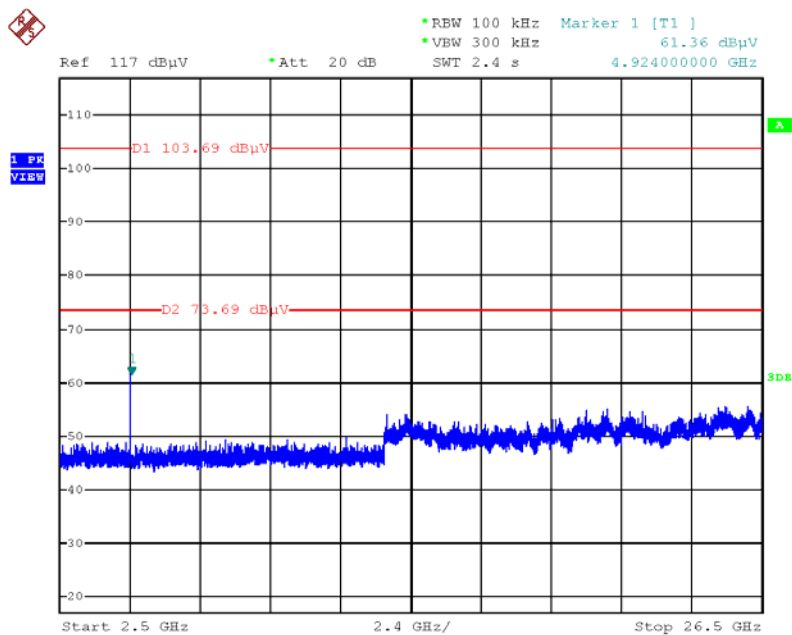


Date: 8.MAY.2013 16:53:46

Plot on Configuration IEEE 802.11g / Reference Level

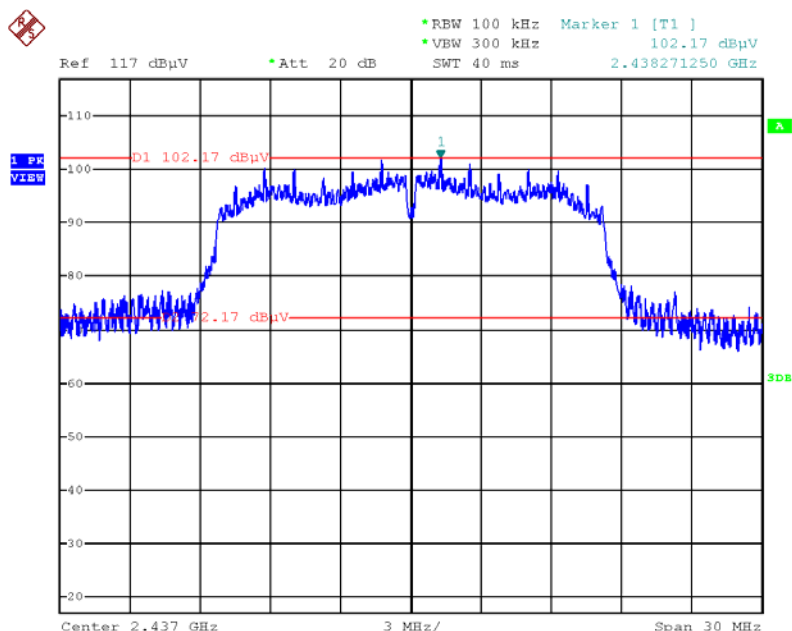


Date: 8.MAY.2013 16:44:41

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

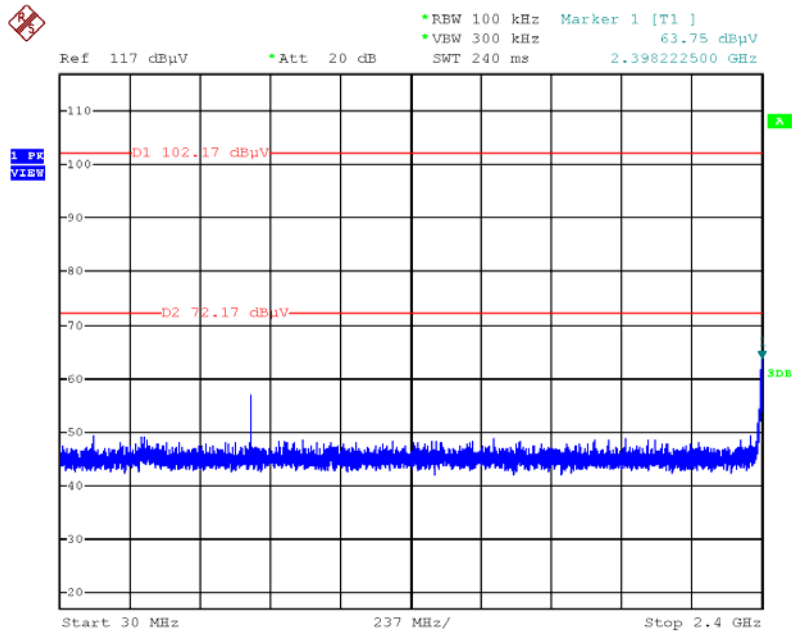


Date: 8.MAY.2013 16:47:02

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~2650MHz (down 30dBc)

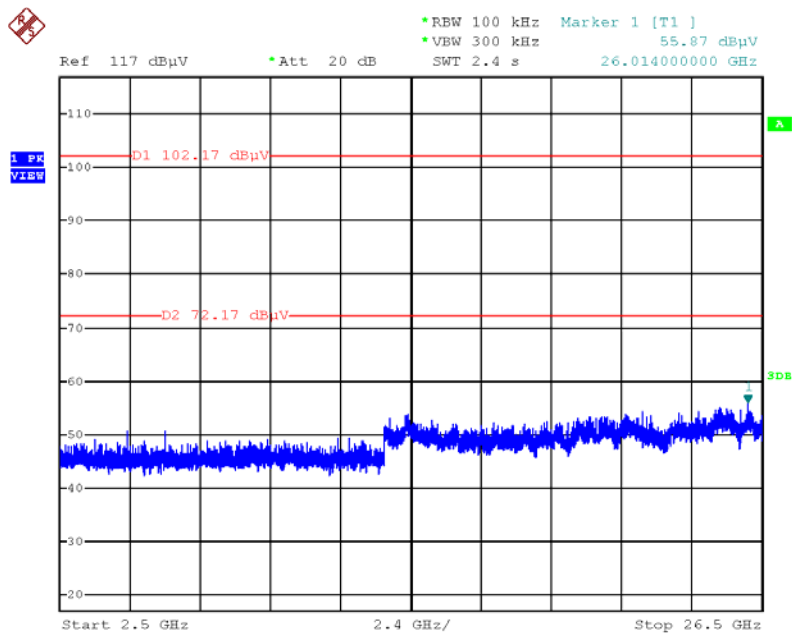


Date: 8.MAY.2013 16:47:36

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

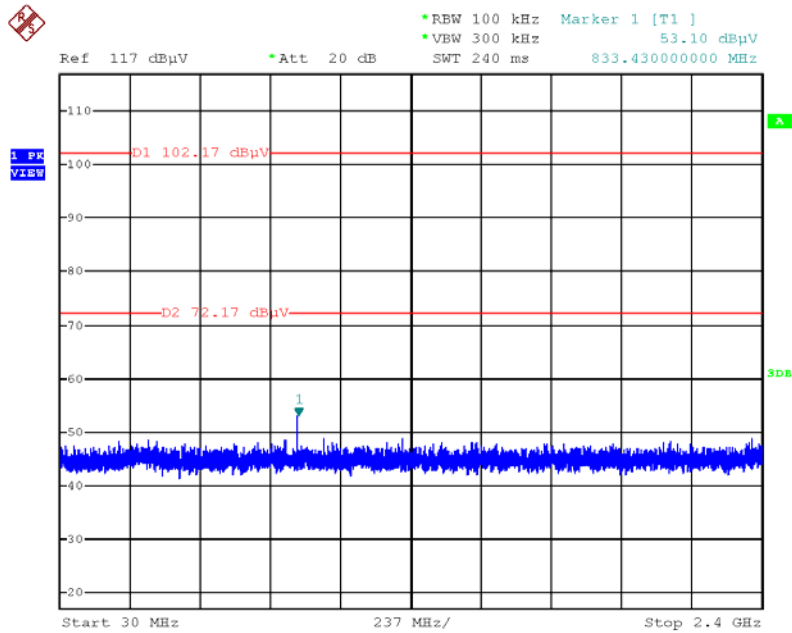


Date: 8.MAY.2013 16:46:27

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

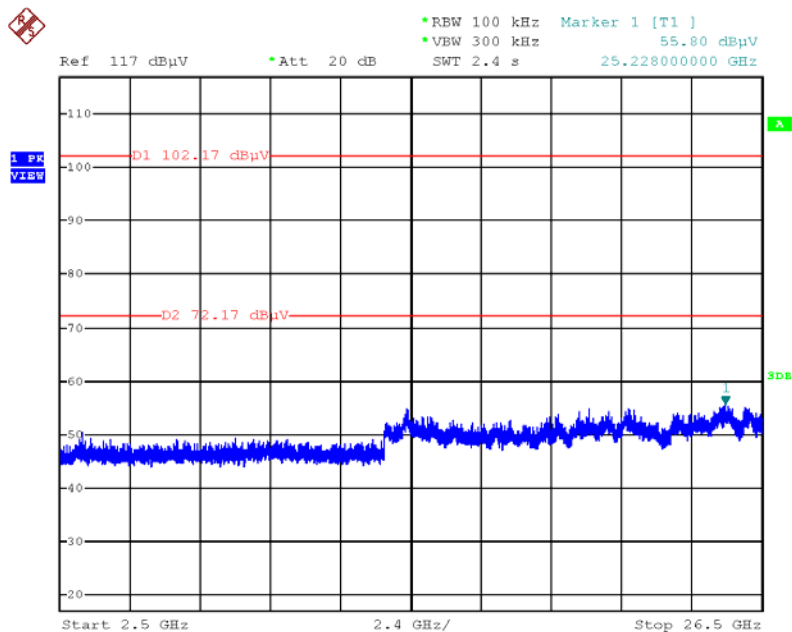


Date: 8.MAY.2013 16:45:55

Plot on Configuration IEEE 802.11a / Reference Level

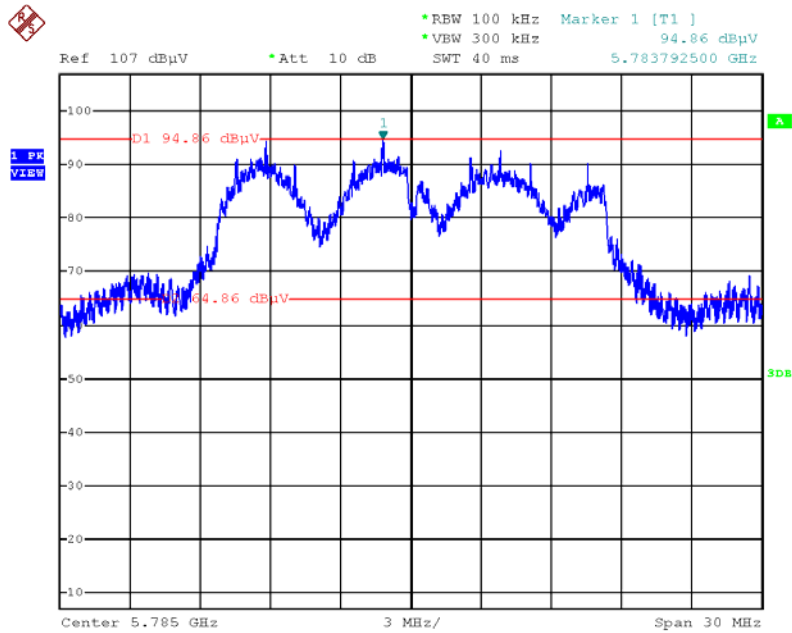


Date: 8.MAY.2013 16:25:30

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

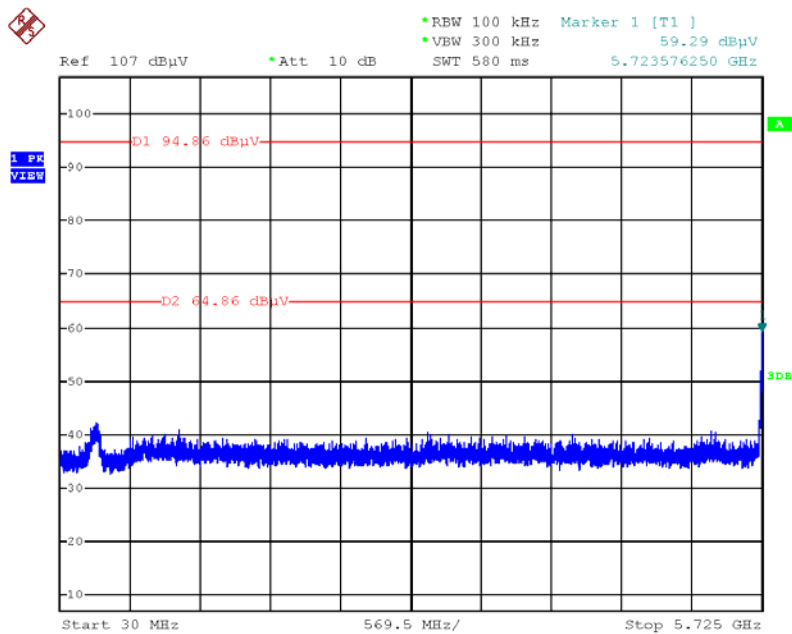


Date: 8.MAY.2013 16:26:25

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

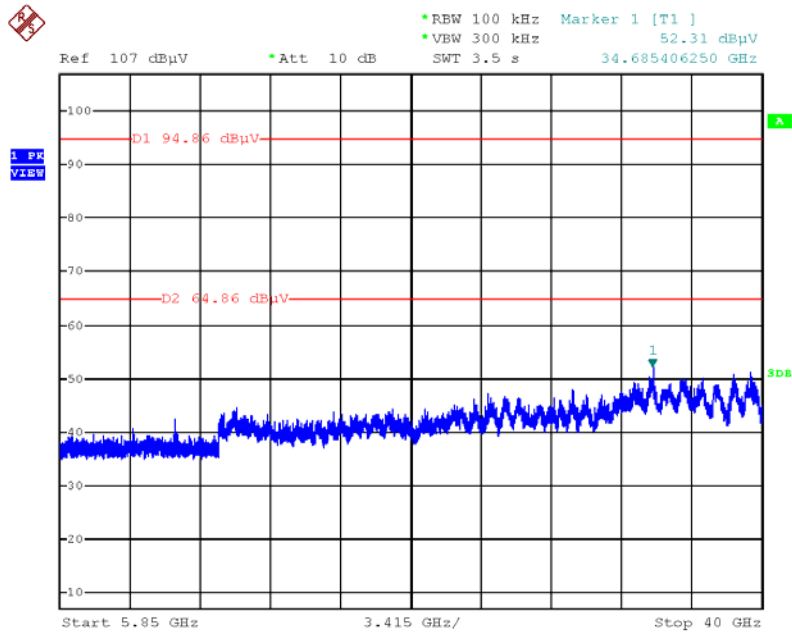


Date: 8.MAY.2013 16:27:05

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

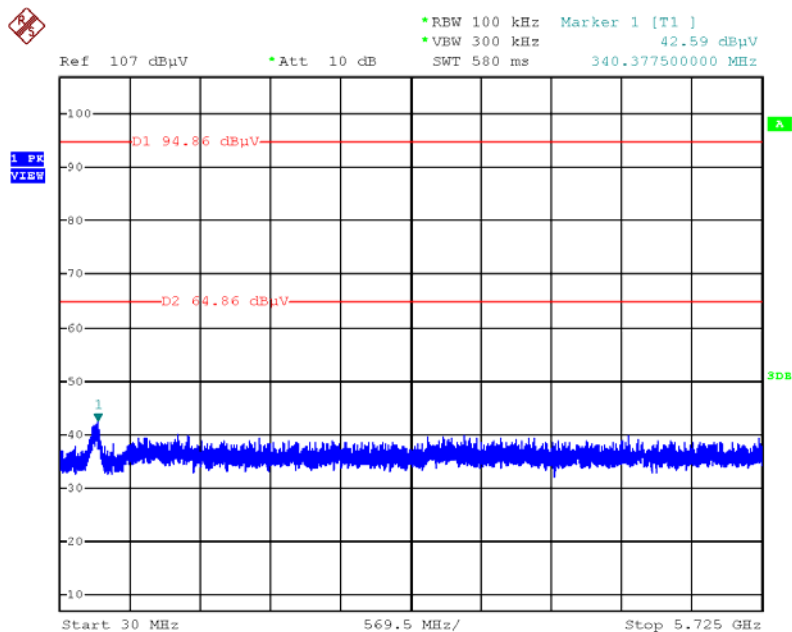

Date: 8.MAY.2013 16:28:35

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

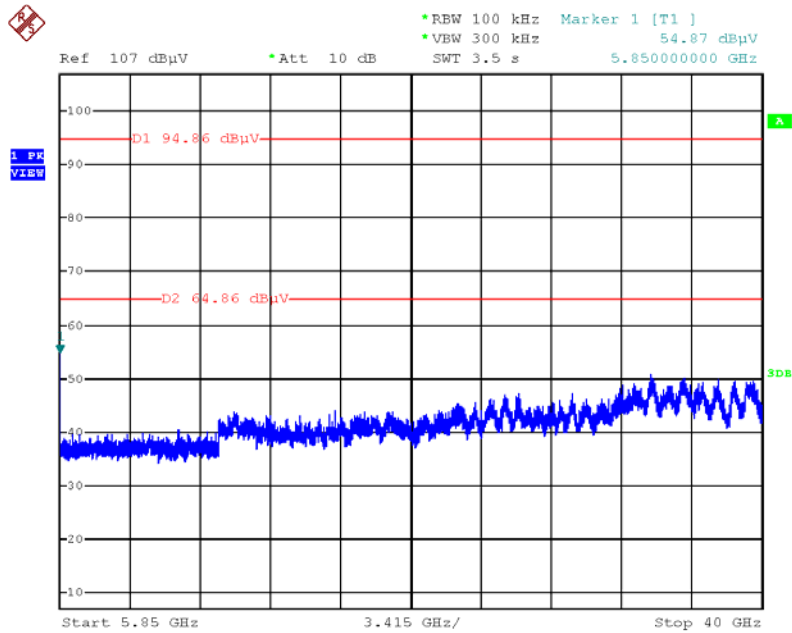

Date: 8.MAY.2013 16:28:00

4.7. Chain Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an Chain with extension cable. An intentional radiator shall be designed to ensure that no Chain other than that furnished by the responsible party shall be used with the device. The use of a permanently attached Chain or of an Chain that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken Chain, but the use of a standard Chain jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Chain Connector Construction

Please refer to section 3.3 in this test report; Chain connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG CHAIN	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (O3CH01-CB)
Loop Chain	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (O3CH01-CB)
Horn Chain	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (O3CH01-CB)
Horn Chain	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (O3CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (O3CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (O3CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 15, 2013	Radiation (O3CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (O3CH01-CB)
Chain Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (O3CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (O3CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“**” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085