



TEST REPORT nr. R06148202_rev30

This test report cancel and replace document nr. R06148202_rev20 date 22.03.07

Test item

Description.....: A829US Fully integrated UHF compact reader
 Trademark.....: CAEN RFID
 Model and/or type reference.....: A829US
 Manufacturer.....: Same as client
 Serial Number.....: --

Client

Name.....: CAEN RFID
 Address.....: Via Vetraia, 11
: 55049 VIAREGGIO (LU) – ITALY

Test specification

Standard.....: FCC Rules & Regulations, Title 47 (2005) - Part 15 paragraph(s) : 247(a),
 247(b), 247(c), 209 and 207

Report

Tested by (+ signature).....: A. Bertezolo - *Supervisor*

Approved by (+ signature).....: R. Beghetto - *Laboratory Manager*

Date of issue.....: 12.04.07

Contents.....: 63 pages

This test report shall not be reproduced except in full without the written approval of CMC.
 The test results presented in this report relate only to the item tested.



Index

| | |
|---|-----------|
| 1. SUMMARY | 3 |
| 2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)..... | 4 |
| 2.1 TEST SITE | 4 |
| 3. TESTING AND SAMPLING..... | 4 |
| 4. OPERATIVE CONDITIONS | 4 |
| 5. PHOTOGRAPH(S) OF EUT | 5 |
| 6. EQUIPMENT LIST | 7 |
| 7. MEASUREMENT UNCERTAINTY | 9 |
| 8. REFERENCE DOCUMENTS | 9 |
| 9. DEVIATION FROM TEST SPECIFICATION..... | 10 |
| 10. TEST CASE VERDICTS | 10 |
| 11. RESULTS..... | 10 |
| 11.1 BANDWIDTH | 11 |
| 11.2 CHANNEL SEPARATION | 12 |
| 11.3 AVERAGE TIME OF OCCUPANCY | 13 |
| 11.4 NUMBER OF HOPPING CHANNELS..... | 14 |
| 11.5 PEAK OUTPUT POWER | 15 |
| 11.6 BAND EDGE..... | 16 |
| 11.7 CONDUCTED SPURIOUS..... | 17 |
| 11.8 RADIATED SPURIOUS..... | 18 |
| 11.9 EMISSION OF MAINS TERMINAL DISTURBANCE VOLTAGE (CONTINUOUS DISTURBANCE)..... | 21 |
| 11.10 MAXIMUM PERMISSIBLE EXPOSURE | 22 |
| 12. GRAPHS AND TABLES..... | 23 |
| 13. REMARKS | 63 |



| 1. Summary | | | |
|---|-----------------------------|----------------|----------|
| Emission: FCC Rules & Regulations, Title 47 | | | |
| Test specifications | Environmental Phenomena | Tests sequence | Result |
| Part 15.247(a) | Bandwidth | 4 | Complies |
| Part 15.247(a) | Channel Separation | 1 | Complies |
| Part 15.247(a) | Time of Occupancy | 3 | Complies |
| Part 15.247(a) | Number of Hopping Frequency | 2 | Complies |
| Part 15.247(b) | Peak Output Power radiated | 5 | Complies |
| Part 15.247(c) | Band Edge | 6 | Complies |
| Part 15.247(c) Part 15.209 | Radiated Spurious | 7 | Complies |
| Part 15.247(c) Part 15.209 | Conducted Spurious | 8 | Complies |
| Part 15.207 | Conducted Emission | 9 | Complies |

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification.



5. Photograph(s) of EUT







6. Equipment list

| <i>Id. number</i> | <i>Manufacturer</i> | <i>Model</i> | <i>Description</i> | <i>Serial number</i> |
|-------------------|---------------------|---------------|----------------------------------|----------------------|
| CMC S001 | Rohde & Schwarz | ESHS30 | EMC interference receiver | 862024/003 |
| CMC S002 | Rohde & Schwarz | ESVS30 | EMC interference receiver | 826638/011 |
| CMC S003 | SCHAFFNER | NSG 2025-4 | Burst source with CDN | 1010 |
| CMC S004 | SCHAFFNER | NSG 435-01 | ESD simulator | 1166 |
| CMC S005 | XITRON | 2503 | Harmonic & Flicker analyser | 2503592013 |
| CMC S006 | Chauvin Arnoux | CA43 | Field meter | 218541RLV |
| CMC S007 | Rohde & Schwarz | SMY01 | RF signal generators | 841403/038 |
| CMC S009 | Rohde & Schwarz | ESH2-Z5 | Artificial network | 839497/007 |
| CMC S010 | Rohde & Schwarz | ESH3-Z2 | Impulses limiting device | --- |
| CMC S012 | Rohde & Schwarz | MDS21 | Absorbing clamp | 838506/015 |
| CMC S013 | Rohde & Schwarz | EZ-17 | Current probe | 840411/009 |
| CMC S014 | Rohde & Schwarz | ESH2-Z3 | Passive probe | --- |
| CMC S015 | RKB | LOG801000 | Log-periodic Antenna | --- |
| CMC S016 | Rohde & Schwarz | HK116 | Biconical antenna | 839472/001 |
| CMC S017 | Rohde & Schwarz | HL223 | Log-periodic Antenna | 825584/009 |
| CMC S018 | SCHAFFNER | CDN 126 | Coupling clamp | 128 |
| CMC S019 | FCC | FCC 801-M5-25 | CDN Power Line | 06 |
| CMC S020 | Ofel | ROS 100 | Impedance | 9511503 |
| CMC S021 | CMC | TRBS 01 | Balance-to-unbalance transformer | --- |
| CMC S022 | Teseo | LAS 1 | Loop antenna | 3971 |
| CMC S024 | CMC | CTL-01 | Voltage change for LISN | --- |
| CMC S025 | Salmoiraghi | 1750-1 | Hygro - Thermograph | 323.601 |
| CMC S026 | Chroma | C6530 | Power supply source | 653000095 |
| CMC S027 | Amplifier Research | 75A250 | RF Amplifier | 19349 |
| CMC S028 | FCC | FCC-203I | Injection clamp | 209 |
| CMC S029 | Keytek | Cemaster | Surge, dips, burst source | 9609258 |
| CMC S030 | Rohde & Schwarz | ESPC | EMC interference receiver | 844006/013 |
| CMC S031 | Tektronix | TDS 210 | Digital oscilloscope | B010552 |
| CMC S032 | SCHAFFNER | NSG 2050 | Surge source with CDN | 200111-253AR |
| CMC S033 | Tektronix | P6015 | High voltage probe | R0238/1 |
| CMC S034 | Schwarzbeck | UHA 9105 | Dipole | UHA 91052234 |
| CMC S037 | Rohde & Schwarz | NRVS | Power meter | 845127/023 |
| CMC S039 | CMC | BI 01 | Induction coil | --- |
| CMC S040 | Walker Scientific | ELF 50-D | Magnetic field meter | K71484-290 |
| CMC S042 | Fluke | Fluke 73 | Multimeter | 67771510 |
| CMC S(51-75) | CMC | LFXXX | Dummy lamp | --- |
| CMC S076 | Altitude | 25438 | Barometer | --- |
| CMC S077 | Fluke | Fluke-87 | Multimeter | 69050353 |
| CMC S078 | Amplifier Research | 100W1000M1 | RF Amplifier | 21849 |
| CMC S079 | AH System, Inc | SAS-200/542 | Biconical antenna | 504 |
| CMC S080 | AH System; Inc | SAS-200/510 | Log periodic antenna | 807 |
| CMC S081 | AH System; Inc | SAS 200/550-1 | Active Monopole Antenna | 660 |
| CMC S082 | AH System; Inc | SAS-200/560 | Loop Antenna | 635 |
| CMC S083 | AH System; Inc | BCP-200/510 | LF Current Probe | 564 |
| CMC S084 | AH System; Inc | BCP-200/511 | HF/VHF Current Probe | 579 |
| CMC S085 | AH System; Inc | SAS-200/530 | Broadband dipole | 504 |
| CMC S086 | CMC | RHCP01 | Resistance 470Kohm | --- |
| CMC S087 | CMC | RHCP01 | Resistance 470Kohm | --- |
| CMC S088 | CMC | LFAS20 | Dummy lamp | --- |
| CMC S089 | CMC | CSTARTER | Capacitor 5000pF | --- |
| CMC S090 | CMC | CSTARTER | Capacitor 5000pF | --- |
| CMC S091 | CMC | DIPLP | Dipole for Loop Antenna control | --- |
| CMC S094 | Schwarzbeck | NNBM 8126-A | Artificial network | 8126A161 |
| CMC S095 | FCC | FCC 801-M3-16 | CDN power line | 9821 |
| CMC S096 | B & K | 2260 | Phonometer | 1847463 |



| | | | | |
|----------|--------------------|------------------|------------------------------------|-----------------|
| CMC S105 | Decca | PA-50 | Log-periodic antenna | 34/17977 - b |
| CMC S106 | Gigatronix | 900 | RF signal generator | 323001 |
| CMC S107 | Hewlett Packard | HP8563E | Spectrum analyser | 3846A09658 |
| CMC S108 | Emco | 3115 | Horn antenna | 9811-5622 |
| CMC S109 | Farnell | LFM4 | LF signal generator | 531 |
| CMC S110 | CMC | OPS800 | Open strip line 800mm | --- |
| CMC S111 | LEM HEME | PR 1001 | Current probes | --- |
| CMC S112 | Amplifier Research | DC3010 | Directional coupler | 15238 |
| CMC S114 | Schwarzbeck | VHA 9103 | Dipole | VHA 91031801 |
| CMC S116 | CMC | BCIP01 | Bulk current injection probe | -- |
| CMC S117 | MARCONI | 2019A | RF signal generator | 118453/014 |
| CMC S118 | Hewlett Packard | E3632A | Programmable power supply | KR75301881 |
| CMC S119 | Hewlett Packard | HP8903B | Audio Analyzer | 3011A09055 |
| CMC S120 | FCC | FC130-A | Bulk Current Injection Probe | 118 |
| CMC S121 | Wavetek | LCR55 | Bridge LCR | 20104738 |
| CMC S122 | Fluke | 336 | Amperometric clamp meter | 81754972 |
| CMC S123 | Rohde & Schwarz | SML03 | RF signal generator | 100625 |
| CMC S124 | Spin | AMTP42-20 | Horn Antenna | 103 |
| CMC S125 | SCHAFFNER | PNW 2003 | Dips source | 200234-014SC |
| CMC S126 | LDS + Dactron | V730-335+LASER | Vibration testing system | 132+133+4512698 |
| CMC S127 | SCHAFFNER | HLA6120 | Loop Antenna | 1191 |
| CMC S128 | SCHAFFNER | CBA9428 | RF Amplifier | 1006 |
| CMC S129 | Rohde & Schwarz | ESPI7 | Receiver | 836.914/004 |
| CMC S130 | SCHAFFNER | NSG 5000 | Automotive Impulse Generator | 02032579-1 |
| CMC S131 | SCHAFFNER | CDN 500 | Capacitive clamp | 400-151/0128 |
| CMC S132 | CMC | OPS150 | Open strip line 150mm | --- |
| CMC S133 | RKB | LOG8002500 | Log-periodic Antenna | --- |
| CMC S135 | LEM HEME | PR 30 | Current Probe | P04217832830 |
| CMC S136 | Schwarzbeck | VULB 9136 | Broadband Antenna | 9136-205 |
| CMC S138 | Agilent | 33220A | Function / Arbitrary Waveform Gen. | MY44003979 |
| CMC S139 | Wilcoxon | 736 | Accelerometer 101 mV/g | 12245 |
| CMC S140 | Wilcoxon | 732A | Accelerometer 9.8 mV/g | 1424 |
| CMC S141 | Dytran | 3023A1 | Accelerometer Triaxial | 383 |
| CMC S142 | Narda | ELT-400+B-sensor | Exposure level tester | D-0034+D-0032 |
| CMC S143 | EM TEST | DPA 500 | Harmonic & Flicker analyser | 0903 - 04 |
| CMC S144 | Rohde & Schwarz | URV5 | Power meter | 881375/004 |
| CMC S145 | Hewlett Packard | 778D | Directional coupler | 17237 |
| CMC S146 | Amplifier Research | 10W1000B | RF Amplifier | 18451 |
| CMC S150 | RKB | LOG3080 | Log-periodic Antenna | --- |
| CMC S155 | Chroma | 61705 | Power supply source | 000000088 |
| CMC S156 | Yokogawa | DL9040 | Digital oscilloscope | 91F643771 |
| CMC A001 | Sispe | F5123 | Shield chamber | --- |
| CMC A002 | SIDT | 951130 | Anechoic chamber | --- |
| CMC A005 | Fenner | | Television | 008203 |
| CMC A006 | Rohde & Schwarz | HZ-1 | Wood support for antennas | 893227/002 |
| CMC A007 | CMC | 10707 | Semi-anechoic chamber | --- |
| CMC A008 | CMC | BPA | Track for absorbing clamp | --- |
| CMC A009 | C&P | TI02 | Isolating transformer | --- |
| CMC A012 | AH System; Inc | ATU 200/510 | Support for antennas | --- |
| CMC A013 | CMC | TR01 | Rotary motorized table | --- |
| CMC A014 | CMC | PM01 | Antenna positionning Mast | --- |
| CMC A015 | Samsung | VP-D101 | Camera | W4706VKX |



7. Measurement uncertainty

| <i>Test</i> | <i>Value</i> |
|--|-------------------------|
| Conducted disturbance test – continuous and discontinuous - (9 kHz – 30 MHz) | 1.8 dB |
| Insertion loss test | 1.8 dB |
| Radiated electromagnetic disturbance test (loop antenna) | 2.0 dB |
| Radiated disturbance test | 5.1 dB |
| Disturbance power test | 2.2 dB |
| Harmonic current emissions test | 0.4 % |
| Voltage fluctuation and flicker test | 1.5 % |
| Electrostatic discharge immunity test | 8.1 % |
| Electrical fast transients / burst immunity test | 7.1 % |
| Radiated electromagnetic field immunity test | 0.6 V/m at 3V/m |
| Pulse modulated radio-frequency electromagnetic field immunity test | 0.6 V/m at 3V/m |
| Surge immunity test | 2.7 % |
| Injected currents immunity test (150 kHz – 230 MHz) | 0.4 V at 3V |
| Power frequency magnetic field immunity test | 0.2 A/m at 3 A/m |
| Short interruption immunity test | 0.8 % |

8. Reference documents

| <i>Reference no.</i> | <i>Description</i> |
|--|--|
| FCC Rules and Regulation Title 47 part 15 (2005) | -- |
| ANSI C63.4 | American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz – 40GHz |
| Internal Procedure PM001 rev. 1.0 (Quality Manual) | Measure Procedure |
| Internal procedure INC_M rev. 5.3 (Quality Manual) | Measurement uncertainty calculation |



9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector .
 At the frequencies where the measures exceed the limit or within 6dB from it, the test was repeated with quasi-peak detector and/or average detector.

10. Test case verdicts

Test case does not apply to the test object : N / N.A.
 Test item does meet the requirement..... : P / Pass / Complies
 Test item does not meet the requirement : F / Fail / Does not comply
 Test not performed : NE / Not Executed

11. Results

In this clause tests results are reported.
 All measurements are done in accordance with the Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA-705
 Measurement uncertainty is in accordance with document CMC INC_M rev. 5.3.



11.1 Bandwidth

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 19 °C Atmospheric pressure 100 kPa Relative humidity 46 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(a)
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Result

| Channel | Modulation | Frequency | Graph(s) | Bandwidth | Remark |
|---------|------------|-----------|-----------|-----------|--------|
| 0 | Type 1 | 912,5 MHz | G06148201 | 88 kHz | -- |
| 25 | Type 1 | 915 MHz | G06148202 | 88 kHz | -- |
| 49 | Type 1 | 917,4 MHz | G06148203 | 89 kHz | -- |
| 0 | Type 2 | 912,5 MHz | G06148204 | 95 kHz | -- |
| 25 | Type 2 | 915 MHz | G06148205 | 97 kHz | -- |
| 49 | Type 2 | 917,4 MHz | G06148206 | 96 kHz | -- |

Measurement uncertainty: ±1 kHz

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result

The requirements are met



11.2 Channel Separation

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 21 °C Atmospheric pressure 100 kPa Relative humidity 46 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(a)
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

Limit: Minimum 25kHz or the 20dB Bandwidth of the hopping system

Result

| <i>Port</i> | <i>Modulation</i> | <i>Graph(s)</i> | <i>Channel Separation</i> | <i>Remark</i> |
|--------------------------------|-------------------|-----------------|---------------------------|---------------|
| Enclosure | Type 1 | G06148207 | 100 kHz | -- |
| Enclosure | Type 2 | G06148208 | 100 kHz | -- |
| Measurement uncertainty: ±1kHz | | | | |

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result

The requirements are met



11.3 Average Time of Occupancy

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 21 °C Atmospheric pressure 99 kPa Relative humidity 42 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(a)
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

0.4 s within 20 s period

Result

| Channel | Modulation | Graph(s) | Dwell time | Remark |
|---------|------------|-----------|------------|--------|
| 25 | Type 1 | G06148267 | 21,4ms | -- |
| 25 | Type 2 | G06148266 | 34,4ms | -- |

| Channel | Modulation | Time between two transmission | Nr. of hopping frequency | Nr. of transmission for channel | Time of Occupancy | Remarks |
|---------|------------|-------------------------------|--------------------------|---------------------------------|--------------------|---------|
| 25 | Type 1 | 47,2ms | 50 | 20s/0,0472/50 = 8,47 | 8,47x21,4= 181,3ms | -- |
| 25 | Type 2 | 47,2ms | 50 | 20s/0,0472/50 = 8,47 | 8,47x34,4= 291,4ms | -- |

Measurement uncertainty: $\pm 1\mu\text{s}$ x nr. of channels

Remarks //////////////

Reference documents See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report) CMC S129

Result The requirements are met



11.4 Number of Hopping Channels

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 22 °C Atmospheric pressure 99 kPa Relative humidity 46 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(a)
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Result

| Port | Modulation | Graph(s) | Number of Hopping Frequency | Remark |
|-----------|------------|-----------|-----------------------------|--------|
| Enclosure | Type 1 | G06148209 | 50 | -- |
| Enclosure | Type 2 | G06148210 | 50 | -- |

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result

The requirements are met



11.5 Peak Output Power

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 21 °C Atmospheric pressure 100 kPa Relative humidity 48 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(b)
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

| Frequency range | RF power output |
|-----------------|-----------------|
| 902 – 928 MHz | 1,0 W / 30dBm |

Result

| Channel | Peak Output Power | Remark |
|--------------------------------|-------------------|--------|
| 0 | +17,8 dBm | -- |
| 25 | +17,9 dBm | -- |
| 49 | +17,7 dBm | -- |
| Measurement uncertainty: ±3dBm | | |

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result

The requirements are met



11.6 Band Edge

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 22 °C Atmospheric pressure 99 kPa Relative humidity 46 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(c)
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (see section 15.205(c)).

Result

| Channel | Modulation | Graph(s) | Attenuation Band Edge | Remark |
|---------|------------|-----------|-----------------------|-----------------|
| 0 – 49 | Type 1 | G06148215 | > 20dBc | Hopping enable |
| 0 – 49 | Type 1 | G06148216 | > 20dBc | Hopping enable |
| 0 – 49 | Type 2 | G06148217 | > 20dBc | Hopping enable |
| 0 – 49 | Type 2 | G06148218 | > 20dBc | Hopping enable |
| 0 – 49 | Type 1 | G06148262 | > 20dBc | Hopping disable |
| 0 – 49 | Type 1 | G06148263 | > 20dBc | Hopping disable |
| 0 – 49 | Type 2 | G06148264 | > 20dBc | Hopping disable |
| 0 – 49 | Type 2 | G06148265 | > 20dBc | Hopping disable |

Measurement uncertainty: ±1dB

Remarks //////////////

Reference documents See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report) CMC S129

Result The requirements are met



11.7 Conducted Spurious

Test configuration and test method

Test site Semi-anechoic chamber
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 22 °C Atmospheric pressure 99 kPa Relative humidity 46 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(c) and Part 15.209
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement. Attenuation below the general limits specified in cl. 15.209(a) is not required. In addition, radiated which fall in the restricted bands, as defined in cl. 15.205(a), must also comply with the radiated emission limits specified in cl. 15.209(a).

Result

| Channel | Modulation | Graph(s) | Remarks | Result |
|---------|------------|-----------|---------|----------|
| Ch 0 | Type 1 | G06148219 | -- | Complies |
| Ch 25 | Type 1 | G06148220 | -- | Complies |
| Ch 49 | Type 1 | G06148221 | -- | Complies |
| Ch 0 | Type 2 | G06148222 | -- | Complies |
| Ch 25 | Type 2 | G06148223 | -- | Complies |
| Ch 49 | Type 2 | G06148224 | -- | Complies |

Remarks

Up to 7GHz, the measured level is more than 20dB below the limit.

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Measurement uncertainty: See clause 7 of this test report

Result

The requirements are met



11.8 Radiated Spurious

Test configuration and test method

Test site Semi-anechoic chamber
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 22 °C Atmospheric pressure 99 kPa Relative humidity 46 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(c) and Part 15.209
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in cl. 15.205(a), must also comply with the radiated emission limits specified in cl. 15.209(a) (see cl.15.205(c)).

Result

| Channel | Modulation | Polarization | Frequency Range (MHz) | Graph(s) | Remarks | Result |
|---------|------------|--------------|-----------------------|-----------|---------|----------|
| Ch 0 | Type 1 | Horizontal | 30 – 1000 | G06148250 | -- | Complies |
| Ch 25 | Type 1 | Horizontal | 30 – 1000 | G06148251 | -- | Complies |
| Ch 49 | Type 1 | Horizontal | 30 – 1000 | G06148252 | -- | Complies |
| Ch 0 | Type 2 | Horizontal | 30 – 1000 | G06148253 | -- | Complies |
| Ch 25 | Type 2 | Horizontal | 30 – 1000 | G06148254 | -- | Complies |
| Ch 49 | Type 2 | Horizontal | 30 – 1000 | G06148255 | -- | Complies |
| Ch 0 | Type 1 | Vertical | 30 – 1000 | G06148256 | -- | Complies |
| Ch 25 | Type 1 | Vertical | 30 – 1000 | G06148257 | -- | Complies |
| Ch 49 | Type 1 | Vertical | 30 – 1000 | G06148258 | -- | Complies |
| Ch 0 | Type 2 | Vertical | 30 – 1000 | G06148259 | -- | Complies |
| Ch 25 | Type 2 | Vertical | 30 – 1000 | G06148260 | -- | Complies |
| Ch 49 | Type 2 | Vertical | 30 – 1000 | G06148261 | -- | Complies |



| Nr. Harmonics | AV level (dB μ V/m) | | | | | | AV Limits (dB μ V/m) | Remark |
|-----------------------------------|-------------------------|-------------------------------|------------|-------------------------------|-------------|-------------------------------|-----------------------------|--------|
| | Channel 0 | | Channel 25 | | Channle. 49 | | | |
| | Frequency | (dB μ V/m) | Frequency | (dB μ V/m) | Frequency | (dB μ V/m) | | |
| II Harmonic | 1825 | 43,6 | 1830 | 44,8 | 1834,8 | 51,2 | 54,00 | -- |
| III Harmonic | 2737,5 | 53,7 | 2745 | 52,6 | 2752,2 | 52,6 | 54,00 | -- |
| IV Harmonic | 3654,9 | 53,8 | 3662,4 | 53,7 | 3669,6 | 53,6 | 54,00 | -- |
| V Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 54,00 | -- |
| VI Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 54,00 | -- |
| VII Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 54,00 | -- |
| VIII Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 54,00 | -- |
| IX Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 54,00 | -- |
| X Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 54,00 | -- |
| Measuremt Uncertainty: ± 4 dB | | | | | | | | |

| Nr. Harmonics | PK level (dB μ V/m) | | | | | | PK Limits (dB μ V/m) | Remark |
|-----------------------------------|-------------------------|-------------------------------|------------|-------------------------------|-------------|-------------------------------|-----------------------------|--------|
| | Channel 0 | | Channel 25 | | Channle. 49 | | | |
| | Frequency | (dB μ V/m) | Frequency | (dB μ V/m) | Frequency | (dB μ V/m) | | |
| II Harmonic | 1825 | 44,2 | 1830 | 45,4 | 1834,8 | 52,1 | 74,00 | -- |
| III Harmonic | 2737,5 | 54,5 | 2745 | 53,1 | 2752,2 | 53,4 | 74,00 | -- |
| IV Harmonic | 3654,9 | 54,7 | 3662,4 | 54,4 | 3669,6 | 54,7 | 74,00 | -- |
| V Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 74,00 | -- |
| VI Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 74,00 | -- |
| VII Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 74,00 | -- |
| VIII Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 74,00 | -- |
| IX Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 74,00 | -- |
| X Harmonic | -- | More than 20dB below limit | -- | More than 20dB below limit | -- | More than 20dB below limit | 74,00 | -- |
| Measuremt Uncertainty: ± 4 dB | | | | | | | | |



Remarks

EUT was tested in 3 orthogonal planes. In results table are reported the worst case.

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S107

Measurement uncertainty: See clause of this test report

Result

The requirements are met



11.9 Emission of mains terminal disturbance voltage (continuous disturbance)

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 20 °C Atmospheric pressure 99 kPa Relative humidity 45 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.207
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: AC mains

EUT exercising

See clause 4 of this test report

Acceptance limits

| Frequency range (MHz) | Limits | |
|-----------------------|--------------------------|-----------------------|
| | <i>dB(μV) Quasi-peak</i> | <i>dB(μV) Average</i> |
| 0,15 to 0,50 | 66 to 56 | 56 to 46 |
| 0,50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Result

| Line | Graphs | Remarks | Result |
|---------------|-----------|---------|----------|
| Line 0V (USB) | G07047802 | -- | Complies |
| Line 5V (USB) | G07047803 | -- | Complies |

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a X
 AV: Average; AV [1s] (average at 1 second) values are marked with a +

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S001

Measurement uncertainty: See clause 7 of this test report

Result

The requirements are met



11.10 Maximum permissible Exposure

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 21 °C Atmospheric pressure 100 kPa Relative humidity 45 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 1.1310
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

915/1500 mW/cm² = 0,61 mW/cm² max at 20cm of distance

Result

| Power Density Limit (mW/cm ²) | Output Power (mW) | Power Density at 20cm (mW/cm ²) | Remarks |
|--|----------------------|--|---------|
| 0,61 | 61,6 | 0,01 | -- |

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129


Measurement uncertainty: See clause 7 of this test report

Result

The requirements are met




G06148202

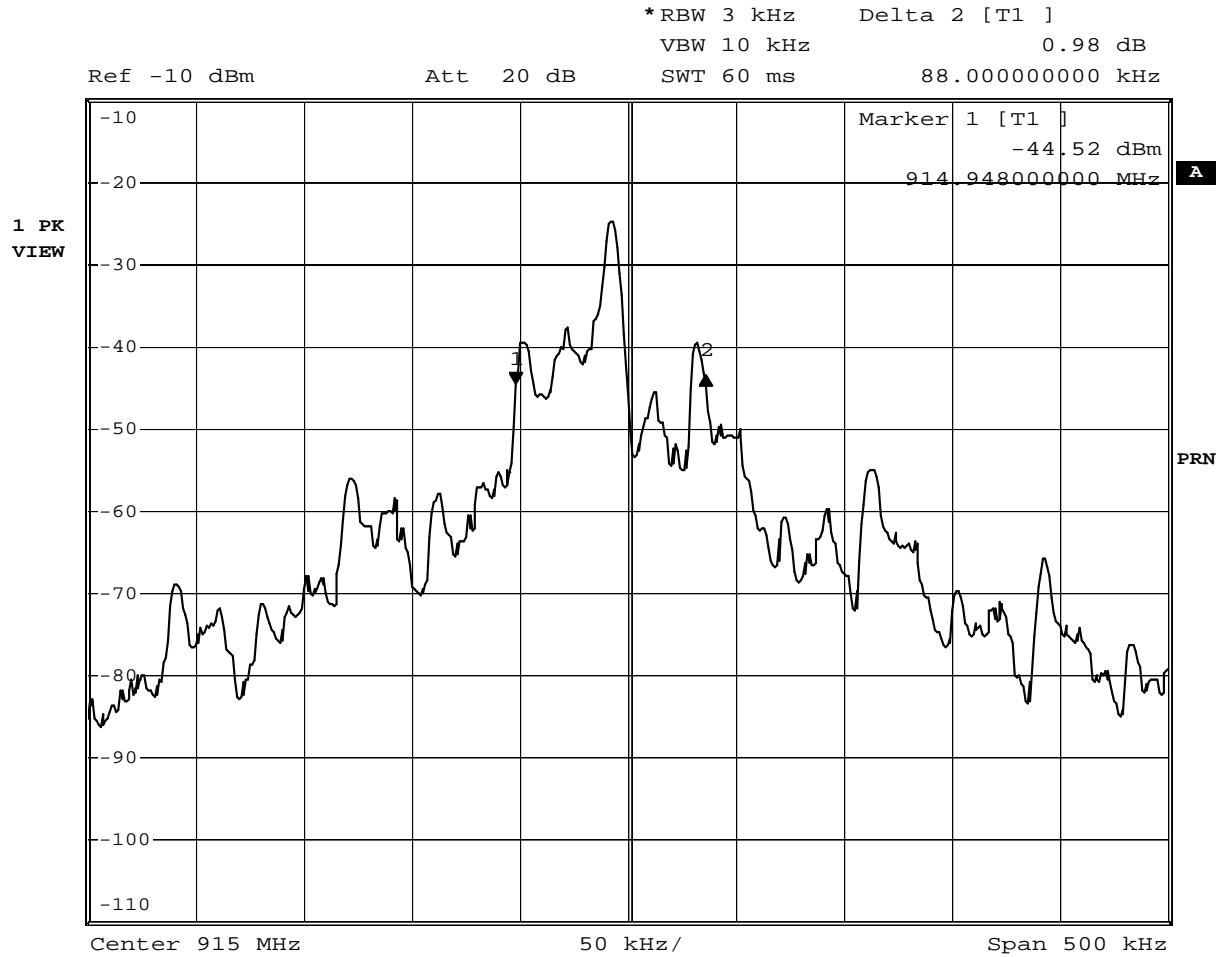

Date: 9.NOV.2006 15:12:32




G06148203

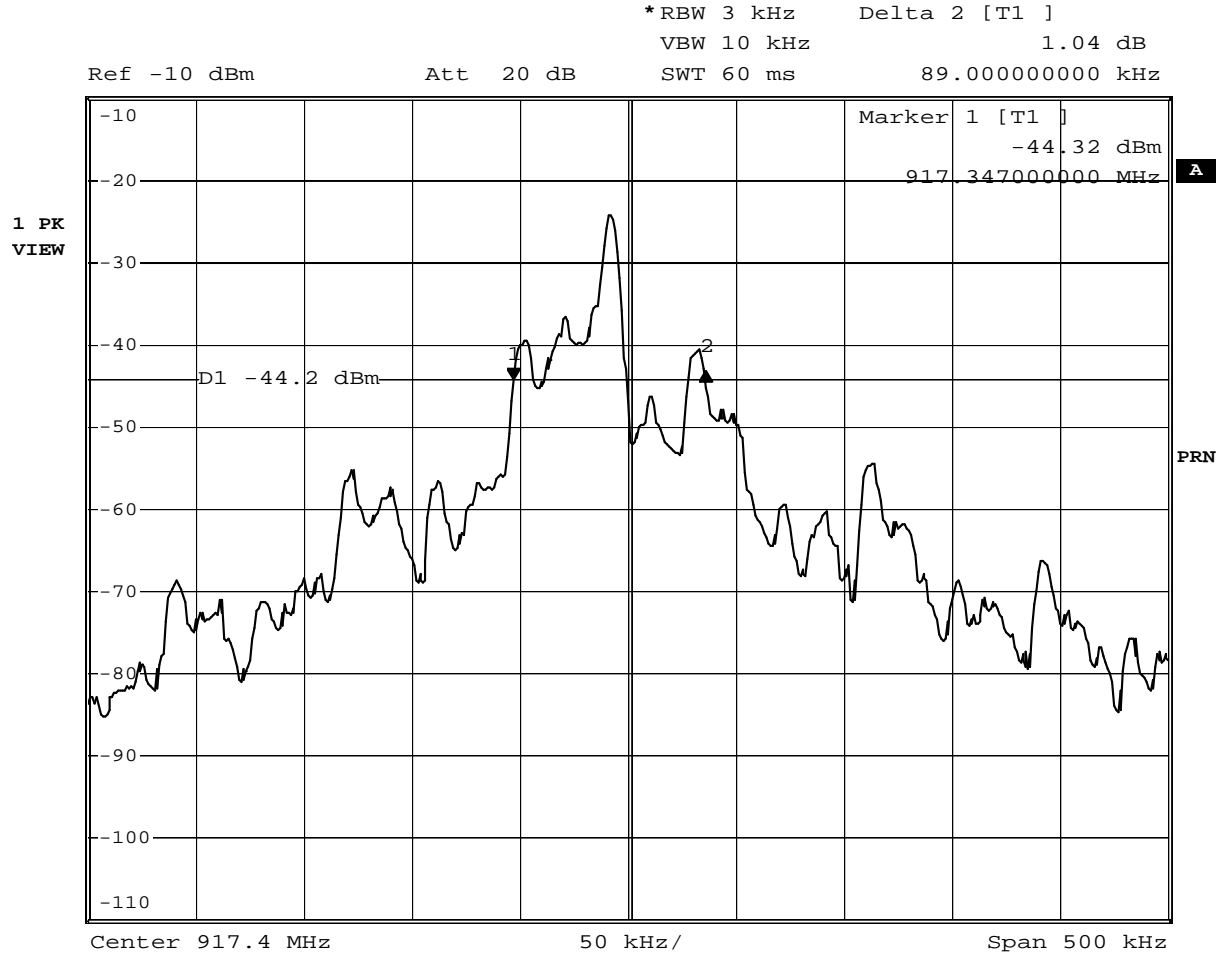

Date: 9.NOV.2006 15:59:41




G06148205

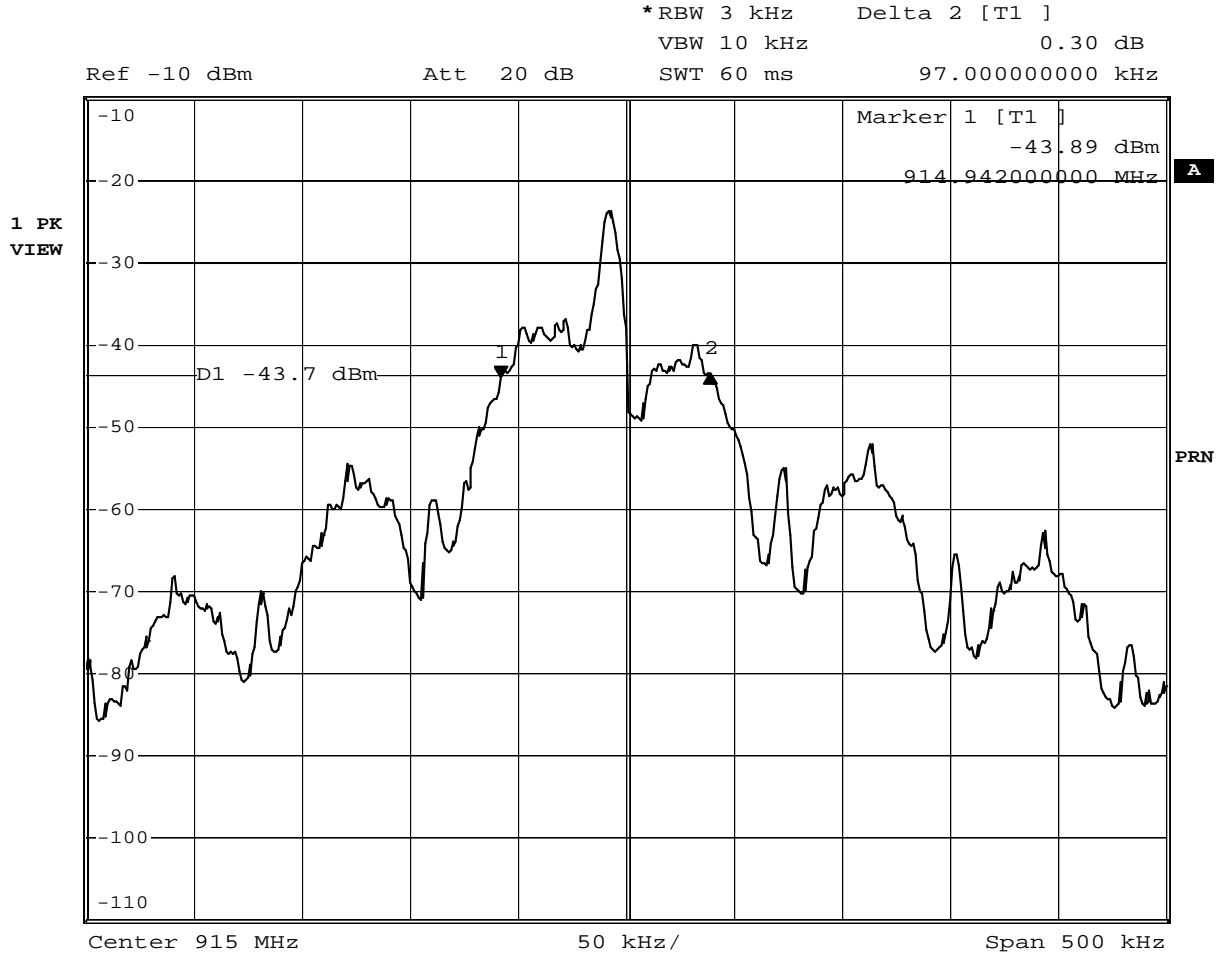

Date: 9.NOV.2006 15:22:43




G06148208

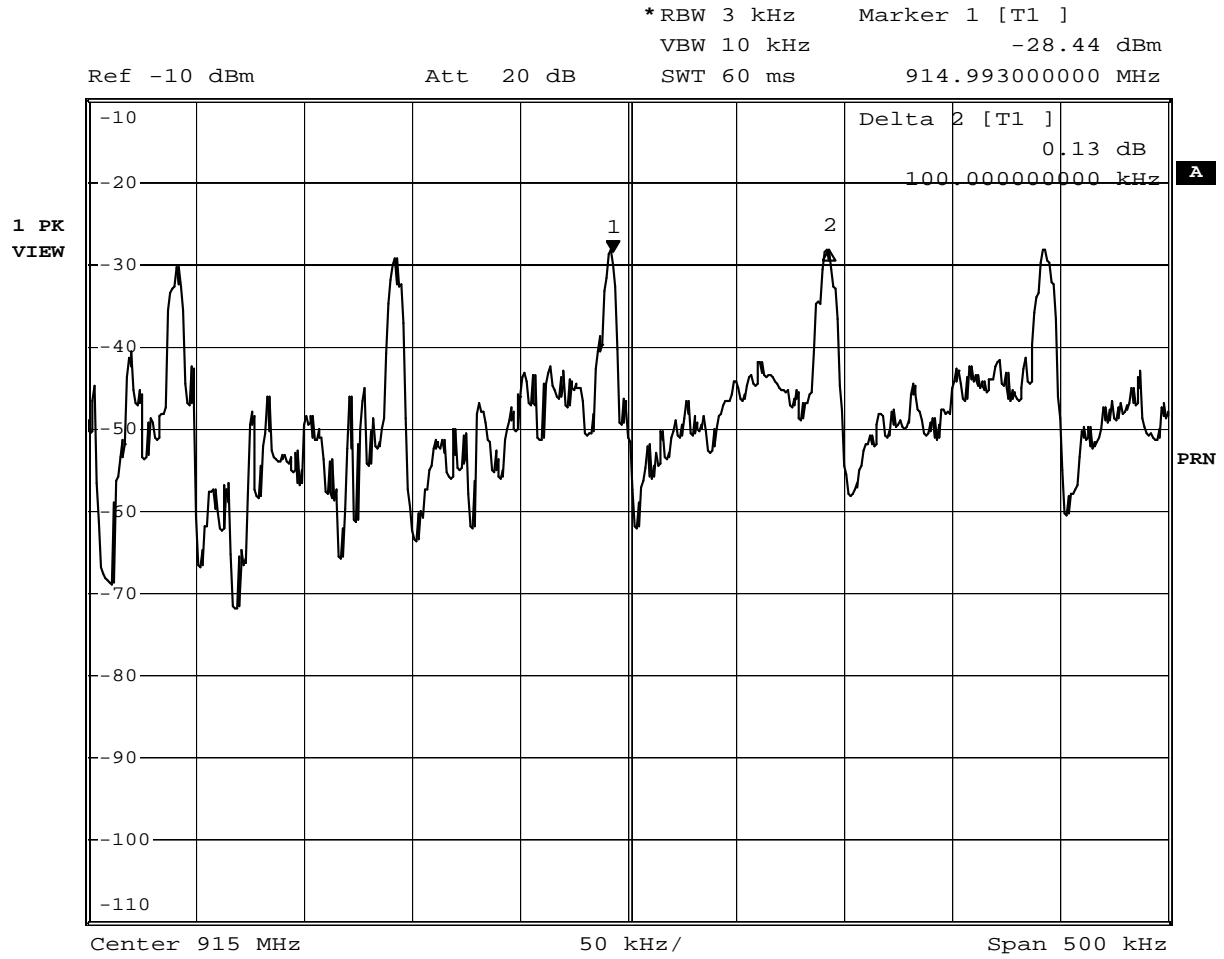

Date: 9.NOV.2006 15:37:48




G06148215

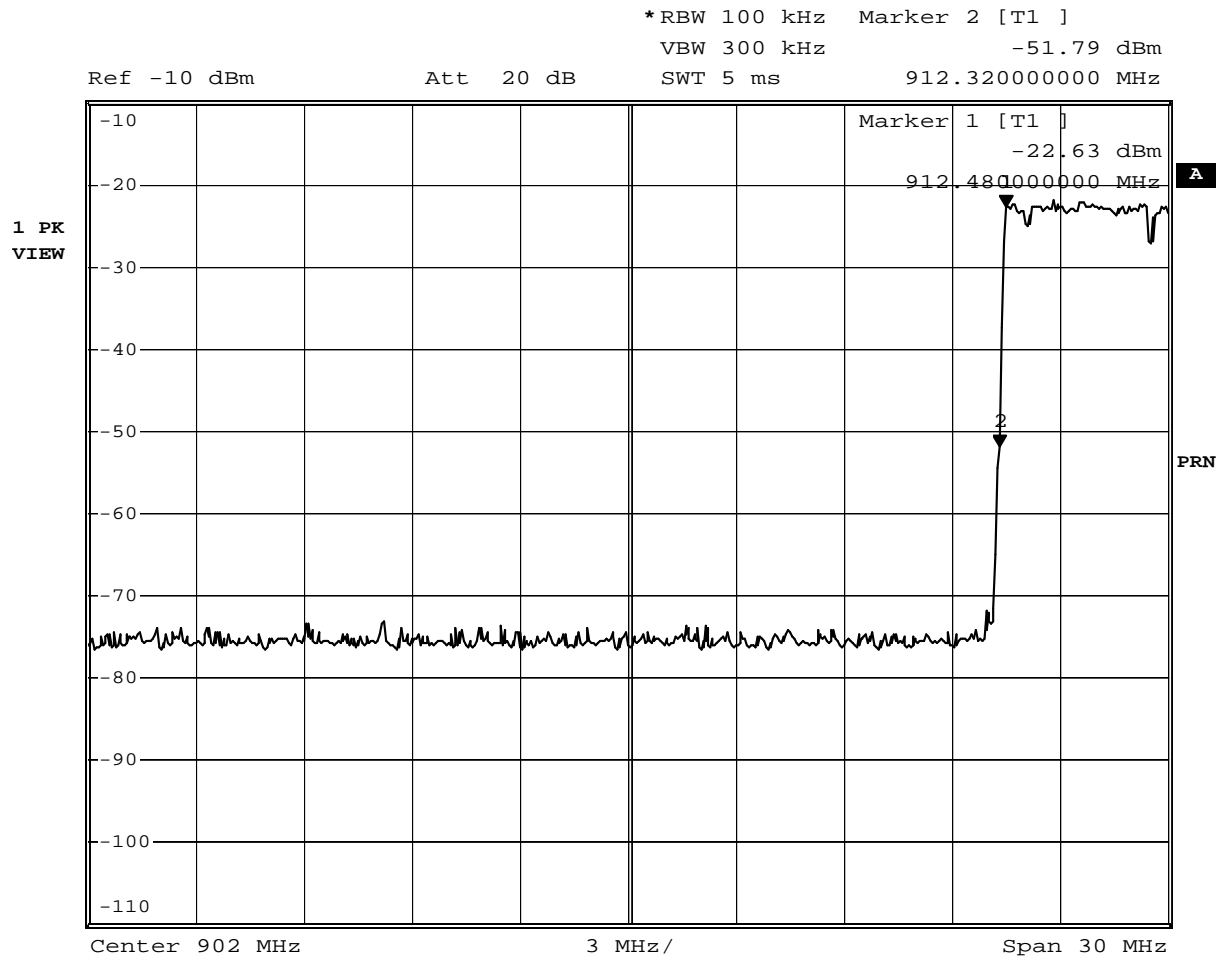

Date: 9.NOV.2006 16:57:53




G06148216

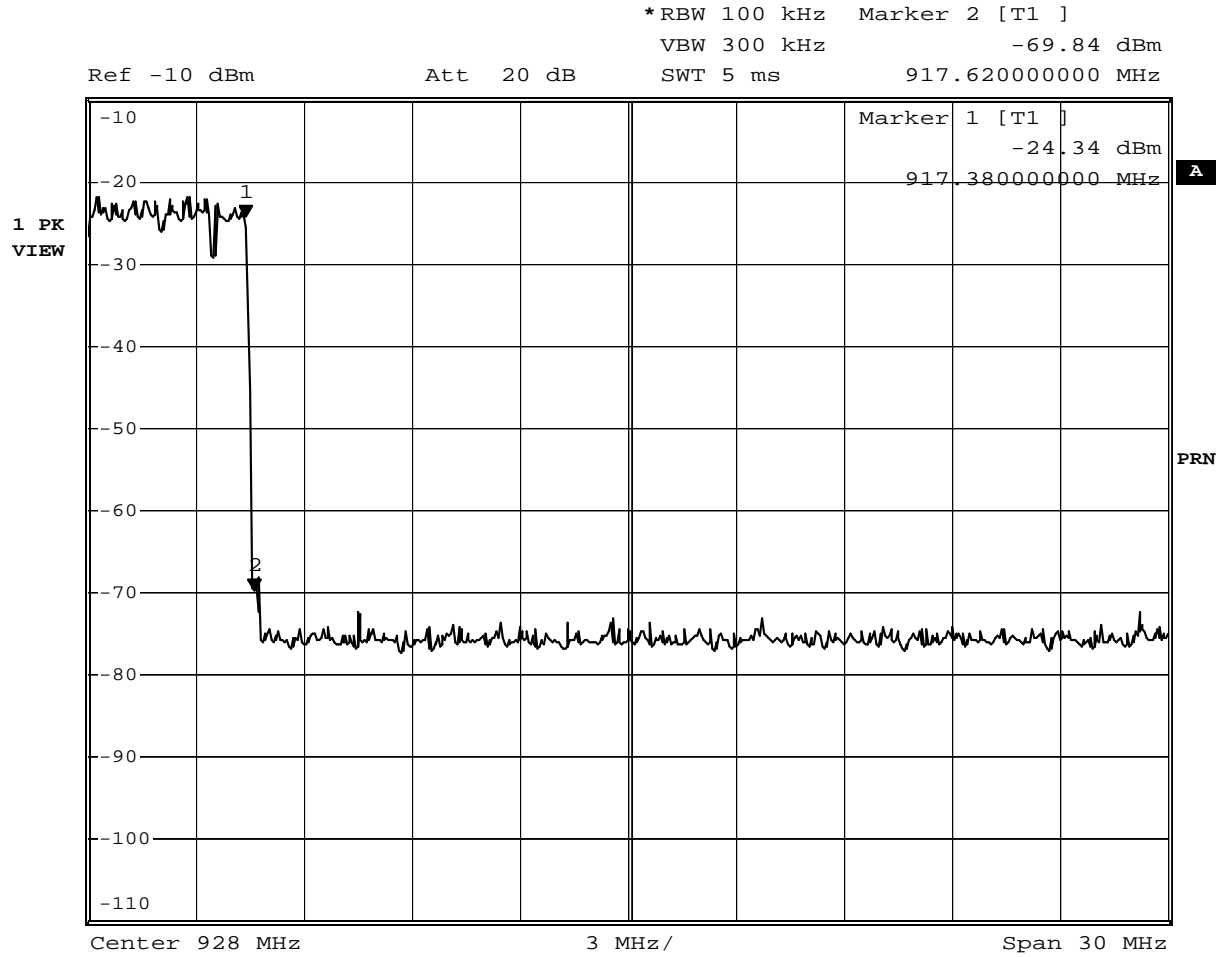

Date: 9.NOV.2006 16:59:57




G06148217

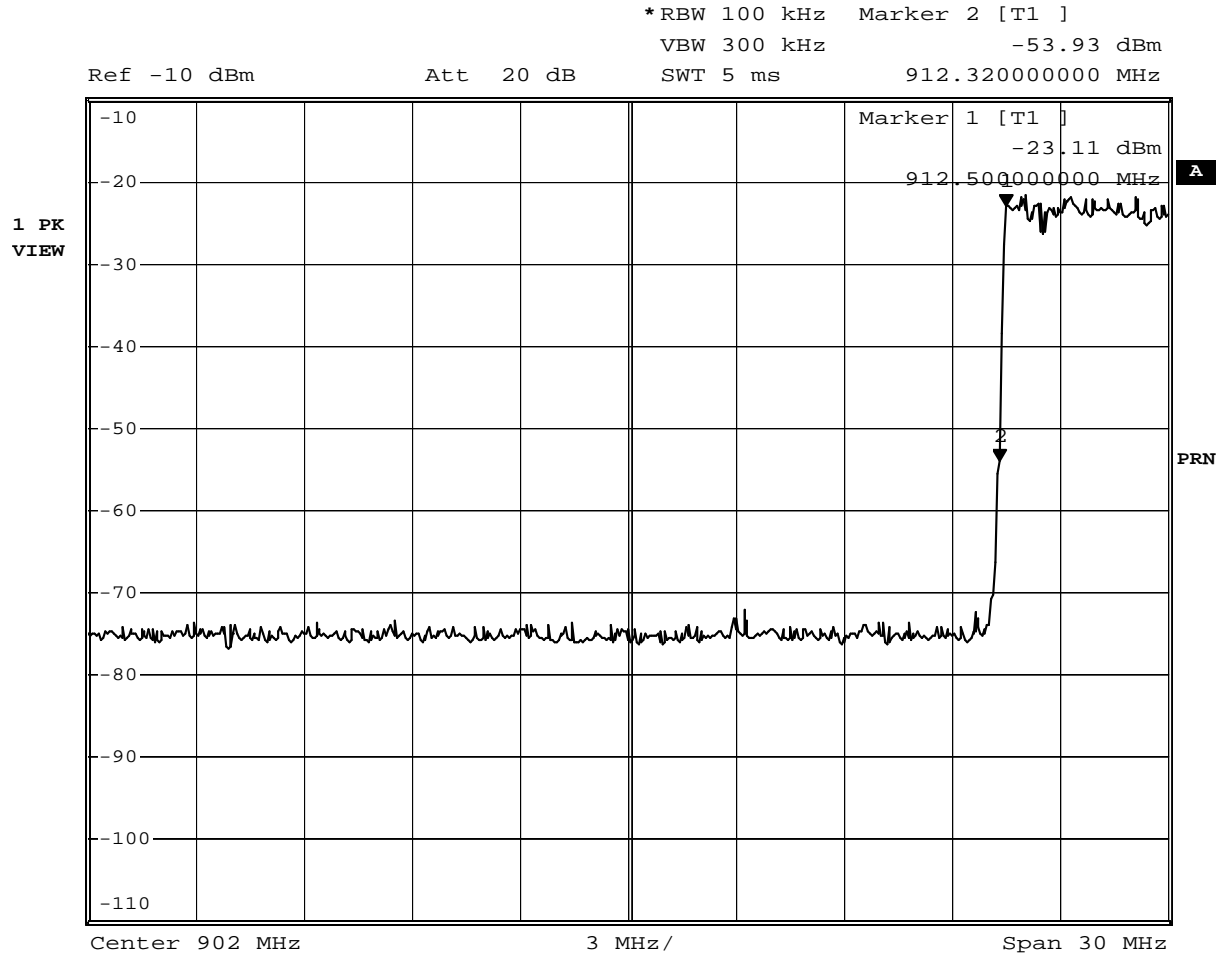

Date: 9.NOV.2006 17:02:26




G06148221

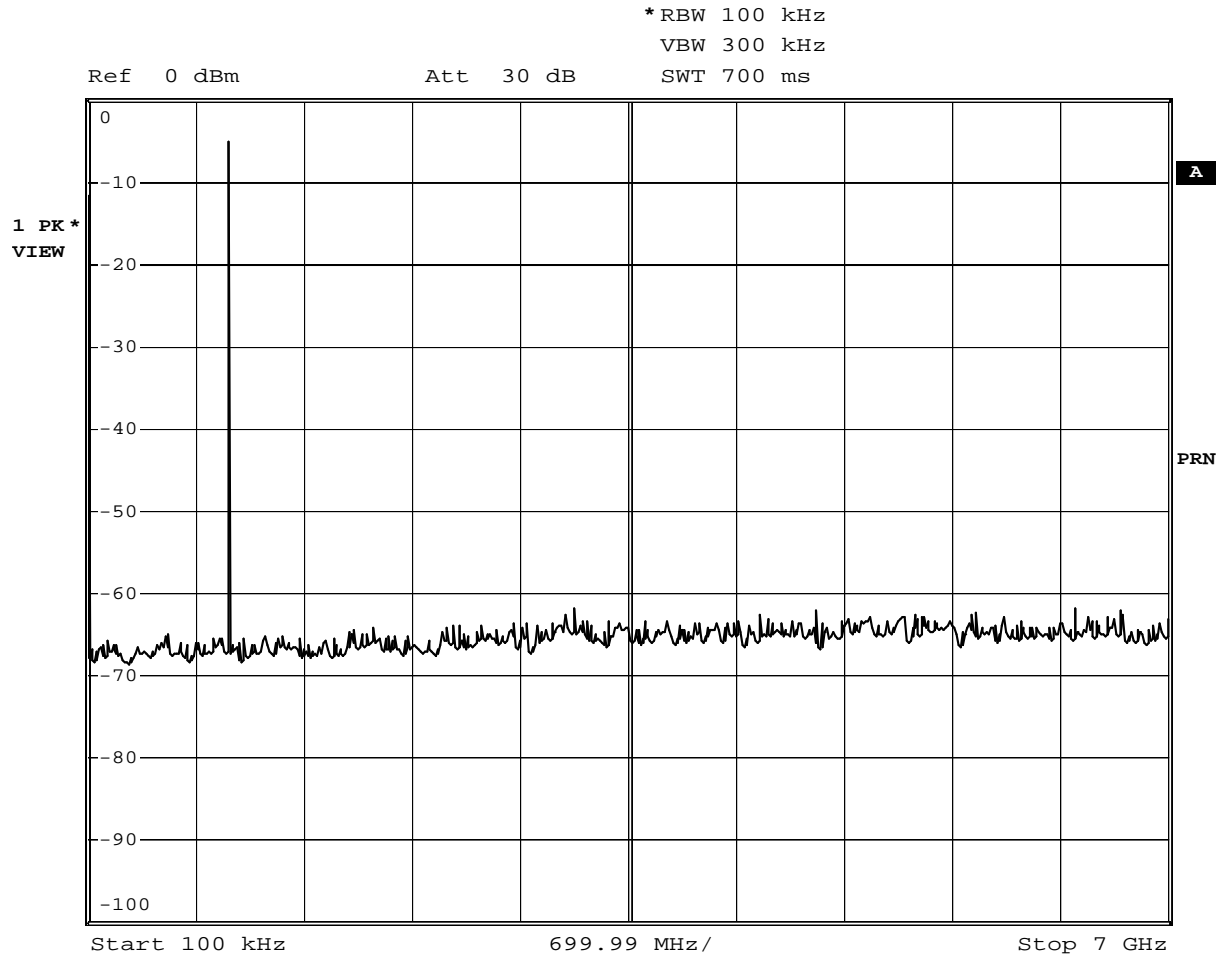

Date: 5.DEC.2006 16:05:29




G06148222

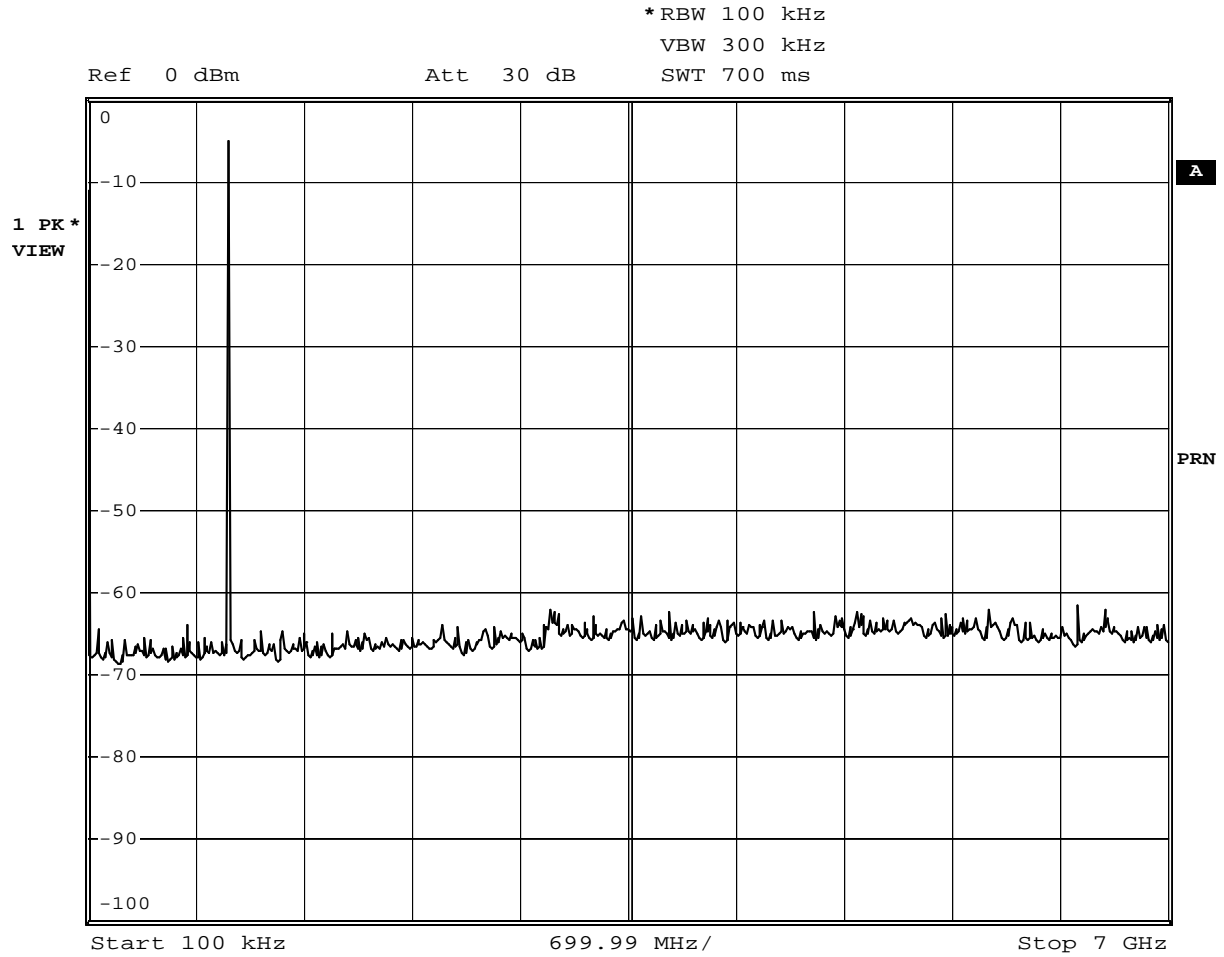

Date: 5.DEC.2006 16:07:16



G06148223

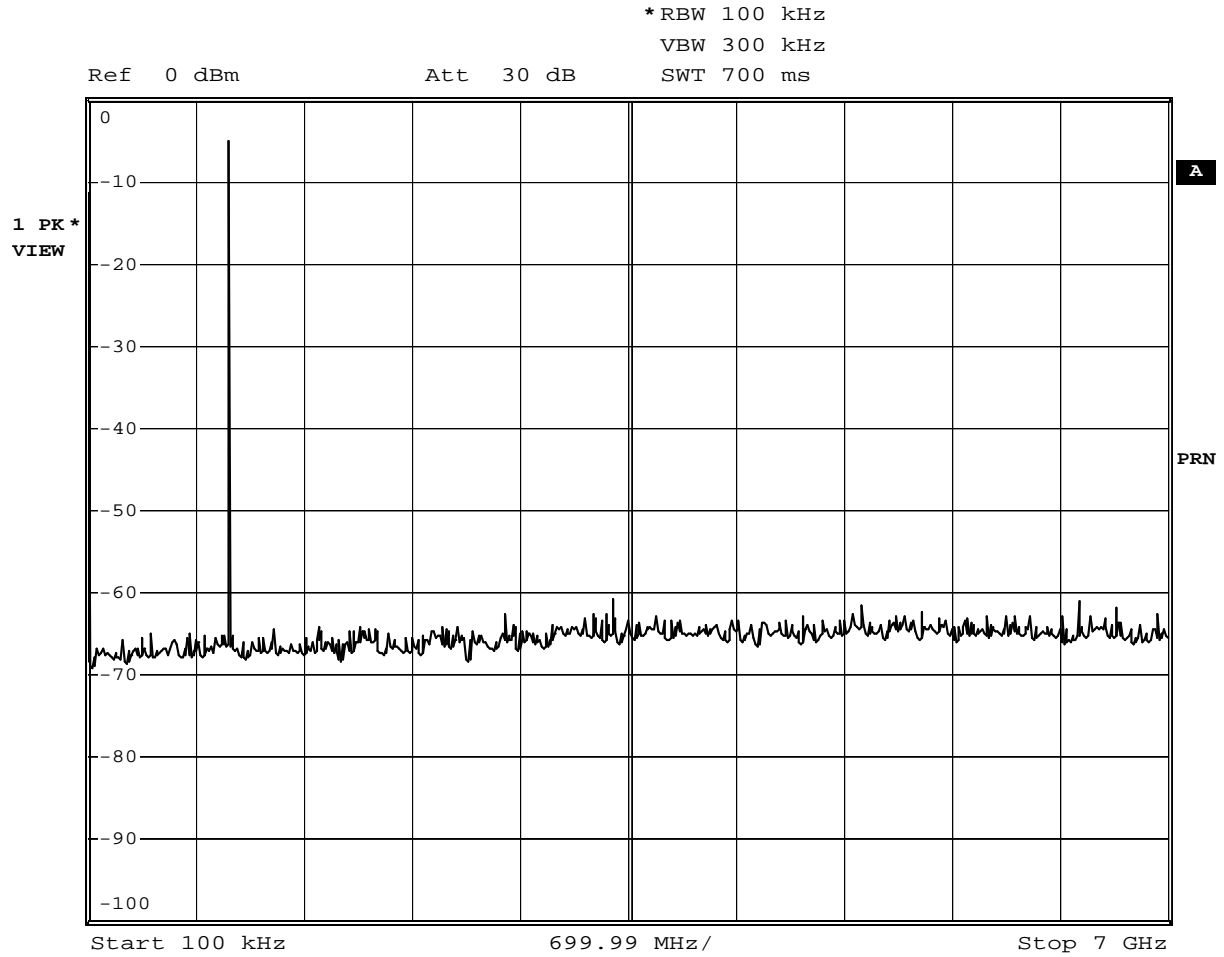


Date: 5.DEC.2006 16:08:10



G06148250

CMC Centro Misure Compatibilita'
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Gen ch0
Operator: Bertezolo 06148250
Test Spec: FO

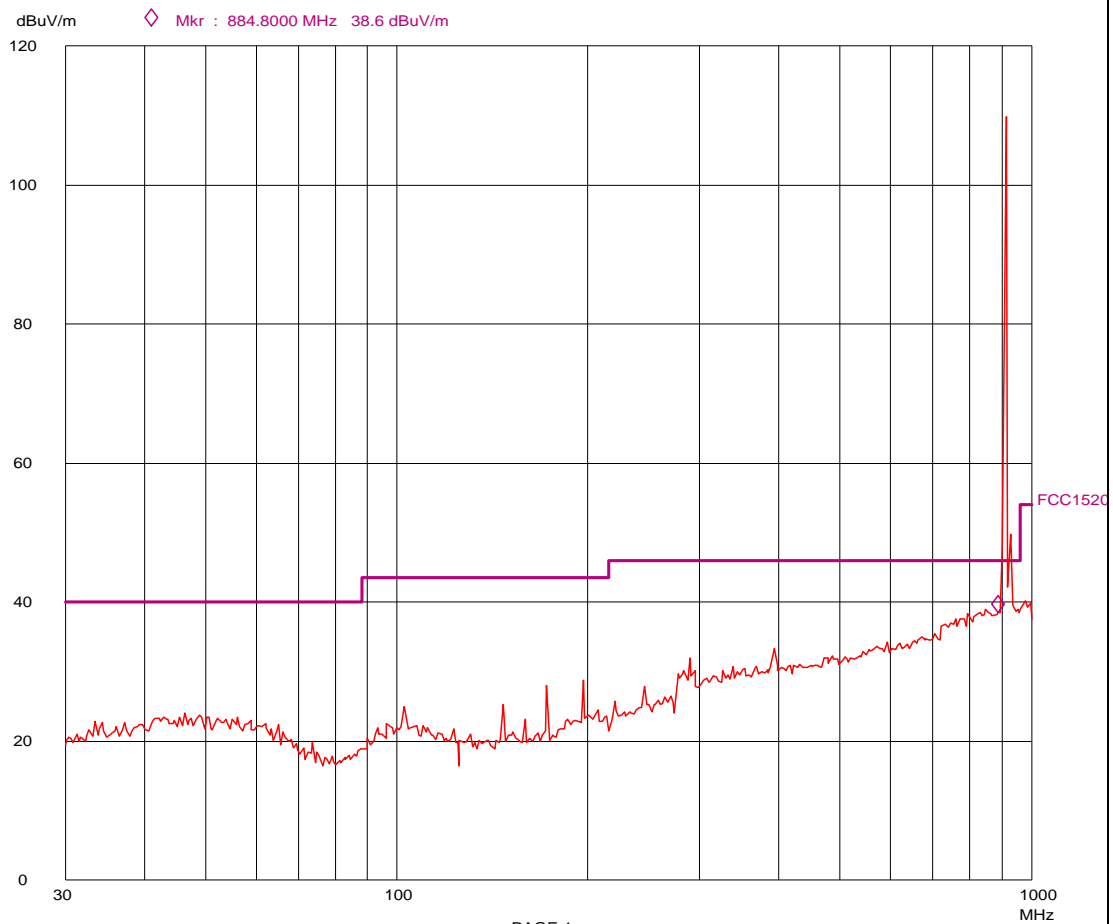




G06148251

CMC Centro Misure Compatibilita'
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Gen ch25
Operator: Bertezolo 06148251
Test Spec: FO

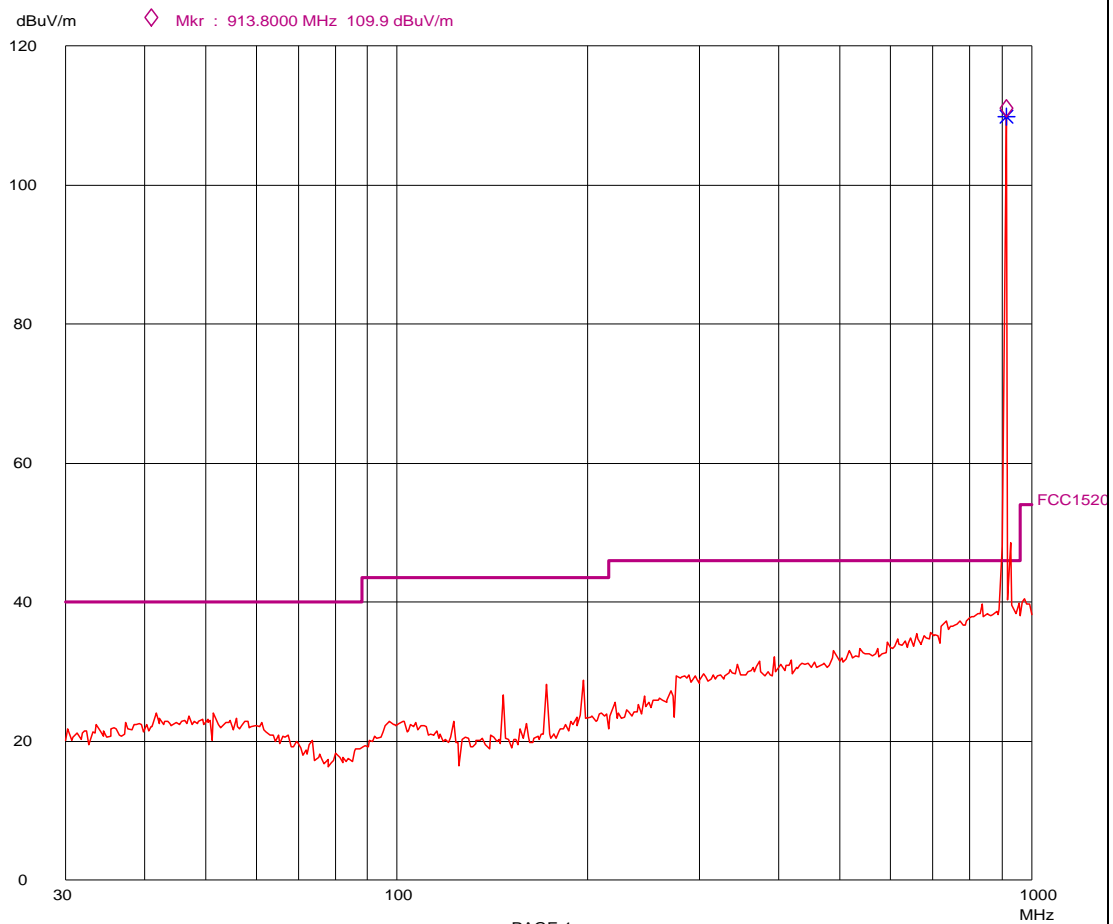




G06148252

CMC Centro Misure Compatibilita'
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Gen ch49
Operator: Bertezolo 06148252
Test Spec: FO

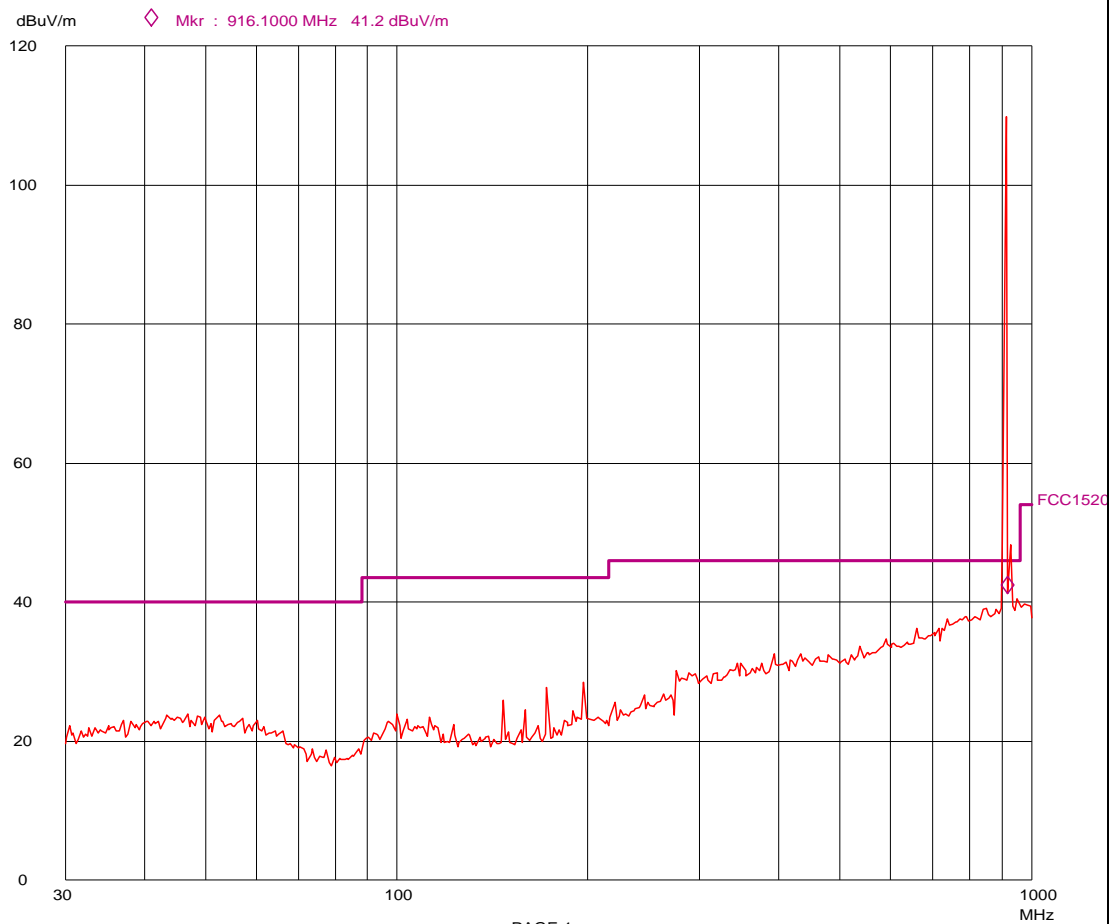




G06148253

CMC Centro Misure Compatibilit 
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Iso ch0
Operator: Bertezolo 06148253
Test Spec: FO

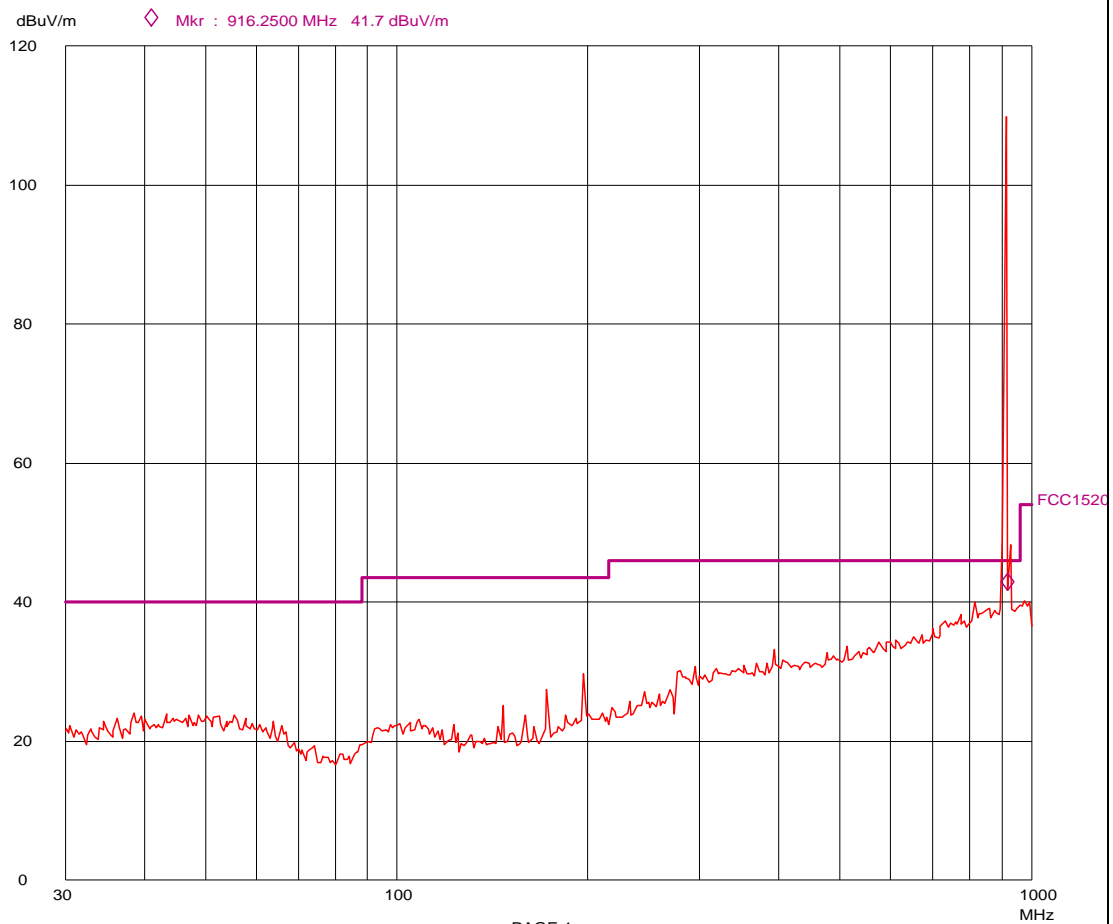




G06148254

CMC Centro Misure Compatibilita'
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Iso ch25
Operator: Bertezolo 06148254
Test Spec: FO

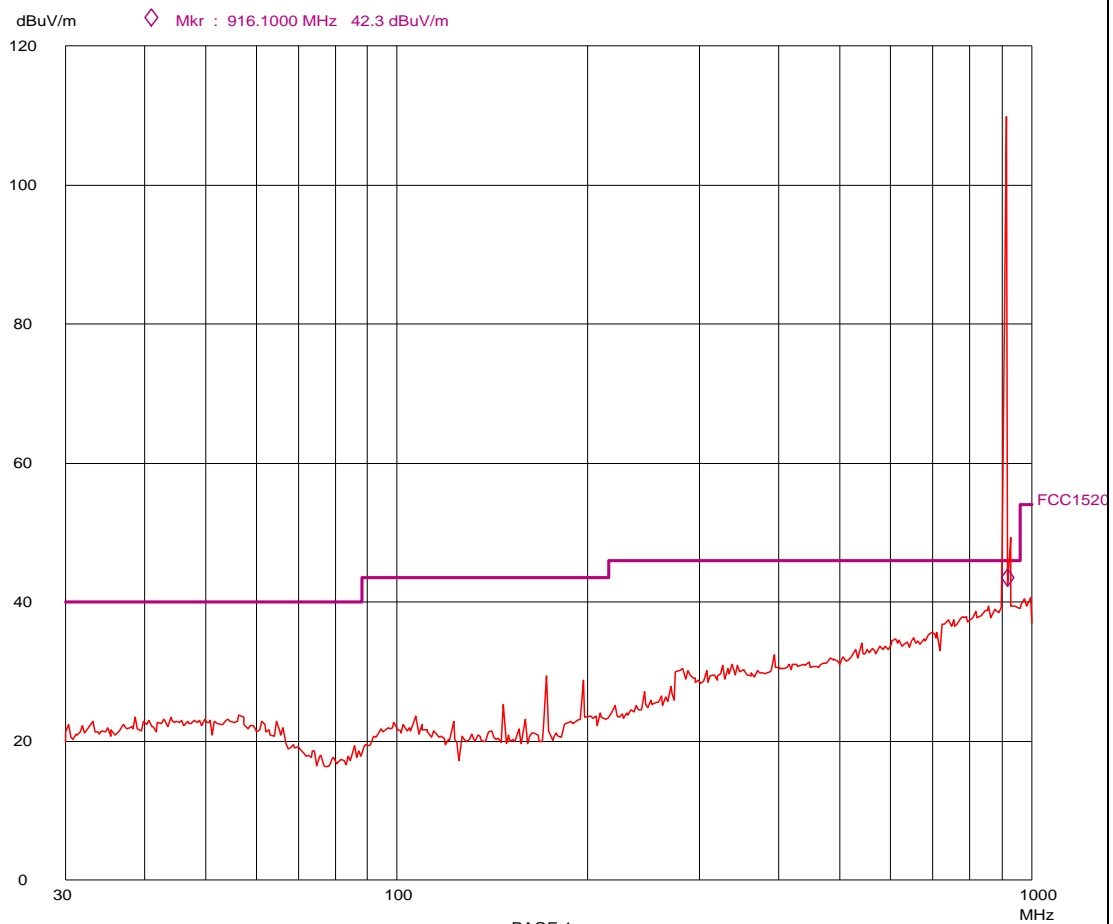




G06148255

CMC Centro Misure Compatibilita'
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Iso ch49
Operator: Bertezolo 06148255
Test Spec: FO

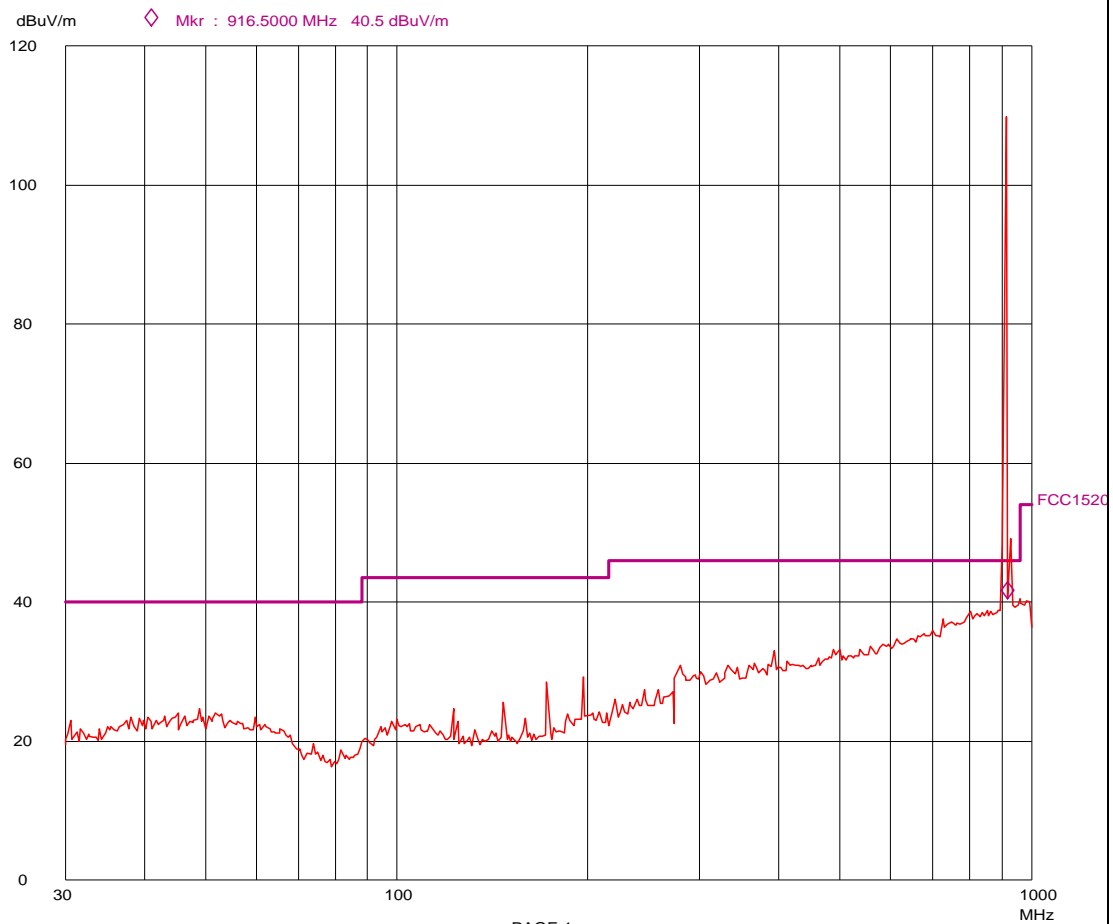




G06148256

CMC Centro Misure Compatibilita'
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Gen ch0
Operator: Bertezolo 06148256
Test Spec: FV

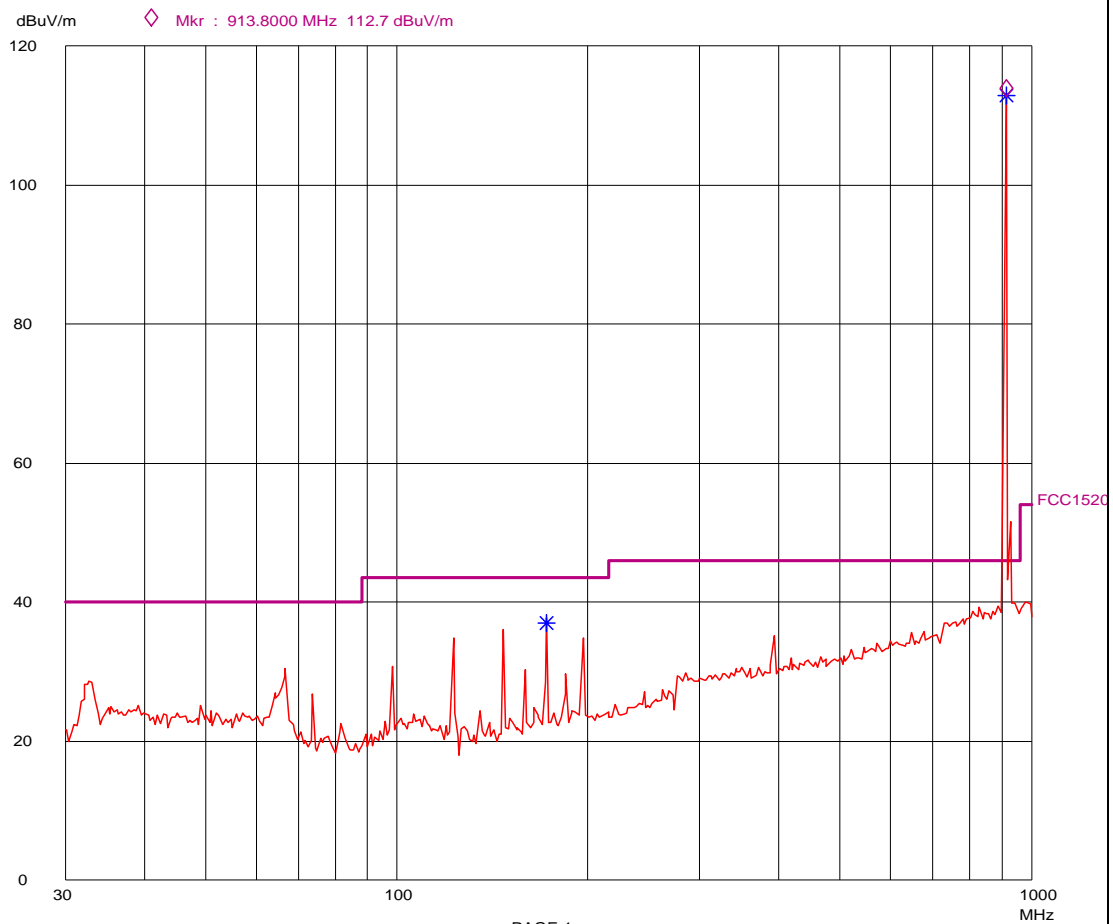




G06148257

CMC Centro Misure Compatibilita'
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Gen ch25
Operator: Bertezolo 06148257
Test Spec: FV

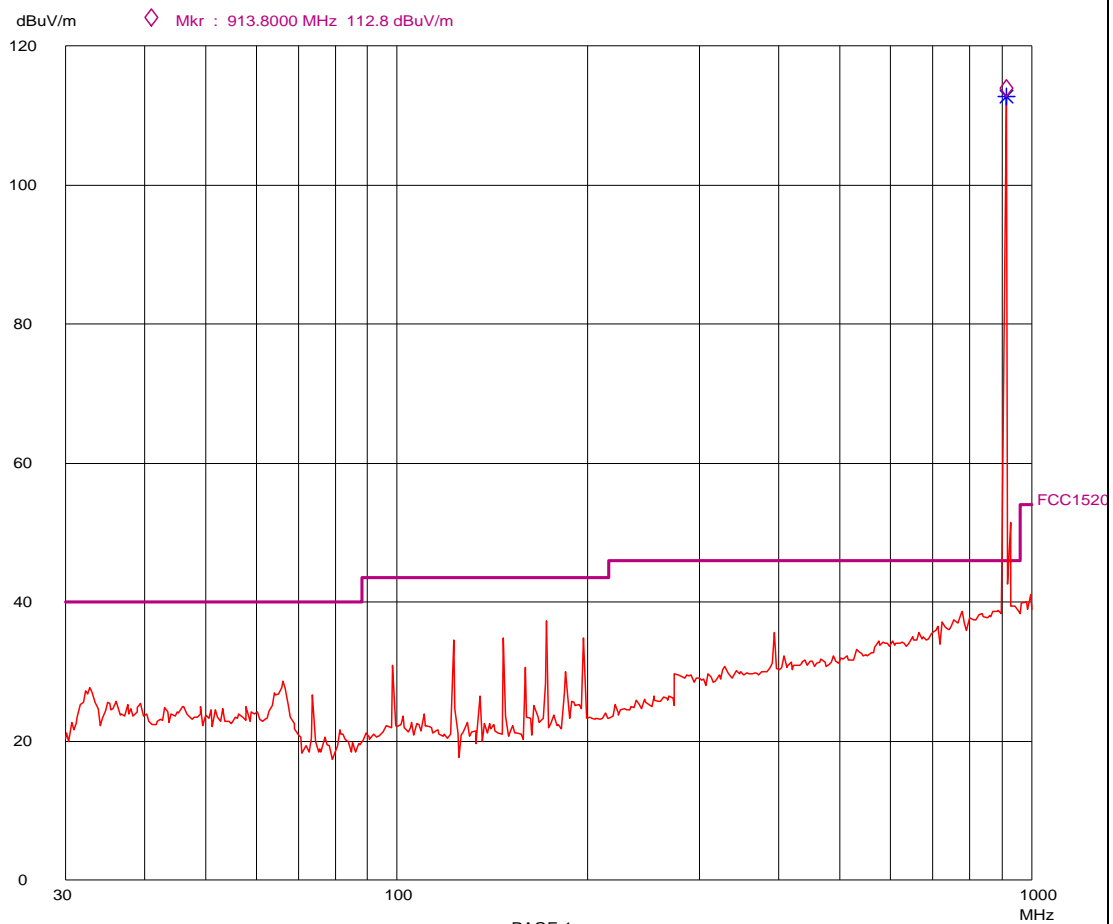




G06148258

CMC Centro Misure Compatibilita'
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Gen ch49
Operator: Bertezolo 06148258
Test Spec: FV

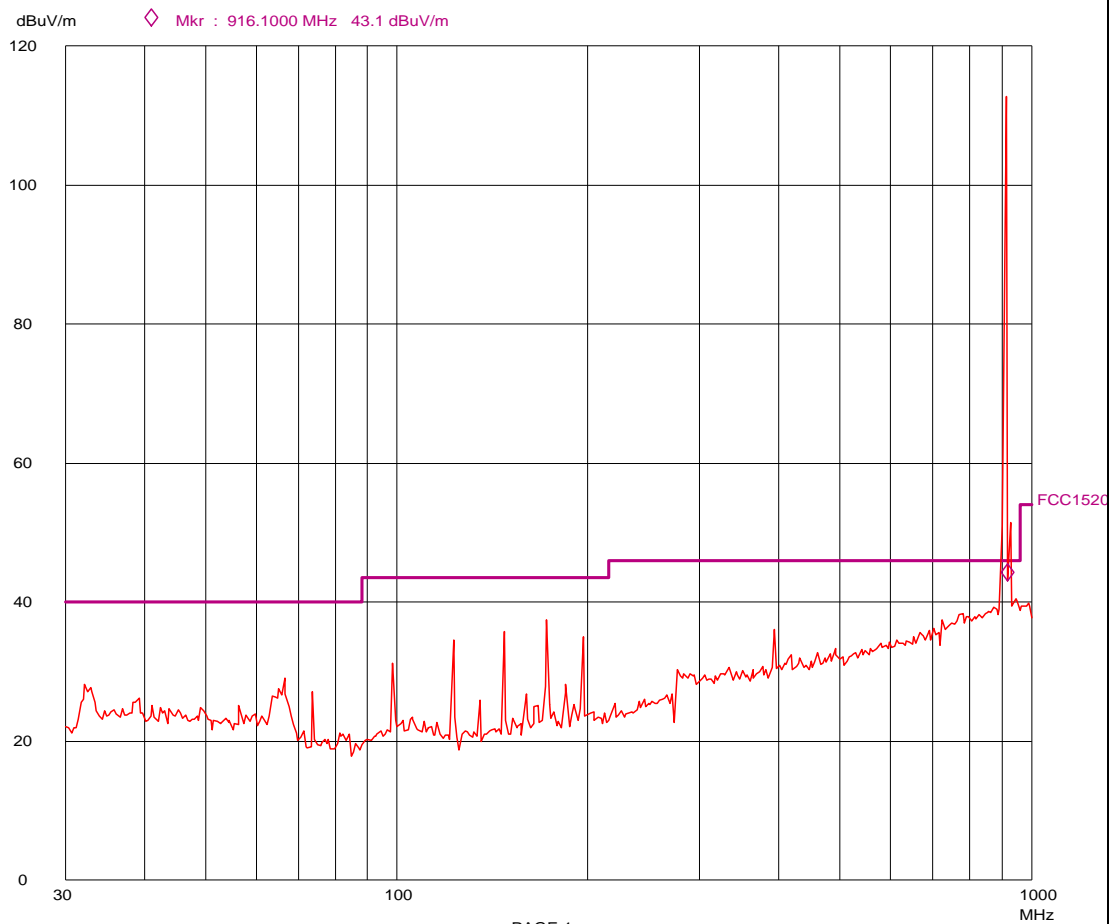




G06148259

CMC Centro Misure Compatibilit 
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Iso ch0
Operator: Bertezolo 06148259
Test Spec: FV

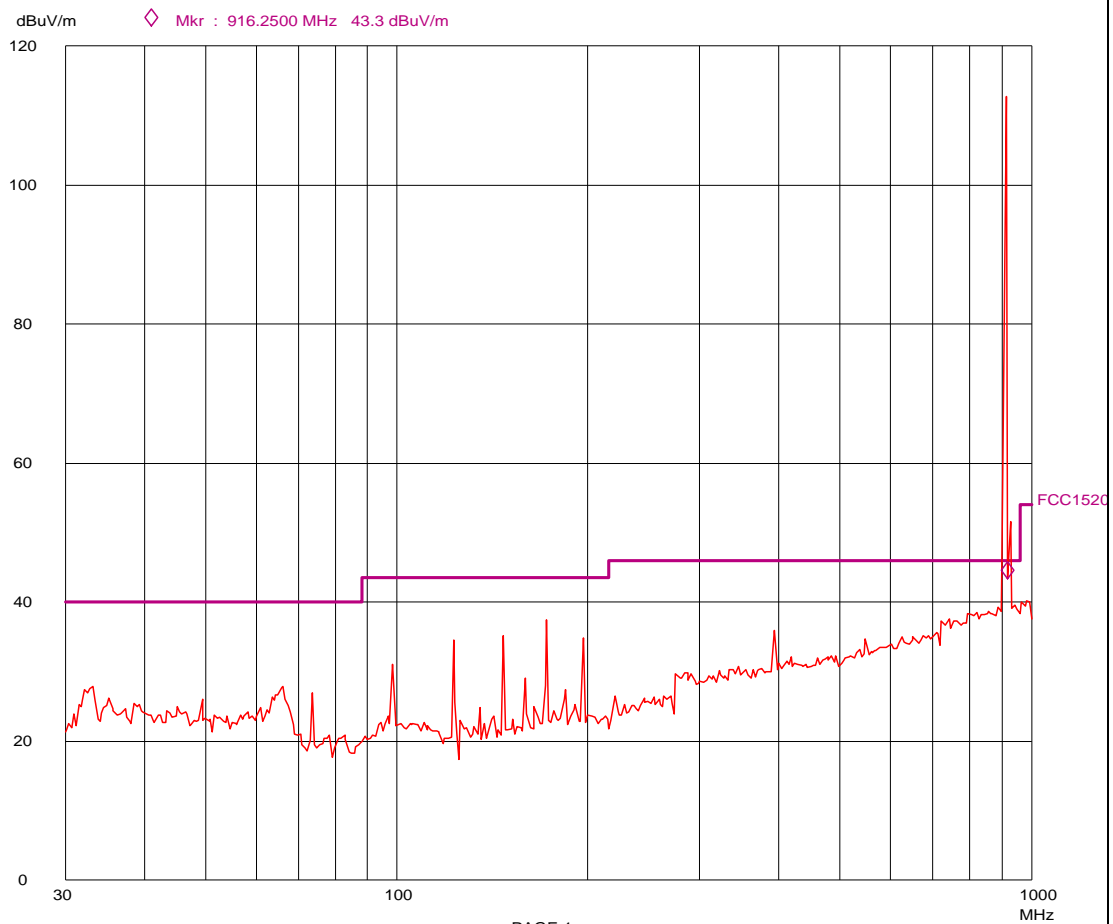




G06148260

CMC Centro Misure Compatibilit 
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Iso ch25
Operator: Bertezolo 06148260
Test Spec: FV

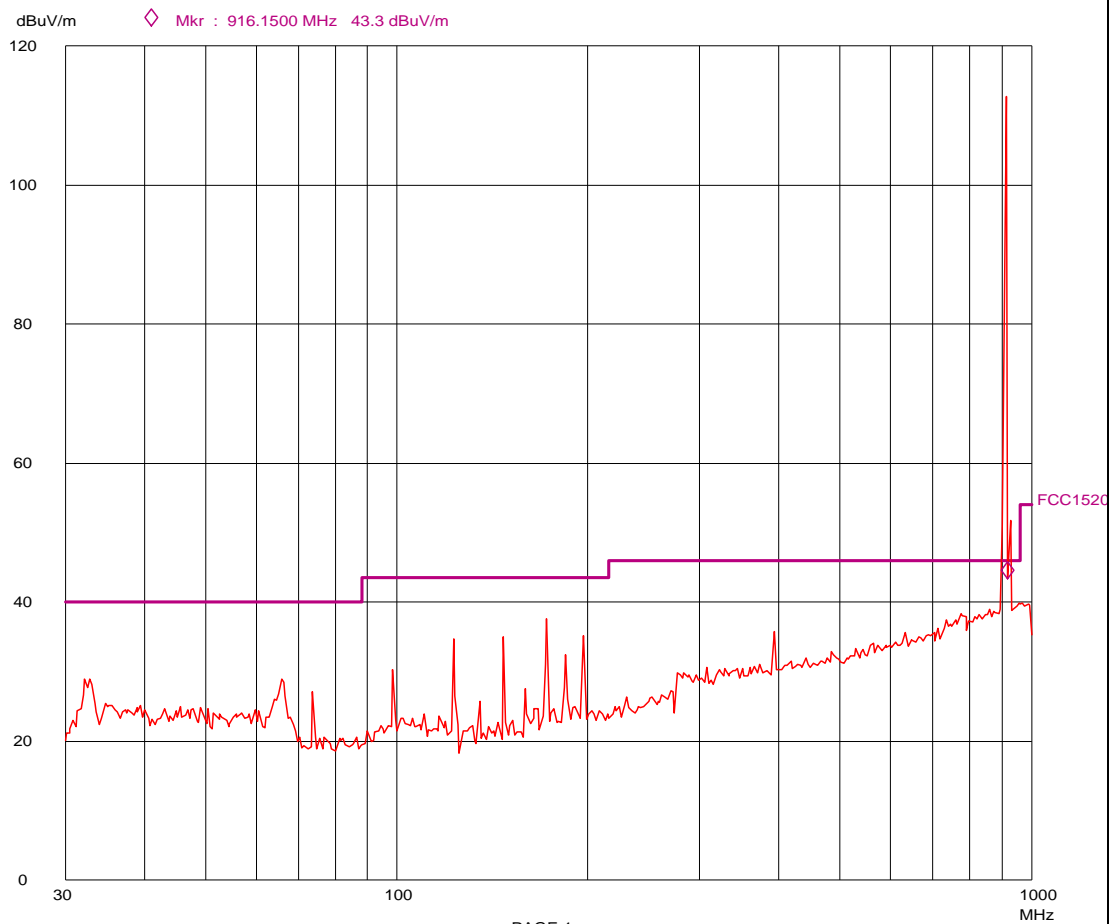




G06148261


CMC Centro Misure Compatibilit 
Emissioni 30 - 1000 MHz

EUT: A829
Op Cond: Mod Iso ch49
Operator: Bertezolo 06148261
Test Spec: FV

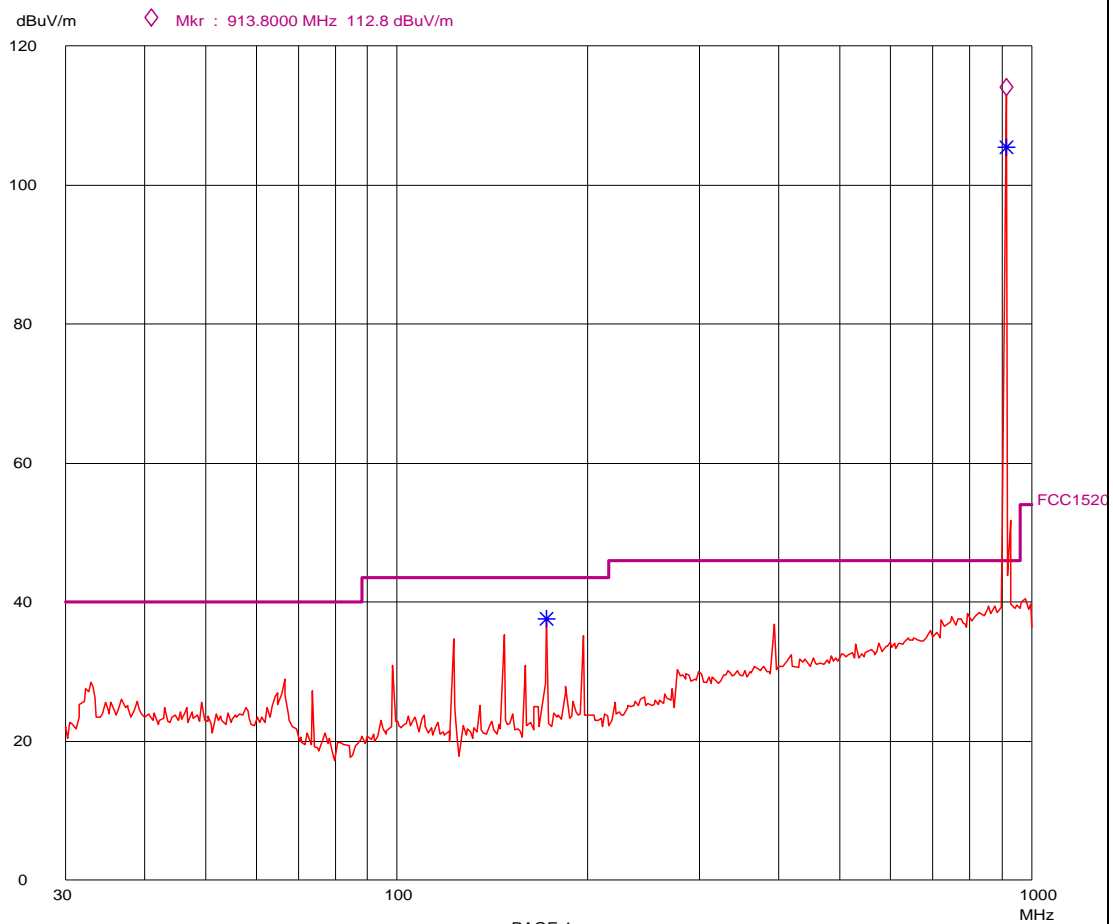




G06148263

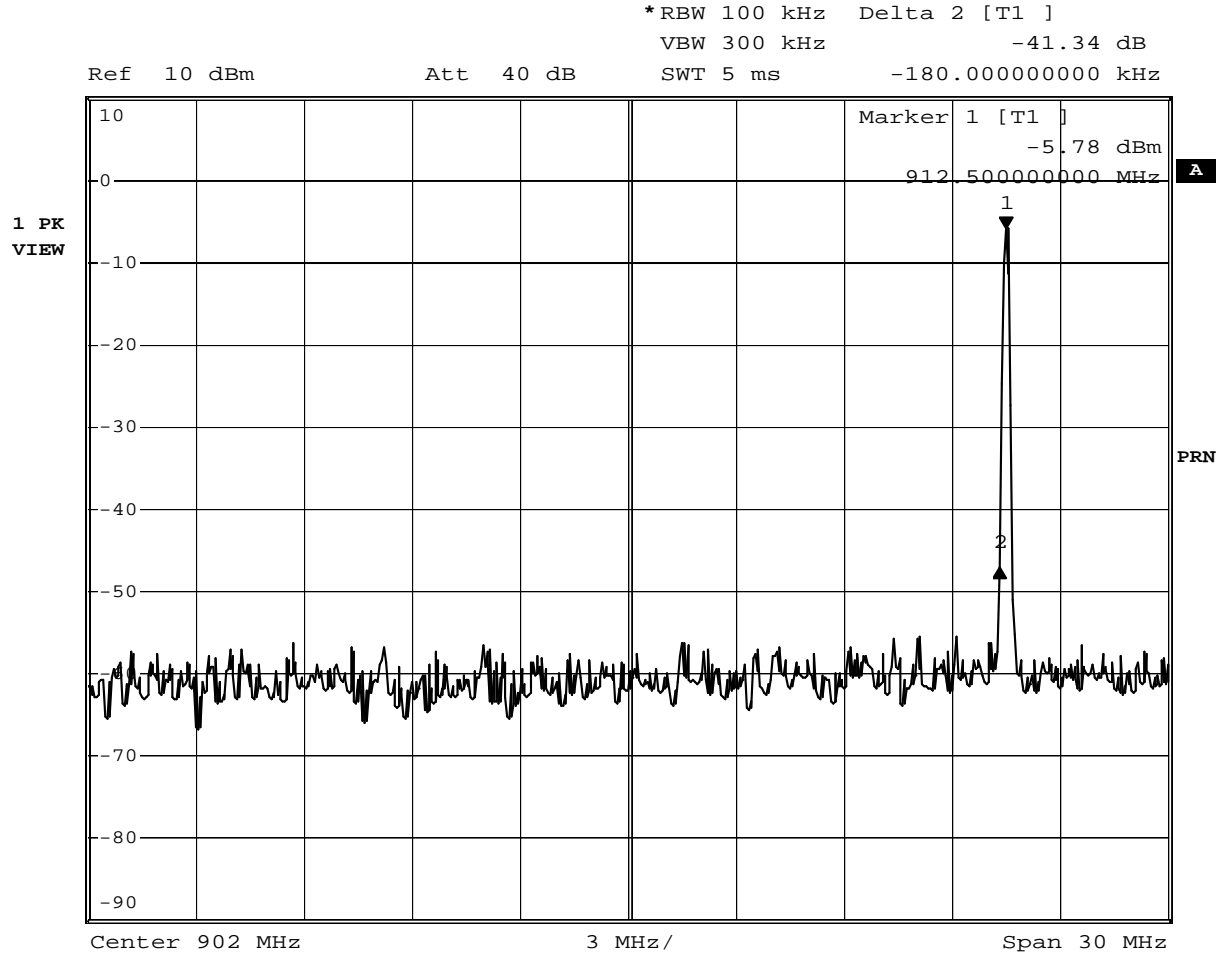

Date: 2.MAR.2007 16:02:13




G06148266

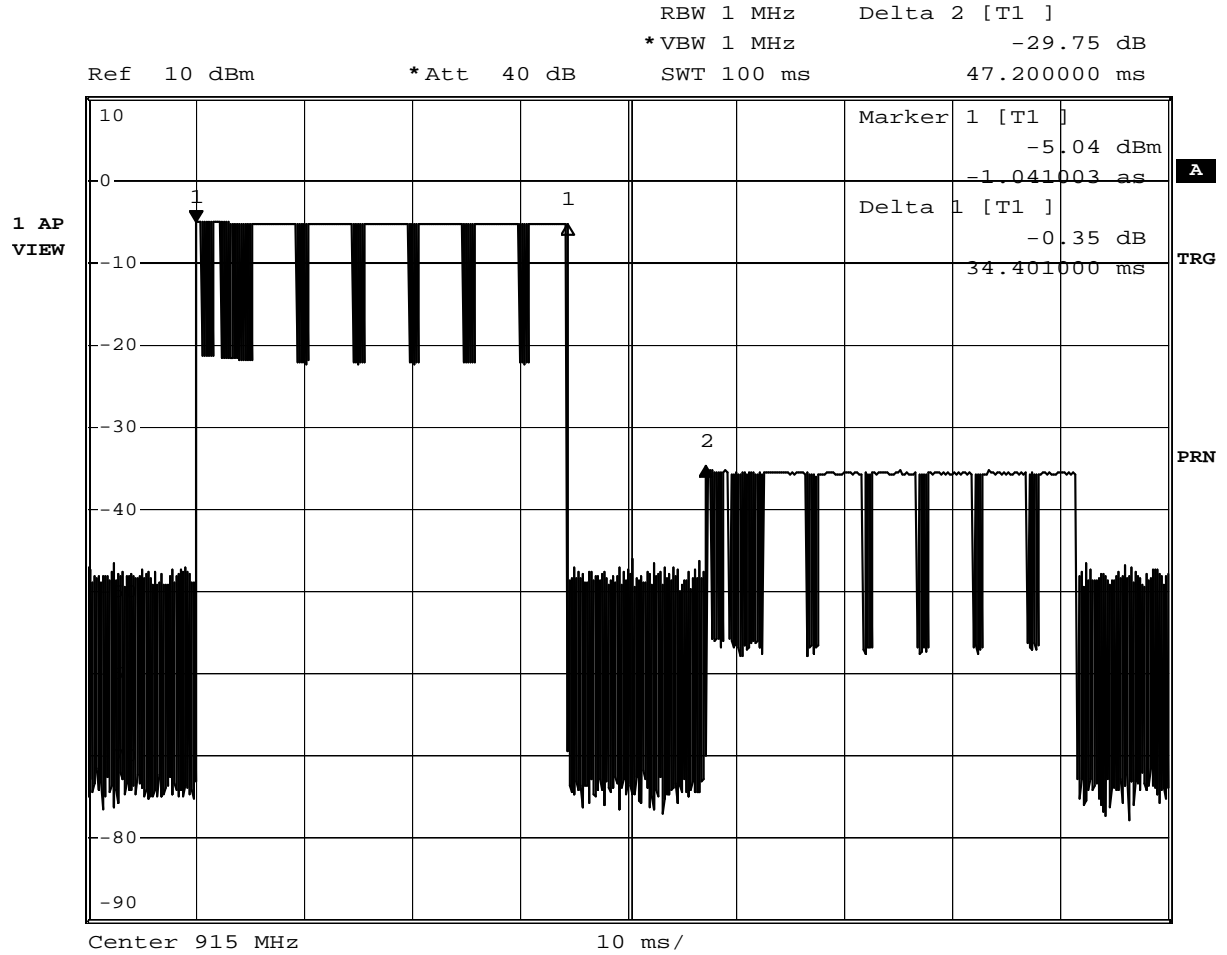

Date: 8.MAR.2007 10:15:32



G06148267

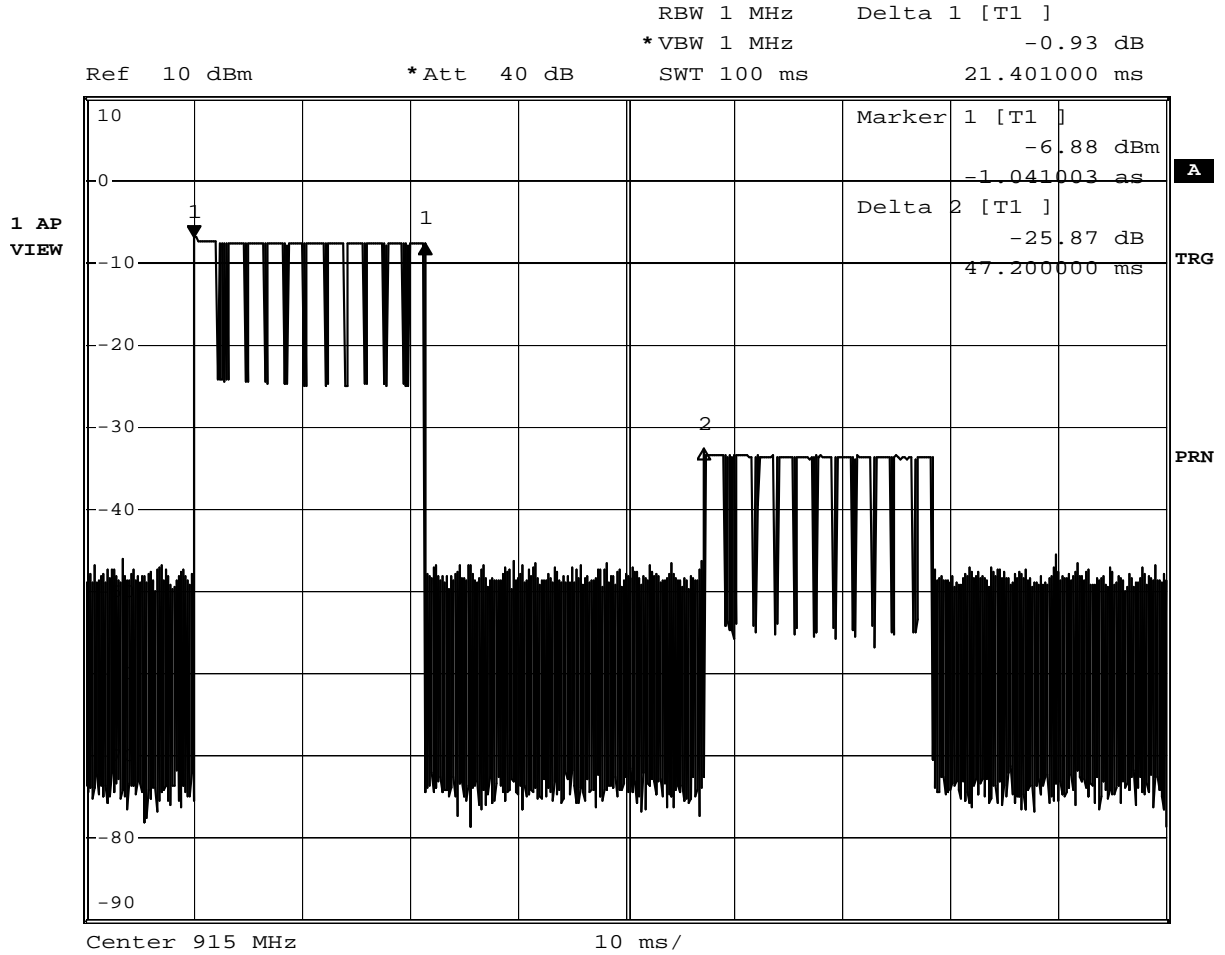


Date: 8.MAR.2007 10:17:56



G07047802

CMC Centro Misure Compatibilità srl
Emissioni 0.15 - 30 MHz

Op Cond: Alimentato in standby
Operator: Bertezolo 07047802
Test Spec: Line 0V(USB)
Comment:

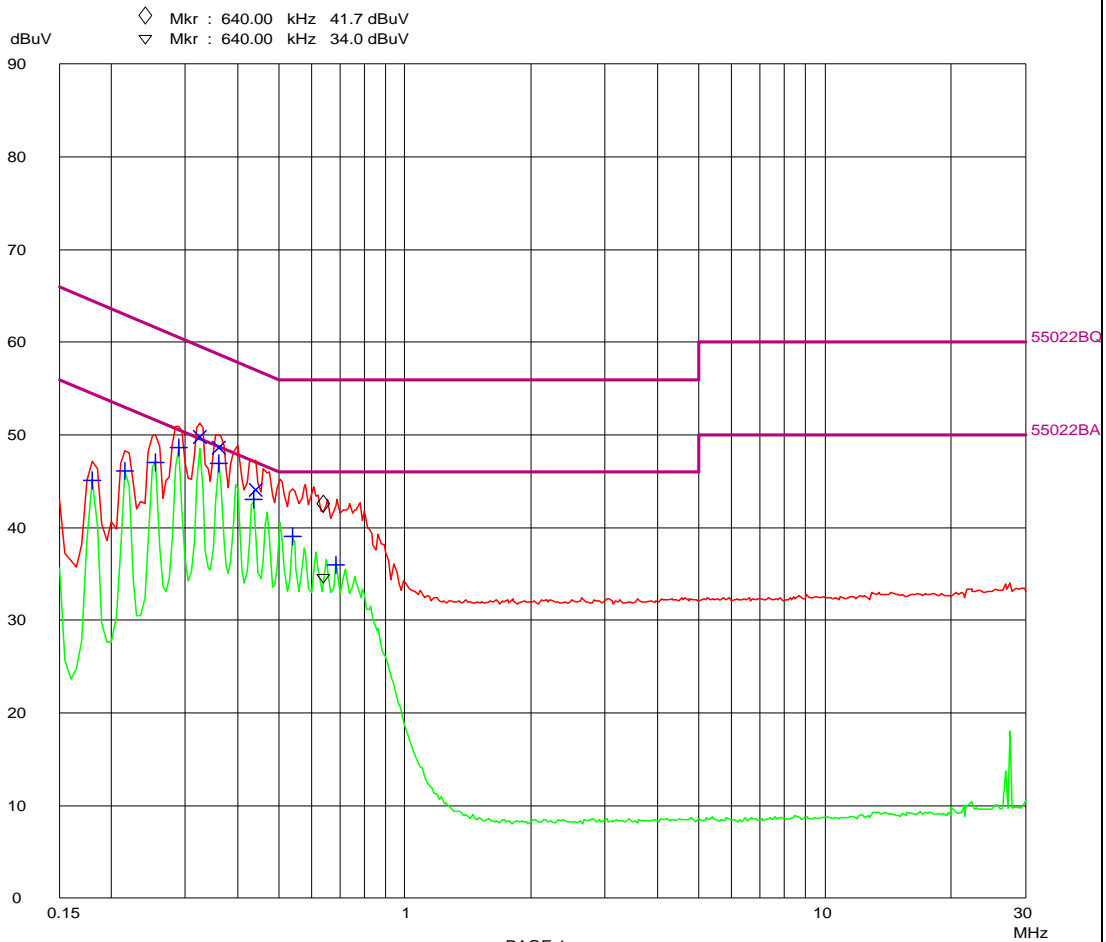




G07047803

CMC Centro Misure Compatibilità srl Emissioni 0.15 - 30 MHz

Op Cond: Alimentato in standby
Operator: Bertezolo 07047803
Test Spec: Line 5V(USB)
Comment:

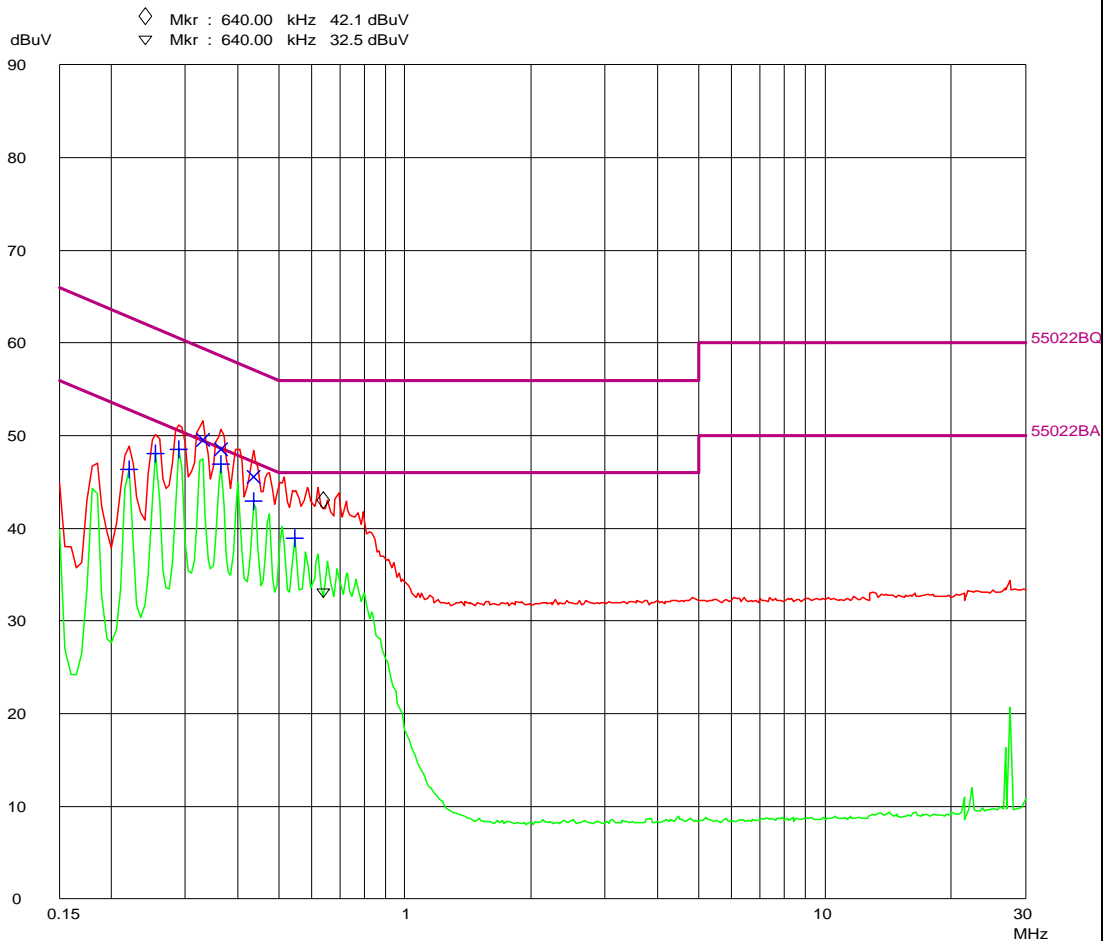



13. Remarks

Pseudorandom Frequency Hopping Sequence

At boot time, a random sequence of numbers comprised between 0 and 49 is generated using the C rand() function with an initial seed derived from the reader Serial Number (SN).

An example of a random sequence generated by the reader is the following:

Sequence : 37,47,41,11,30,26,6,42,9,20,7,23,44,15,39,32,43,1,40,27,46,
13,12,3,36,25,0,33,4,14,21,2,16,24,18,22,31,35,34,10,29,19,
28,5,38,45,48,8,17,49

The random sequence is inserted into an array (named CHlist in the firmware code) of 50 elements : the first element of the array is the first random number of the sequence, the last element is the last random number of the sequence. Each element (named CH) represents a different RF channel; each channel is related to the carrier wave frequency by the following formula:

$$F_{cw} = 912.5 + 100\text{KHz} * \text{CH} \text{ (MHz)}$$

Equal Hopping Frequency Use

In the firmware code a timeout is set to check if the currently selected channel has been in use for more than 400 msec. If this is the case an array index (called CHindex) is incremented by one and the element value of the CHlist array whose index is equal to CHindex is extracted from the array. This would be the channel selected for the next transmission phase.

When the array index equals 49 the next selected index will be 0. As we have 50 channels, each channel can be selected for not more than 400 msec in a 20 second period.

System Receiver Hopping Capability

The receiver's architecture is based on a direct conversion scheme (zero IF) with local oscillator derived from the transmit chain, so the reception frequency is automatically synchronized to the transmission frequency during frequency hopping sequence.

System Receiver Input Bandwidth

The receiver input bandwidth is determined by the baseband filter at the output of zero IF mixer. As this filter has a 3dB bandwidth of 100 KHz it matches the channel spacing.