
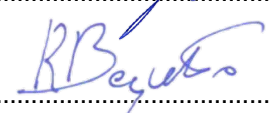




TEST REPORT Nr. R20155201

Federal Communication Commission (FCC)

Report Reference No.	R20155201
Date of issue:	09.10.2020
Total number pages:	50
Applicant's name	Caen RFID S.r.l.
Address	Via Vetraia, 11 – 55049 Viareggio (LU) – Italy
Test specification:	
Standards	FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247 Tests details at page 9
Non-standard test method	N/A
Test Report Form No.	15-247_HoppingCMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF	2020-10
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
Test item description	R1270C – Quark Up – 500 mW UHF RFID Ultra Compact Module
Trademark	Caen RFID
Manufacturer	Caen RFID S.r.l.
Model / Type reference	WR1270CXAAAA
FCC ID	UVECAENRFID015
Rating(s)	5 Vdc from USB
Report	
Tested by (name + signature)	M. Segalla 
Approved by (name + signature)	R. Beghetto 

CMC Centro Misure Compatibilità S.r.l.



1	Summary	
1	Summary.....	2
2	Reference standard	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of test item(s).....	5
6.1	Photos of the test item.....	6
7	Verdict summary section	8
8	Test conditions.....	10
8.1	General.....	10
9	Test results	11
9.1	Antenna requirements	11
9.2	Emissions in restricted frequency bands and in unrestricted frequency bands	12

CMC Centro Misure Compatibilità S.r.l.



2 Reference standard	
FCC Rules and Regulation Title 47 part 15:2019	--
3 List of attachments	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

<i>Revision index</i>	<i>Date</i>	<i>Change history</i>
1.0	09.10.2020	--



Testing and sampling:	
Date of receipt of test item	25.08.2020
Testing start date	24.09.2020
Testing end date	07.10.2020
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion. The results relate to the sample as it has been received.
Internal identification.....	Adhesive label with the product number P200839
General remarks:	
<p>This report shall not be reproduced, except in full, without the written approval of CMC. The test results presented in this report relate only to the object tested. “(see appended table)”: refers to a table appended to the report. Throughout this report a comma is used as the decimal separator.</p>	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
Definition of symbols used in this test report:	
<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report. <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report.	

CMC Centro Misure Compatibilità S.r.l.







6 General description of test item(s)


Description	R1270C – Quark Up – 500 mW UHF RFID Ultra Compact Module							
Model Number	WR1270CXAAAA							
FCC ID	UVECAENRFID015							
Serial Number	0673000714130027							
Brand name	Caen RFID							
Frequency band	902 – 928 MHz							
Nominal frequencies	F _L : 902,75 MHz	F _M : 914,75 MHz	F _H : 927,25 MHz					
Rated power supply	Voltage and Frequency			Reference poles				
				N	L1	L2	L3	PE
	<input type="checkbox"/>	AC:		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	DC: 5 V from USB							<input type="checkbox"/>
Software version	1.7.0							
Test configuration	<input checked="" type="checkbox"/>	Table top equipment						
	<input type="checkbox"/>	Floor standing equipment						
	<input type="checkbox"/>	Hand-held equipment						
Type of equipment	<input checked="" type="checkbox"/>	Transmitter unit						
	<input type="checkbox"/>	Receiver unit						
Type of station	<input type="checkbox"/>	Fixed station						
	<input type="checkbox"/>	Portable station						
	<input checked="" type="checkbox"/>	Mobile station						
Operating modes	No.	Operating mode of test item						
	1	EUT in continuous transmission at maximum power						
Accessories (not part of the test item)	Accessory		Type		Manufacturer			
	PC		U32U		Asus			



6.1 Photos of the test item

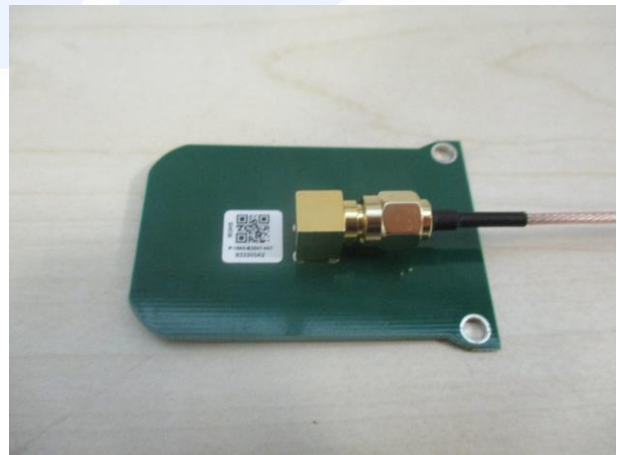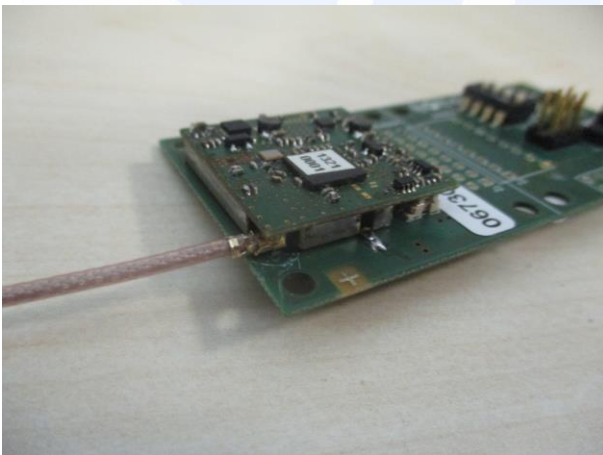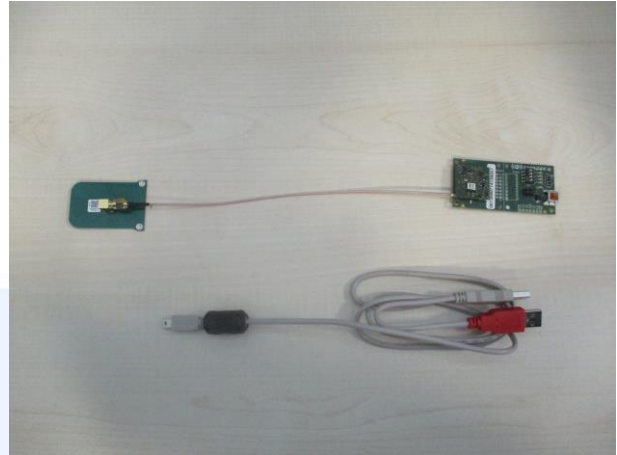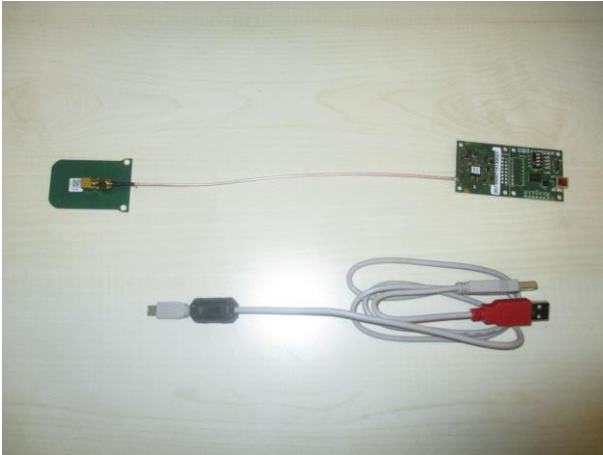

CMC Centro Misure Compatibilità S.r.l.

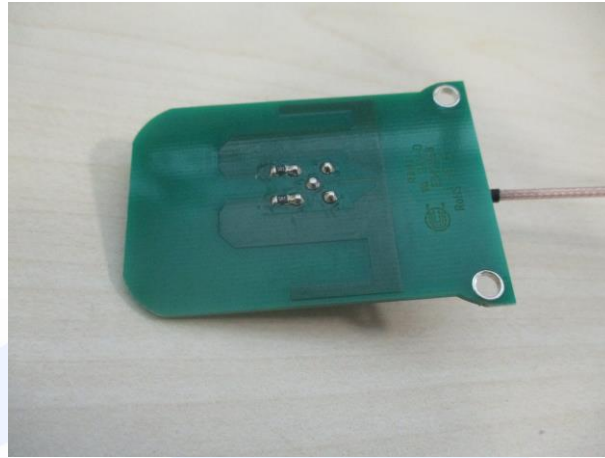



7 Verdict summary section

FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.247 (a) (1)	Pseudo randomly ordered list of hopping frequencies	--	P
Part 15.203	Antenna requirements	ANSI C63.10	P
Part 15.207	Conducted emissions	ANSI C63.10	N/E
Part 15.209	Radiated emissions and spurious emission	ANSI C63.10	P
Part 15.247	20 dB Bandwidth	ANSI C63.10	N/E
Part 15.247	Channel Separation	ANSI C63.10	N/E
Part 15.247	Number of Hopping Channel	ANSI C63.10	N/E
Part 15.247	Time of occupancy	ANSI C63.10	N/E
Part 15.247	Band edge	ANSI C63.10	N/E
Part 15.209 and 15.247	Peak Output Power	ANSI C63.10	N/E



Normative references	
Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2019	--
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC rules
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices



8 Test conditions

8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.		
	The climatic conditions during the tests were within the following limits:		
	Temperature	Humidity	Atmospheric pressure
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties	Attachment 1		



9 Test results

9.1 Antenna requirements

Tested by	M. Segalla	
Test date	24.09.2020	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded</p>	
Antenna type.....	<input type="checkbox"/>	Integral antenna
	<input checked="" type="checkbox"/>	External antenna
Antenna gain.....	-20 dBi	
External R.F. power amplifier	Not Present	

CMC Centro Misure Compatibilità S.r.l.



9.2 Emissions in restricted frequency bands and in unrestricted frequency bands

Tested by	M. Segalla	
Test date	24.09.2020	
Test location (stand)	Semi-anechoic chamber (CMC A070)	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description	<input checked="" type="checkbox"/>	Table top equipment set-up (80 cm above the reference ground plane)
	<input type="checkbox"/>	Floor standing equipment set-up (insulating material up to 12 mm thick)
	<input type="checkbox"/>	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description	--	
Test method applied	<input checked="" type="checkbox"/>	SAC with measurement distance [m]: 10 and 3
Supplementary information.....	--	

Acceptance limits

Acceptance limits for emissions in restricted frequency bands ($f < 1000$ MHz)		
Frequency range (MHz)	Test distance (m)	Limits [dB(μ V/m)]
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Acceptance limits for emissions in restricted frequency bands ($f \geq 1000$ MHz)			
Frequency (MHz)	Test distance (m)	AV limits [dB(μ V/m)]	Peak limits [dB(μ V/m)]
> 1000	3	54	74




The restricted frequency bands are listed in the following table

MHz	MHz	MHz	GHz
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

Acceptance limits for emissions in non-restricted frequency bands


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test setup

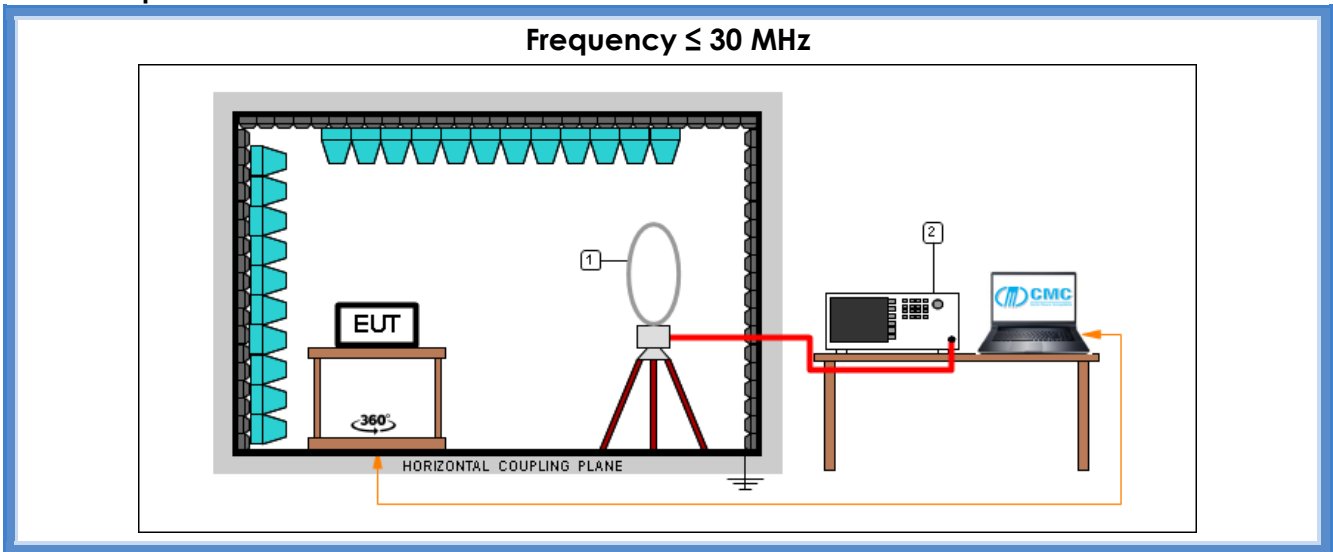

Test setup PE004_01

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

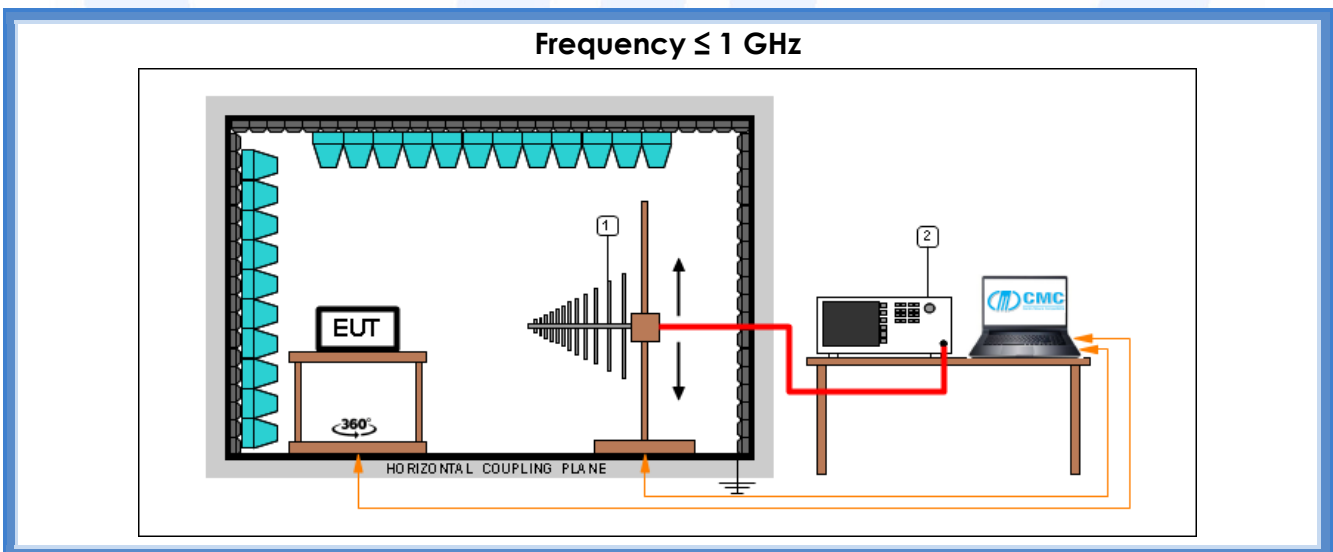


Test setup PE004_02

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

Test setup PE004_03

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

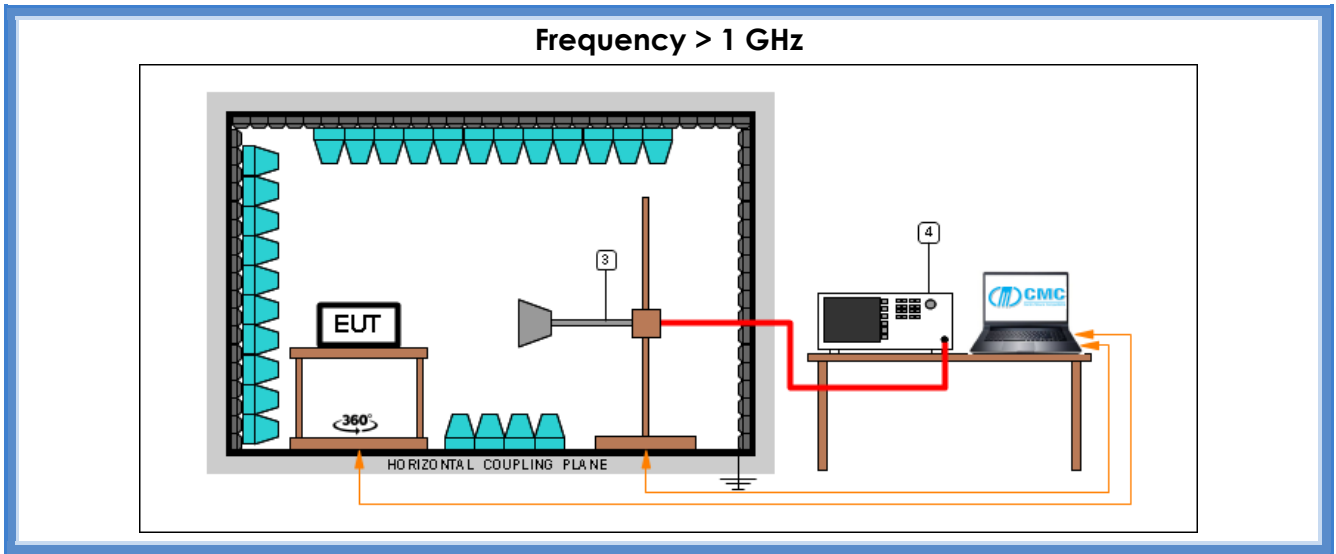

Test setup PE004_04

Nr.	Id. Number	Manufacturer	Model	Description
4	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
3	CMC S108	Emco	3115	Waveguide antenna



Result

Channel (MHz)	Polarization	Frequency Range (MHz)	Graphs	Result
902,75	H	1000 – 10000	G20154850	P
902,75	V	1000 – 10000	G20154851	P
914,75	V	1000 – 10000	G20154852	P
914,75	H	1000 – 10000	G20154853	P
927,25	H	1000 – 10000	G20154854	P
927,25	V	1000 – 10000	G20154855	P
Worst case	V	30 – 300	G20154856	P
Worst case	H	30 – 300	G20154857	P
902,75	H	300 – 1000	G20154858	P
902,75	V	300 – 1000	G20154859	P
914,75	V	300 – 1000	G20154860	P
914,75	H	300 – 1000	G20154861	P
927,25	H	300 – 1000	G20154862	P
927,25	V	300 – 1000	G20154863	P
Worst case	Loop	0,009 – 30	G20154864	P

Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels.

Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.

Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $20\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.

Peaks above the limits are caused by the nominal transmitting frequencies


Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +

AV: Average; AV [1s] (average at 1 second) values are marked with a X



Graphs

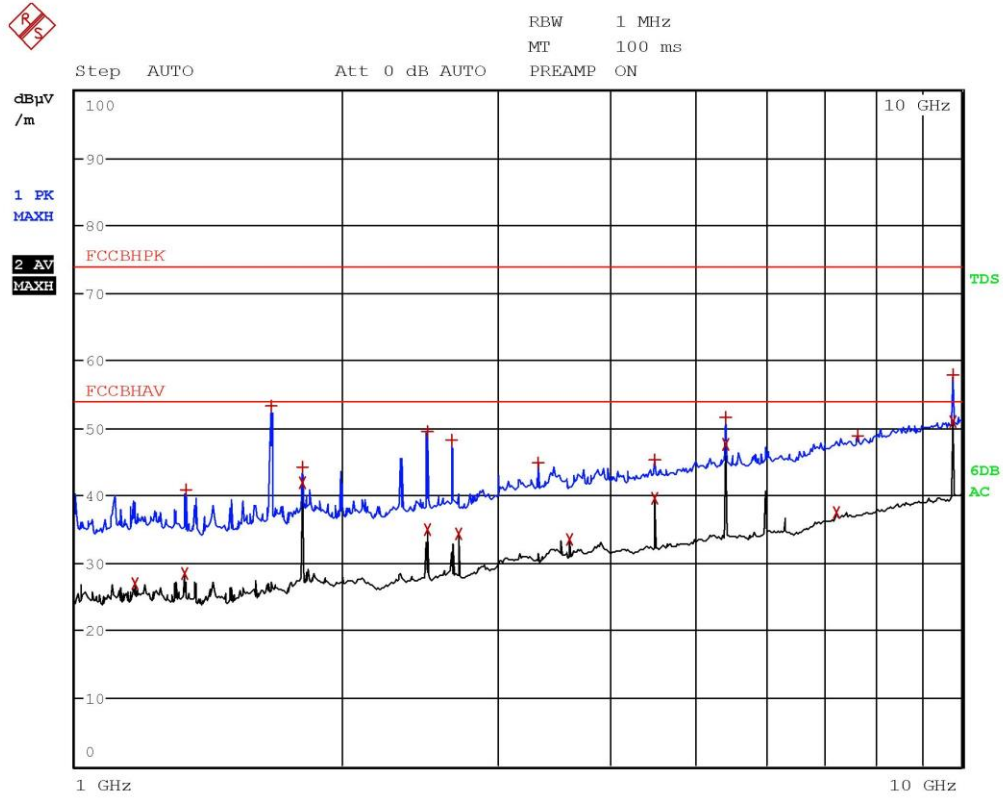


Segalla 20154850



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
2 Average	1.1664 GHz	27.09	-26.88
2 Average	1.3296 GHz	28.53	-25.44
1 Max Peak	1.3308 GHz	40.89	-33.08
1 Max Peak	1.6628 GHz	53.36	-20.62
2 Average	1.8056 GHz	41.91	-12.07
1 Max Peak	1.8056 GHz	44.13	-29.84
1 Max Peak	2.4944 GHz	49.55	-24.42
2 Average	2.4948 GHz	35.04	-18.93
1 Max Peak	2.6588 GHz	48.29	-25.68
2 Average	2.708 GHz	34.30	-19.67
1 Max Peak	3.3328 GHz	44.82	-29.15
2 Average	3.6112 GHz	33.46	-20.51
1 Max Peak	4.5136 GHz	45.21	-28.77
2 Average	4.5136 GHz	39.70	-14.27
1 Max Peak	5.4164 GHz	51.49	-22.48
2 Average	5.4164 GHz	47.55	-6.42
2 Average	7.222 GHz	37.58	-16.39
1 Max Peak	7.6476 GHz	48.82	-25.15
2 Average	9.7852 GHz	50.97	-3.00
1 Max Peak	9.7864 GHz	57.97	-16.00

Segalla 20154850

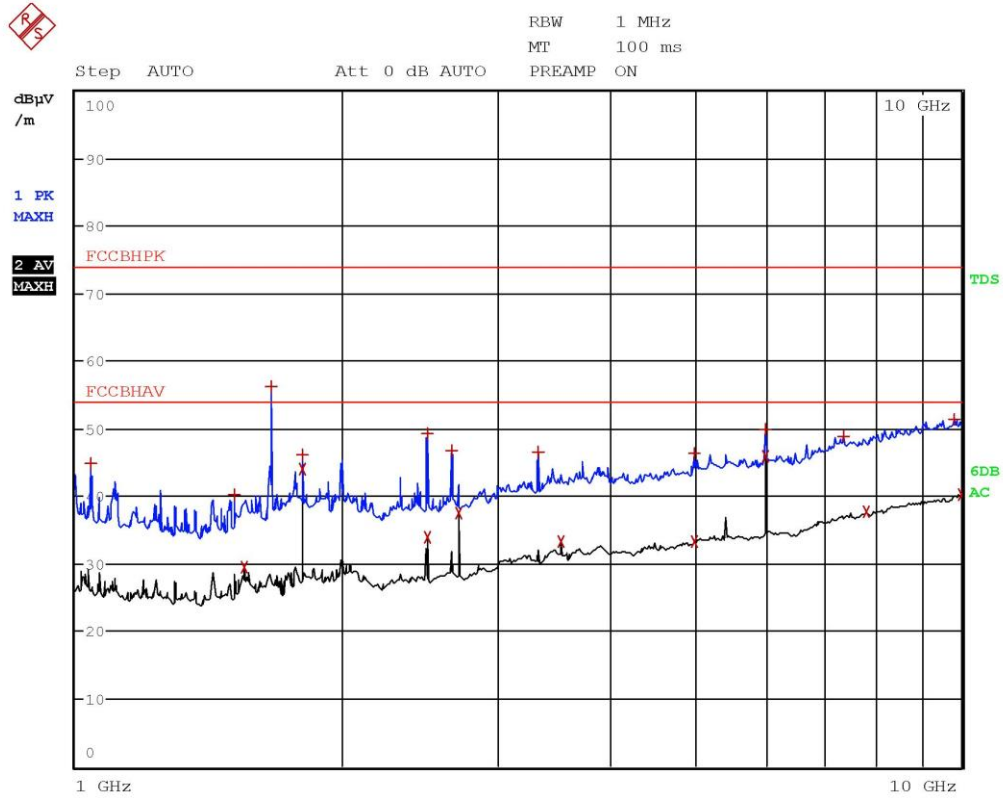

Segalla 20154851


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Max Peak	1.0428 GHz	44.87	-29.10
1 Max Peak	1.5096 GHz	40.22	-33.75
2 Average	1.55 GHz	29.45	-24.52
1 Max Peak	1.6628 GHz	56.19	-17.78
2 Average	1.8056 GHz	43.93	-10.04
1 Max Peak	1.8056 GHz	46.08	-27.89
2 Average	2.4944 GHz	33.99	-19.98
1 Max Peak	2.4952 GHz	49.17	-24.80
1 Max Peak	2.6612 GHz	46.67	-27.30
2 Average	2.7084 GHz	37.51	-16.46
1 Max Peak	3.324 GHz	46.52	-27.45
2 Average	3.5356 GHz	33.35	-20.62
1 Max Peak	4.9936 GHz	46.27	-27.70
2 Average	5.0016 GHz	33.37	-20.60
1 Max Peak	5.9996 GHz	49.98	-23.99
2 Average	6 GHz	45.92	-8.05
1 Max Peak	7.3572 GHz	48.80	-25.17
2 Average	7.8084 GHz	37.66	-16.31
1 Max Peak	9.8304 GHz	51.44	-22.54
2 Average	9.9828 GHz	40.17	-13.80

Segalla 20154851

CMC Centro Misure Compatibilità S.r.l.

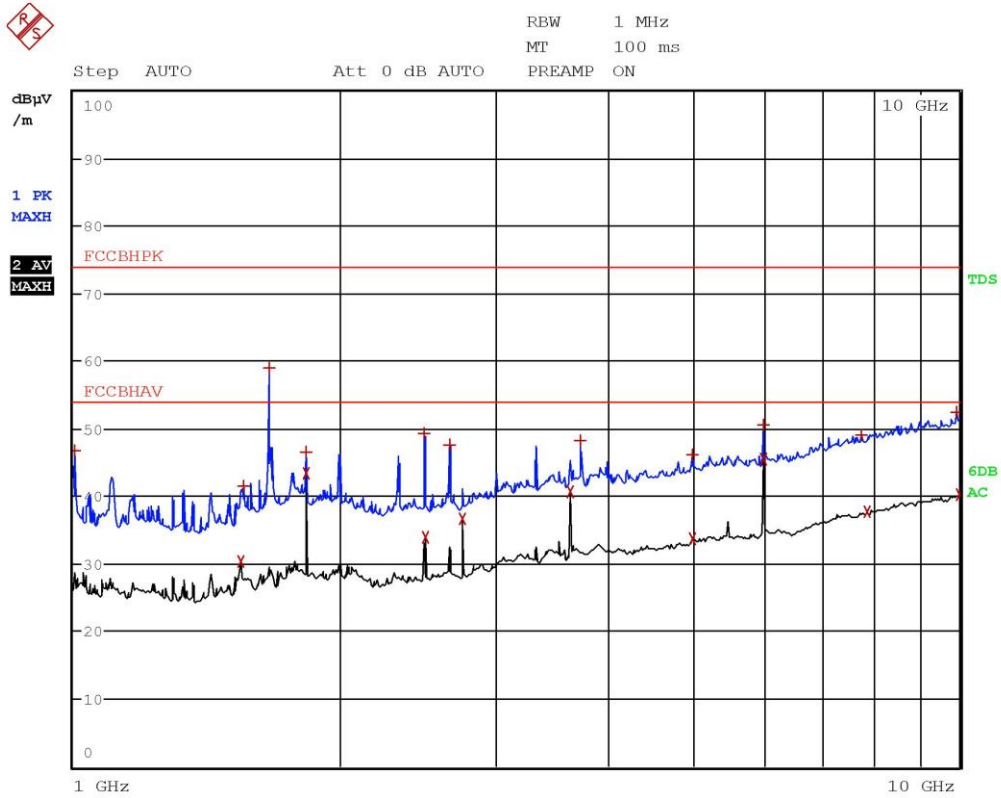


Segalla 20154852

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Max Peak	1.0044 GHz	46.77	-27.20
2 Average	1.548 GHz	30.42	-23.55
1 Max Peak	1.5572 GHz	41.44	-32.53
1 Max Peak	1.6624 GHz	59.02	-14.95
2 Average	1.8296 GHz	43.40	-10.57
1 Max Peak	1.8296 GHz	46.51	-27.46
1 Max Peak	2.49 GHz	49.23	-24.75
2 Average	2.4944 GHz	33.86	-20.11
1 Max Peak	2.6588 GHz	47.56	-26.41
2 Average	2.7444 GHz	36.67	-17.30
2 Average	3.6332 GHz	40.73	-13.24
1 Max Peak	3.7364 GHz	48.18	-25.79
1 Max Peak	4.9984 GHz	46.02	-27.96
2 Average	4.9996 GHz	33.64	-20.34
2 Average	6 GHz	45.41	-8.56
1 Max Peak	6.0004 GHz	50.44	-23.53
1 Max Peak	7.74 GHz	49.03	-24.94
2 Average	7.8788 GHz	37.64	-16.33
1 Max Peak	9.9236 GHz	52.44	-21.54
2 Average	9.9848 GHz	40.19	-13.78

Segalla 20154852

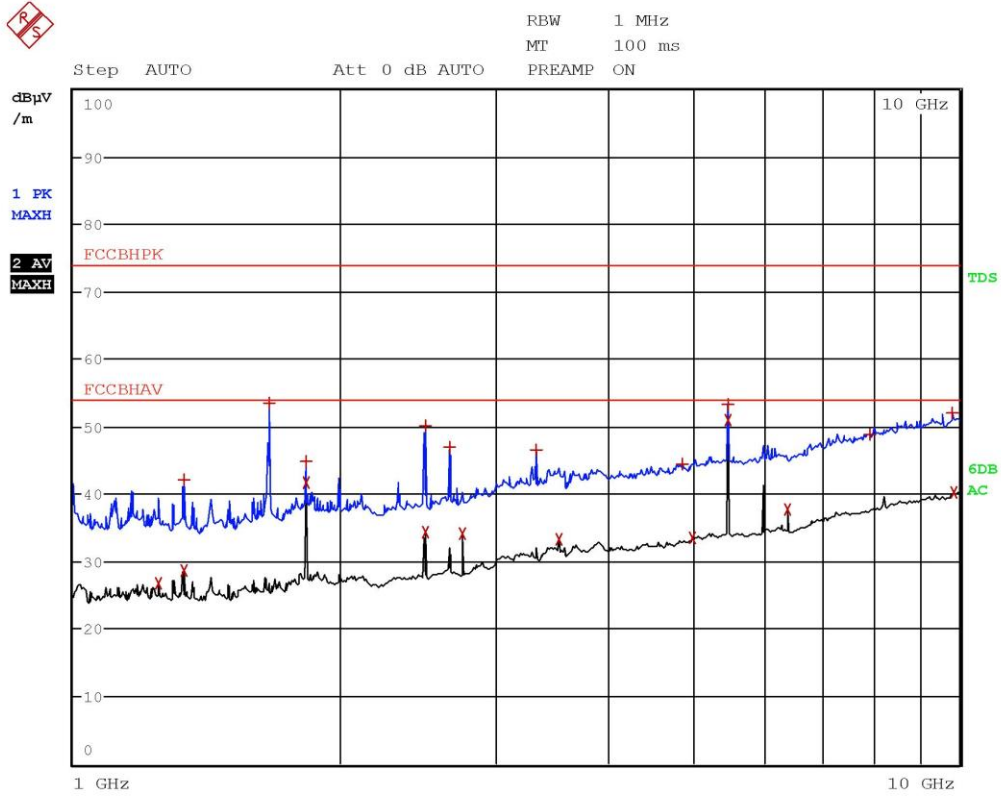

Segalla 20154853


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
2 Average	1.248 GHz	26.76	-27.22
2 Average	1.3308 GHz	28.61	-25.36
1 Max Peak	1.3312 GHz	42.13	-31.84
1 Max Peak	1.6632 GHz	53.41	-20.56
2 Average	1.8296 GHz	41.76	-12.21
1 Max Peak	1.8296 GHz	44.82	-29.15
1 Max Peak	2.4928 GHz	50.20	-23.77
2 Average	2.494 GHz	34.37	-19.60
1 Max Peak	2.6628 GHz	47.01	-26.96
2 Average	2.7444 GHz	34.07	-19.90
1 Max Peak	3.3272 GHz	46.49	-27.48
2 Average	3.5356 GHz	33.37	-20.60
1 Max Peak	4.8648 GHz	44.45	-29.52
2 Average	4.9904 GHz	33.43	-20.54
1 Max Peak	5.4884 GHz	53.24	-20.73
2 Average	5.4884 GHz	50.88	-3.09
2 Average	6.4032 GHz	37.78	-16.19
1 Max Peak	7.9132 GHz	48.90	-25.07
1 Max Peak	9.8024 GHz	52.08	-21.89
2 Average	9.8368 GHz	40.17	-13.80

Segalla 20154853

CMC Centro Misure Compatibilità S.r.l.

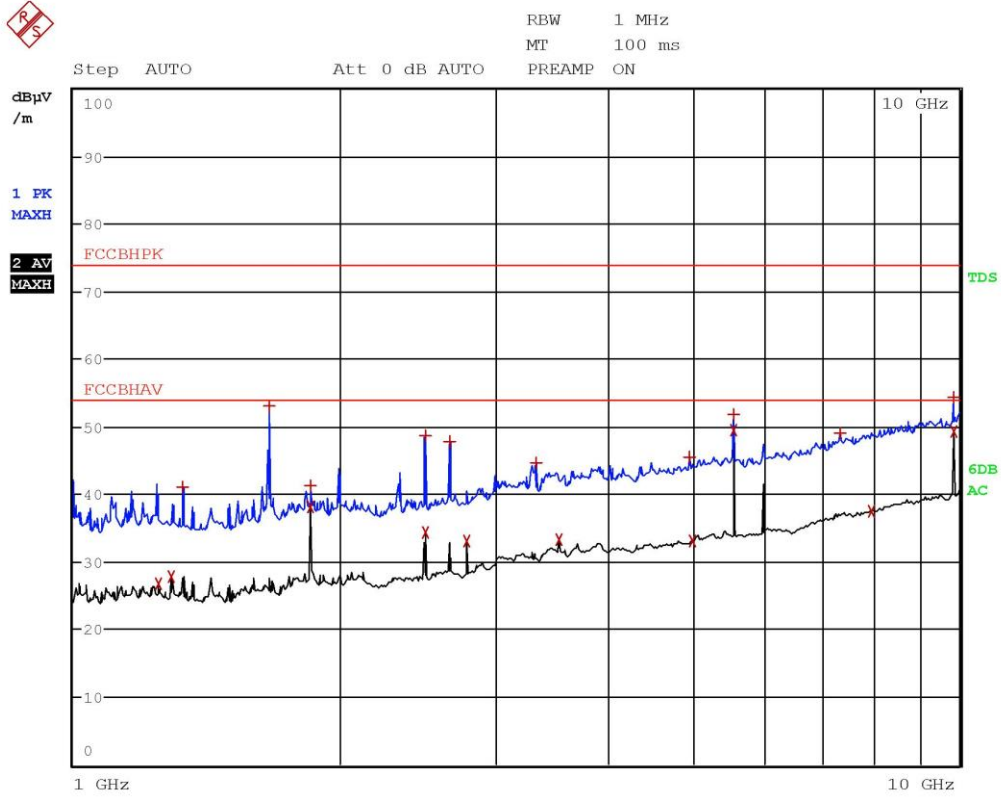

Segalla 20154854

CMC Centro Misure Compatibilità S.r.l.