

# TEST REPORT

OF

FCC Part 15 Subpart C §15.209, §15.231  
FCC ID : UVNTP2-TRUCKER-RA

Equipment Under Test : REPEATER  
Model Name : TP2-TRUCKER-RA  
Applicant : SEETRON INC.  
Manufacturer : SEETRON INC.  
Date of Test(s) : 2015. 03. 09 ~ 2015. 03. 29  
Date of Issue : 2015. 03. 29

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Patrick Kang

Date:

2015. 03. 29

Approved By:



Hyunchae You

Date:

2015. 03. 29

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**TABLE OF CONTENTS**

	Page
1. General Information -----	3
2. Field Strength of Fundamental -----	6
3. Spurious Emission-----	11
4. Bandwidth of Operation Frequency-----	13
5. Transmission Time -----	15

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-837

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : + 82 31 688 0901

Fax No. : + 82 31 688 0921

### 1.2. Details of applicant

Applicant : SEETRON INC.

Address : 201-403, 388 Songnea-daero, Wonmi-gu, Bucheon-si, Gyeonggi-do, 420-733

Contact Person : Cho, Byoum-Youn

Phone No. : + 82 32 327 8123

### 1.3. Description of EUT

Kind of Product	REPEATER
Model Name	TP2-TRUCKER-RA
Associated Transmitter	TP2-CV1-1 (FCC ID : UVNTP2-CV1-1)
Power Supply	DC 24.0 V (used by vehicle battery)
Frequency Range	Tx : 433.92 MHz, Rx : 433.92 MHz
Modulation Type	FSK
Number of Channels	1
Antenna Type	Coil Antenna

### 1.4. Associated Transmitter

Model name	Information
TP2-CV1-1 (FCC ID : UVNTP2-CV1-1)	- Basic model
TP2-CV1-3 TP2-2.3P TP2-AD-9	- These added models have different external depends on various car wheel. - H/W and S/W are same as basic.

- TP2-CV1-1 was the worst case among the associated transmitters. So TP2-CV1-1 was used for test.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal Date	Cal Interval	Cal Due.
Signal Generator	Agilent	E8257D	MY51501169	Jul. 17, 2014	Annual	Jul. 17, 2015
Spectrum Analyzer	Agilent	N9030A	MY53120526	Jul. 17, 2014	Annual	Jul. 17, 2015
Spectrum Analyzer	R&S	FSV30	101004	Jun. 25, 2014	Annual	Jun. 25, 2015
DC power Supply	Agilent	U8002A	MY48490027	Dec. 22, 2014	Annual	Dec. 22, 2015
Attenuator	Mini-Circuits	BW-N20W5+	0950-4	Dec. 23, 2014	Annual	Dec. 23, 2015
Preamplifier	H.P.	8447F	2944A03909	Aug. 27, 2014	Annual	Aug. 27, 2015
Preamplifier	R&S	SCU-18	10117	Dec. 26, 2014	Annual	Dec. 26, 2015
High Pass Filter	Mini-Circuits	NHP-800+	VUU16801113-2	Jul. 01, 2014	Annual	Jul. 01, 2015
High Pass Filter	Wainwright	WHK3.0/18G-10SS	344	Jun. 10, 2014	Annual	Jun. 10, 2015
Test Receiver	R&S	ESU26	100109	Mar. 03, 2015	Annual	Mar. 03, 2016
Loop Antenna	SCHWARZBECK Mess-Elektronik	FMZB1519	1519-039	Jul. 09, 2013	Biennial	Jul. 09, 2015
Trilog Broadband Antenna	SCHWARZBECK Mess-Elektronik	VULB9163	396	Jun. 07, 2013	Biennial	Jun. 07, 2015
Horn Antenna	R&S	HF906	100326	Dec. 10, 2013	Biennial	Dec. 10, 2015
Antenna Master	INN-CO	MM4000	N/A	N.C.R.	N/A	N.C.R.
Turn Table	INN-CO	DS 1200S	N/A	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N.C.R.	N/A	N.C.R.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD : FCC Part 15 Subpart C §15.209, §15.231		
Section in FCC Part 15	Test Item	Result
15.209(a) 15.231(e)	Radiated emission, Spurious Emission and Field Strength of Fundamental	Complied
15.231(c)	Bandwidth of Operation frequency	Complied
15.231(e)	Transmission Time	Complied

## 1.7. Test Report Revision


Revision	Report number	Date of issue	Description
0	F690501/RF-RTL008498	2015. 03. 17	Initial
1	F690501/RF-RTL008498-1	2015. 03. 29	Retested with associated transmitter (TP2-CV1-1).

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


## 2. Field Strength of Fundamental

### 2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

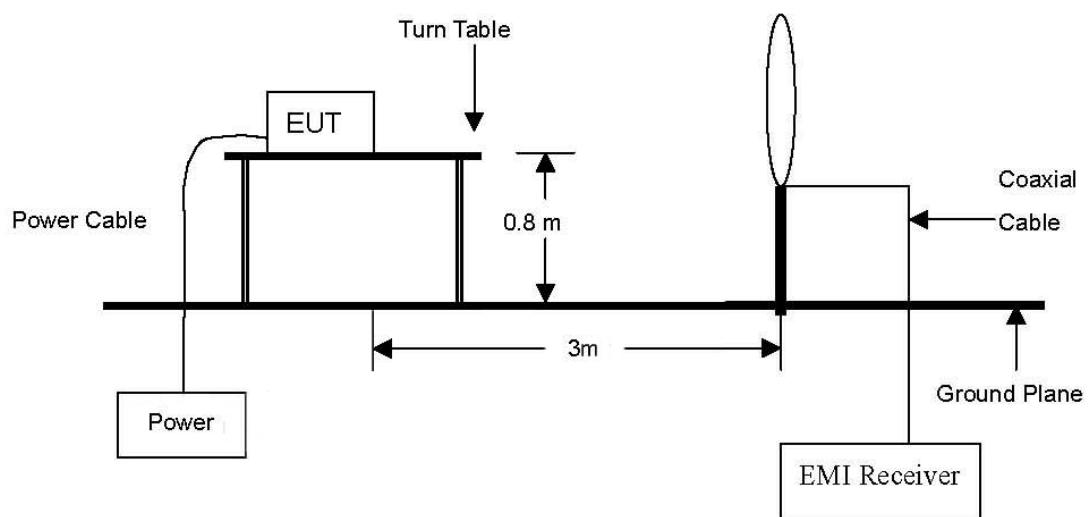


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

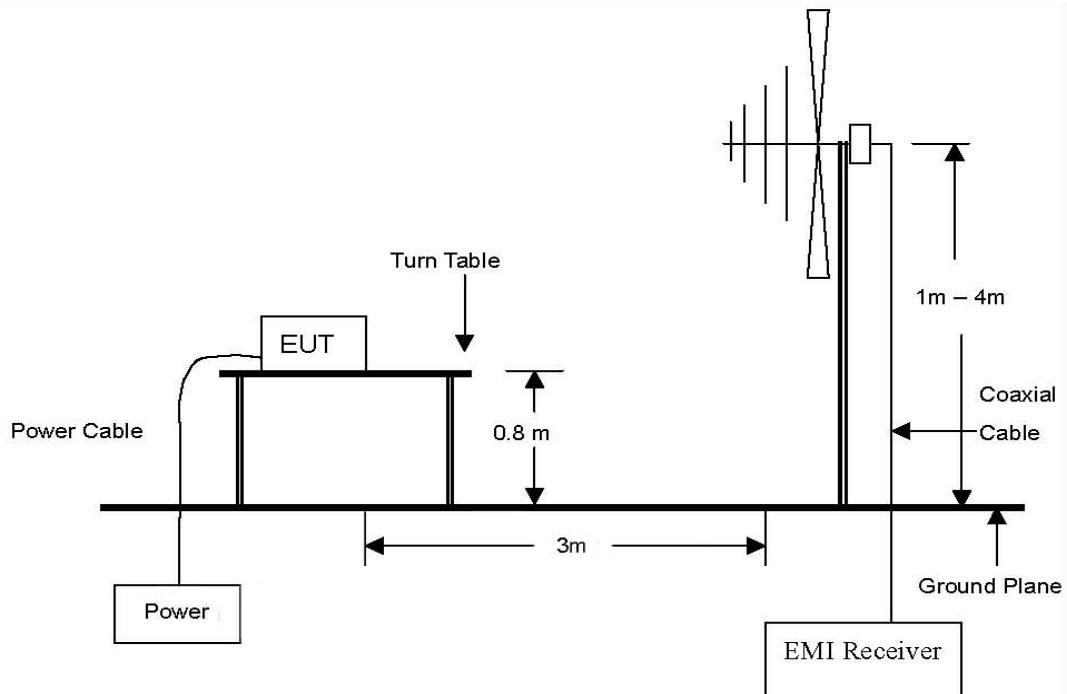

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

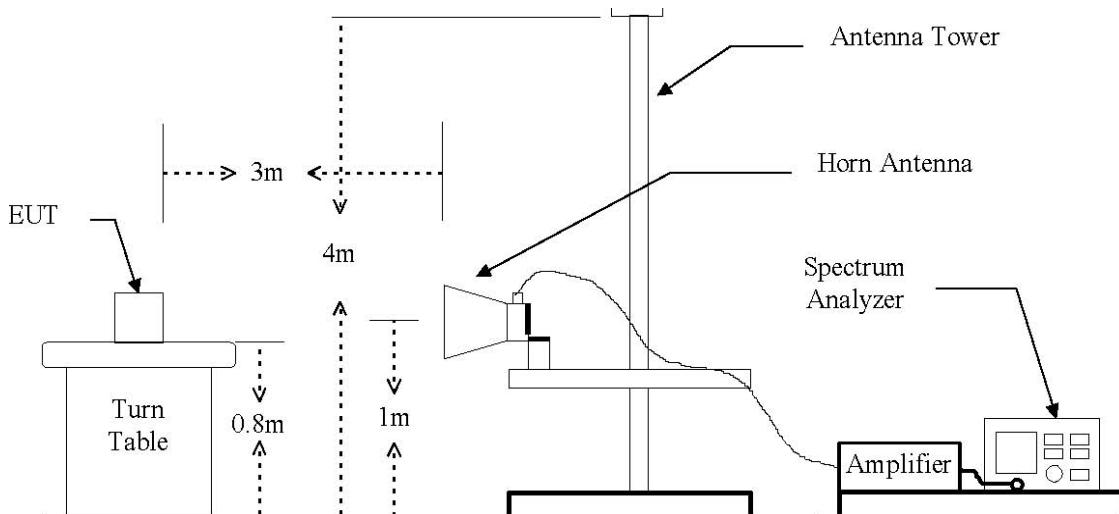

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.2. Limit

### 2.2.1. Radiated emission limits, general requirements

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 -88	100**	3
88 -216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241

### 2.2.2. Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

According to 15.231(e), intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) and may be employed for any type of operation, including operation prohibited in paragraph (a), provided the intentional radiator complies with the provisions of paragraph (b) through (d) of this Section, except the field strength table in paragraph (b) is replaced by the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 – 40.70	1,000	100
70 - 130	500	50
130 – 174	500 to 1,500 **	50 to 150 **
174 – 260	1,500	150
260 – 470	1,500 to 5,000 **	150 to 500 **
Above 470	5,000	500

\*\* linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows : for the band 130-174 MHz,  $\mu$ V/m at 3 meters =  $22.72727(F)-2454.545$ ; for the band 260-470 MHz,  $\mu$ V/m at 3 meters =  $16.6667(F)-2833.333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2009

### 2.3.1. Test Procedures for emission from 9 kHz to 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

### 2.3.2. Test Procedures for emission from 30 MHz to 1 000 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

### 2.3.3. Test Procedures for emission above 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical

Freq. (MHz)	Detector	Ant. Pol.	Reading (dB $\mu$ N)	Antenna Factor (dB)	Cable Loss (dB)	Result (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
433.92	Peak	H	67.60	17.46	2.70	87.76	92.87	5.11
433.92	Average	H	49.88	17.46	2.70	70.04	72.87	2.83
433.92	Peak	V	67.30	17.09	2.70	87.09	92.87	5.78
433.92	Average	V	49.58	17.09	2.70	69.37	72.87	3.50

**Remark:**

To get a maximum emission level from the EUT, the EUT was moved throughout the X-axis, Y-axis and Z-axis. Worst case is Z-axis.

Definition of DUT for three orthogonal planes is described in the test setup photo.

**Note:**

1. Correction Factor = Antenna Factor + Cable Loss
2. 3 m Limit (dB $\mu$ N/m) =  $20\log[16.6667(F(\text{MHz})) - 2833.3333] = 72.87$
3. Average Reading = Peak Reading + Duty Cycle Correction Factor
4. Duty Cycle Correction Factor :  $20\log(\text{Ton} / 100 \text{ ms}) = 20\log(13/100) = -17.72$ 
  - Tx on time = 13 ms
  - Tx on+off = 30.535 s (pulse train is 100 ms instead of 30.535 s)

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3. Spurious Emission

#### 3.1. Test Setup

Same as section 2.1. of this report

#### 3.2. Limit

Same as section 2.2. of this report

#### 3.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2009

##### 3.3.1. Test Procedures for emission from 9 kHz to 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### 3.3.2. Test Procedures for emission from 30 MHz to 1 000 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

##### 3.3.3. Test Procedures for emission above 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3.4. Test Result

Ambient temperature : (23 ± 1) °C  
Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. The frequency spectrum from 9 kHz to 4 340.00 MHz was investigated  
All reading values are peak detector.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
867.82	37.20	Peak	H	22.72	-23.73	36.19	72.87	36.68
867.82	33.50	Peak	V	23.28	-23.73	33.05	72.87	39.82
*1 301.82	50.00	Peak	V	25.16	-37.57	37.59	74.00	36.41
1 735.67	47.48	Peak	H	26.94	-36.65	37.77	72.87	35.10
1 735.87	47.97	Peak	V	26.94	-36.65	38.26	72.87	34.61
2 169.71	47.46	Peak	H	27.58	-35.87	39.17	72.87	33.70
2 603.63	47.20	Peak	V	28.59	-35.74	40.05	72.87	32.82
3 037.40	46.12	Peak	V	29.91	-35.50	40.53	72.87	32.34
3 037.42	45.35	Peak	H	29.91	-35.50	39.76	72.87	33.11
Above 3 100.000	Not detected	-	-	-	-	-	-	-

**Remark:**

1. To get a maximum emission level from the EUT, the EUT was moved throughout the X-axis, Y-axis and Z-axis. Worst Case is Z-axis  
Definition of DUT for three orthogonal planes is described in the test setup photo.
2. “\*\*” means the restricted band.
3. - 3 m Peak Limit (dB $\mu$ V/m) =  $20\log[16.6667(F(\text{MHz}))-2833.3333] = 72.87$   
- 3 m average limit (dB $\mu$ V/m) =  $20\log[16.6667(F(\text{MHz}))-2833.3333] - 20 = 52.87$
4. Correction Factor = Antenna Factor + Cable Loss
5. Average test would not be applied if the peak results were lower than the average limit.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 4. Bandwidth of Operation Frequency

### 4.1. Test Setup



### 4.2. Limit

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 4.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=10 kHz, VBW=10 kHz and Span=1 MHz.
3. The bandwidth of fundamental frequency was measured and recorded.

---


*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

#### 4.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.


Carrier Frequency (MHz)	Bandwidth of the emission (kHz)	Limit (kHz)	Remark
433.92	138.90	1 084.80	The point 20 dB down from the modulated carrier

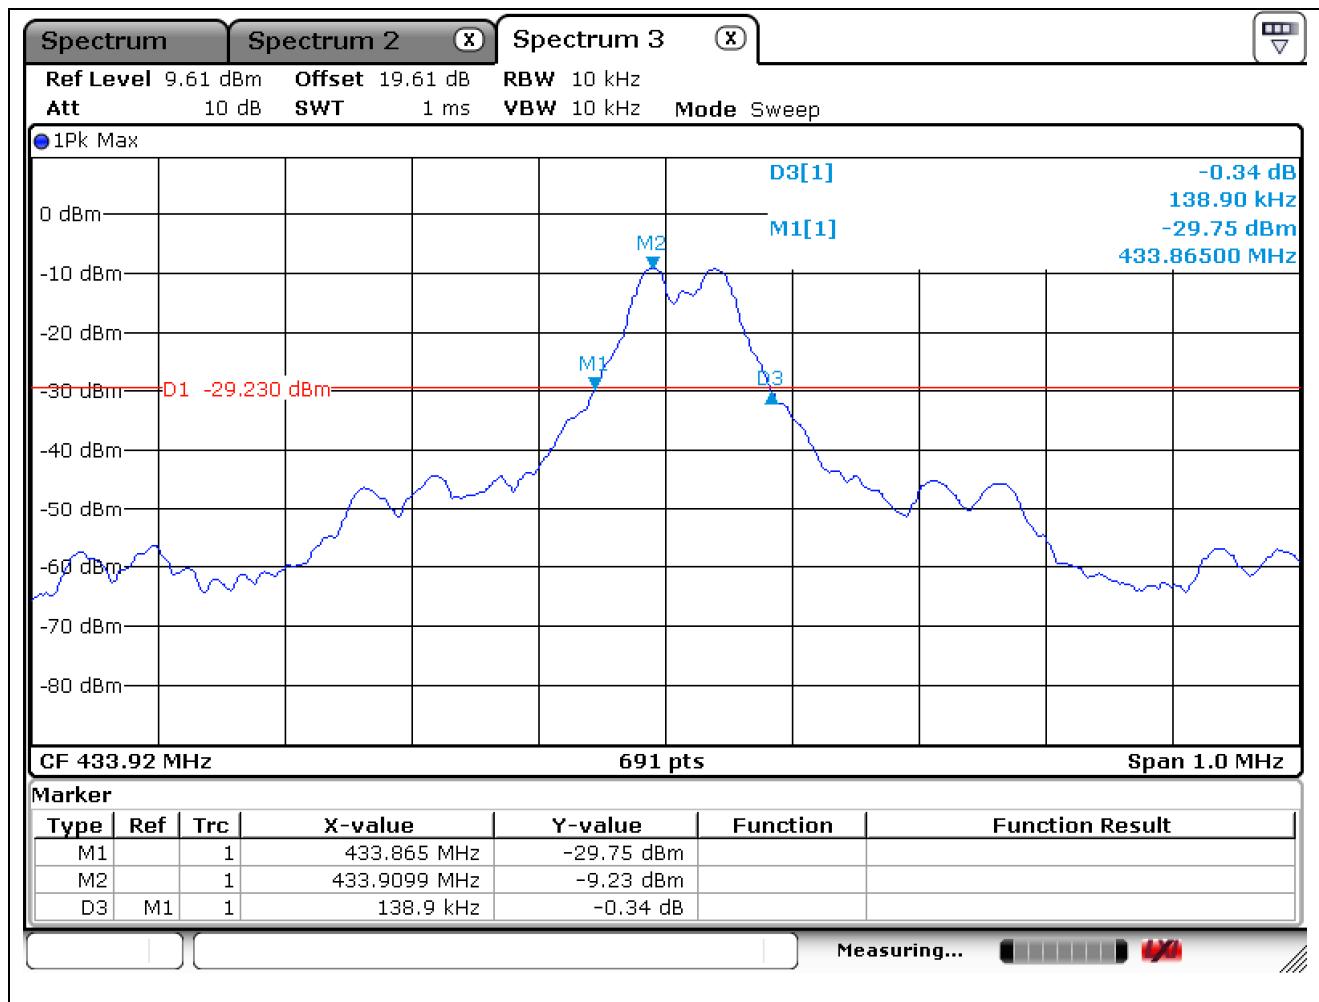

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 5. Transmission Time

### 5.1. Test Setup

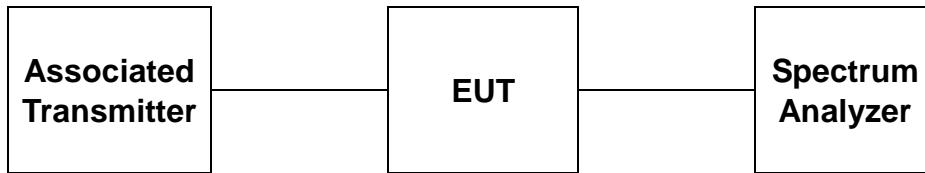

### 5.2. Limit

Devices Operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### 5.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=1 MHz  
VBW=1 MHz, Span=0 Hz.
3. The bandwidth of fundamental frequency was measured and recorded.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 5.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

Frequency (MHz)	Transmission Time (s)		Silent Duration (s)		Silent Period Versus Transmission Time Ratio		Result
	Measured	Limit	Measured	Limit	Measured	Limit	
433.92	0.013	Same or less than 1 s	30.535	Same or greater than 10 s	2 348.846	At least 30 times the duration of the transmission	Pass


Note:

1. Silent Period Versus Transmission Time Ratio


- Silent Period : 30.535 s
- Transmission Time : 0.013 s
- Ratio : Silent Period / Transmission Time  
= 30.535 (s) / 0.013 (s) = 2 348.846

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

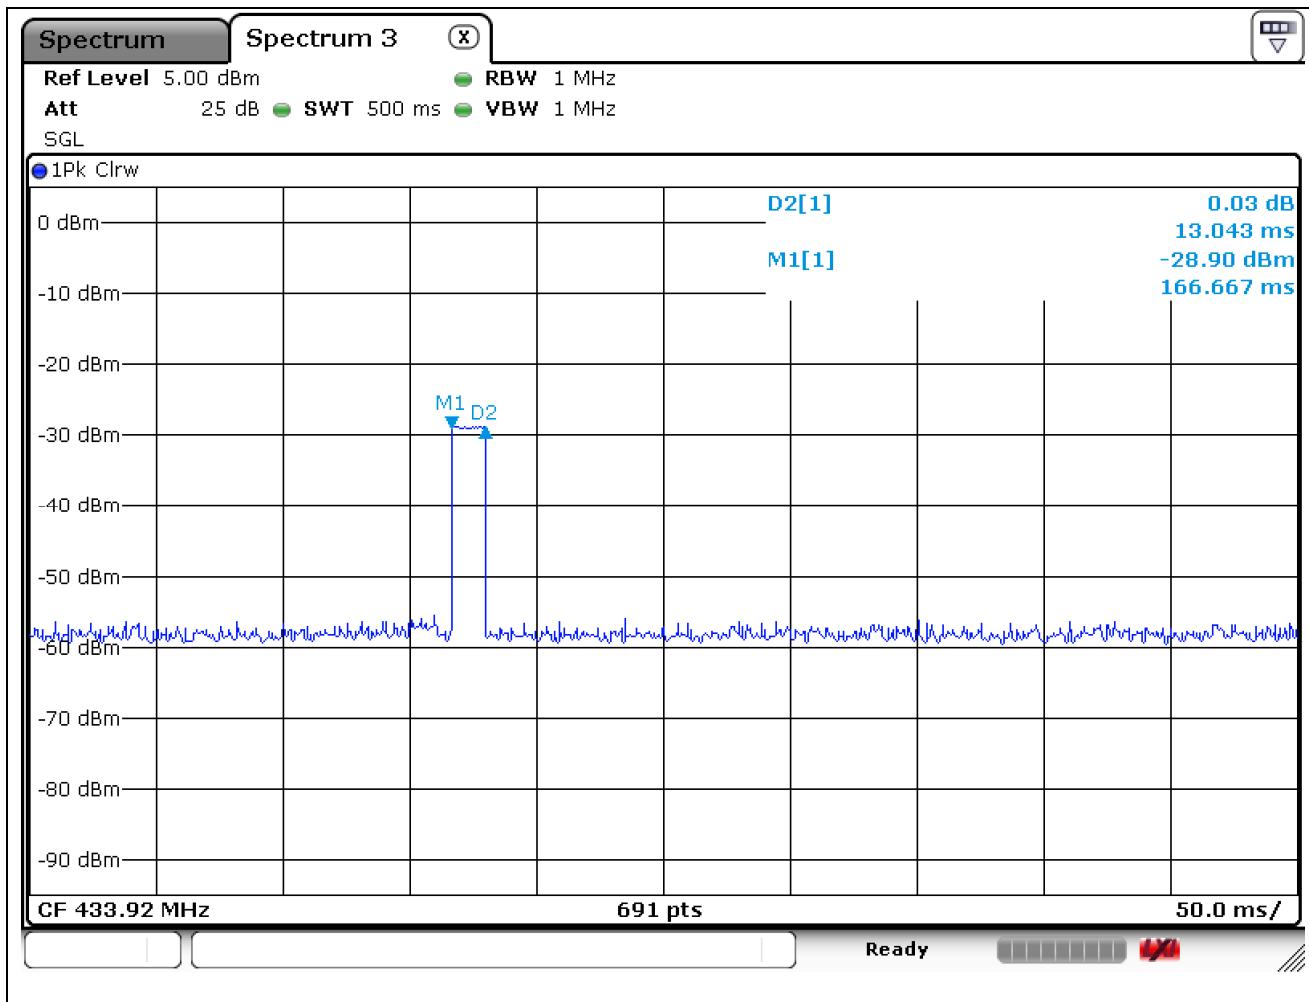**Transmission Time**

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

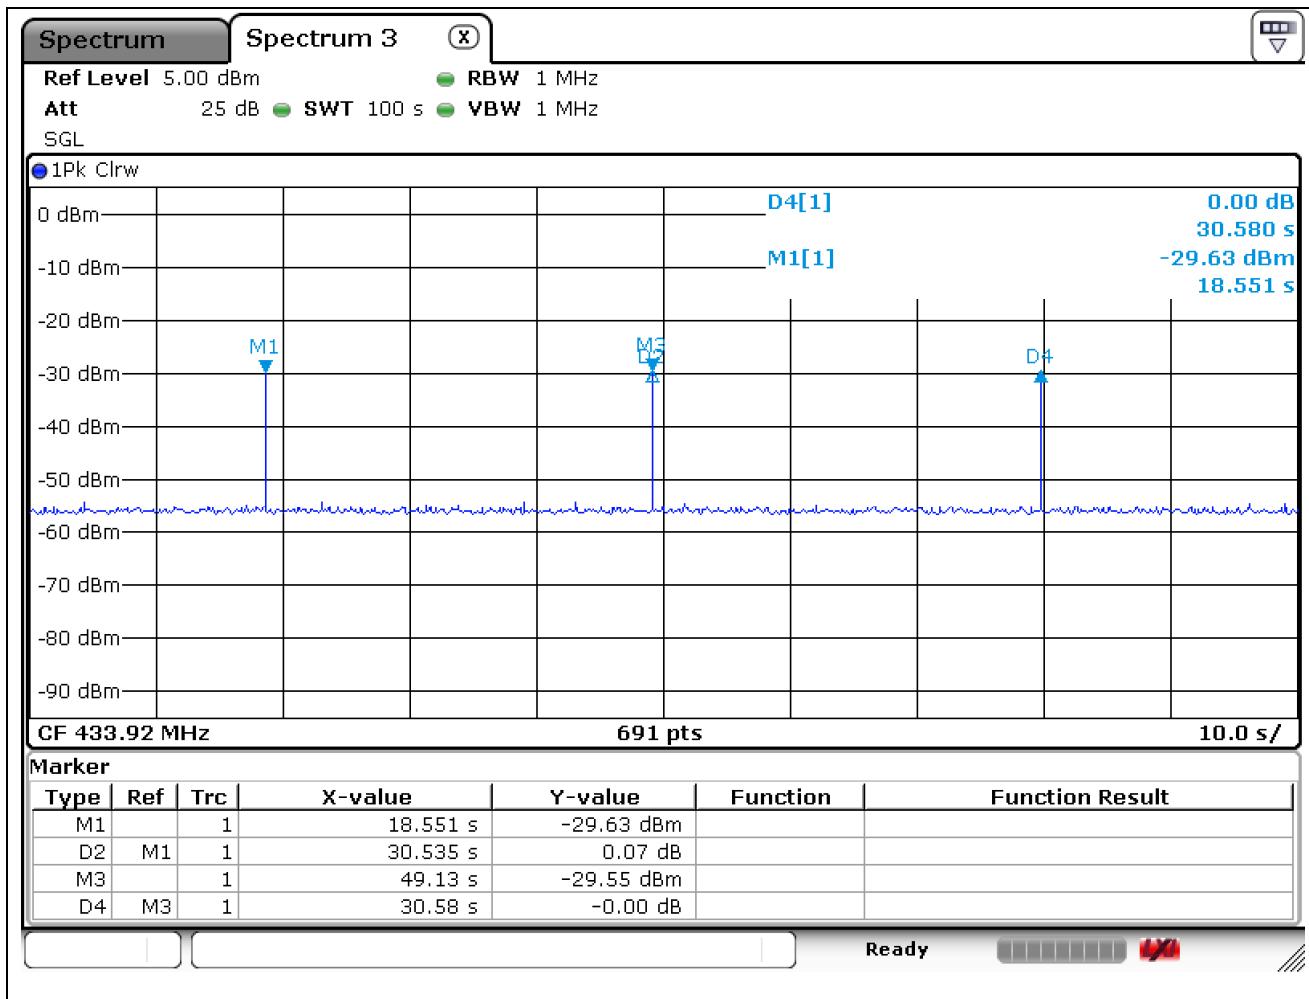**Silent Period**

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*