

**FCC PART 15 SUBPART C TEST REPORT**

**for**

**3.7" Rugged PDA**

**Model No.: P37B**

**FCC ID: UVZP37BW**

**of**

**Applicant: ACA Digital Corporation**

**Address: 17F, NO. 866-7 Zhongzheng Rd., Zhonghe City,  
Taipei county, 235 TAIWAN, R.O.C.**

**Tested and Prepared**

**by**

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679A-1**

**A2LA Accredited No.: 2732.01**



**Report No.: W6D20909-10102-C-1**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877      FAX: 886-2-66068879      E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

## TABLE OF CONTENTS

1	GENERAL INFORMATION.....	2
1.1	Notes .....	2
1.2	Testing laboratory .....	3
1.2.1	<i>Location</i> .....	3
1.2.2	<i>Details of accreditation status</i> .....	3
1.3	Details of approval holder .....	3
1.4	Application details .....	4
1.5	General information of Test item.....	4
1.6	Test standards .....	5
2	TECHNICAL TEST .....	6
2.1	Summary of test results .....	6
2.2	Test environment .....	6
2.3	Test Equipment List .....	7
2.4	General Test Procedure .....	9
3	TEST RESULTS (ENCLOSURE) .....	11
3.1	Peak Output Power (transmitter) .....	12
3.2	RF Exposure Compliance Requirements.....	14
3.3	Out of Band Radiated Emissions .....	14
3.4	Transmitter Radiated Emissions in restricted Bands .....	15
3.5	Spurious emissions (tx) .....	16
3.6	Carrier Frequency Separation .....	19
3.7	Number of Hopping Frequencies.....	20
3.7.1	<i>Pseudorandom Frequency Hopping Sequence</i> .....	20
3.7.2	<i>Coordination of hopping sequences to other transmitters</i> .....	20
3.7.3	<i>System Receiver Hopping Capability</i> .....	20
3.8	Time of Occupancy (Dwell Time).....	21
3.9	20dB Bandwidth .....	23
3.9.1	<i>System Receiver Input Bandwidth</i> .....	23
3.10	Band-edge Compliance of RF Emissions .....	24
3.11	Radiated Emissions from Digital Part.....	26
3.12	Power Line Conducted Emission.....	27
Appendix	.....	29



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## 1 General Information

### **1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services (Taiwan) Co., Ltd.

### **Tester:**

October 1, 2009

Kevin Wang

Date

WTS-Lab.

Name

Signature

### **Technical responsibility for area of testing:**

October 1, 2009

Chang Tse-Ming

Date

WTS-Lab.

Name

Signature



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

### **1.2 Testing laboratory**

#### **1.2.1 Location**

OATS

No.5-1, Shuang Sing Village,  
LiShuei Rd., Wanli Township,  
Taipei County 207, Taiwan (R.O.C.)

Company

Worldwide Testing Services (Taiwan) Co., Ltd.  
6F, NO. 58, LANE 188, RUEY-KUANG RD.  
NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

#### **1.2.2 Details of accreditation status**

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1



### **1.3 Details of approval holder**

Name:

ACA Digital Corporation

Street:

17F, NO. 866-7 Zhongzheng Rd.,

City:

Zhonghe City Taipei county, 235

Country:

Taiwan R.O.C.

Telephone:

+886-2-8228-1121

Fax:

+886-2-2228-9448



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## 1.4 Application details

Date of receipt of test item:

./.

Date of test:

from December 9, 2008 to February 6, 2009

## 1.5 General information of Test item

Type of test item: 3.7" Rugged PDA

Model number: P37B

Multi-listing model number: ./.

Brand name: ACA-Digital

Photos: see Annex

### Technical data

Frequency band for WLAN: 2.412 – 2.462 GHz

Frequency ( ch Low): 2.412 GHz

Frequency ( ch Middle): 2.437 GHz

Frequency ( ch High): 2.462 GHz

Frequency band for Bluetooth: 2.402 – 2.480 GHz

Frequency ( ch Low): 2.402 GHz

Frequency ( ch Middle): 2.441 GHz

Frequency ( ch High): 2.480 GHz

Number of Channels: WLAN: 11 channels

Bluetooth: 79 channels

Power supply: Adaptor ( I/P: AC 100-240 V / 50-60 Hz / 1.5 A,

O/P: 11.0-13.5 Vdc / 3.82-3.11 A )

Battery ( 7.4V, 1900 mAh, rechargeable Li-ion )

Operation modes: duplex

Modulation Type: WLAN: DSSS / OFDM

Bluetooth: GFSK 、  $\pi/4$ DQPSK 、 8DPSK

Antenna Type: 1/2  $\lambda$  dipole antenna

Antenna gain: 2 dBi

Emission designator: 11b: DSSS: 15M2G1D

11g: OFDM: 16M4W7D

Bluetooth (Normal mode): 962KF7D

Bluetooth (EDR mode): 1M29F1D

Additional information: There are two testing modes in the test report.

Mode A: Bluetooth (Normal mode)

Mode B: Bluetooth (EDR mode)

**For WLAN 802.11b and 802.11g test results, please refer to test report number: W6D20909-10102-C-2.**



*Worldwide Testing Services(Taiwan) Co., Ltd.*

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

Host device: none

### Classification:

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input checked="" type="checkbox"/>
Modular Radio Device	<input type="checkbox"/>

## **Transmitter**      **Unom**

### Mode A (Bluetooth Normal Mode)

Power ( ch 0 or ch Low): Conducted: -2.04 dBm

Power ( ch 39 or ch Middle):      Conducted: -2.95 dBm

Power ( ch 78 or ch High): Conducted: -2.91 dBm

## Mode B (Bluetooth EDR Mode)

Power ( ch 0 or ch Low): Conducted: -0.38 dBm

Power ( ch 39 or ch Middle): Conducted: -0.93 dBm

Power ( ch 78 or ch High): Conducted: -0.44 dBm

Manufacturer: (if applicable)

Name: ACA Digital Corporation  
Street: 17F, NO. 866-7 Zhongzheng Rd.,  
City: Zhonghe City Taipei county, 235  
Country: Taiwan R.O.C.

## 1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART C § 15.247 (2008-07)



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **2 Technical test**

### **2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified in 3 were ascertained in the course of the tests performed.

### **2.2 Test environment**

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Details of power supply Adaptor ( I/P: AC 100-240 V / 50-60 Hz / 1.5 A, O/P: 11.0-13.5 Vdc / 3.82-3.11 A )  
Battery ( 7.4V, 1900 mAh, rechargeable Li-ion )

Extreme conditions parameters: test voltage : -- extreme  
min : -- V  
max : -- V

Measurement Uncertainty:

Measurement item	Uncertainty
Peak Output Power	0.51 dB
Spurious Emissions radiated – Transmitter operating	1.67 dB
Carrier Frequency Separation	2060.94 Hz
Time of Occupancy (Dwell Time)	0.04 ms
20 dB Bandwidth	14.243 kHz
Band-edge Compliance of RF Emission	1.52 dBc
Power Line Conducted Emission	1.77 dB



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## 2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2008/9/18	2009/9/17
ETSTW-CE 002	PREREULATOR MODE DC POWER SUPPLY	None	None	None	Function Test	
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2008/9/15	2009/9/14
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2008/9/15	2009/9/14
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2008/5/10	2009/5/09
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	Schwarzbeck	2008/9/18	2009/9/17
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2008/7/25	2009/7/24
ETSTW-CE 015	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T8-02	20307	FCC	2008/9/22	2009/9/21
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2008/9/24	2009/9/23
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2007/10/12	2009/10/11
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2008/10/8	2009/10/7
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2008/9/22	2009/9/21
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2008/9/18	2009/9/17
ETSTW-RE 011	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070165	MOTECH	Function Test	
ETSTW-RE 017	Log-Periodic Antenna	HL025	352886/001	R&S	2008/5/5	2009/5/4
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2008/10/27	2009/10/26
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	Function Test	
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2008/8/27	2009/8/26
ETSTW-RE 028	Log-Periodic DipoleArray Antenna	3148	34429	EMCO	2008/4/23	2009/4/22
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2008/4/23	2009/4/22
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2008/3/26	2009/3/25
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2008/9/1	2009/8/31
ETSTW-RE 033	WaveRunner 6000A Serise Oscilloscope	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	2008/6/27	2009/6/26
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2008/9/1	2009/8/31
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2009/1/8	2011/1/7
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2008/5/2	2009/5/1
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2008/5/22	2009/5/21
ETSTW-RE 047	ESA-E SERIES SPECTRUM ANALYZER	E4445A	MY46181369	Agilent	2008/6/26	2009/6/25



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2008/9/1	2009/8/31
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2007/5/2	2009/5/1
ETSTW-RE 055	SPECTRUM ANALYZER	FSU-26	200074	R&S	2008/7/1	2009/6/30
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	2008/9/1	2009/8/31
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2008/10/28	2009/10/27
ETSTW-RE 105	Match Pad	MDCS1500	None	WOKEN	2008/10/9	2009/10/8
ETSTW-RE 106	Match Pad	MDCS1510	None	WOKEN	2008/10/9	2009/10/8
ETSTW-RE 107	LUMPED ELEMENT POWER DIVIDER	PL2-10	146	MCLI	2008/11/24	2009/11/23
ETSTW-GSM 02	Universal Radio Communication Tester	CMU 200	109439	R&S	2008/9/23	2009/9/22
ETSTW-GSM 23	Power Divider	4901.19.A	None	SUHNER	2008/9/22	2009/9/21



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2003 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

$$\begin{array}{ll} \text{Freq (MHz)} & \text{METER READING + ACF + CABLE LOSS (to the receiver)} = \text{FS} \\ 33 & 20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m} @3\text{m} \end{array}$$

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2003 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services (Taiwan) Co., Ltd. at the registered open field test site located No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.). The Registration Number: **930600**.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor =  $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## 3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Equivalent radiated Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions conducted – Transmitter operating	15.247	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Carrier Frequency Separation	15.247(a) (1)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Number of Hopping Frequencies	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20 dB Bandwidth	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band-edge Compliance of RF Emission	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Digital Part	15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207(a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The follows is intended to leave blank.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

### Mode A:

Test conditions	Conducted Power		
	Channel Low [dBm]	Channel Middle [dBm]	Channel High [dBm]
T <sub>nom</sub> = 23°C   V <sub>nom</sub> = 120 V	-2.04	-2.95	-2.91

### Mode B:

Test conditions	Conducted Power		
	Channel Low [dBm]	Channel Middle [dBm]	Channel High [dBm]
T <sub>nom</sub> = 23°C   V <sub>nom</sub> = 120 V	-0.38	-0.93	-0.44

Test conditions	Radiated Power		
	Channel Low [dBm]	Channel Middle [dBm]	Channel High [dBm]
T <sub>nom</sub> = -- °C   V <sub>nom</sub> = -- V	--	--	--

Test conditions T <sub>nom</sub> = -- °C, V <sub>nom</sub> = -- V Frequency[MHz]	Signal Field strength TX highest power mode dB $\mu$ V/m
--	--
Measurement uncertainty	< 3 dB



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

## **Maximum Peak Output Power**

Limits:

Frequency MHz	Number of hopping channels			
	$\geq 75$	$\geq 50$	$49 \geq 25$	$74 \geq 15$
902-928		30 dBm	24 dBm	
2400-2483.5 MHz	30 dBm	-		21 dbm
5725-5850 MHz	30 dBm	-		

In case of employing transmitter antennas having antenna gain  $> \text{dBi}$  and using fixed point-to point operation consider §15.247 (b)(4).

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Explanation: See attached diagrams in appendix.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **3.2 RF Exposure Compliance Requirements**

According to Supplement C, Edition 01-01 to OET Bulletin 65, Edition 97-01 this spread spectrum transmitter is categorically excluded from routine environmental evaluation because of the low power level, where there is a high likelihood of compliance with RF exposure standards.

The antenna used for this Bluetooth transceiver module must not be co-located or operating in conjunction with any other antenna or transmitter.

## **3.3 Out of Band Radiated Emissions**

FCC Rule: 15.247(c) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz :

Max. reading – 20 dB

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continuous operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty Cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Limit = max. aver. reading-20dB +20dB(because Peak detector is used)

For frequencies above 1GHz (Average measurements).

Max. reading – 20 dB - duty cycle correction:

No duty cycle correction was added to the reading

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 018, ETSTW-RE 021,

ETSTW-RE 028, ETSTW-RE 030, ETSTW-RE 043, ETSTW-RE 064

Explanation: See attached diagrams in appendix.



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

### **3.4 Transmitter Radiated Emissions in restricted Bands**

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency  $\leq$  1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency >1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency >1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction =  $20 \log (\text{dwell time} / 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **3.5 Spurious emissions (tx)**

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

**SAMPLE CALCULATION OF LIMIT.** All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Marker-Delta-Method" or the „Duty-Cycle Correction Factor“.

### **Summary table with radiated data of the test plots**

Model: P37B

Mode: Bluetooth TX CH0

Temperature: 26

°C

Engineer: Kevin

Polarization: Horizontal

Humidity: 50

%

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
152.826	26.26	peak	15.41	41.67	74.00	-32.33	210	150
415.030	25.87	peak	18.10	43.97	74.00	-30.03	140	150

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
4801.603	54.48	47.96	-1.30	53.18	46.66	74.00	54.00	-7.34	210	150
7206.000	42.17	---	1.89	44.06	---	74.00	54.00	-29.94	250	150
9608.000	20.34	---	25.34	39.68	---	74.00	54.00	-34.32	210	150
12010.000	19.73	---	29.32	43.05	---	74.00	54.00	-30.95	250	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
212.345	28.72	peak	12.38	41.10	74.00	-32.90	210	150
624.048	22.68	peak	22.29	44.97	74.00	-29.03	155	150



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
4803.985	55.01	41.77	-1.30	53.71	40.47	74.00	54.00	-13.53	210	150
7206.000	42.03	---	1.89	43.92	---	74.00	54.00	-30.08	220	150
9608.000	20.91	---	25.34	40.25	---	74.00	54.00	-33.75	170	150
12010.000	21.39	---	29.32	44.71	---	74.00	54.00	-29.29	160	150

Mode: Bluetooth TX CH39 Temperature: 26 °C Engineer: Kevin  
Polarization: Horizontal Humidity: 50 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
153.908	25.03	peak	15.42	40.45	74.00	-33.55	210	150
415.030	25.84	peak	18.10	43.94	74.00	-30.06	170	150

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
4881.764	54.00	---	-1.30	52.70	---	74.00	54.00	-21.30	280	150
7323.000	41.15	---	1.85	43.00	---	74.00	54.00	-31.00	260	150
9764.000	20.14	---	25.02	39.16	---	74.00	54.00	-34.84	210	150
12205.000	19.48	---	29.79	43.27	---	74.00	54.00	-30.73	250	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
211.263	29.02	peak	12.36	41.38	74.00	-32.62	210	150
624.048	21.80	peak	22.29	44.09	74.00	-29.91	210	150

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
4881.764	56.86	42.03	-1.30	55.56	40.73	74.00	54.00	-13.27	250	150
7323.000	41.25	---	1.85	43.10	---	74.00	54.00	-30.90	260	150
9764.000	19.91	---	25.02	38.93	---	74.00	54.00	-35.07	210	150
12205.000	19.92	---	29.79	43.71	---	74.00	54.00	-30.29	230	150



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

Mode: Bluetooth TX CH78      Temperature: 26 °C      Engineer: Kevin  
Polarization: Horizontal      Humidity: 50 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
153.908	25.76	peak	15.42	41.18	74.00	-32.82	200	150
415.030	25.19	peak	18.10	43.29	74.00	-30.71	320	150

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
4961.924	57.25	42.83	-1.05	56.20	41.78	74.00	54.00	-12.22	280	150
7440.000	42.43	---	1.80	44.23	---	74.00	54.00	-29.77	120	150
9920.000	19.58	---	26.04	39.62	---	74.00	54.00	-34.38	140	150
12400.000	19.91	---	30.26	44.17	---	74.00	54.00	-29.83	110	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
213.968	28.23	peak	12.41	40.64	74.00	-33.36	230	150
624.048	21.48	peak	22.29	43.77	74.00	-30.23	280	150

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
4953.908	56.51	42.52	-1.08	55.43	41.44	74.00	54.00	-12.56	280	150
7440.000	42.55	---	1.80	44.35	---	74.00	54.00	-29.65	350	150
9920.000	20.27	---	26.04	40.31	---	74.00	54.00	-33.69	220	150
12400.000	20.69	---	30.26	44.95	---	74.00	54.00	-29.05	280	150

**Note**

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See the attached diagram as appendix.

All other not noted test plots do not contain significant test results in relation to the limits.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 018, ETSTW-RE 021, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 064



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **3.6 Carrier Frequency Separation**

Carrier Frequency Separation was measured with modulation (declared by manufacturer).

According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

### **Mode A and Mode B:**

Test conditions	Channel Separation	
	Channel 0	Channel 0+1
T <sub>nom</sub> = 23°C    V <sub>nom</sub> = 120 V		1000 kHz

Test conditions	Channel Separation	
	Channel 39	Channel 39+1
T <sub>nom</sub> = 23°C    V <sub>nom</sub> = 120 V		1006.410256 kHz

Test conditions	Channel Separation	
	Channel 78	Channel 78+1
T <sub>nom</sub> = 23°C    V <sub>nom</sub> = 120 V		1000 kHz

### **Limits:**

Frequency Range MHz	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Explanation: See attached diagrams in appendix.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **3.7 Number of Hopping Frequencies**

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

### **Mode A and Mode B:**

Test conditions	Operating Mode	Number of Channels
$T_{nom}= 23^{\circ}\text{C}$	$V_{nom}= 120 \text{ V}$	normal transmitting

### **Limits:**

Frequency Range MHz	Limit	
	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	$\geq 50$
	Bandwidth $\geq 250 \text{ kHz}$	$\geq 25$
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Explanation: See attached diagrams in appendix.

### **3.7.1 Pseudorandom Frequency Hopping Sequence**

The generation of the hopping sequence is determined by the Bluetooth cord specification and complies with the FCC requirements.

### **3.7.2 Coordination of hopping sequences to other transmitters**

According to the Bluetooth core specification V1.1 such a coordination is not possible. During scatternet function only one of the two hopping sequences will be used at a definite moment.

### **3.7.3 System Receiver Hopping Capability**

According to the Bluetooth core specification. The system receivers shift frequencies in synchronization with the transmitted signals.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **3.8 Time of Occupancy (Dwell Time)**

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483,5 MHz band the average time of occupancy on any channel shall not be greater than 0,4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

### **Mode A and Mode B:**

<b>Test conditions</b>	<b>Operating mode</b>	<b>Measurement period</b>	<b>Time of Occupancy</b>
$T_{\text{nom}} = 23^{\circ}\text{C}$ $V_{\text{nom}} = 120 \text{ V}$ Channel 0	normal transmitting-DH 1	31.6 s	147.52 ms
	normal transmitting-DH 3	31.6 s	275.84 ms
	normal transmitting-DH 5	31.6 s	321.53 ms

<b>Test conditions</b>	<b>Operating mode</b>	<b>Measurement period</b>	<b>Time of Occupancy</b>
$T_{\text{nom}} = 23^{\circ}\text{C}$ $V_{\text{nom}} = 120 \text{ V}$ Channel 39	normal transmitting-DH 1	31.6 s	147.52 ms
	normal transmitting-DH 3	31.6 s	274.88 ms
	normal transmitting-DH 5	31.6 s	327.14 ms

<b>Test conditions</b>	<b>Operating mode</b>	<b>Measurement period</b>	<b>Time of Occupancy</b>
$T_{\text{nom}} = 23^{\circ}\text{C}$ $V_{\text{nom}} = 120 \text{ V}$ Channel 78	normal transmitting-DH 1	31.6 s	127.04 ms
	normal transmitting-DH 3	31.6 s	274.88 ms
	normal transmitting-DH 5	31.6 s	327.14 ms



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

## **Limits and measurement periods:**

Frequency MHz	Number of channels	Measurement Period	Limit
902 – 928	≥50	20 s	0,4 s
	49 ≥ 25	10 s	0,4 s
2400 – 2483,5	≥ 15	0,4 s * number of used channels	0,4 s
5725- 5850	≥ 75	30 s	0,4s

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Explanation: See attached diagrams in appendix, which show the On-time and the number of counted events during the measurement period



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **3.9 20dB Bandwidth**

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

### **Mode A:**

Test conditions	20 dB Bandwidth		
	Channel Low	Channel Middle	Channel High
T <sub>nom</sub> = 23°C    V <sub>nom</sub> = 120 V	961.538461538 kHz	961.538461538 kHz	955.128205128 kHz

### **Mode B:**

Test conditions	20 dB Bandwidth		
	Channel Low	Channel Middle	Channel High
T <sub>nom</sub> = 23°C    V <sub>nom</sub> = 120 V	1.294871795 MHz	1.282051282 MHz	1.282051282 MHz

### **Limits:**

Frequency Range / MHz	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

Test equipment used: ETSTW-RE 055 ETSTW-RE 064

Explanation: See attached diagrams in appendix.

### **3.9.1 System Receiver Input Bandwidth**

It is determined in the Bluetooth core specification. The value matches to the bandwidth of transmitter signal.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **3.10 Band-edge Compliance of RF Emissions**

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

### **Mode A:**

<b>Test conditions</b>		<b>Attenuation at or outside band-edges</b>	
		<b>Single Frequency</b>	
<b>Lower Band-edge</b>	<b>Upper Band-edge</b>		
T <sub>nom</sub> = 23°C	V <sub>nom</sub> = 120 V	38.76 dB	42.79 dB

<b>Test conditions</b>		<b>Attenuation at or outside band-edges</b>	
		<b>Hopping Frequency</b>	
<b>Lower Band-edge</b>	<b>Upper Band-edge</b>		
T <sub>nom</sub> = 23°C	V <sub>nom</sub> = 120 V	39.01 dB	42.79 dB

### **Mode B:**

<b>Test conditions</b>		<b>Attenuation at or outside band-edges</b>	
		<b>Single Frequency</b>	
<b>Lower Band-edge</b>	<b>Upper Band-edge</b>		
T <sub>nom</sub> = 23°C	V <sub>nom</sub> = 120 V	36.15 dB	35.75 dB

<b>Test conditions</b>		<b>Attenuation at or outside band-edges</b>	
		<b>Hopping Frequency</b>	
<b>Lower Band-edge</b>	<b>Upper Band-edge</b>		
T <sub>nom</sub> = 23°C	V <sub>nom</sub> = 120 V	36.08 dB	35.75 dB



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

### **Limits:**

Frequency Range / MHz	Limit
902 –928	
2400 – 2483.5	- 20 dB
5725 - 5850	

Test equipment used: ETSTW-RE 055

Explanation: See attached diagrams in appendix.



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

### **3.11 Radiated Emissions from Digital Part**

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 064

Explanation: The test results are listed in the separated test report no. W6M20812-9482-P-15B.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## **3.12 Power Line Conducted Emission**

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dB $\mu$ V)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

Model:	P37B	Date:	2008/12/9					
Mode:		Temperature:	24	°C				
Polarization:	N	Humidity:	50	%	Engineer: Kevin			
Frequency (MHz)	Reading (dB $\mu$ V) QP Ave.	Factor (dB) Corr.	Result (dB $\mu$ V) QP Ave.	Limit (dB $\mu$ V) QP Ave.	Margin (dB)			
0.1655	18.65	16.10	10.15	28.80	26.25	65.18	55.18	-28.93
0.5950	19.23	17.30	10.16	29.39	27.46	56.00	46.00	-18.54
0.8600	18.73	15.96	10.12	28.85	26.08	56.00	46.00	-19.92
2.9150	20.80	14.70	10.06	30.86	24.76	56.00	46.00	-21.24
12.2222	22.20	19.20	10.48	32.68	29.68	60.00	50.00	-20.32
25.9444	23.10	20.90	10.61	33.71	31.51	60.00	50.00	-18.49

Polarization: L1

Frequency (MHz)	Reading (dB $\mu$ V) QP Ave.	Factor (dB) Corr.	Result (dB $\mu$ V) QP Ave.	Limit (dB $\mu$ V) QP Ave.	Margin (dB)			
0.1547	21.24	19.10	10.18	31.42	29.28	65.74	55.74	-26.46
0.4020	20.10	18.20	10.05	30.15	28.25	57.81	47.81	-19.56
1.8650	18.00	10.60	10.07	28.07	20.67	56.00	46.00	-25.33
3.3300	20.30	11.10	10.09	30.39	21.19	56.00	46.00	-24.81
11.9167	22.20	19.40	10.49	32.69	29.89	60.00	50.00	-20.11
27.9722	22.40	19.40	10.63	33.03	30.03	60.00	50.00	-19.97

**Note:**

1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See attached diagrams in Appendix.



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

### **Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001 ETSTW-CE 003 ETSTW-CE 004 ETSTW-CE 006 ETSTW-RE 064



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

## Appendix

### **A. Measurement diagrams**

1. Peak Output Power
2. Spurious Emissions radiated
3. Carrier Frequency Separation
4. Number of Hopping Frequencies
5. Time of Occupancy (Dwell Time)
6. 20dB Bandwidth
7. Band-edge Compliance of RF Conducted Emissions
8. Power Line Conducted Emission

### **B. Photos**

1. External Photos
2. Internal Photos
3. Set Up Photo of Radiated Emission
4. Set Up Photo of Conducted Emission





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## Peak Output Power Mode A

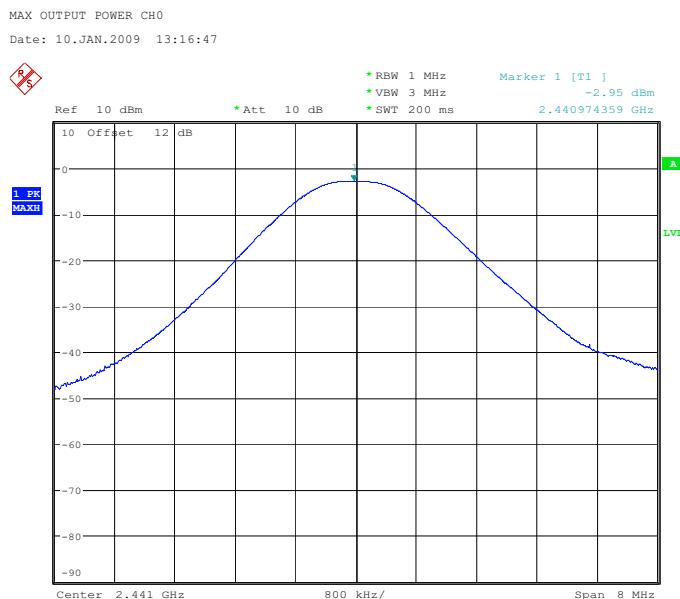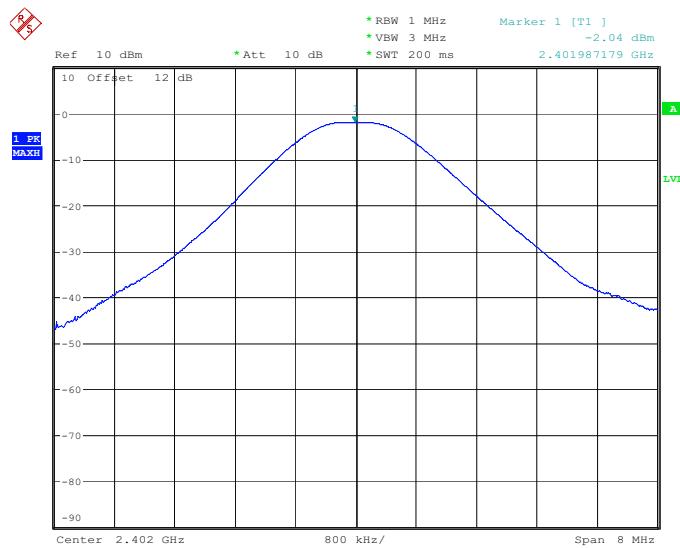





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

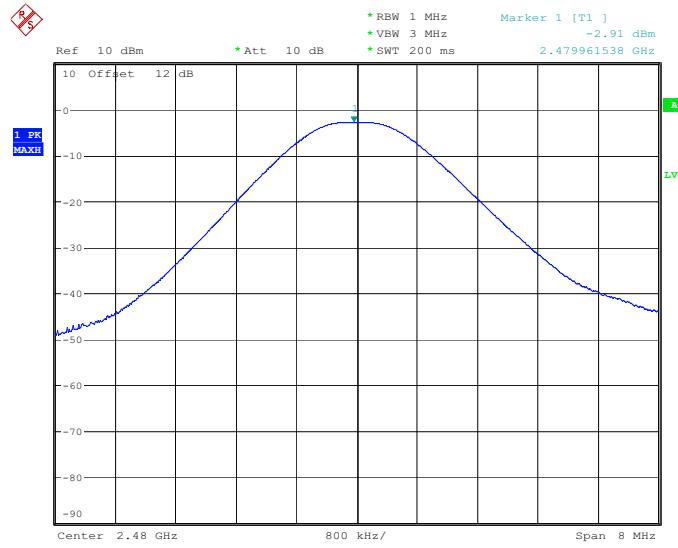

## Mode B


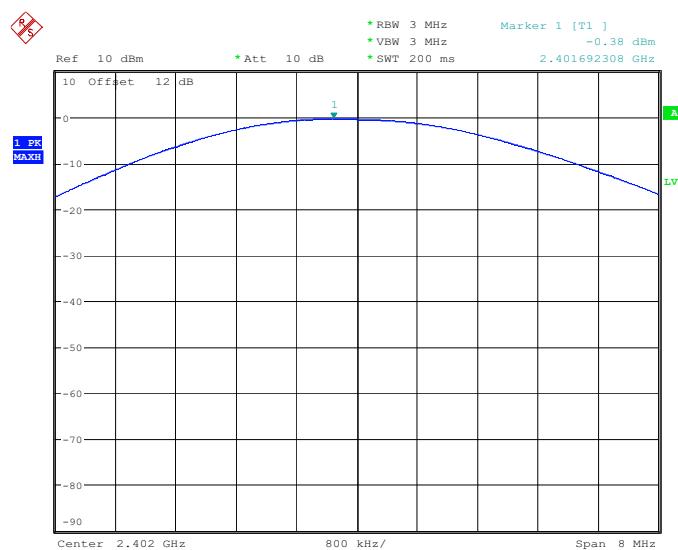




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

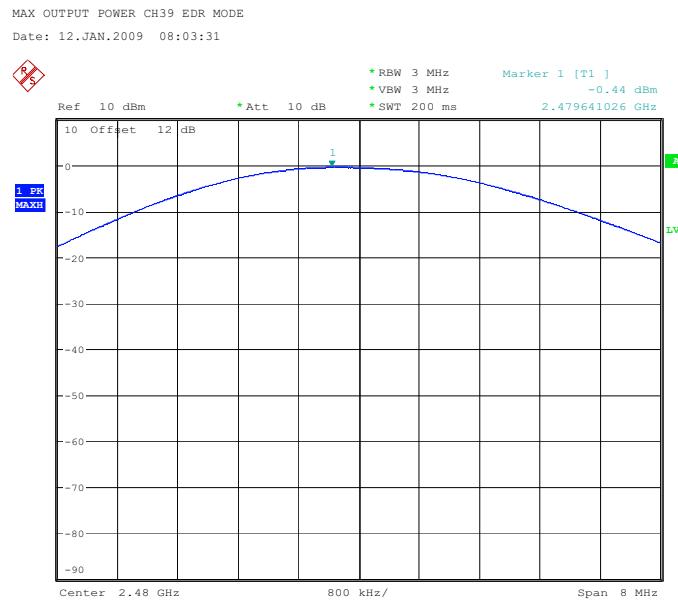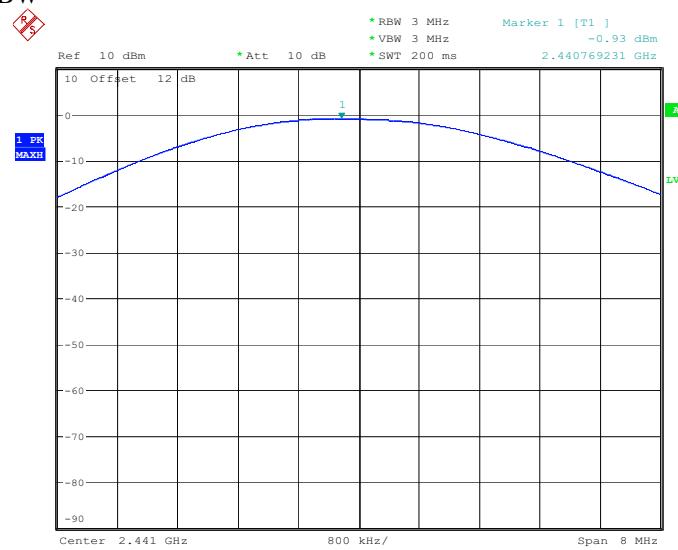

MAX OUTPUT POWER CH78 EDR MODE  
Date: 12.JAN.2009 08:04:10



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

Spurious Emissions radiated

CH 0

Antenna Polarization H

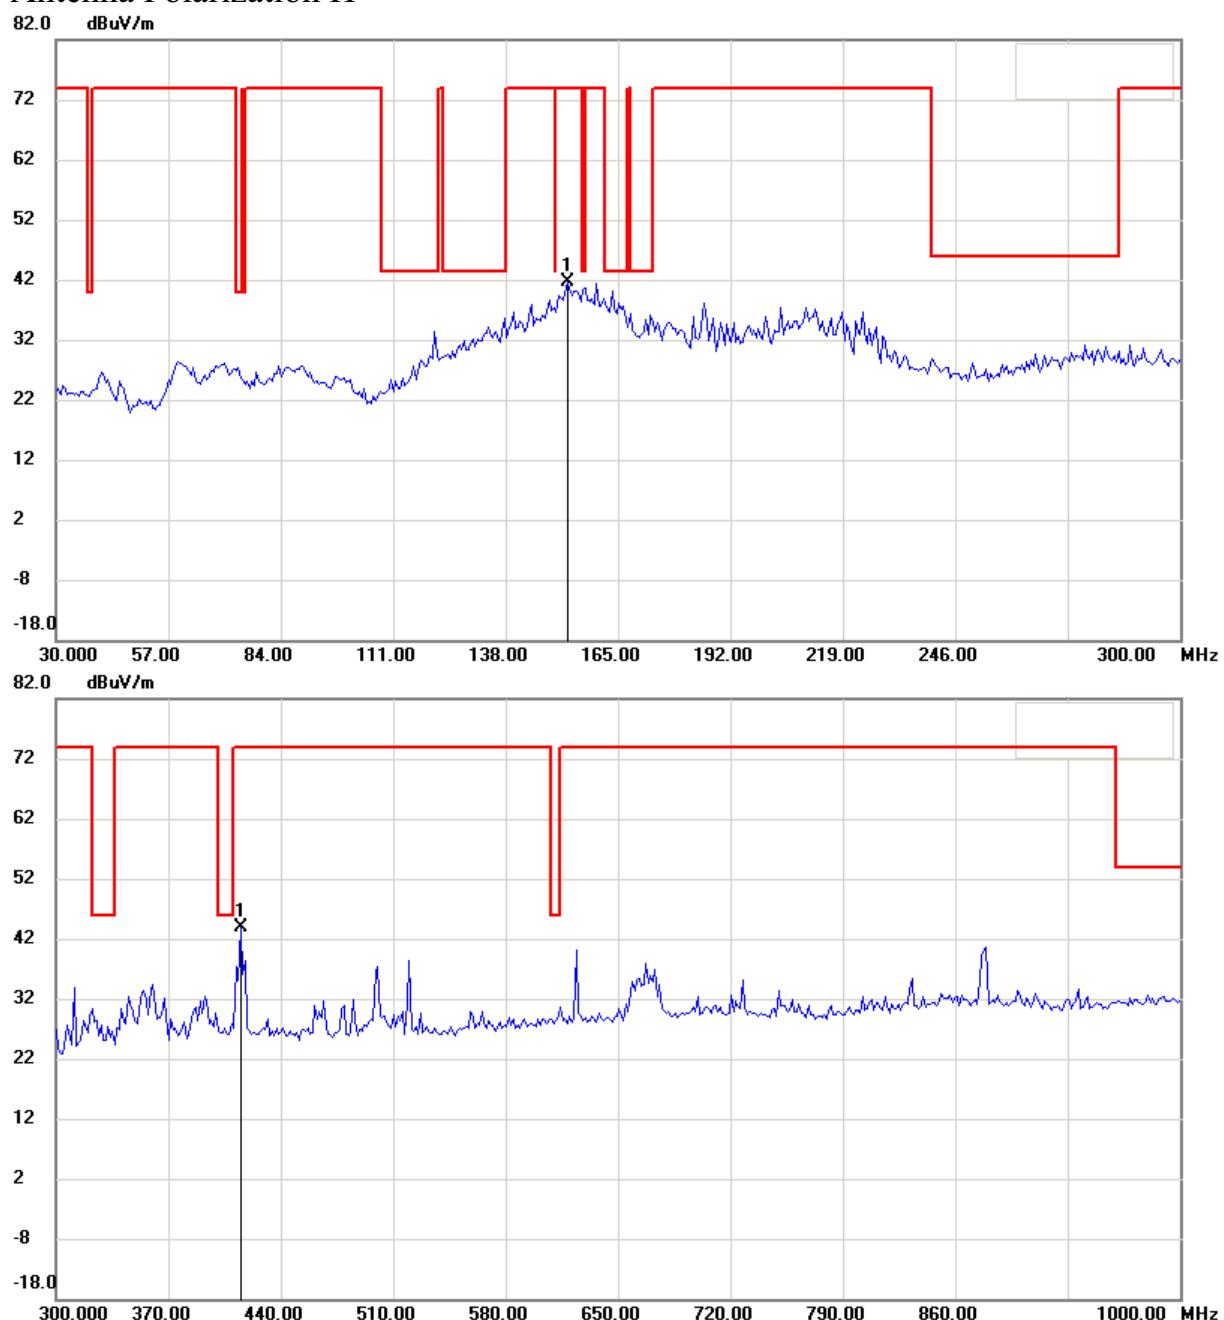

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

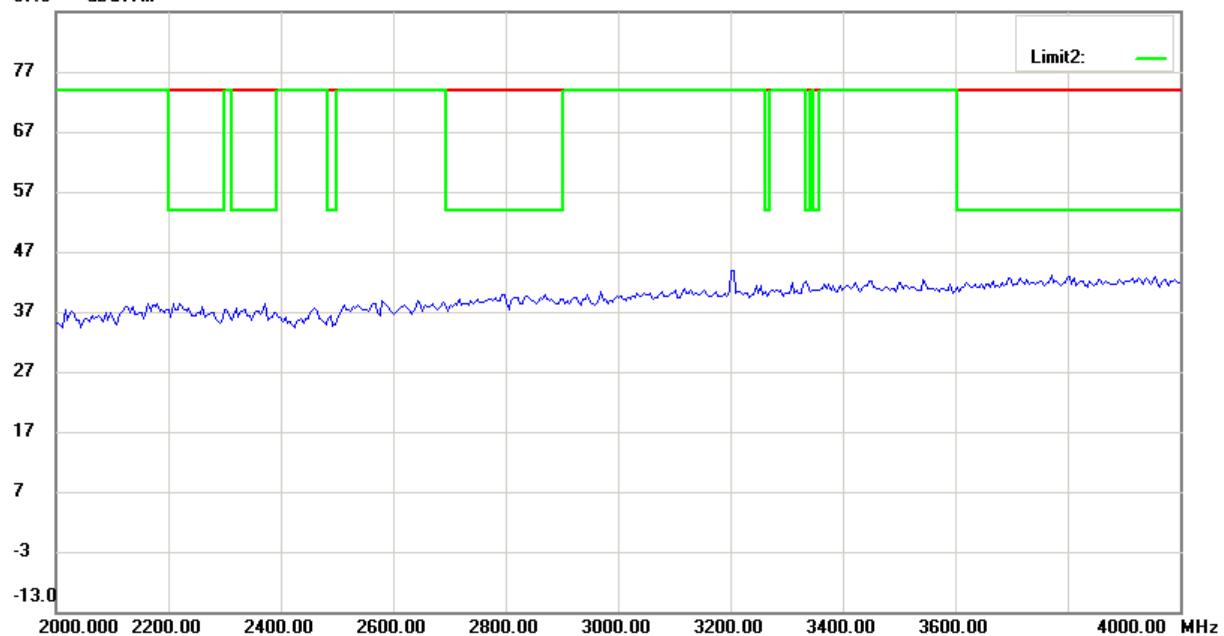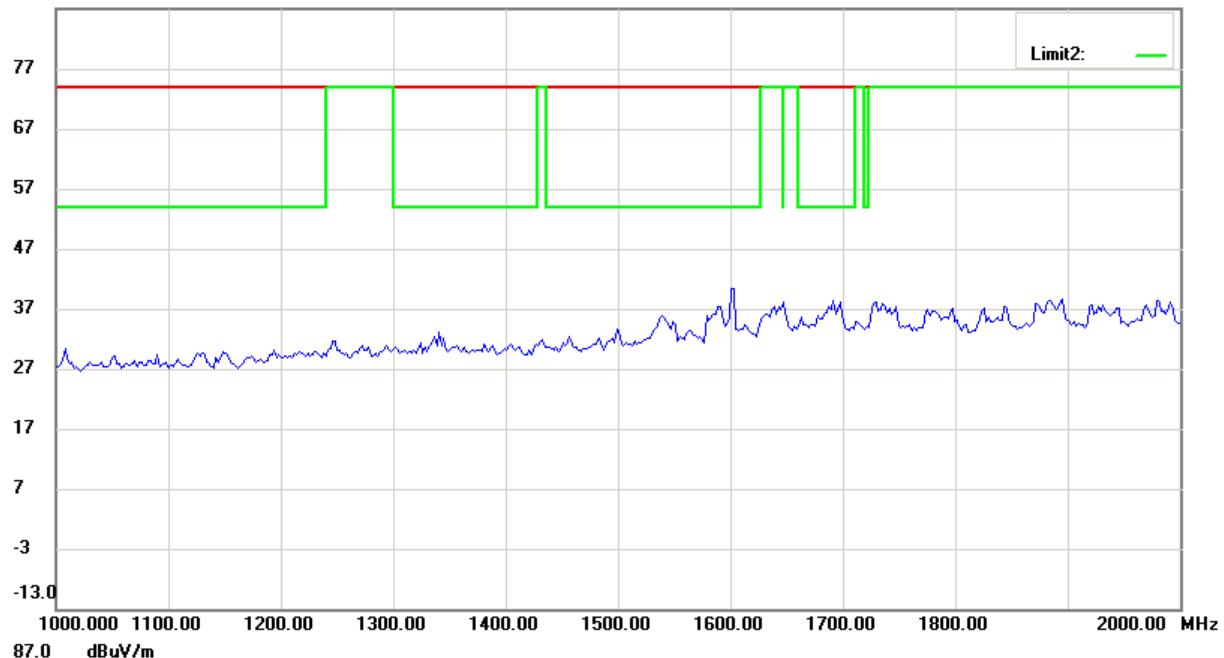

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

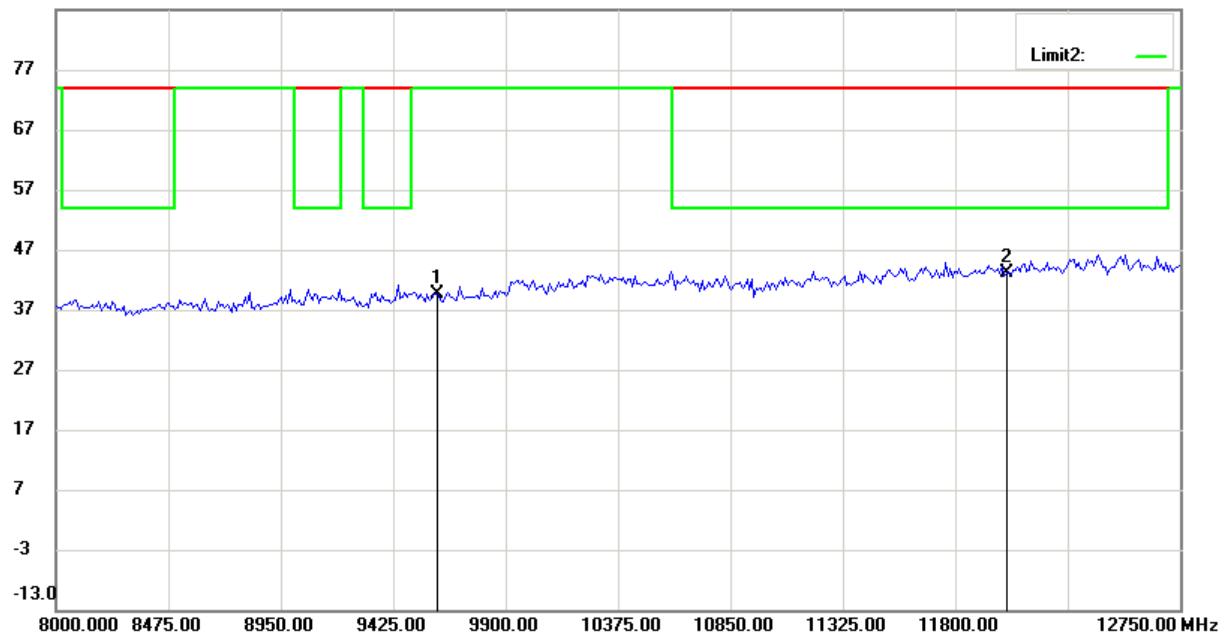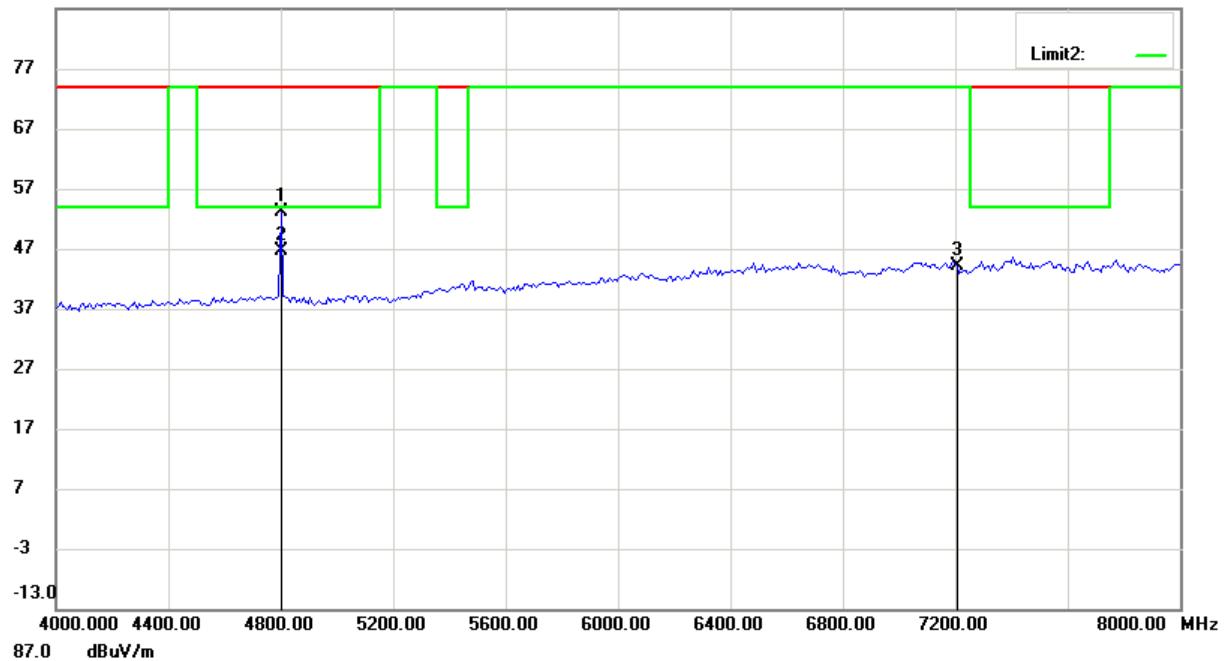

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

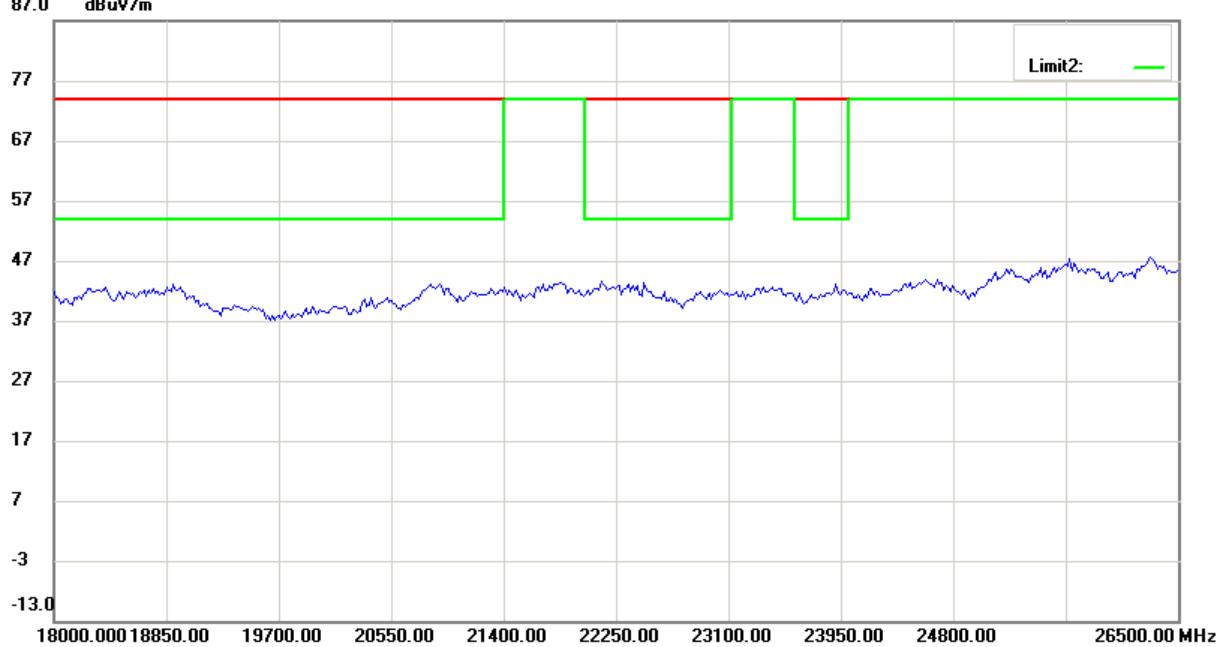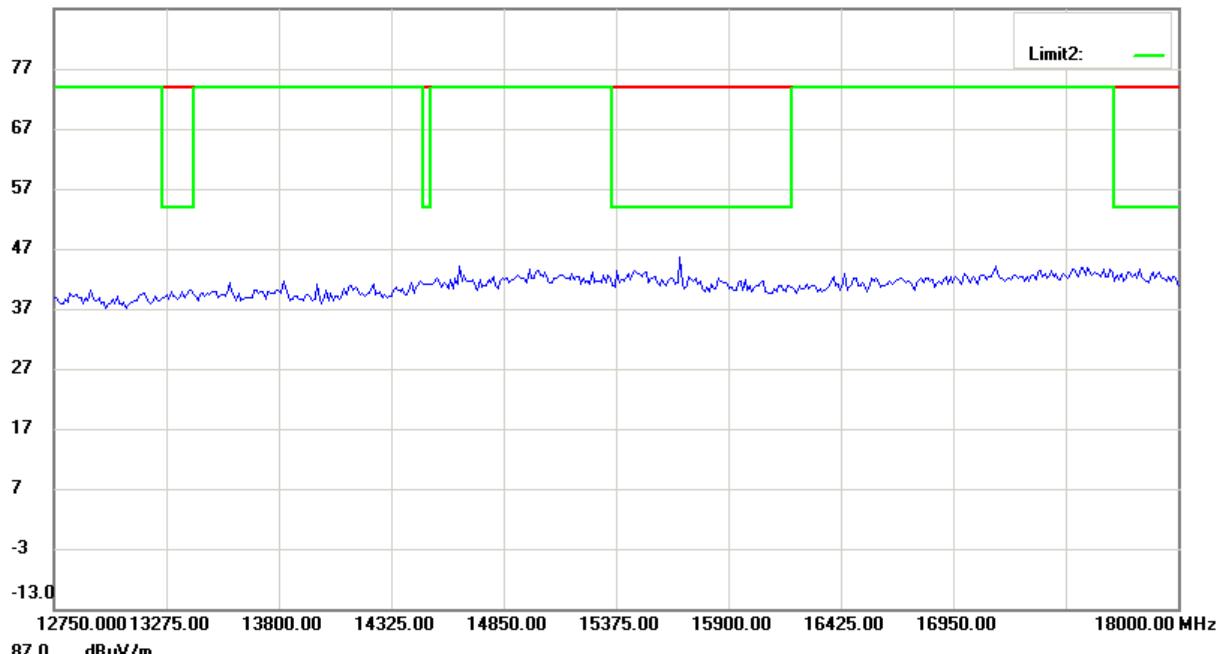

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## Antenna Polarization V

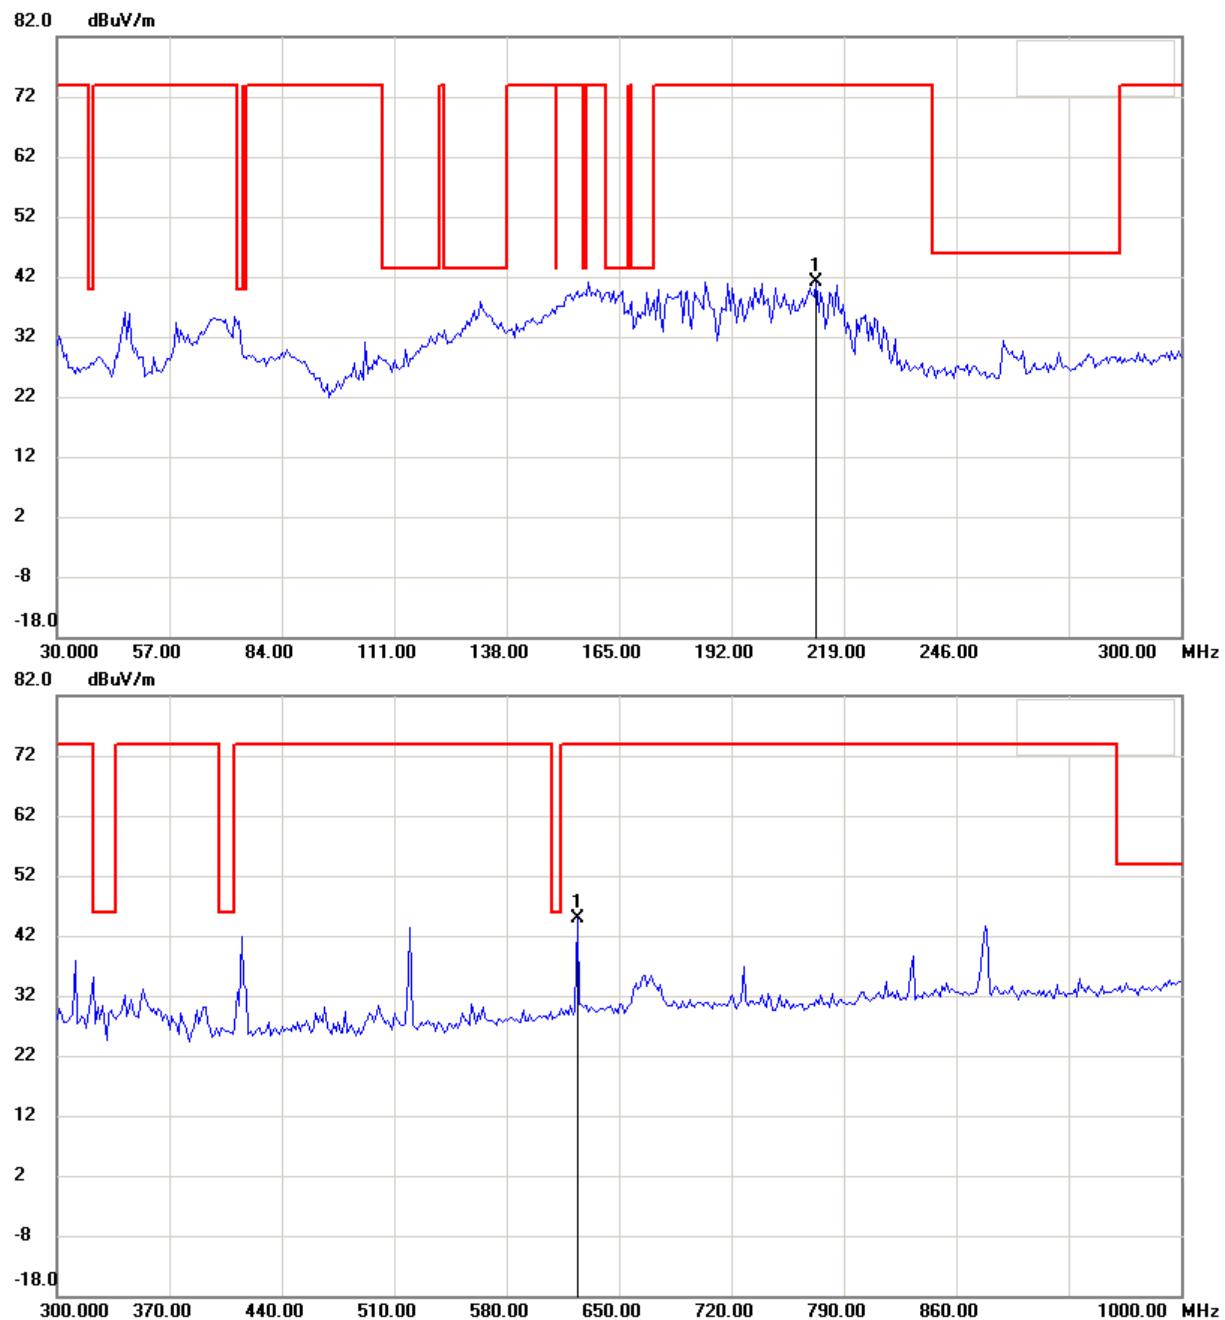

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

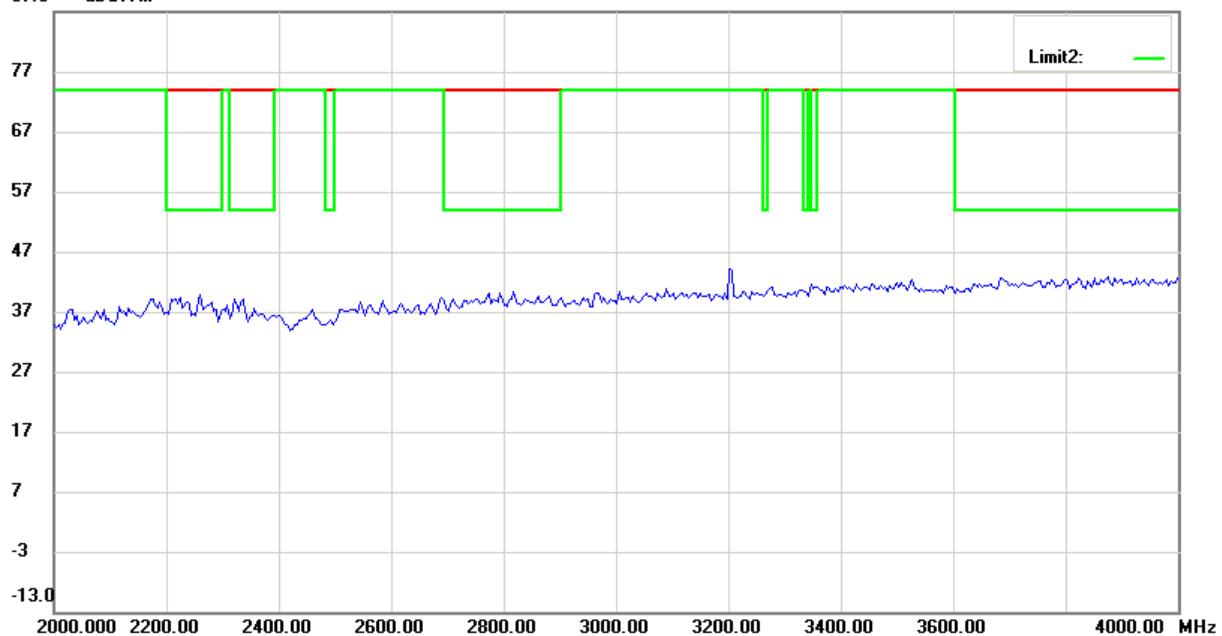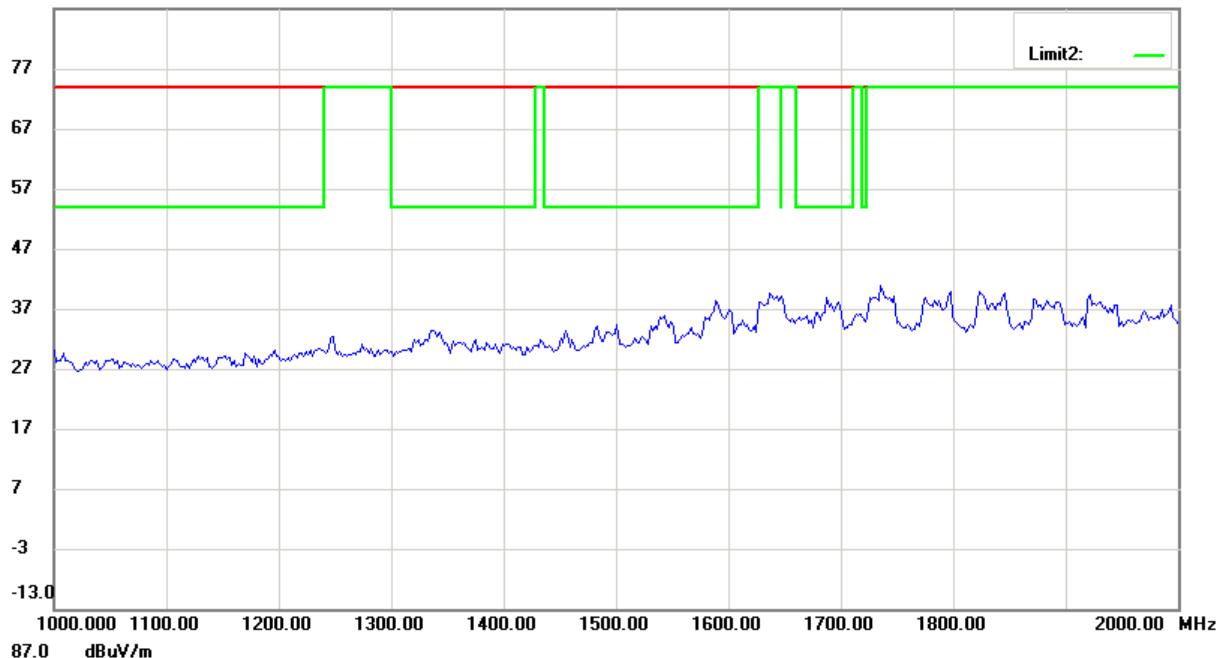

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

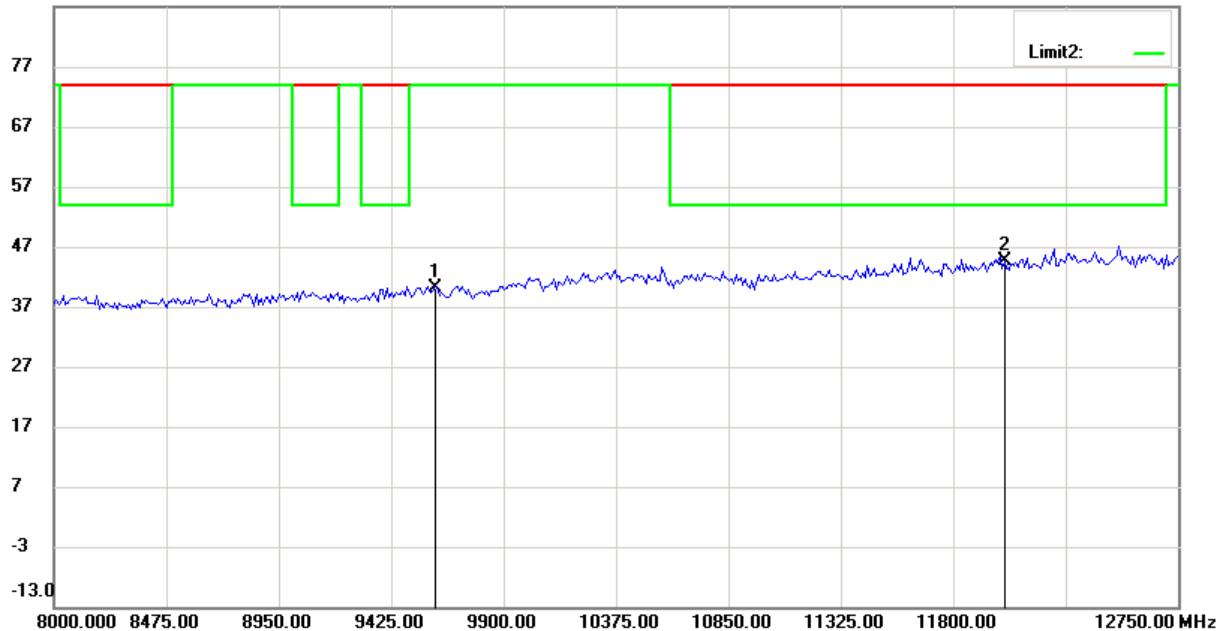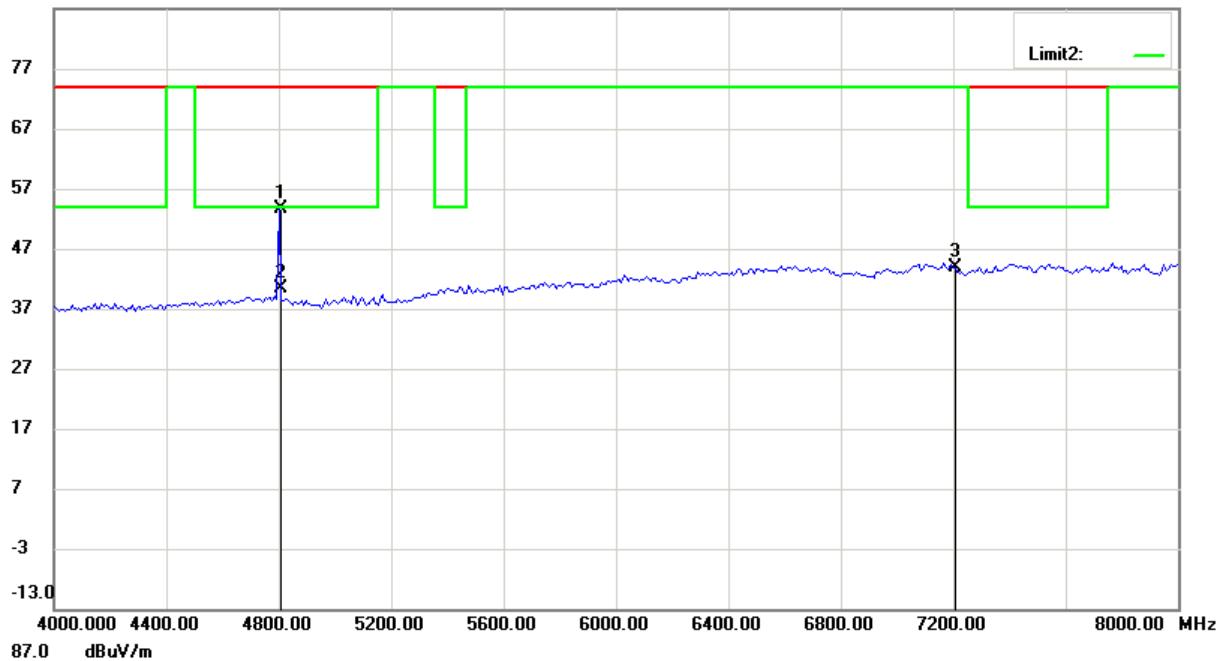

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

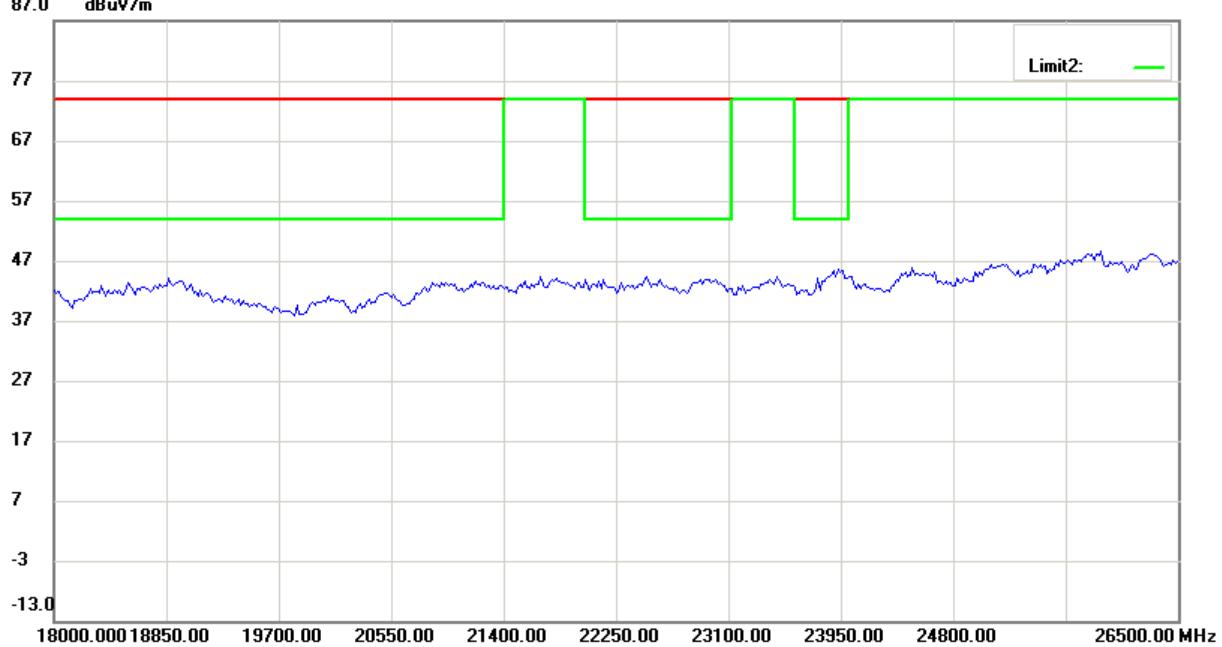

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

CH 39

Antenna Polarization H

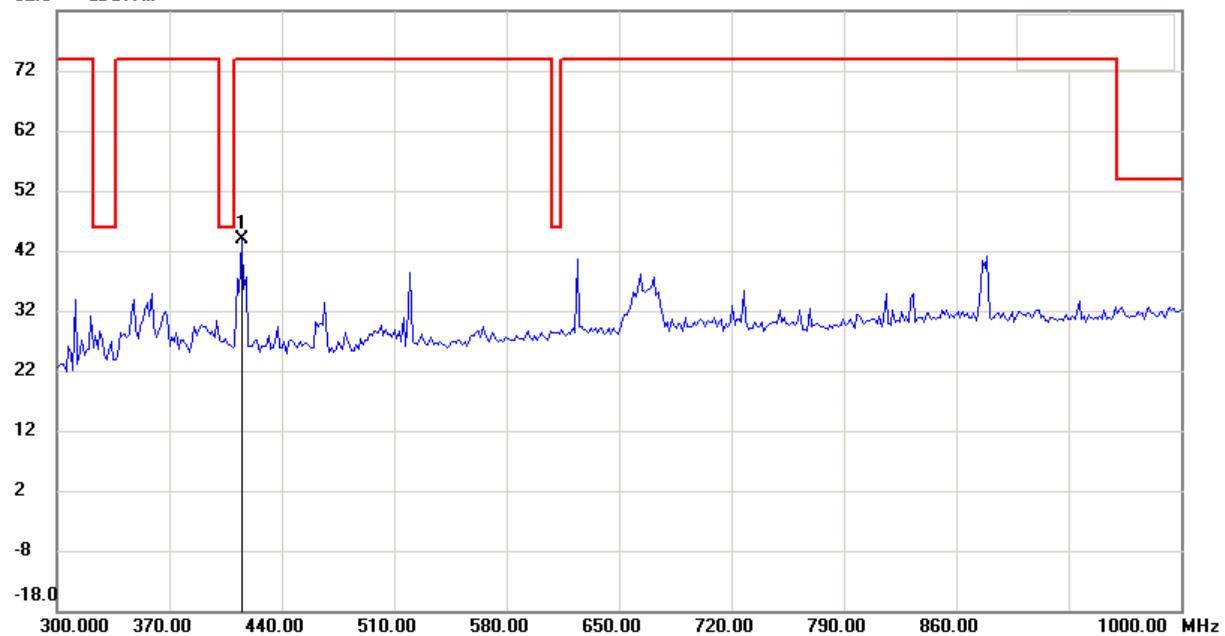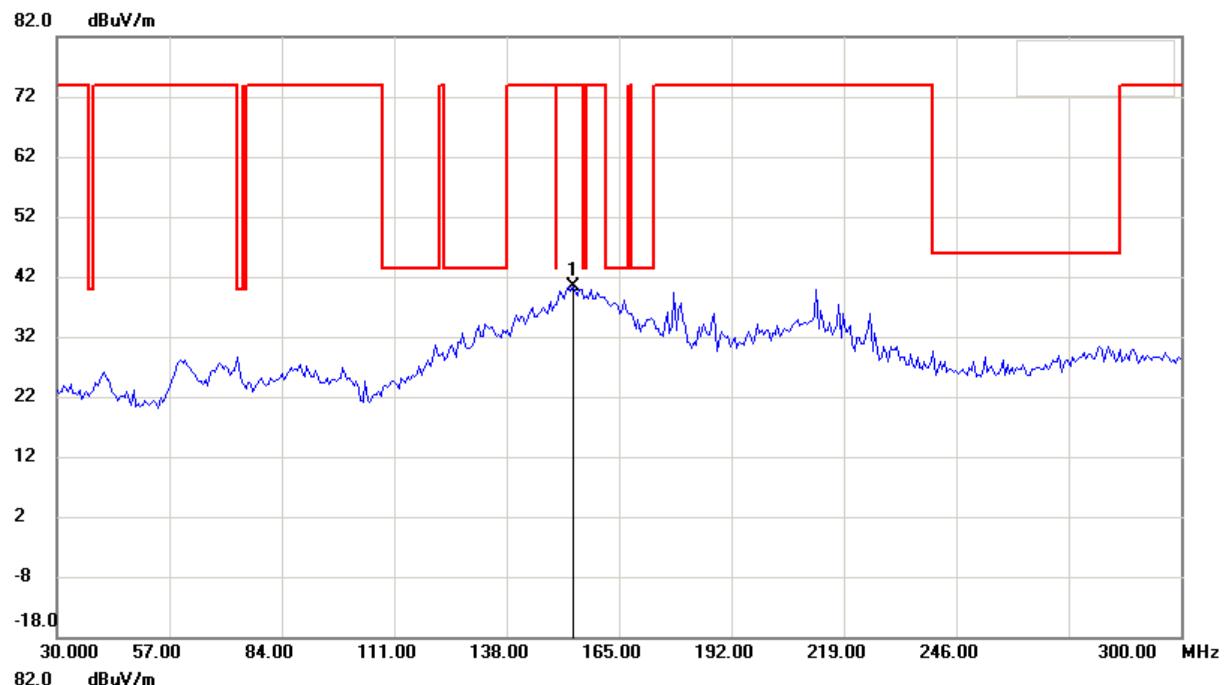

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

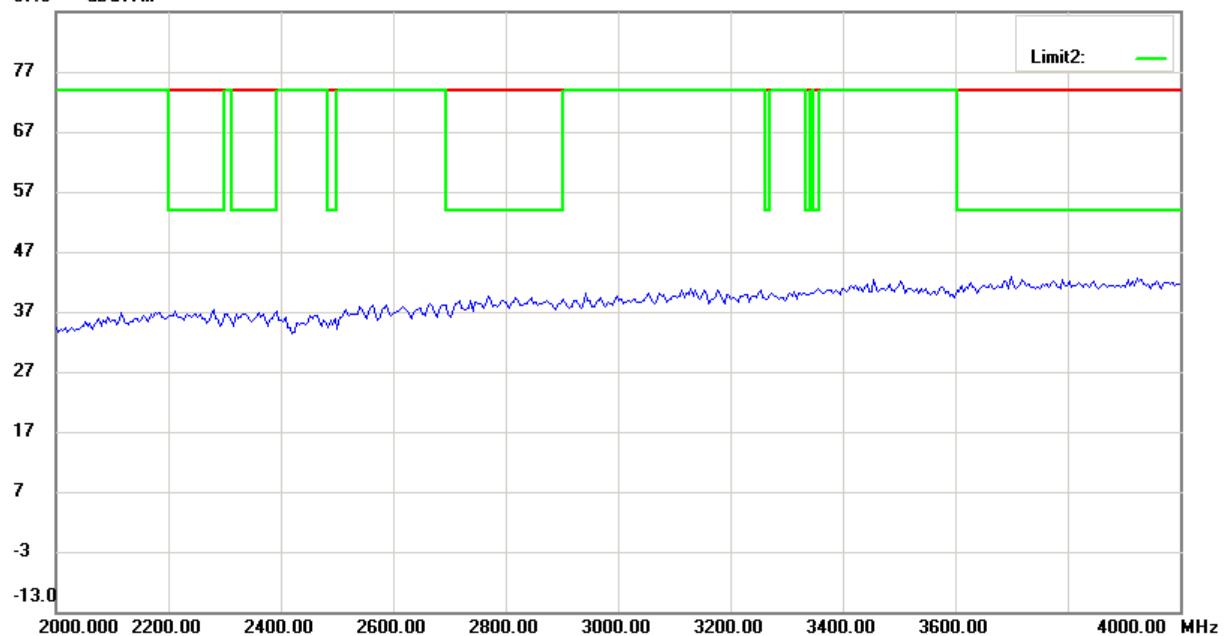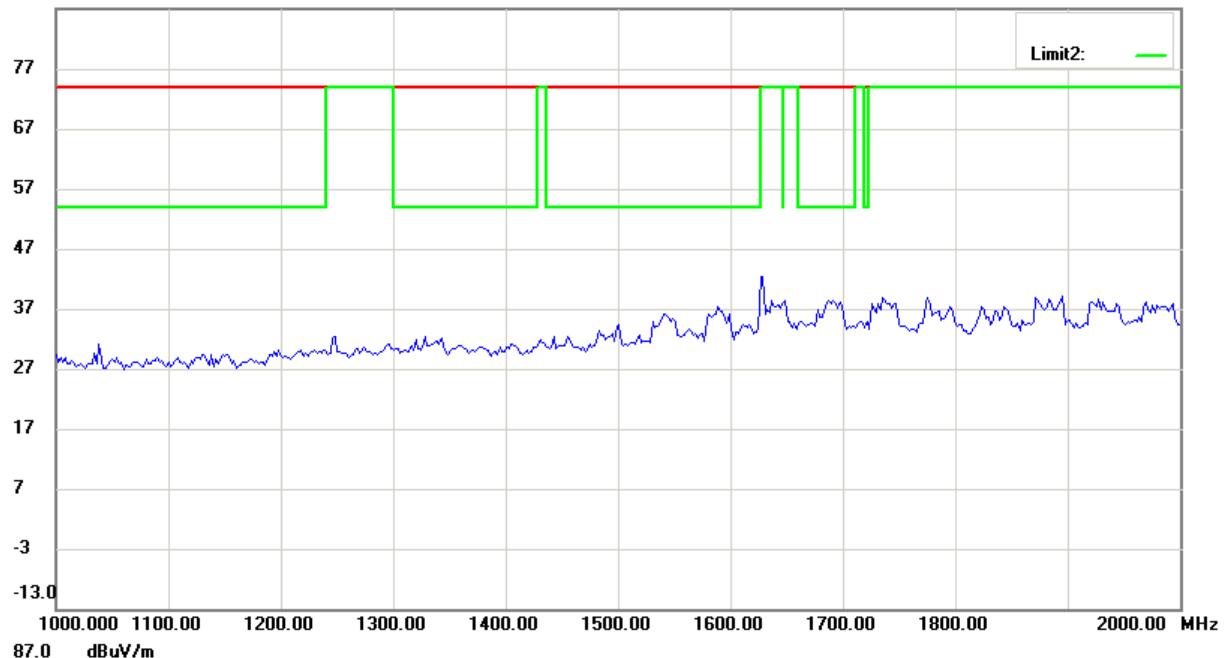

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

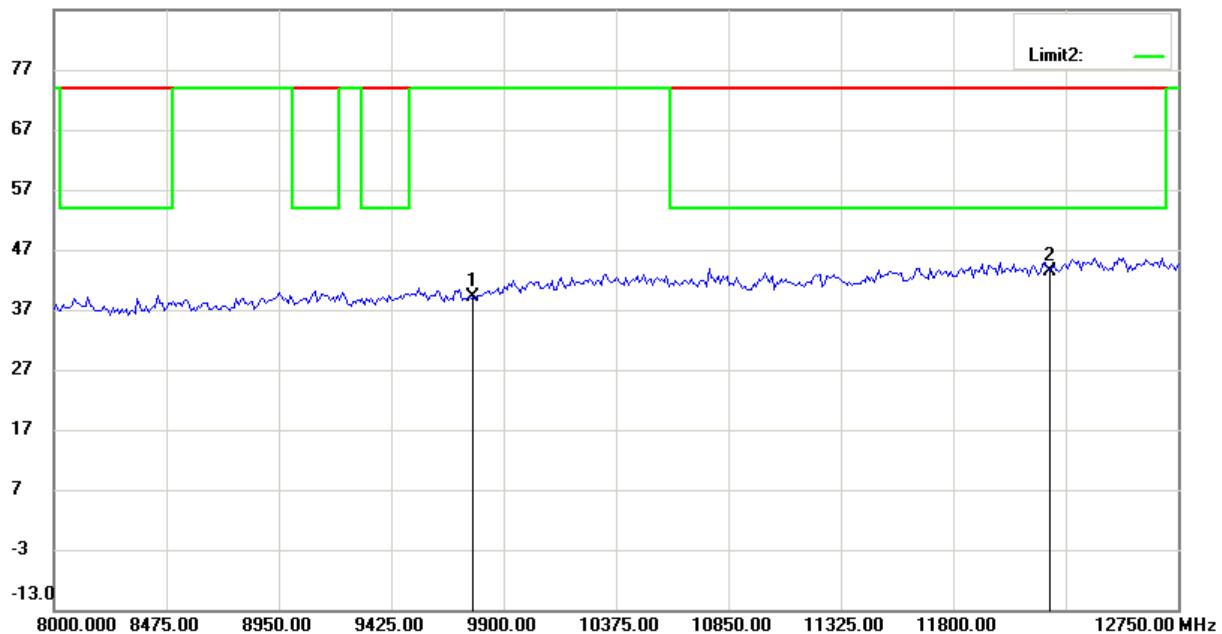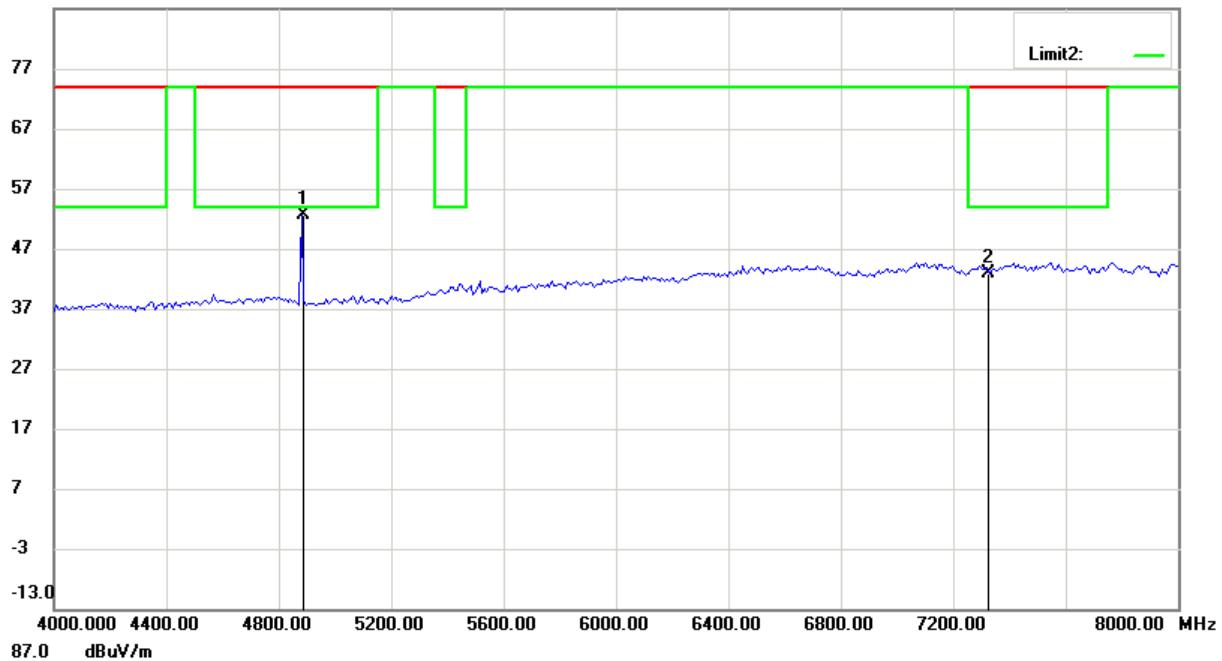

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

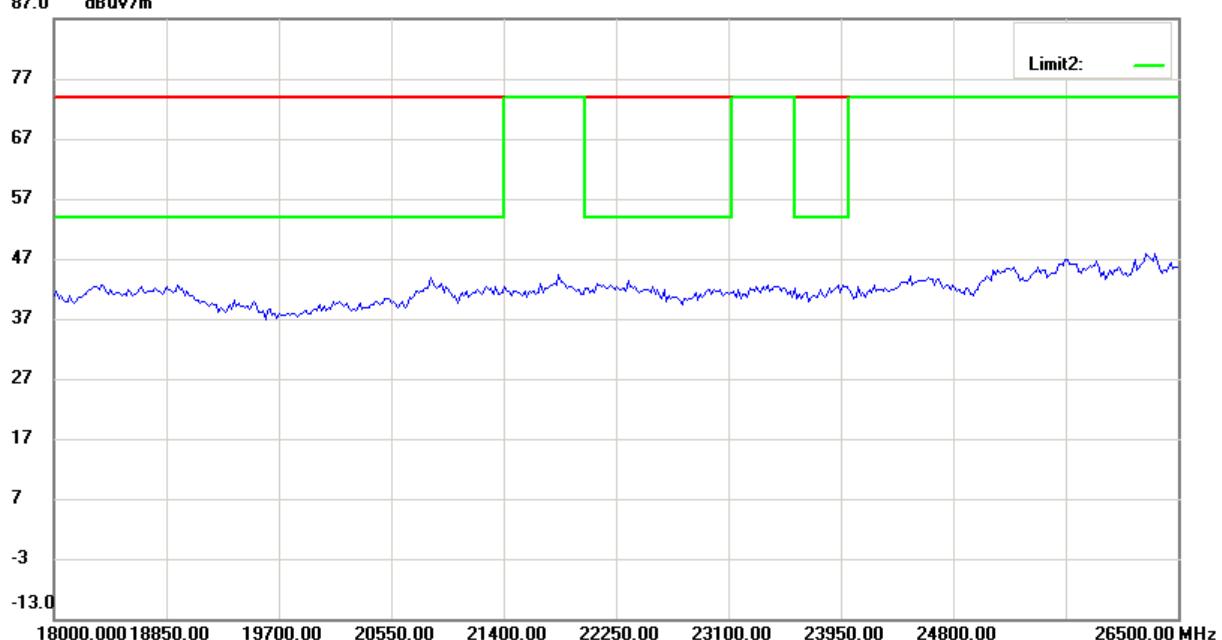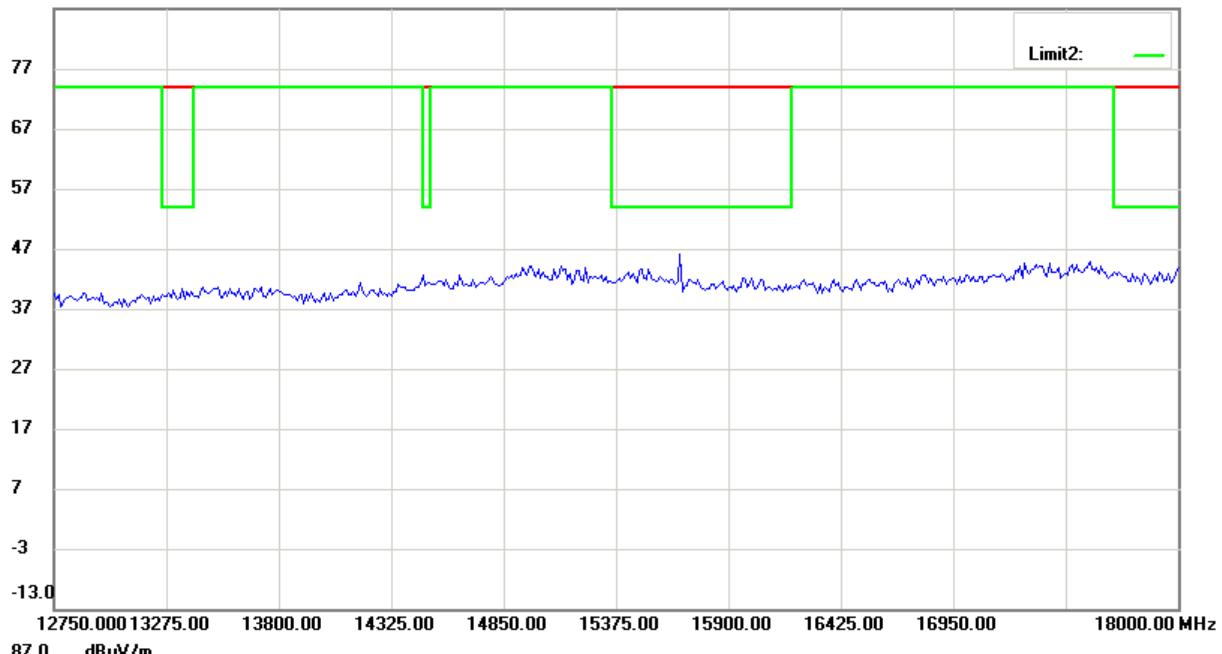

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## Antenna Polarization V

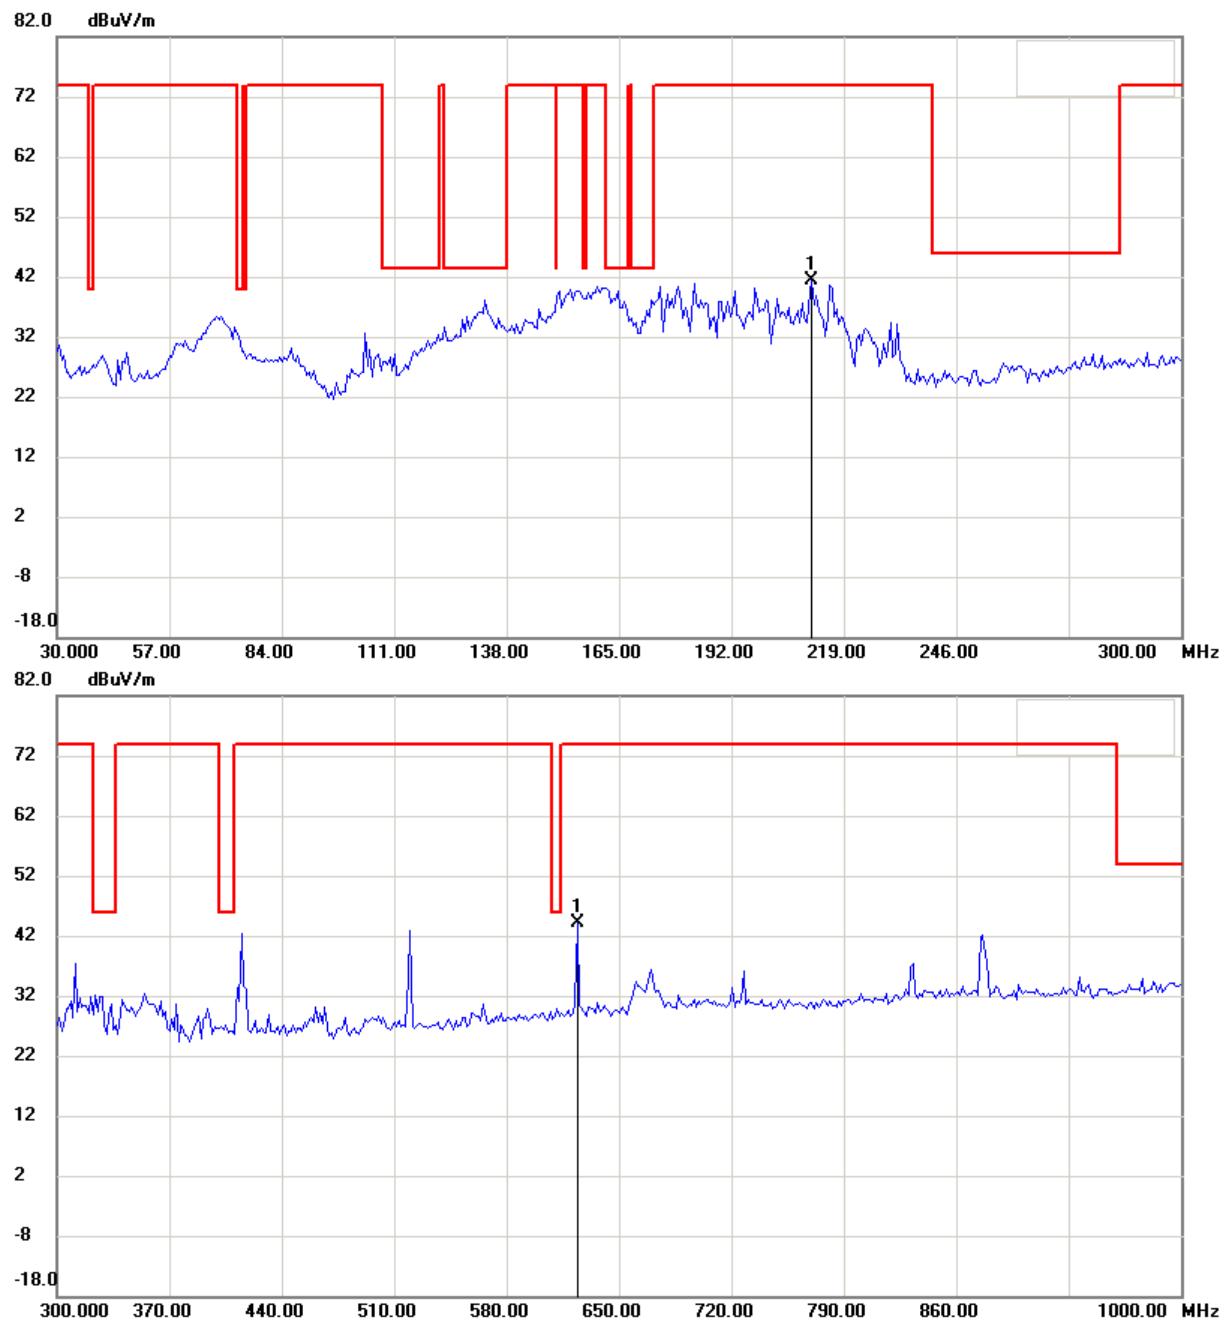

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

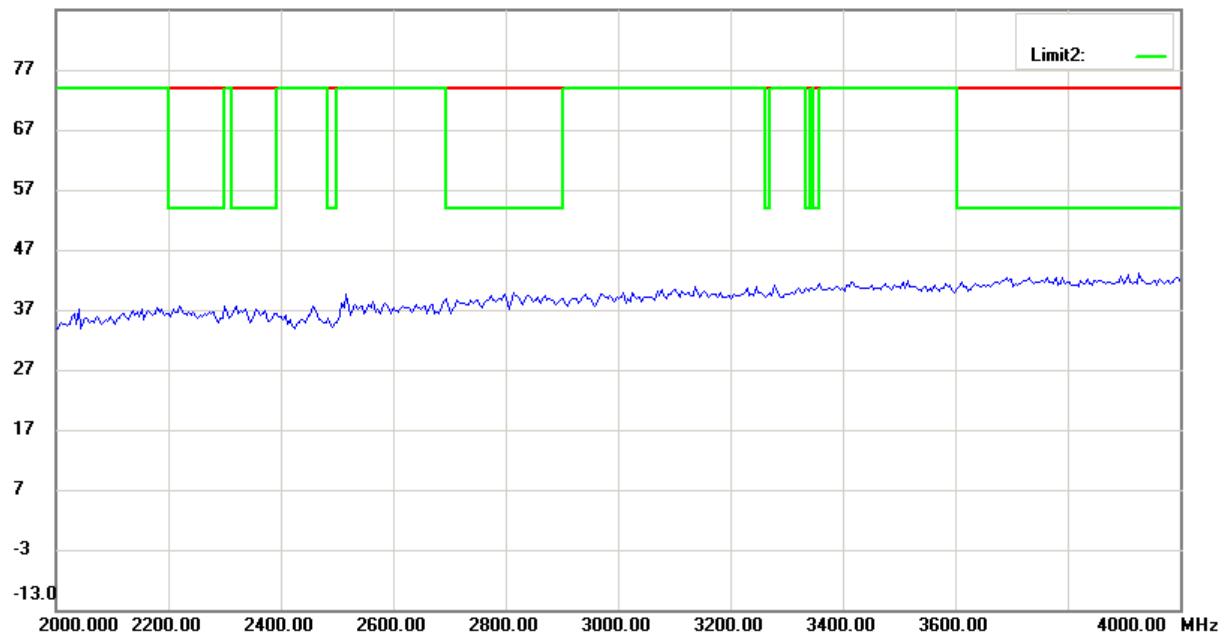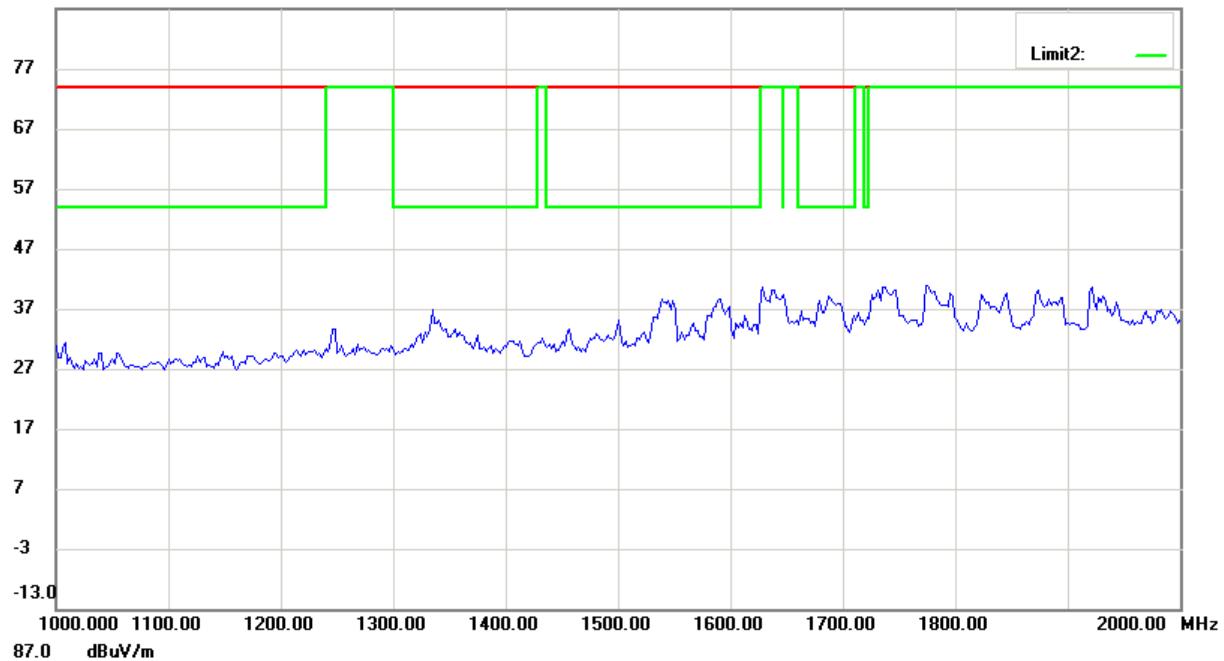

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

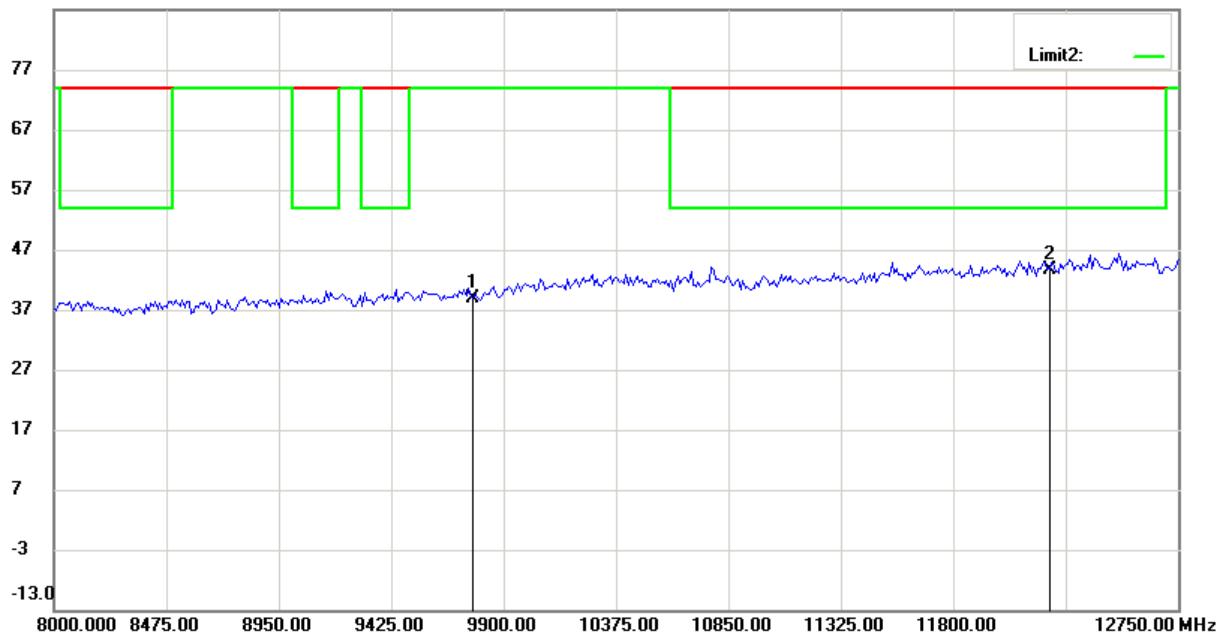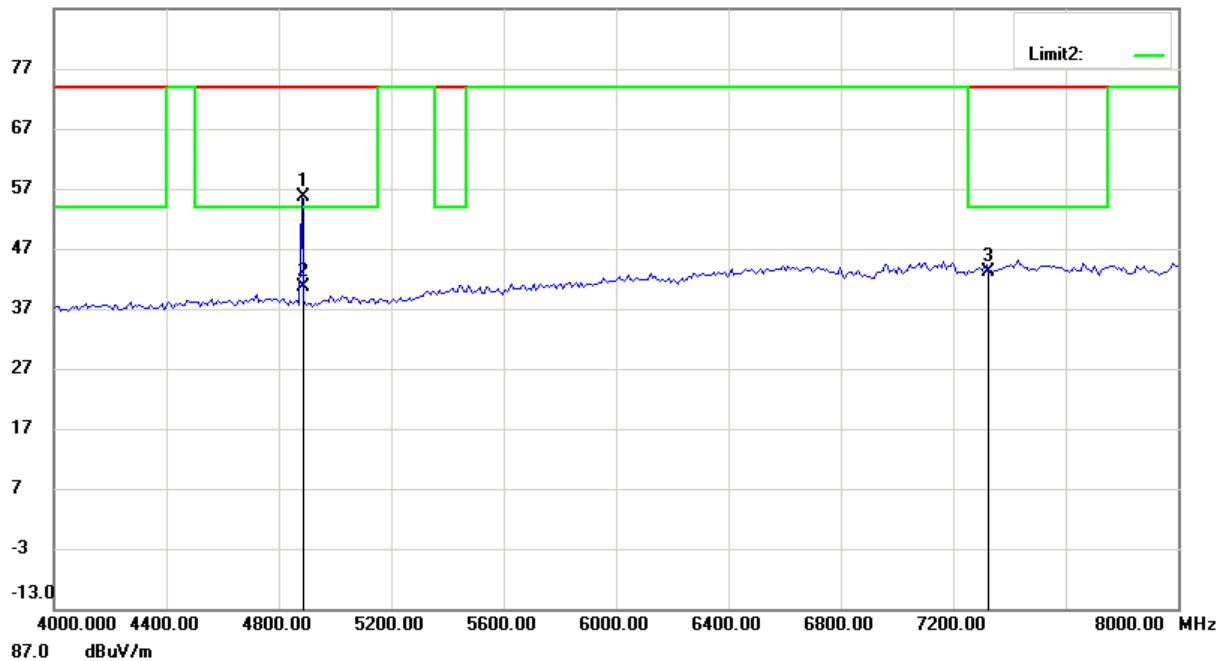

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

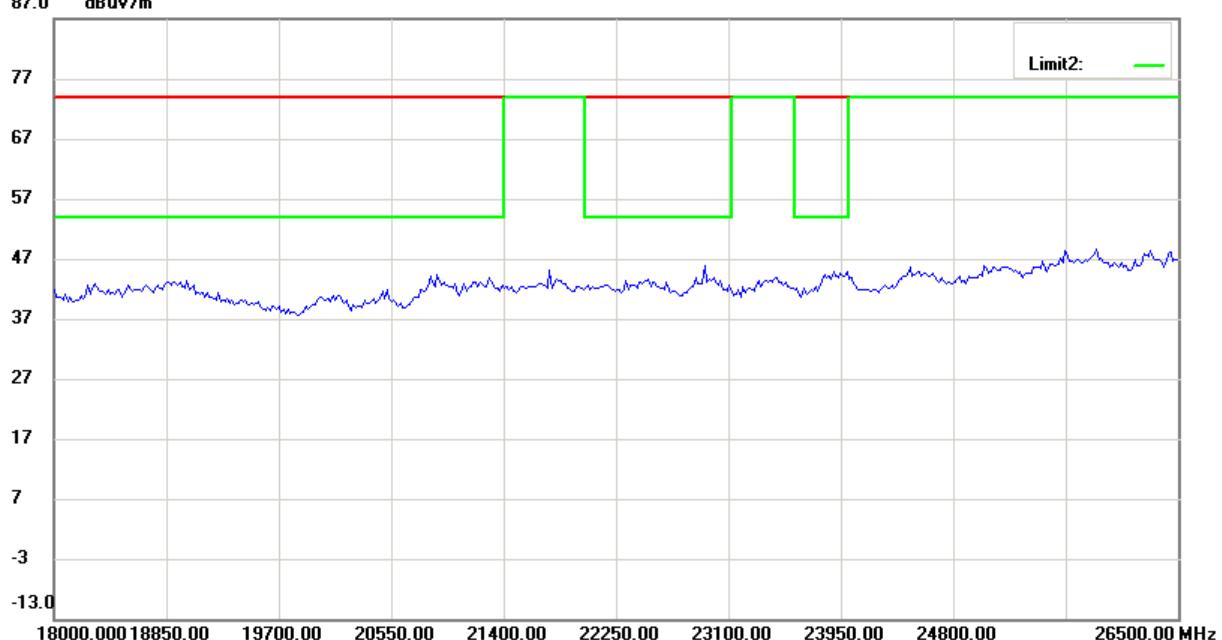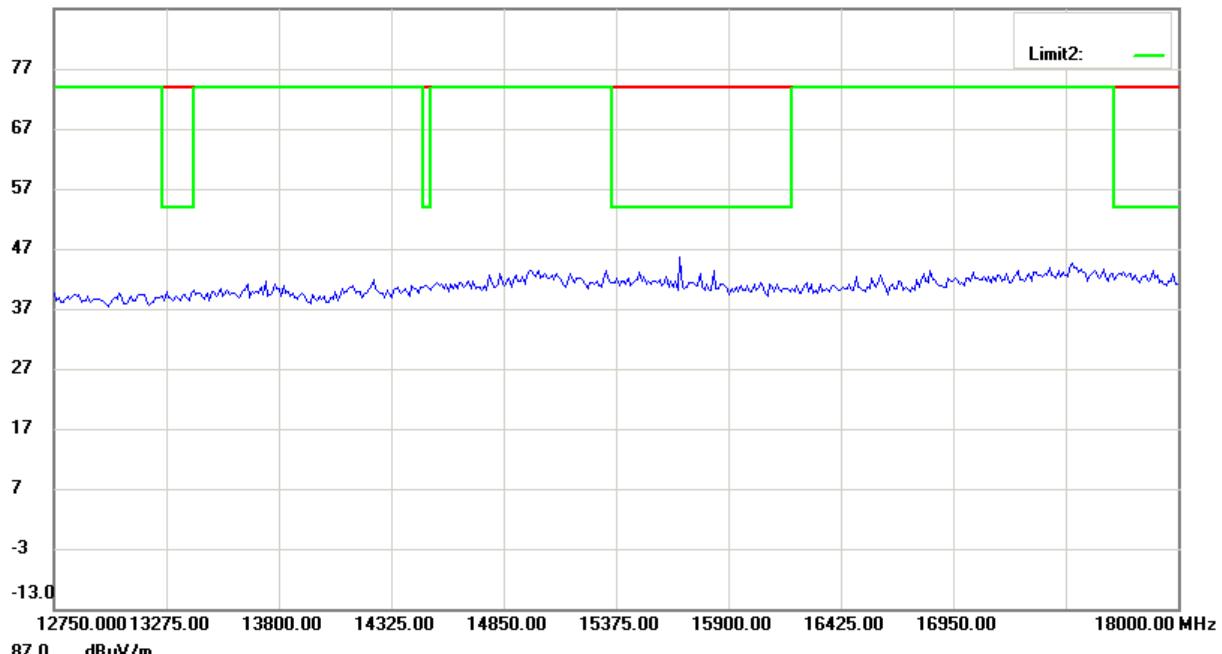

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

CH 78

Antenna Polarization H

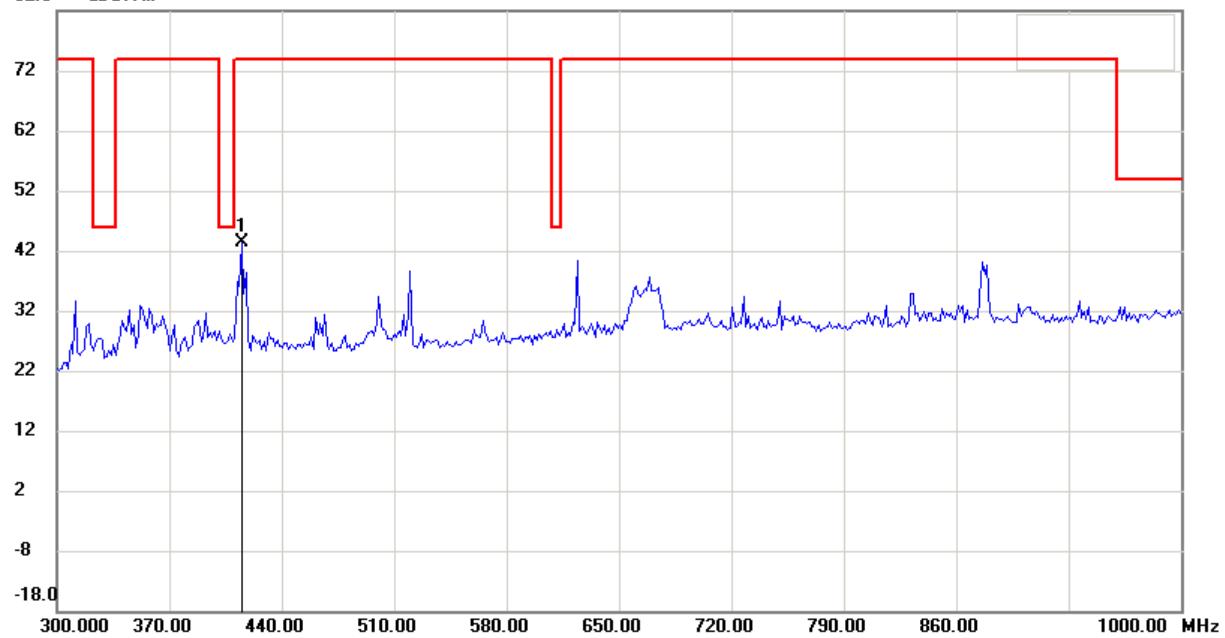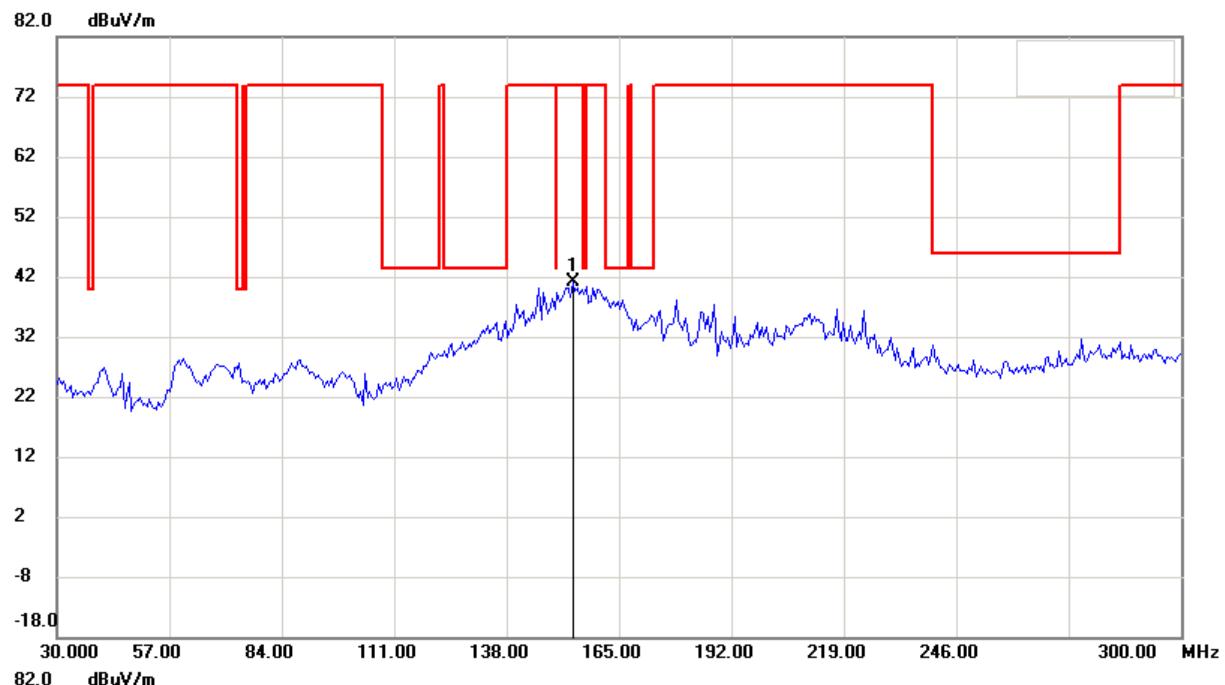

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:



1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

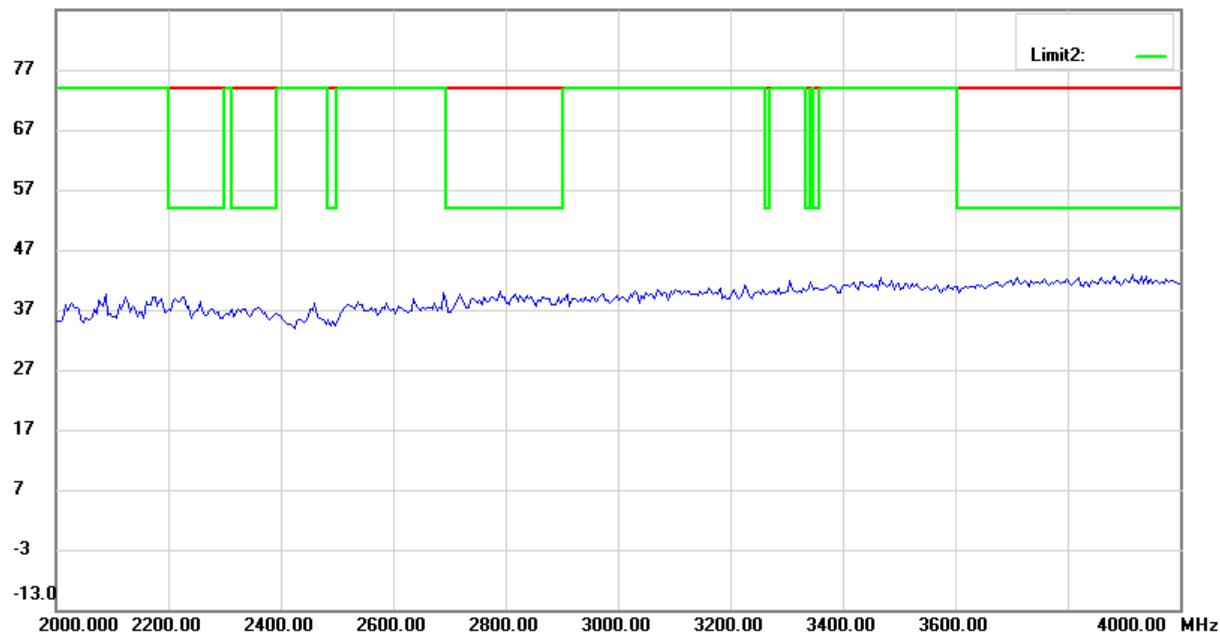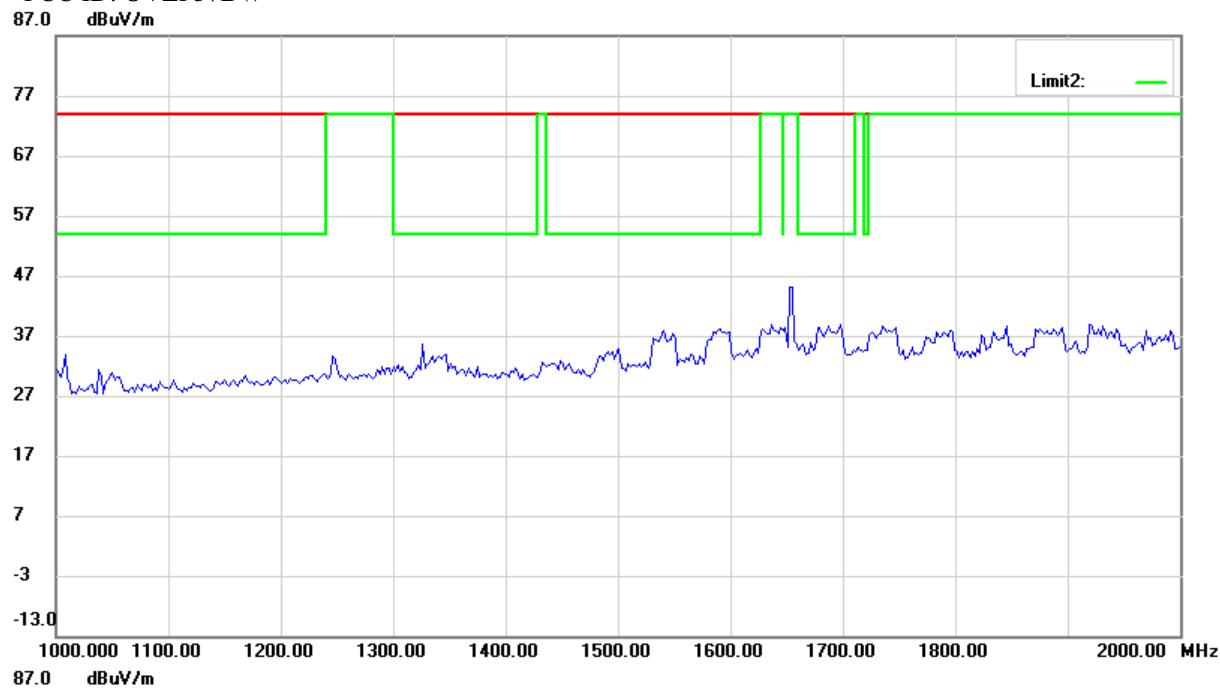

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

97.0 dBuV/m

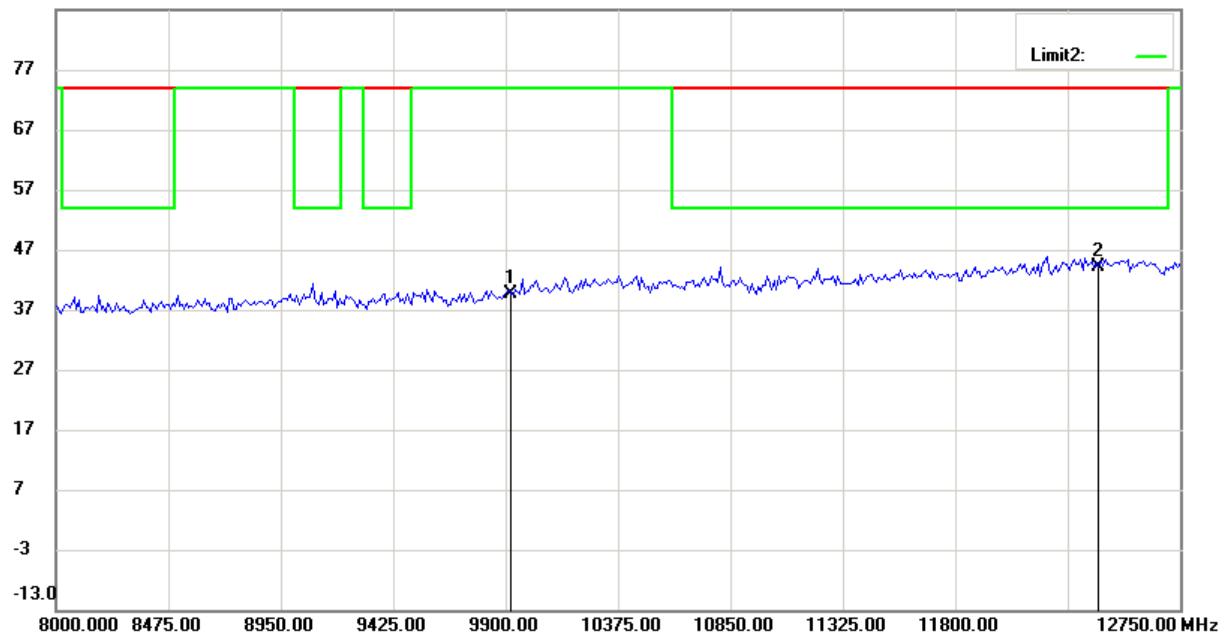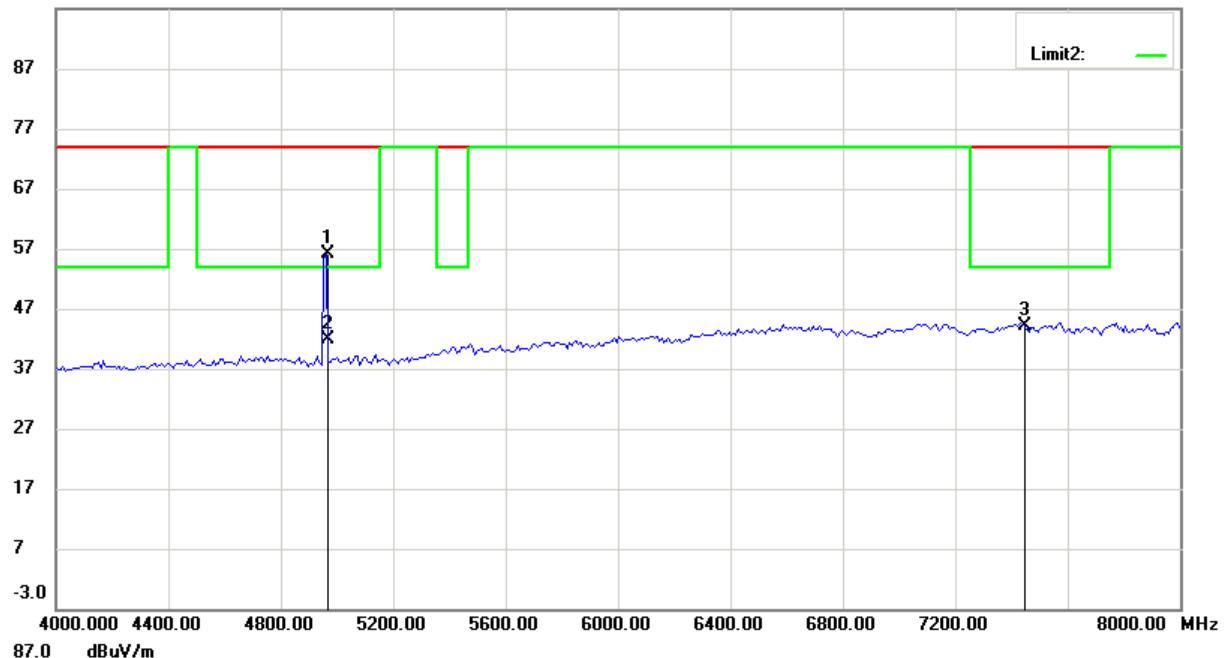

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

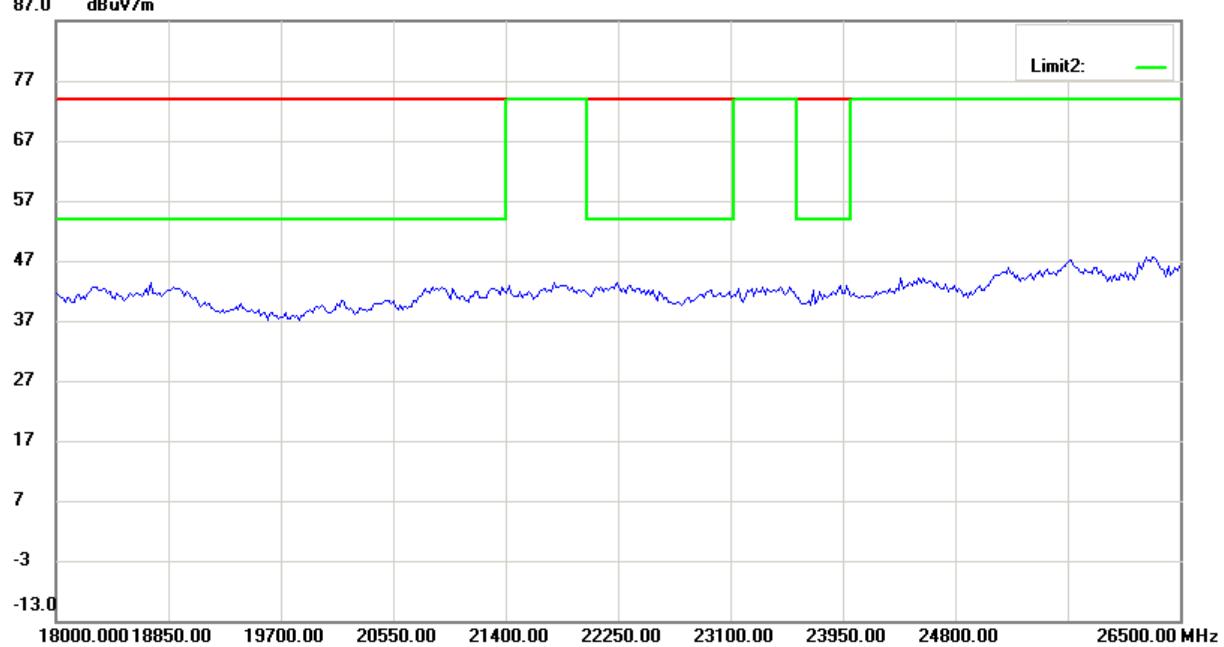

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## Antenna Polarization V

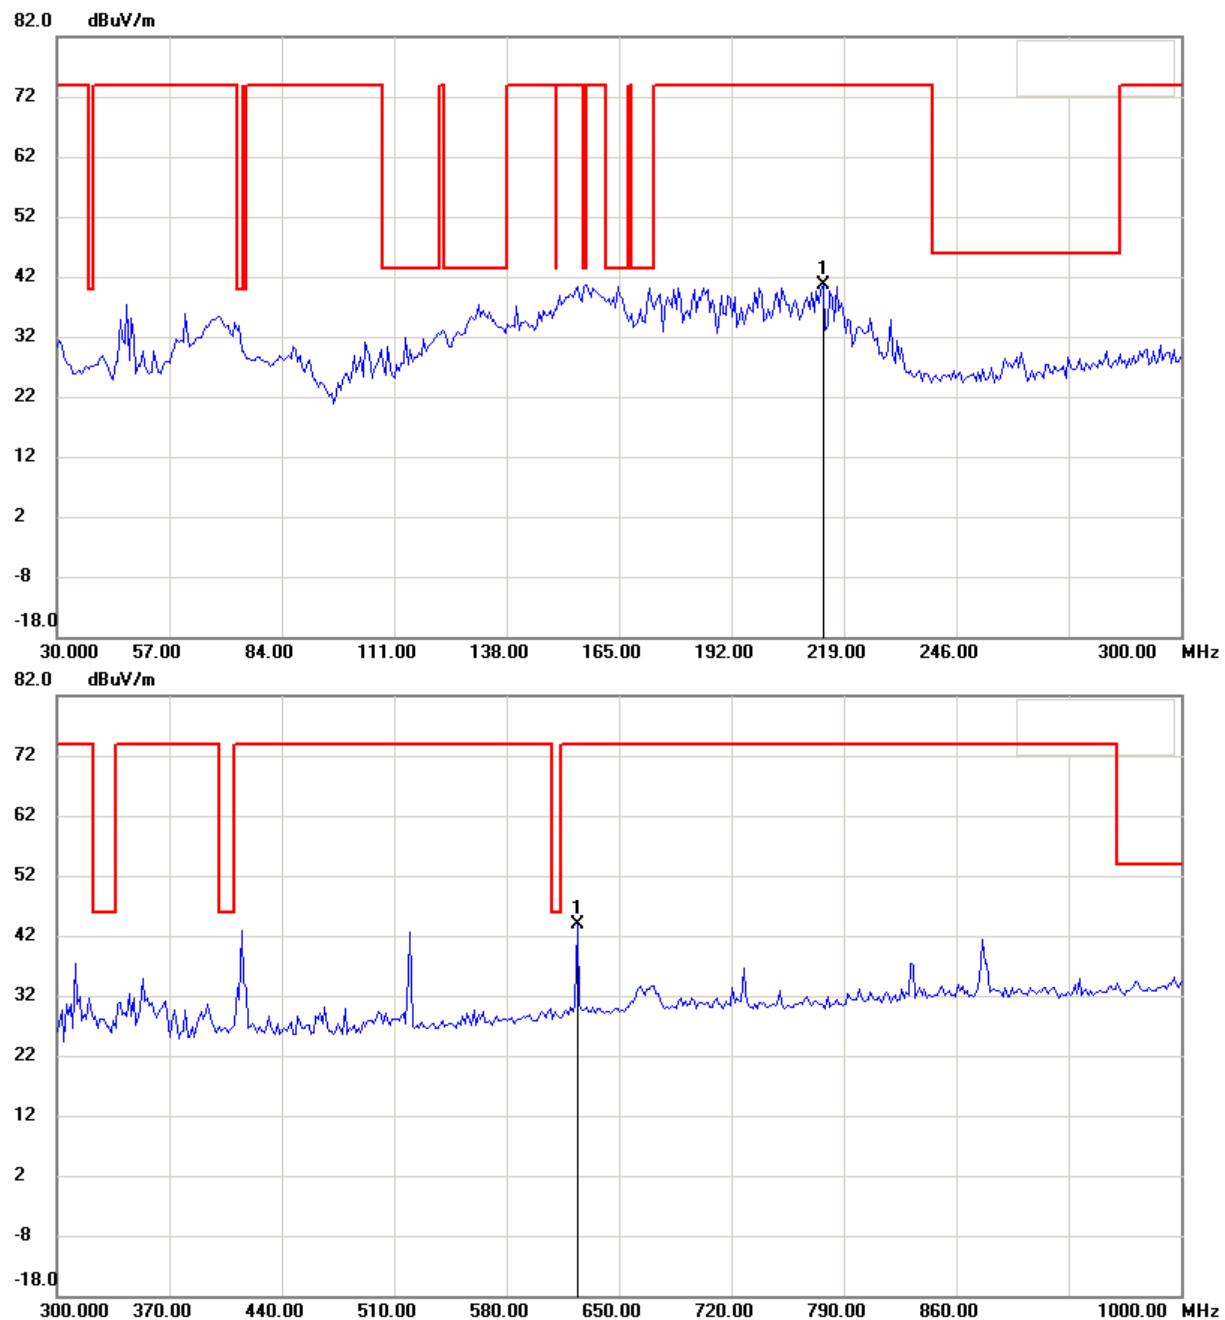

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

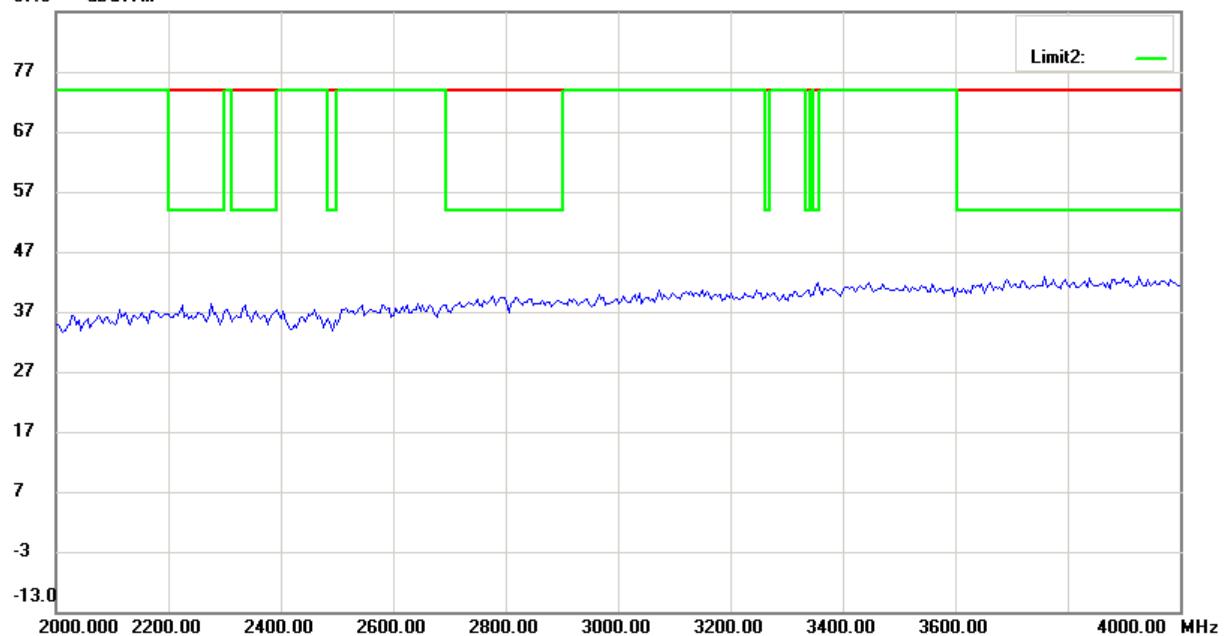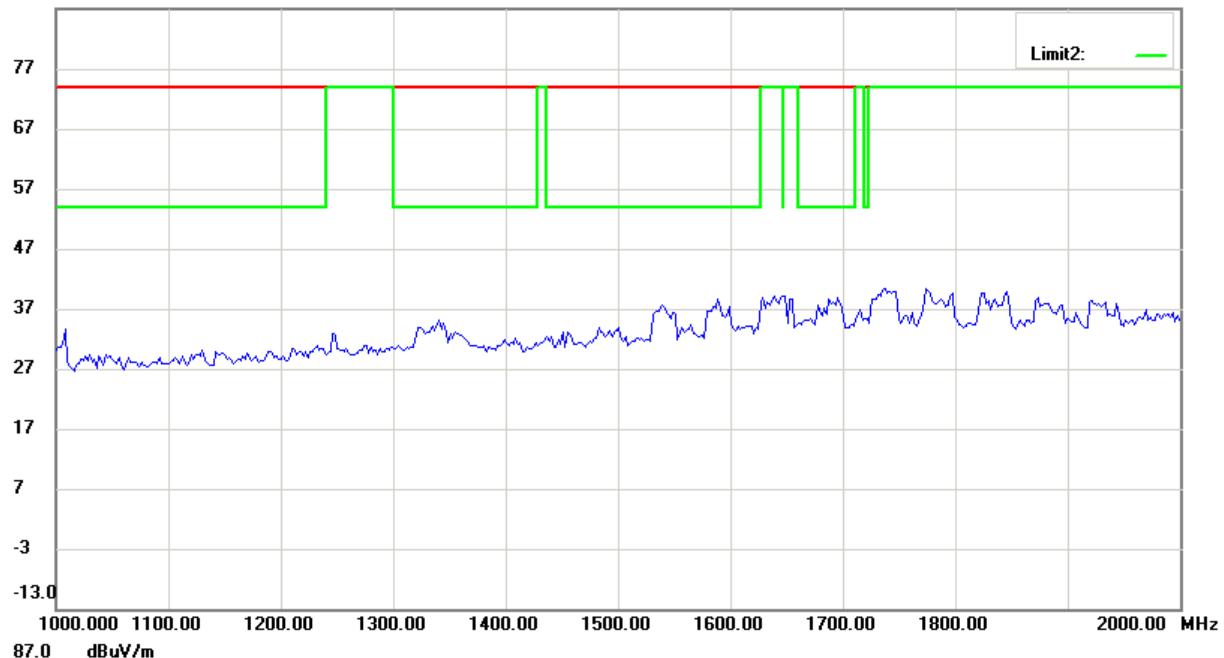

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

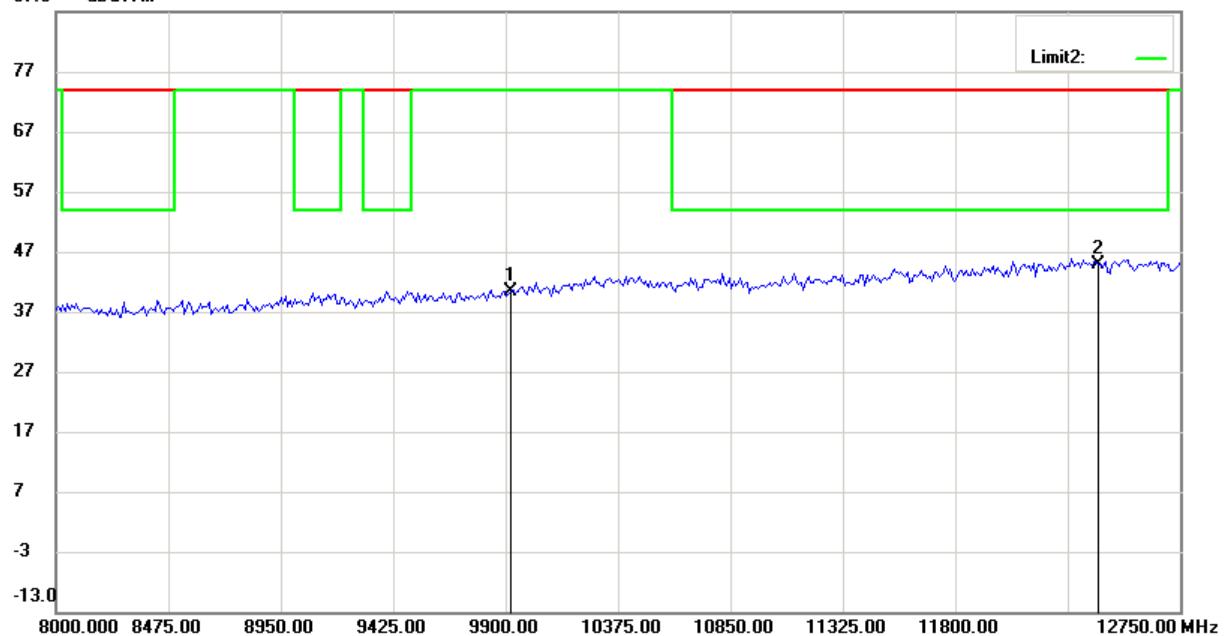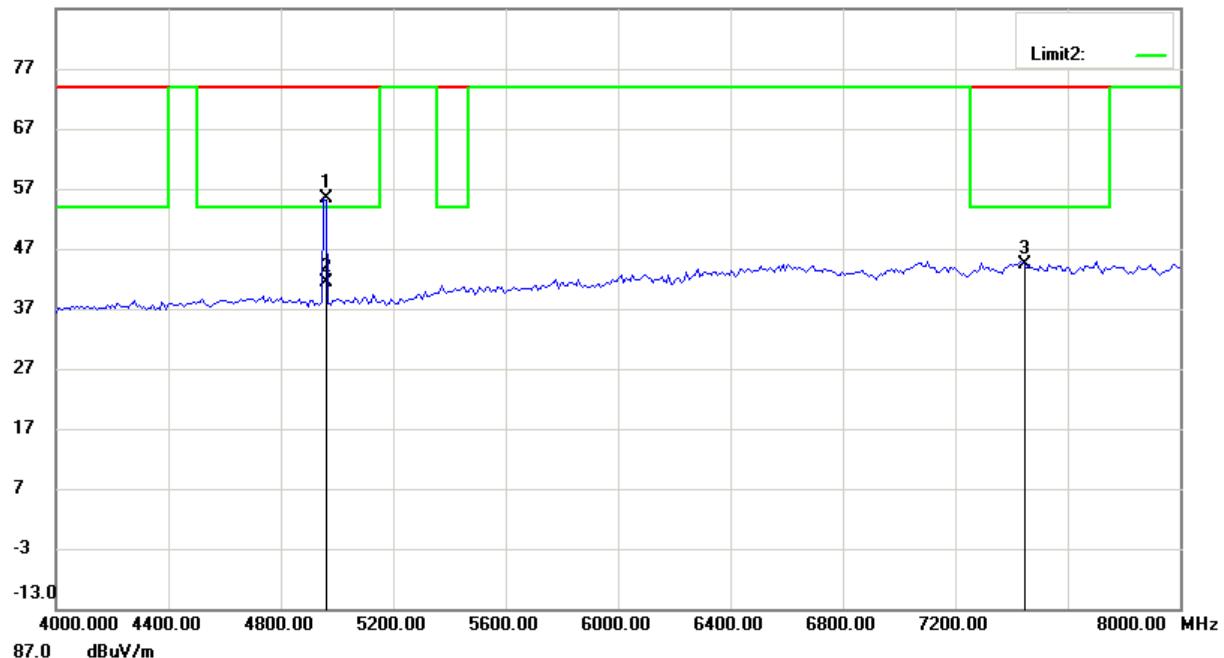

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

87.0 dBuV/m

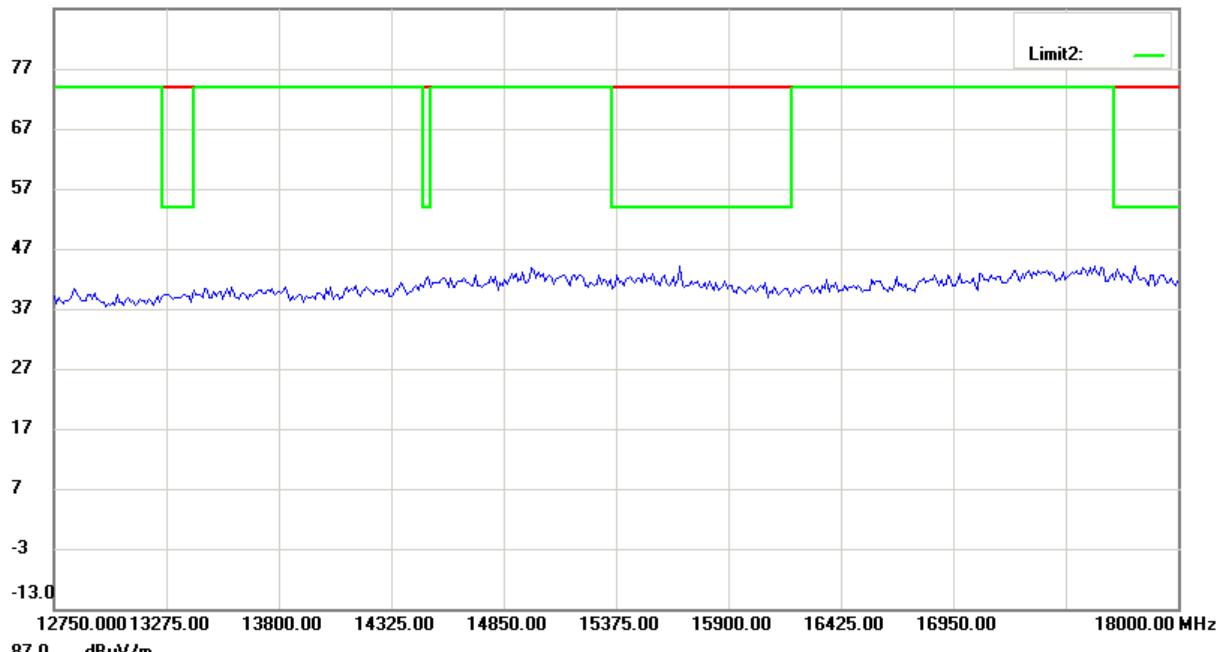

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## Carrier Frequency Separation

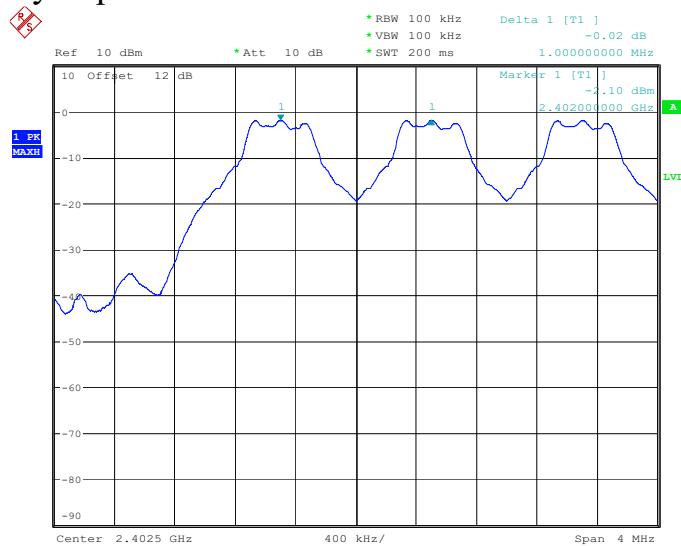

FREQUENCY SEPARATION CH0  
Date: 10.JAN.2009 15:35:01

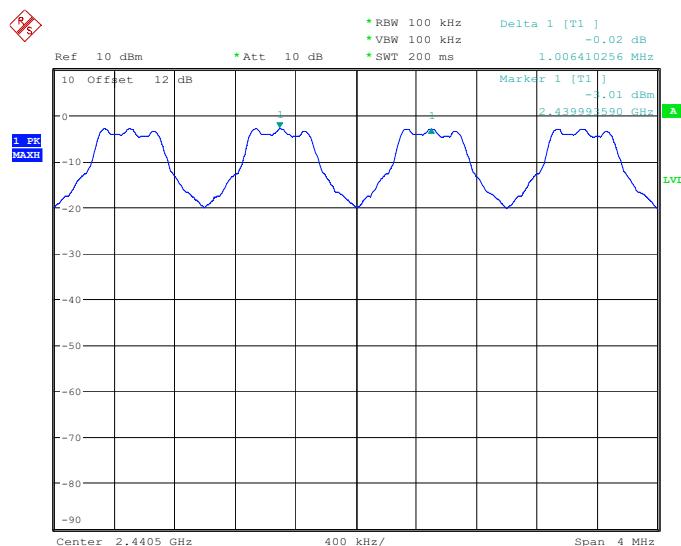


FREQUENCY SEPARATION CH39  
Date: 10.JAN.2009 15:33:28



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

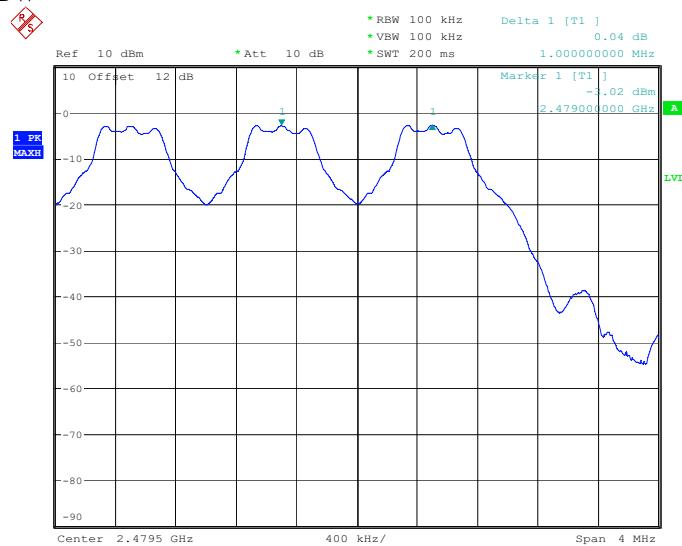

FREQUENCY SEPARATION CH78  
Date: 10.JAN.2009 15:31:43




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1


FCC ID: UVZP37BW

## Number of Hopping Frequencies

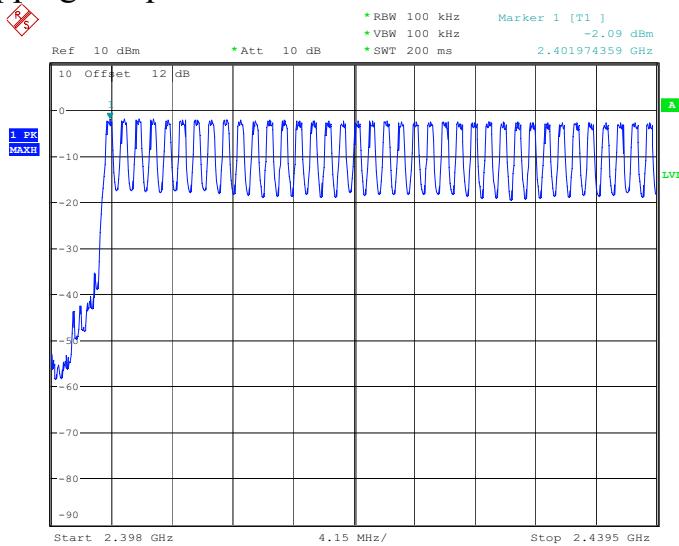

NUMBER OF HOPPING CH0-37

Date: 10.JAN.2009 13:09:17

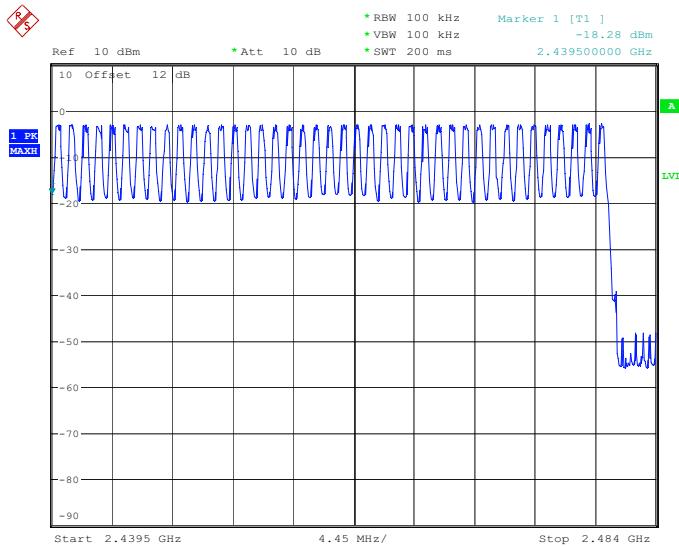

NUMBER OF HOPPING CH37-78

Date: 10.JAN.2009 13:14:29




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1


FCC ID: UVZP37BW

## Time of Occupancy (Dwell Time)

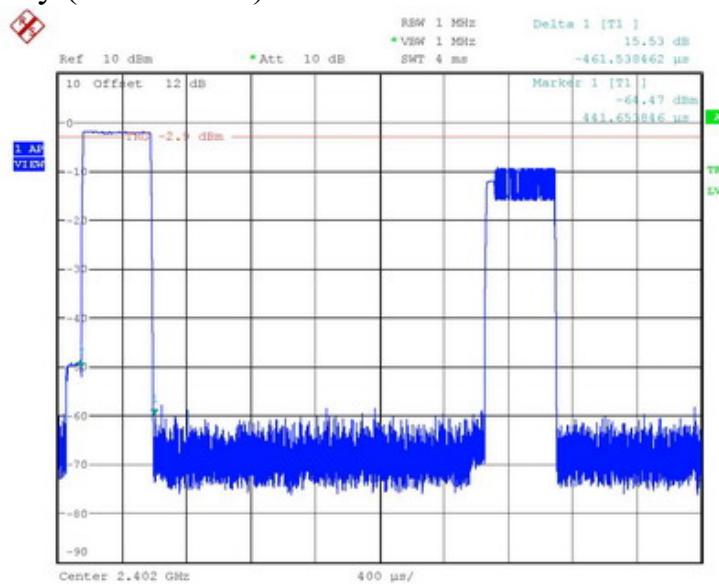

DELL TIME CH0 DH1(0.461ms \* 320events = 147.52ms)

Date: 10.JAN.2009 15:49:20

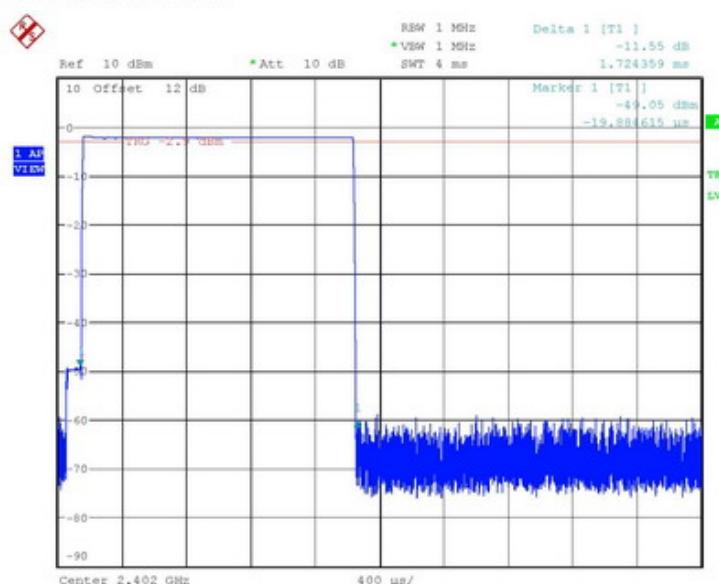



DELL TIME CH0 DH3(1.724ms \* 160events = 275.84ms)

Date: 10.JAN.2009 15:51:52



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

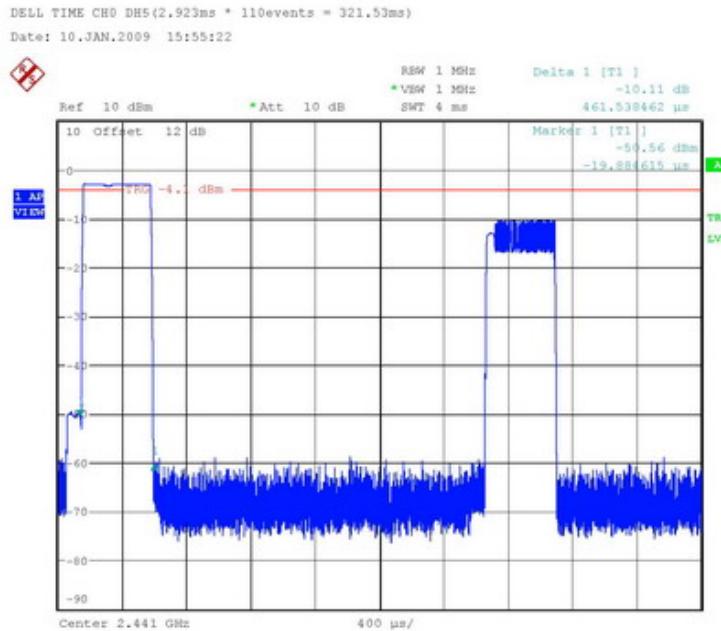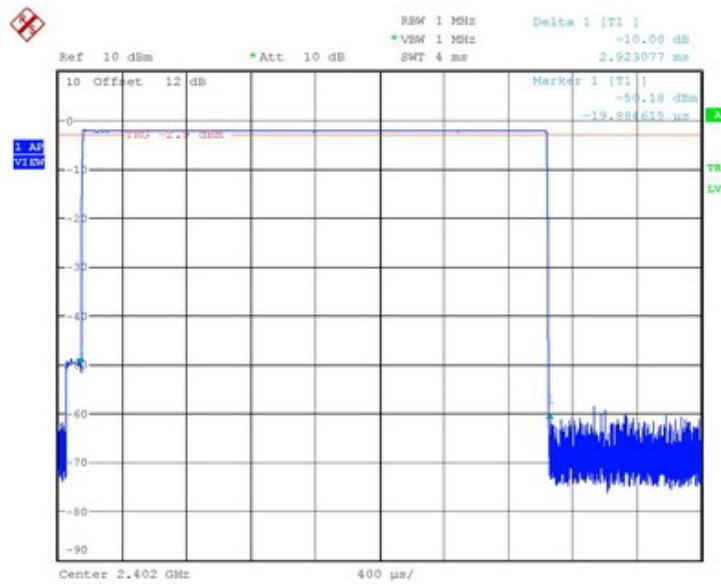




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

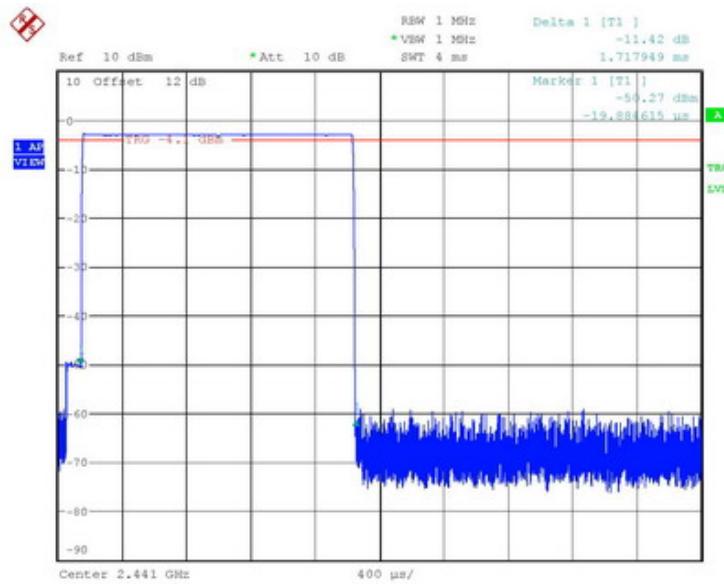

DELL TIME CH39 DH3(1.718ms \* 160events = 274.88ms)  
Date: 10.JAN.2009 16:02:36

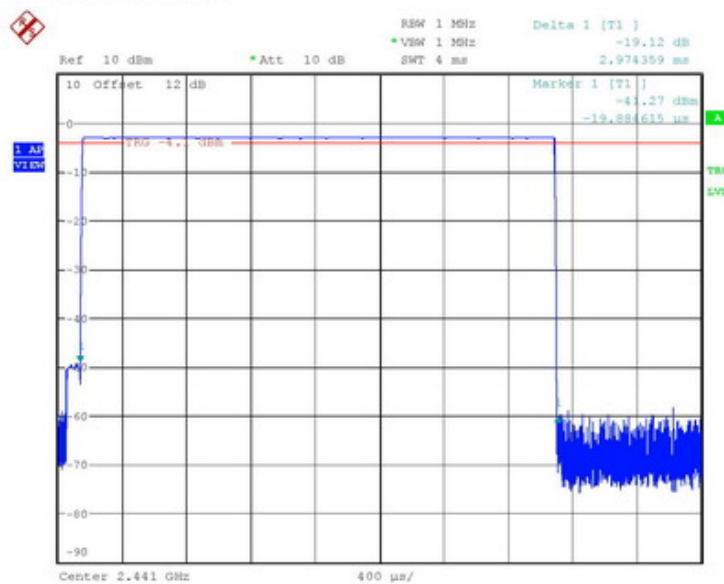


DELL TIME CH39 DH5(2.974ms \* 110events = 327.14ms)  
Date: 10.JAN.2009 16:04:04




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

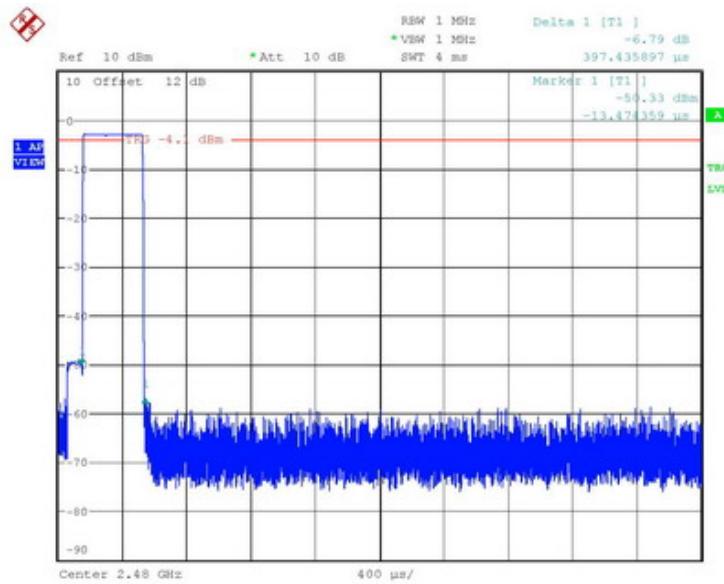

DELL TIME CH78 DH1(0.397ms \* 320events = 127.04ms)  
Date: 10.JAN.2009 16:09:30

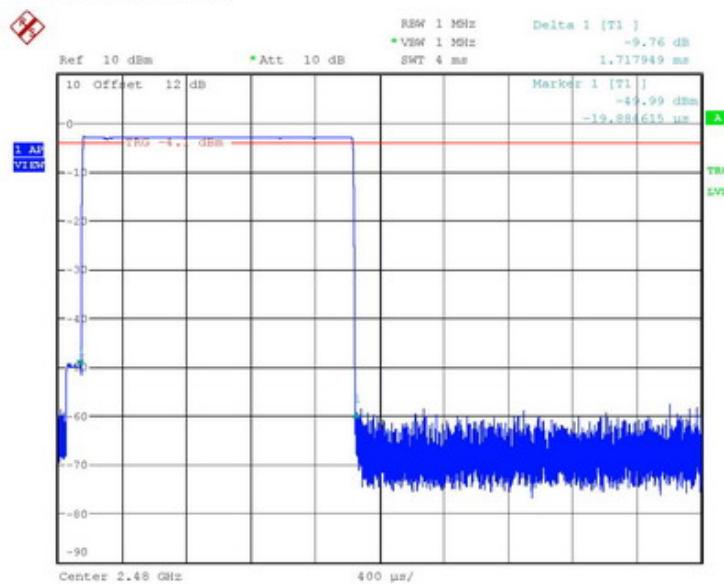


DELL TIME CH78 DH3(1.718ms \* 160events = 274.88ms)  
Date: 10.JAN.2009 16:07:01



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1  
FCC ID: UVZP37BW

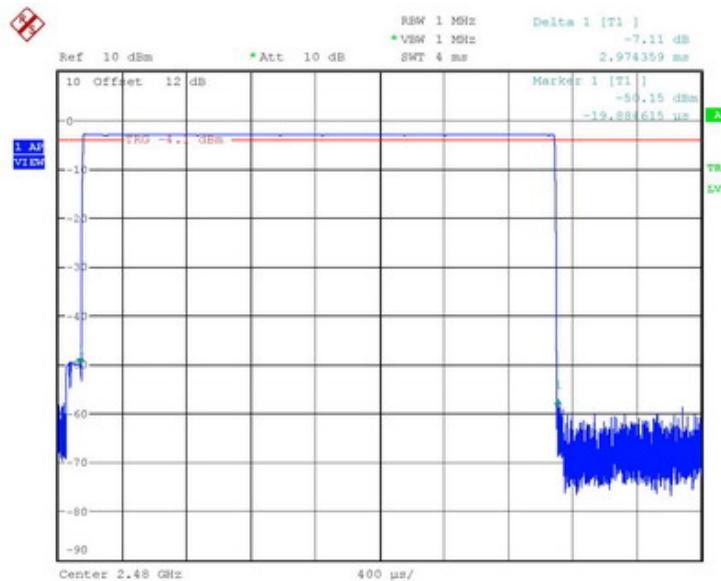

DELL TIME CH78 DH5(2.974ms \* 110events = 327.14ms)  
Date: 10.JAN.2009 16:05:39





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## 20dB Bandwidth

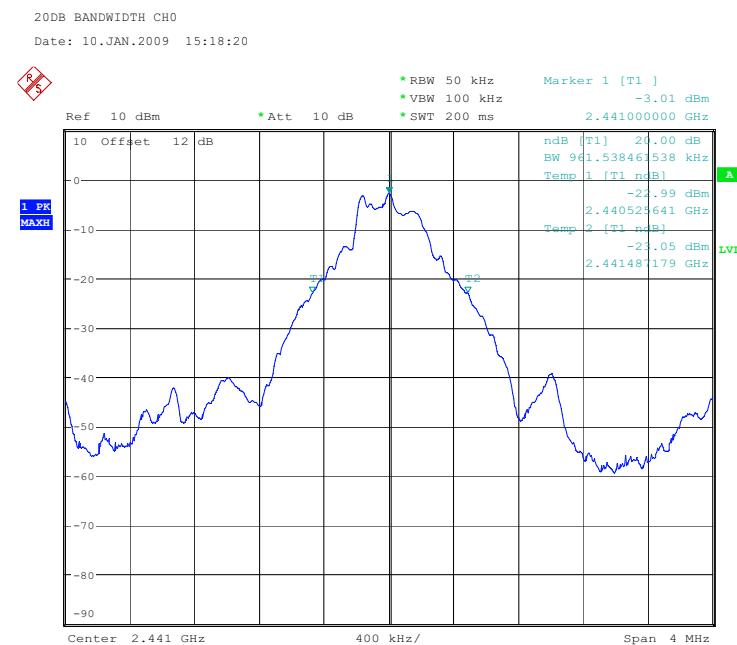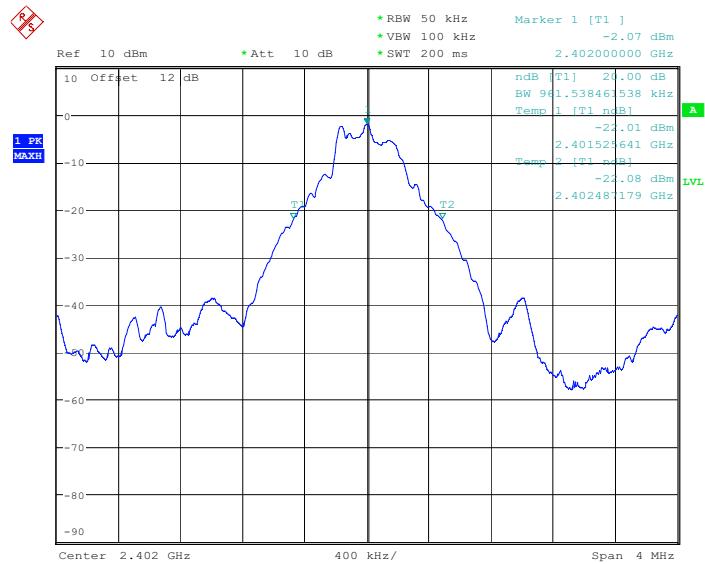





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

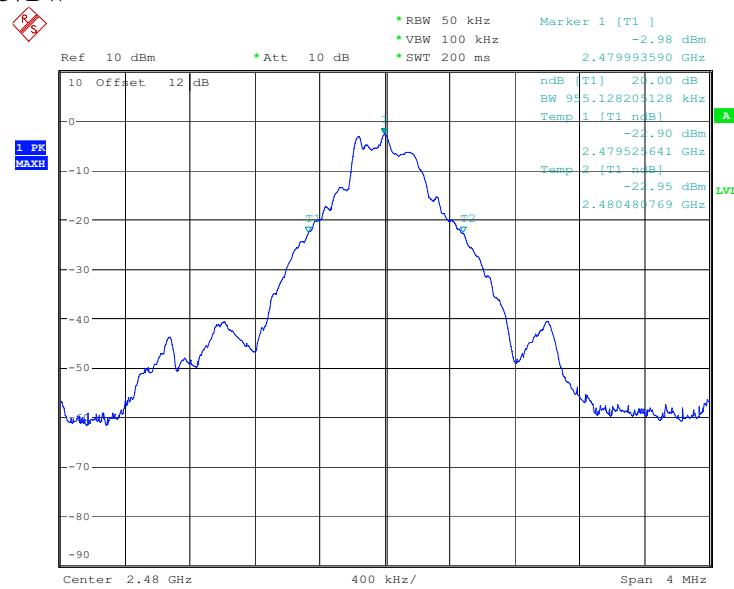

20DB BANDWIDTH CH78  
Date: 10.JAN.2009 15:19:59

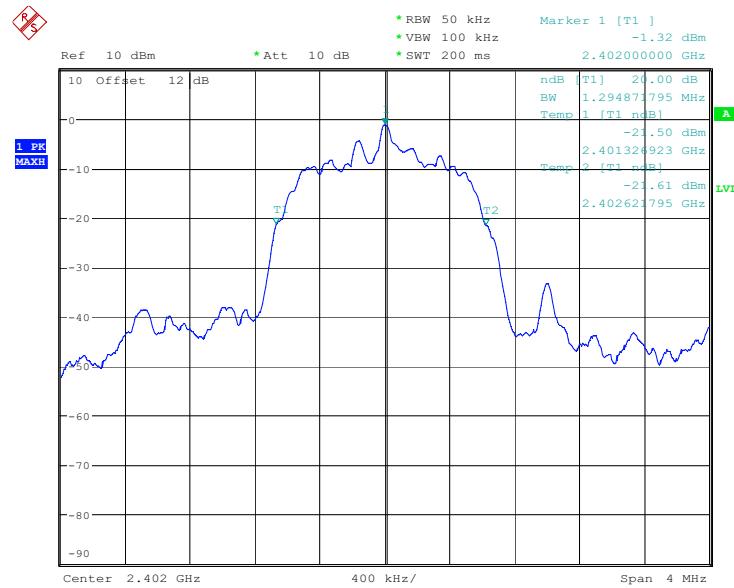


20DB BANDWIDTH CH0 EDR MODE  
Date: 12.JAN.2009 07:28:57



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

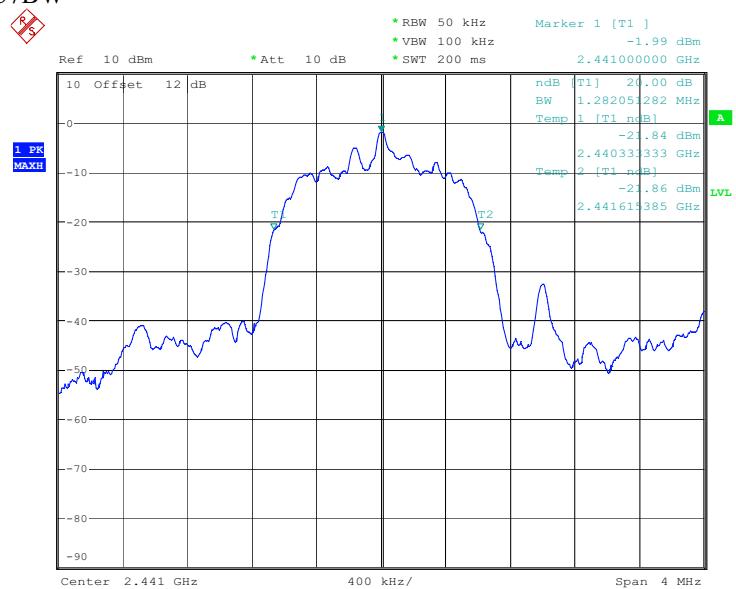

20DB BANDWIDTH CH39 EDR MODE

Date: 12.JAN.2009 07:30:20

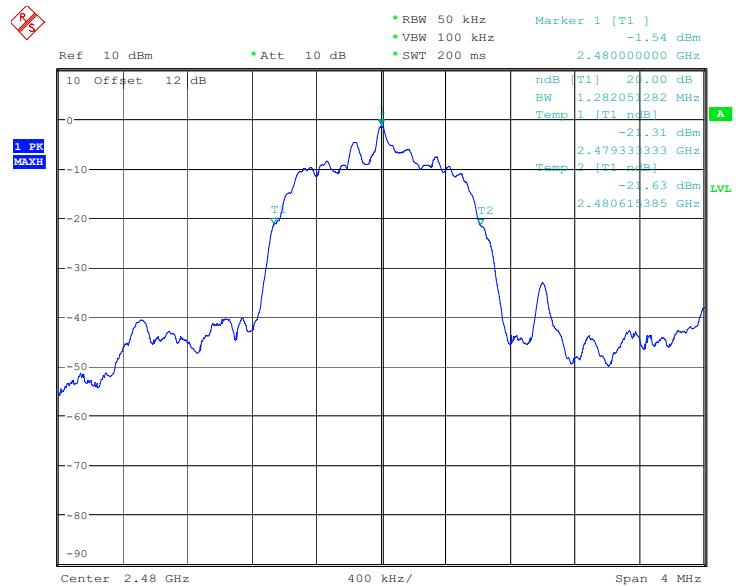

20DB BANDWIDTH CH78 EDR MODE

Date: 12.JAN.2009 07:31:17




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

## Band-edge Compliance of RF Conducted Emissions

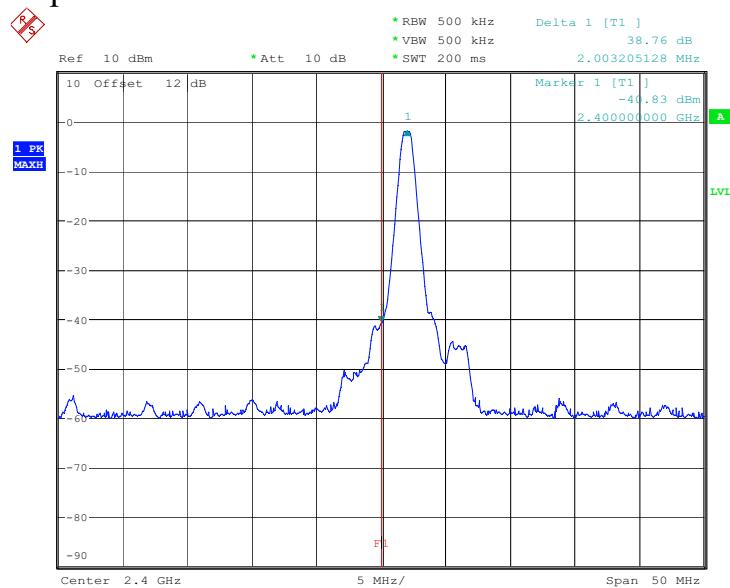

BANDEEDGE CH0  
Date: 10.JAN.2009 13:33:08

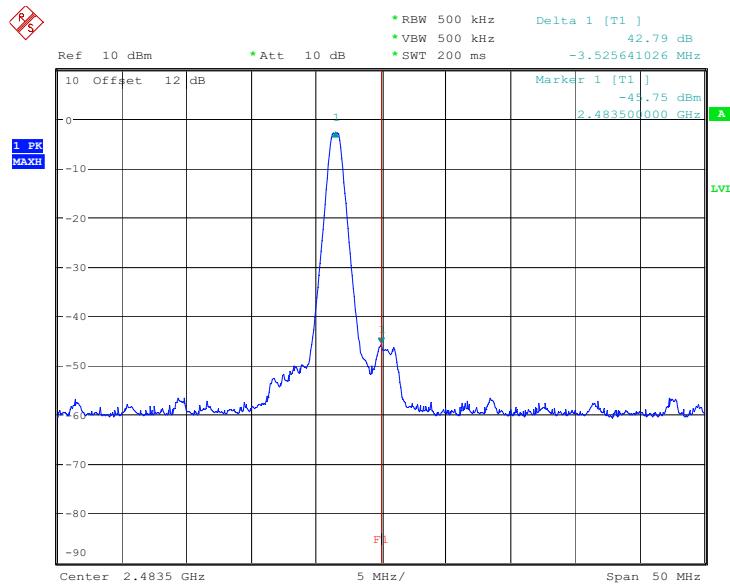


BANDEEDGE CH78  
Date: 10.JAN.2009 13:35:18



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

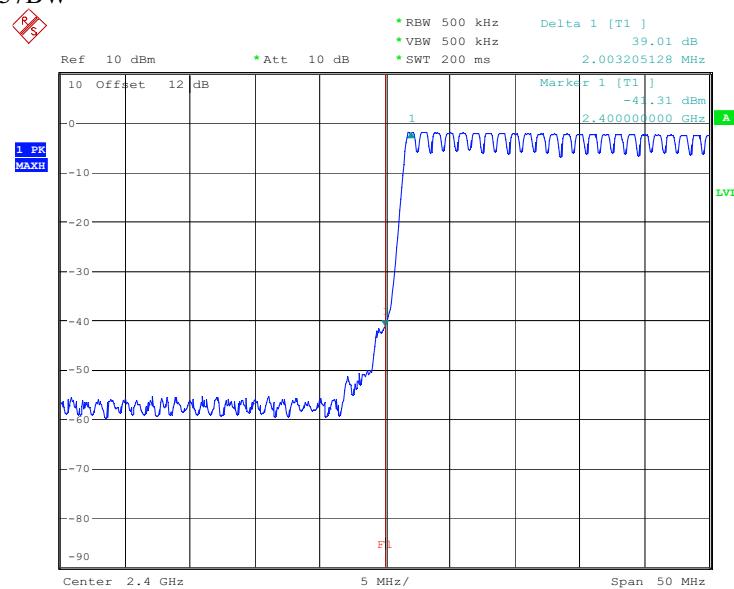

BANDEdge CHO HOPPING MODE

Date: 10.JAN.2009 13:42:24

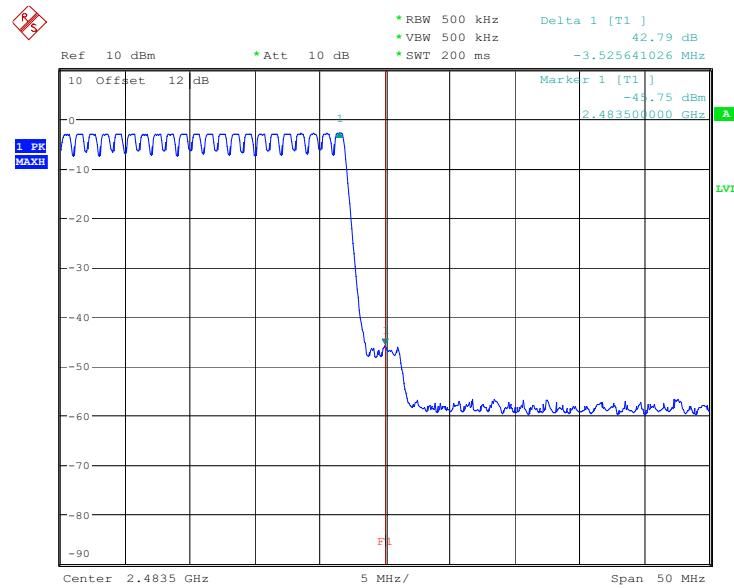

BANDEdge CH78 HOPPING MODE


Date: 10.JAN.2009 13:39:23




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

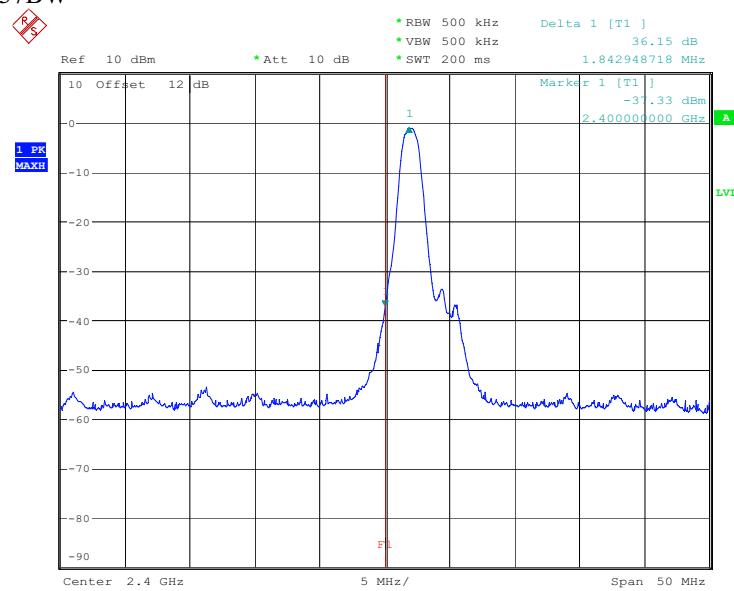

BANDEdge CH0 EDR MODE  
Date: 12.JAN.2009 07:34:26

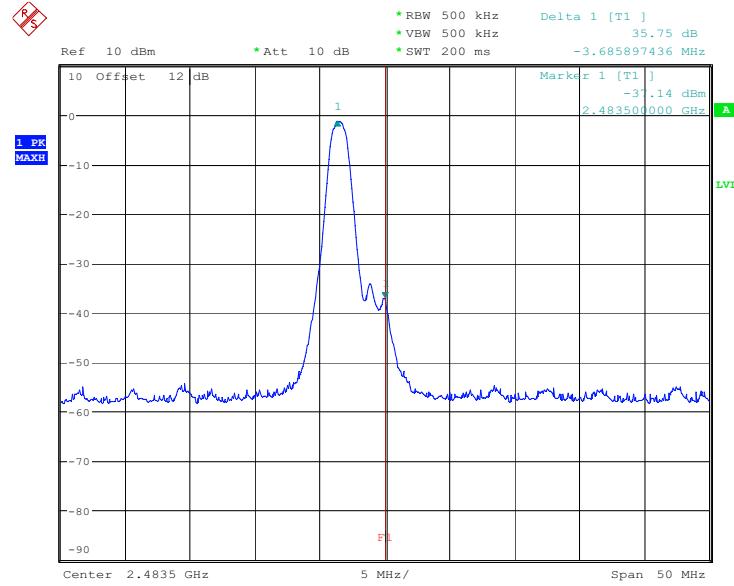


BANDEdge CH78 EDR MODE  
Date: 12.JAN.2009 07:41:46



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6D20909-10102-C-1

FCC ID: UVZP37BW

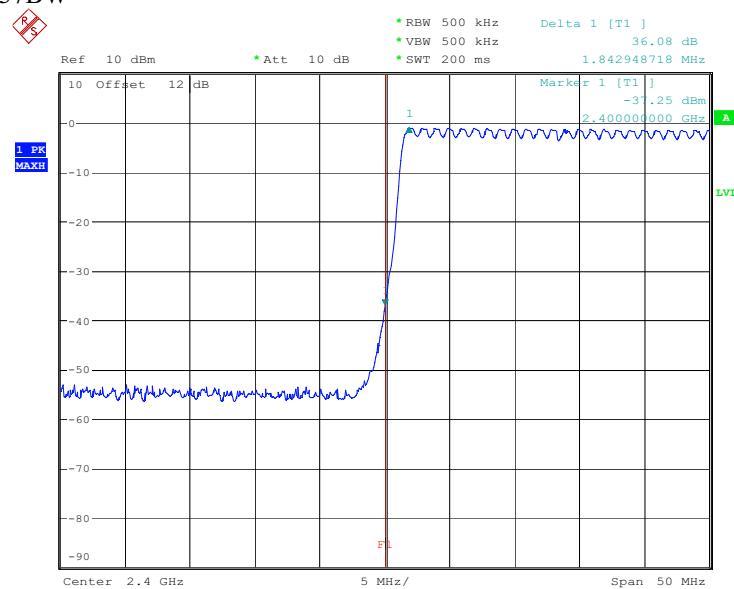

BANDEdge CHO EDR HOPPING MODE

Date: 12.JAN.2009 07:39:38

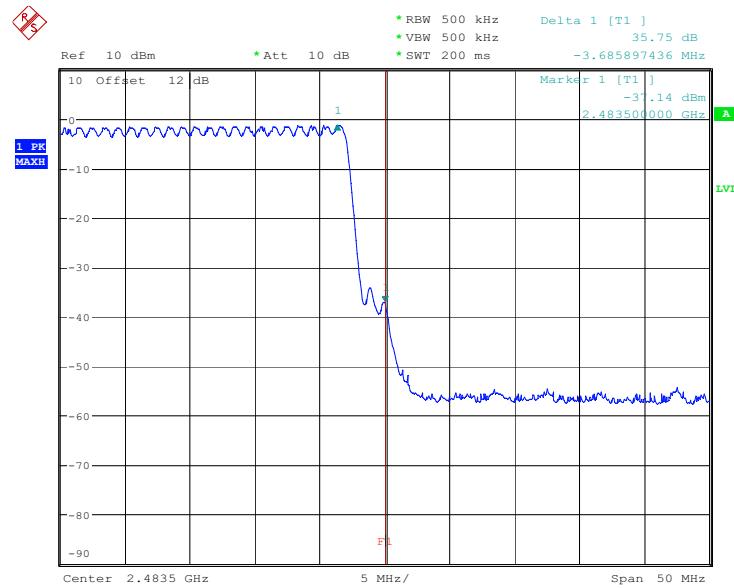

BANDEdge CH78 EDR HOPPING MODE

Date: 12.JAN.2009 07:46:09




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6D20909-10102-C-1


FCC ID: UVZP37BW

## Power Line Conducted Emission

### LISN N

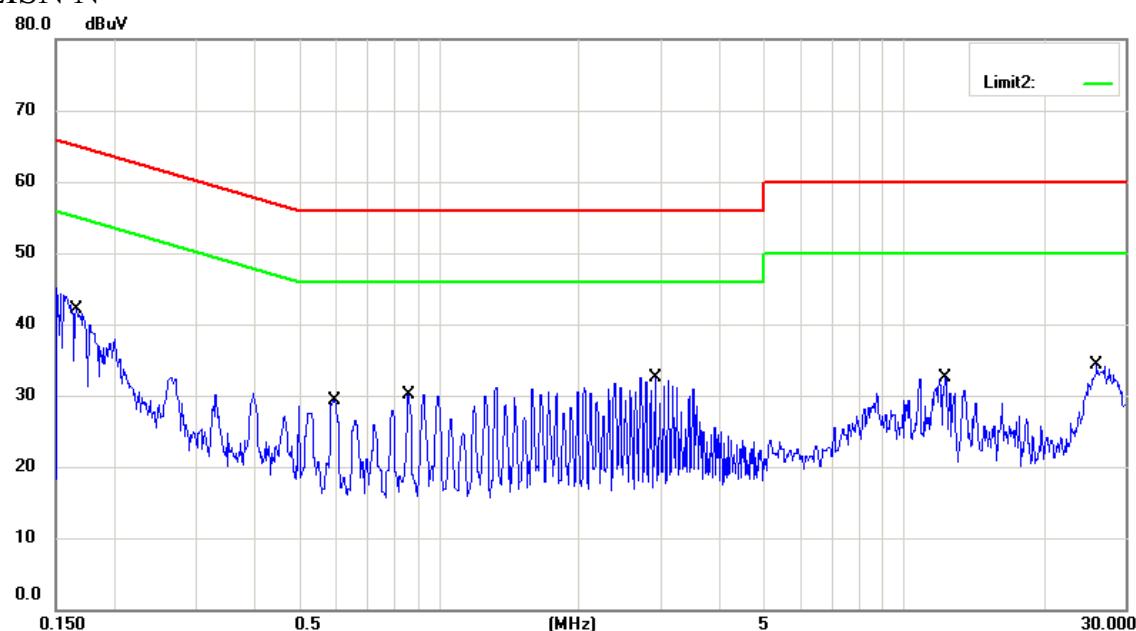

### LISN L1

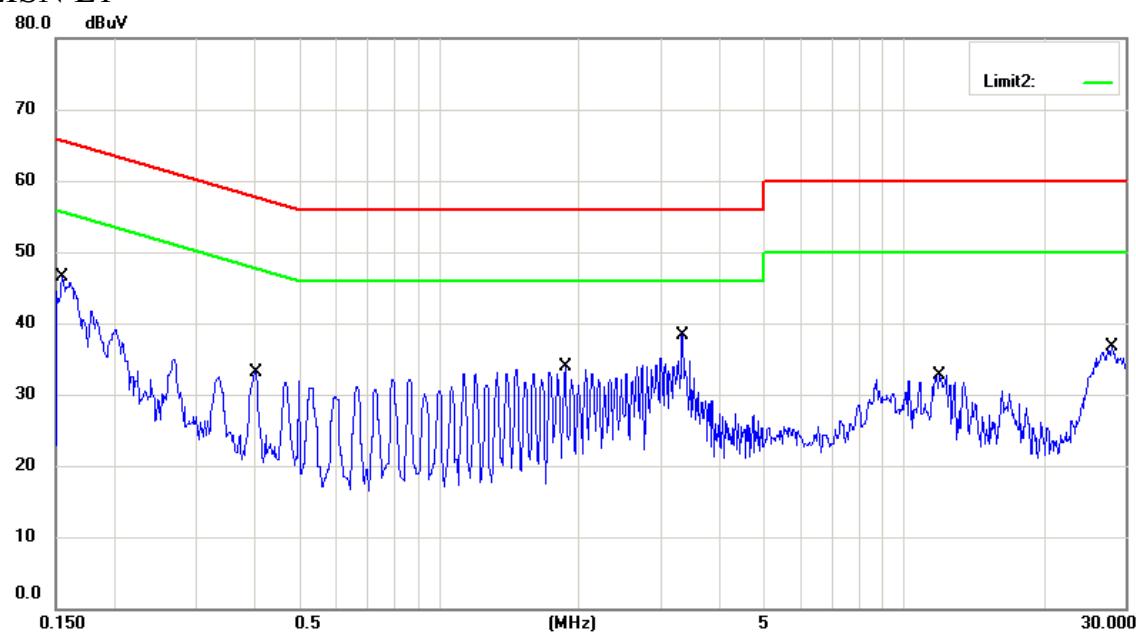

Up Line: QP Limit Line

Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of AC conducted test data of this test report.