


TEST REPORT

For FCC Part15B

Report No.: **CHTEW23020082** Report verification: 


Project No.: **SHT2301033101EW**

FCC ID.....: **UX8-PRM-USTB**

Applicant's name: **Bosch Security Systems BV**

Address.....: **Torenallee 49 5617 BA Eindhoven Netherlands**

Product Name: **Music source player**

Trade Mark:  **BOSCH**

Model No.: **PRM-USTB**

Listed Model(s): **-**

Standard: **47 CFR FCC Part 15 Subpart B**

Date of receipt of test sample.....: **Feb. 10, 2023**

Date of testing.....: **Feb. 11, 2023- Feb. 20, 2023**

Date of issue.....: **Feb. 21, 2023**

Result.....: **Pass**

Compiled by
(position+printed name+signature)....: **File administrators Silvia Li**

Supervised by
(position+printed name+signature)....: **Project Engineer Caspar Chen**

Approved by
(position+printed name+signature)....: **RF Manager Hans Hu**

Silvia Li

Caspar Chen

Hans Hu

Testing Laboratory Name: **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address.....: **1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China**

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY.....</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Testing Laboratory Information	5
<u>4.</u>	<u>TEST CONFIGURATION.....</u>	<u>6</u>
4.1.	Descriptions of test mode	6
4.2.	Support unit used in test configuration and system	6
4.3.	Environmental conditions	6
4.4.	Statement of the measurement uncertainty	6
4.5.	Equipments Used during the Test	7
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>8</u>
5.1.	Conducted Emissions	8
5.2.	Radiated Emissions	10
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>14</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS</u>	<u>15</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2023-02-21	Original

2. TEST DESCRIPTION

Section	Test Item	Section in CFR 47	Result ^{#1}	Test Engineer
5.1	Conducted Emissions	15.107(a)	PASS	Dongyang Wu
5.2	Radiated Emissions	15.109(a)	PASS	Quanhai Deng

Note:


#1: The test result does not include measurement uncertainty value

3. SUMMARY

3.1. Client Information

Applicant:	Bosch Security Systems BV
Address:	Torenallee 49 5617 BA Eindhoven Netherlands
Manufacturer:	Bosch Security Systems B.V.
Address:	Torenallee 49, 5617 BA Eindhoven, Netherlands

3.2. Product Description

Main unit information:	
Product Name:	Music source player
Trade Mark:	 BOSCH
Model No.:	PRM-USTB
Listed Model(s):	-
Power supply:	110-120Va.c. or 220-240Va.c.
Hardware version:	V1.0
Software version:	V1.0

3.3. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. Descriptions of test mode

Test mode O1	USB video port connected to U-disk and playing
Test mode O2	SD card playing

Pre-scan above all test mode, found below test mode which it was worse case mode, so only show the test data for worse case mode on the test report

Test Item	Test mode for worse case
Conducted Emissions	Test mode O1
Radiated Emissions	Test mode O2

4.2. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
✓ No				
Item	Equipment	Trade Name	Model No.	Other
1	-	-	-	-
2	-	-	-	-

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Radiated Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

● Conducted Emission

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2022/08/30	2023/08/29
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2022/08/29	2023/08/28
●	Pulse Limiter	R&S	HTWE0193	ESH3-Z2	101447	2022/08/29	2023/08/28
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX 142	EF-NM-BNCM-2M	2022/09/17	2023/09/16
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated Emission-Below 1GHz

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2023/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2022/08/30	2023/08/29
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0547	VULB9163	945	2022/05/23	2025/05/22
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2022/11/04	2023/11/03
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2023/02/24	2024/02/23
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2023/02/24	2024/02/23
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-Above 1GHz

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2018/09/27	2023/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2022/08/25	2023/08/24
●	Horn Antenna	ETS	HTWE0548	3117	240120	2022/05/20	2025/05/19
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2023/02/27	2024/02/26
●	RF Connection Cable	HUBER+SUHNER	HTWE0126-01	RE-7-FH	N/A	2023/02/27	2024/02/26
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● Auxiliary Equipment

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
○	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2022/08/25	2023/08/24
○	RF Communication Test Set	HP	HTWE0038	8920A	3813A10206	2022/08/25	2023/08/24
○	Digital intercom communication tester	Aeroflex	HTWE0255	3920B	1001682041	2022/08/25	2023/08/24

5. TEST CONDITIONS AND RESULTS

5.1. Conducted Emissions


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

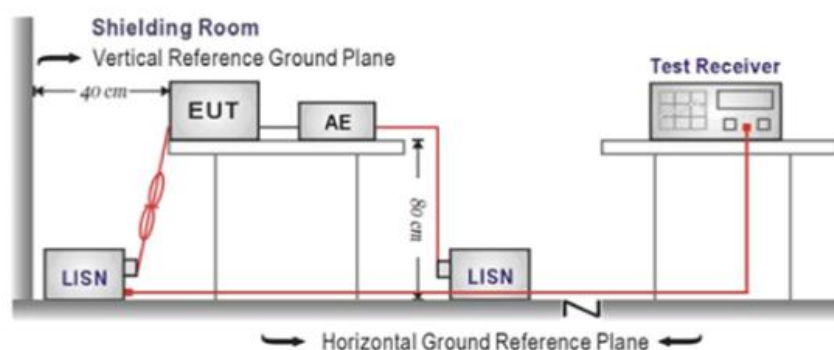

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Line:

L

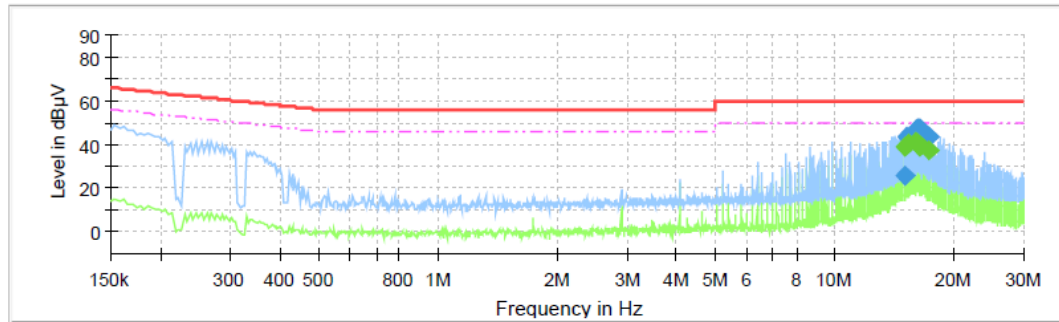


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
15.091500	25.93	---	60.00	34.07	L1	10.7
15.111500	---	38.86	50.00	11.14	L1	10.7
15.275500	43.79	---	60.00	16.21	L1	10.7
15.299500	---	40.14	50.00	9.86	L1	10.7
16.079500	46.21	---	60.00	13.79	L1	10.7
16.087500	---	41.03	50.00	8.97	L1	10.7
16.271500	47.43	---	60.00	12.57	L1	10.7
16.275500	---	40.42	50.00	9.58	L1	10.7
16.463500	47.41	---	60.00	12.59	L1	10.7
16.467500	---	38.58	50.00	11.42	L1	10.7
17.247500	43.14	---	60.00	16.86	L1	10.7
17.251500	---	37.17	50.00	12.83	L1	10.7

Test Line:

N

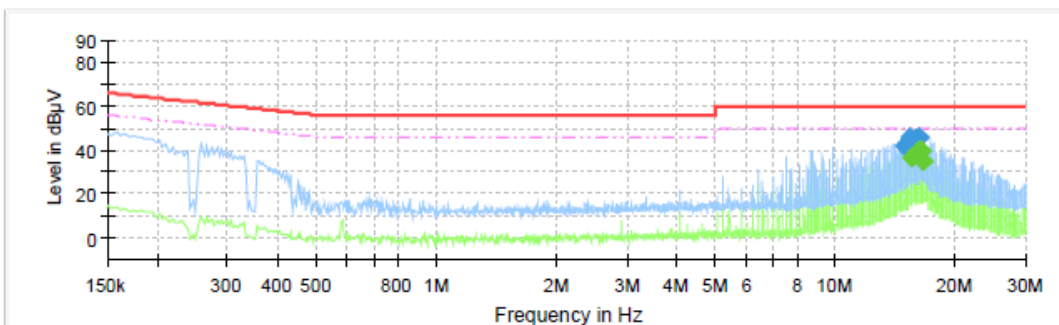

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
14.931500	42.12	---	60.00	17.88	N	10.6
15.303500	45.94	---	60.00	14.06	N	10.6
15.503500	---	36.55	50.00	13.45	N	10.6
15.507500	44.33	---	60.00	15.67	N	10.6
15.883500	45.23	---	60.00	14.77	N	10.6
16.087500	---	38.98	50.00	11.02	N	10.6
16.087500	44.88	---	60.00	15.12	N	10.6
16.275500	45.92	---	60.00	14.08	N	10.6
16.279500	---	39.58	50.00	10.42	N	10.6
16.464500	---	39.51	50.00	10.49	N	10.6
16.467500	---	39.24	50.00	10.76	N	10.6
16.655500	---	34.78	50.00	15.22	N	10.6

5.2. Radiated Emissions


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.109


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

➤ 30MHz ~ 1GHz

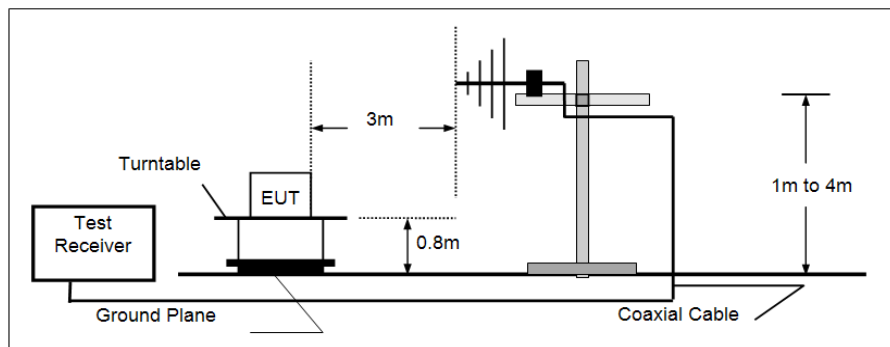

➤ Above 1GHz

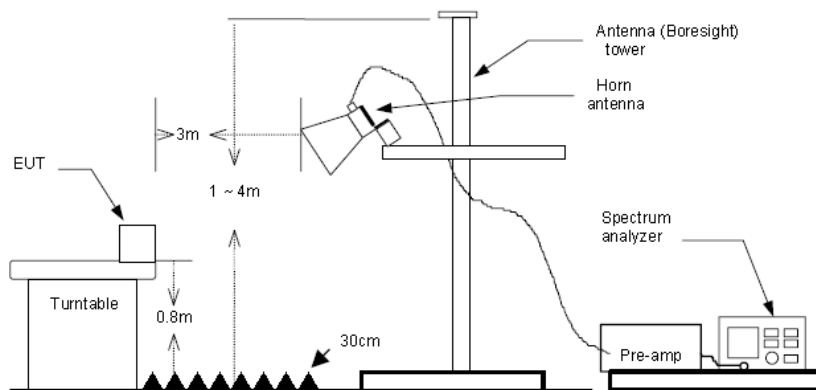

TEST PROCEDURE

- The EUT was tested according to ANSI C63.4:2014.
- The EUT is placed on a turn table which is 0.8 meter above ground.
- The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
- Use the following spectrum analyzer settings
 - Span shall wide enough to fully capture the emission being measured;
 - Below 1GHz,
RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
The emission levels of frequency above 6GHz are very lower than limit and not show in test report.


Polarization:

Horizontal

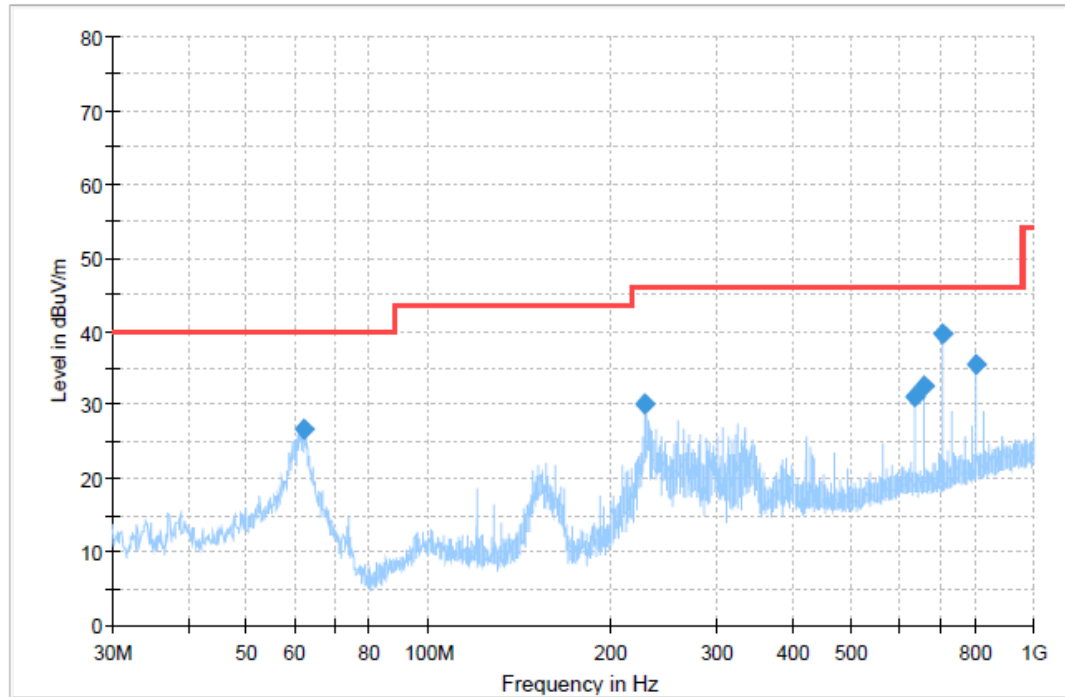

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
62.131250	26.59	40.00	13.41	300.0	H	154.0	-9.8
228.243750	30.12	46.00	15.88	100.0	H	114.0	-8.6
636.007500	31.01	46.00	14.99	100.0	H	44.0	1.0
660.015000	32.46	46.00	13.54	100.0	H	267.0	1.1
708.030000	39.56	46.00	6.44	100.0	H	83.0	1.4
804.060000	35.42	46.00	10.58	100.0	H	312.0	3.1

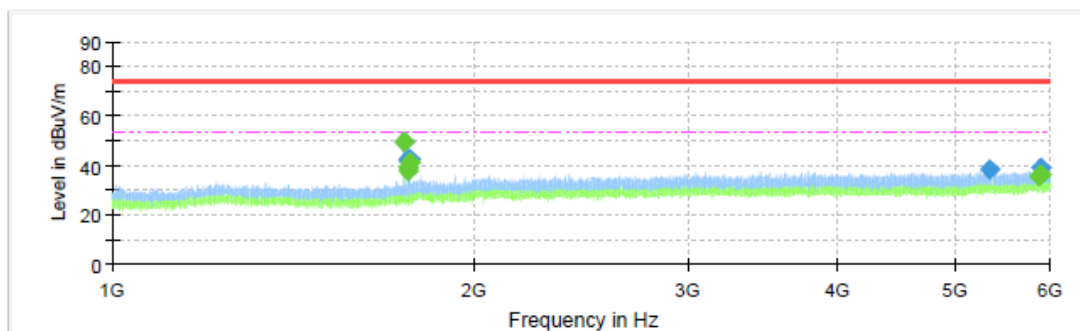


Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1746.093750	49.82	---	74.00	24.18	150.0	H	1.0	-8.9
1746.093750	---	49.49	54.00	4.51	150.0	H	1.0	-8.9
1759.687500	---	37.72	54.00	16.28	150.0	H	283.0	-8.7
1759.843750	42.35	---	74.00	31.65	150.0	H	283.0	-8.7
1760.468750	41.56	---	74.00	32.44	150.0	H	283.0	-8.7
1760.468750	---	39.17	54.00	14.83	150.0	H	283.0	-8.7
1763.750000	42.25	---	74.00	31.75	150.0	H	1.0	-8.7
1763.906250	---	41.24	54.00	12.76	150.0	H	1.0	-8.7
5345.156250	38.28	---	74.00	35.72	150.0	H	85.0	-0.1
5878.906250	---	35.50	54.00	18.50	150.0	H	297.0	1.1
5884.531250	---	36.23	54.00	17.77	150.0	H	0.0	1.1
5897.656250	38.74	---	74.00	35.26	150.0	H	264.0	1.1


Polarization:

Vertical

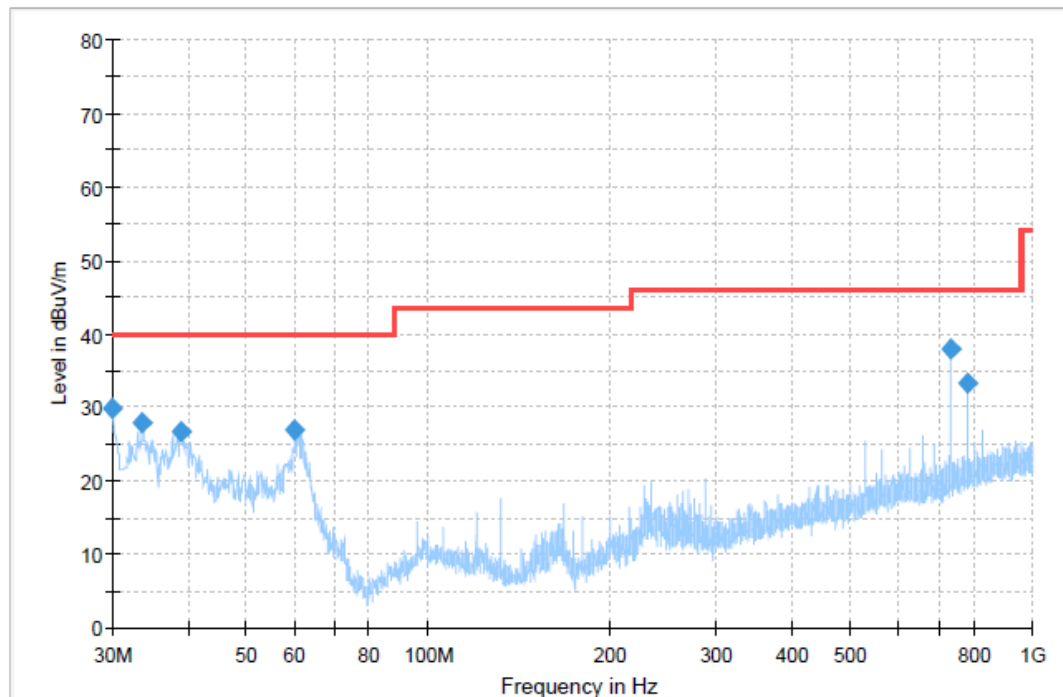

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.000000	29.93	40.00	10.07	100.0	V	284.0	-11.3
33.637500	27.79	40.00	12.21	100.0	V	236.0	-10.6
39.093750	26.74	40.00	13.26	100.0	V	241.0	-9.6
60.191250	26.97	40.00	13.03	100.0	V	229.0	-9.2
732.037500	38.00	46.00	8.00	100.0	V	12.0	2.0
780.052500	33.21	46.00	12.79	100.0	V	160.0	2.8

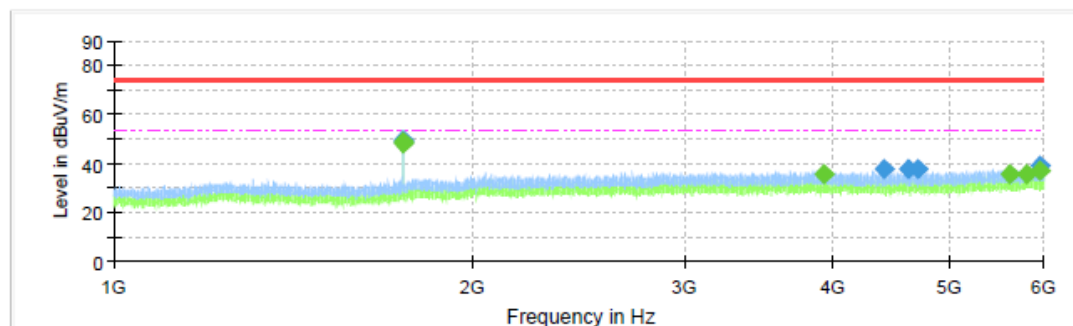

Final Result


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1746.093750	48.58	---	74.00	25.42	150.0	H	304.0	-8.9
1746.093750	---	48.00	54.00	6.00	150.0	H	304.0	-8.9
1747.187500	49.85	---	74.00	24.15	150.0	H	314.0	-8.9
1747.187500	---	48.53	54.00	5.47	150.0	H	314.0	-8.9
3931.250000	---	35.39	54.00	18.61	150.0	H	256.0	-2.7
4403.437500	37.43	---	74.00	36.57	150.0	H	117.0	-2.2
4622.500000	37.61	---	74.00	36.39	150.0	H	256.0	-1.5
4707.968750	37.36	---	74.00	36.64	150.0	H	330.0	-1.4
5616.718750	---	35.24	54.00	18.76	150.0	H	107.0	0.3
5810.156250	---	35.84	54.00	18.16	150.0	H	138.0	0.9
5962.968750	---	36.89	54.00	17.11	150.0	H	146.0	1.2
5962.968750	38.78	---	74.00	35.22	150.0	H	146.0	1.2

6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)



Radiated Emissions (30MHz-1GHz)

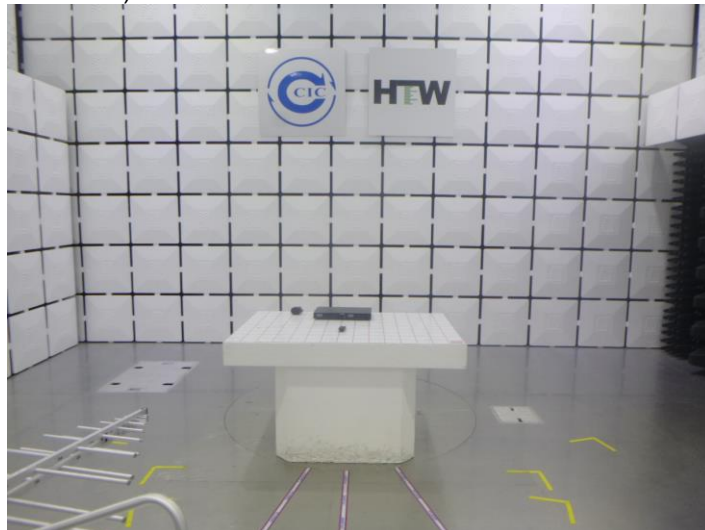

Radiated Emissions (Above 1GHz)



7. **EXTERNAL AND INTERNAL PHOTOS**

Refer to the test report No.: CHTEW23020080

-----End of Report-----