

FCC Test Report (TR-1302-006-05)

Applicant : GP Electronics (HK) Ltd.

Address : 6/F Gold Peak Building, 30 Kwai Wing Road, Kwai Chung,
N.T., Hong Kong

Manufacturer : GP Electronics (Huizhou) Co. Ltd.

Address : No.76, Hui Feng Si Road, Zhong Kai Hi-Tech Industrial
Development Zone, Huizhou, Guangdong, P.R.China 516006

Product Name : Powered Subwoofer

Trademark : KEF

Model(s) : V-20W

Standard(s) : FCC Part 15 Subpart C

Test Result : Pass

Date of Test : Jul 04, 2013 to Aug 20, 2013

Report issued Dated : Sep 02, 2013

The report shall not be reproduced except in full, without the written approval of the TDK EMC Center.

The results in this report apply only to the sample(s) tested. The production units are required to conform to the initial sample as received when the units are placed in the market.



Responsible Engineer	:		Approved by	:	
		Phenix Zhang	Technical manager		CHAN king-chui
Date	:	2013.09.02	Date	:	2013.09.02

Table of Contents

Description	Page
1.Description of the Test Site.....	3
1.1 Test Site Location:.....	3
1.2 Site Registration.....	3
1.3 Test Scope.....	3
2.Description of the Tested Samples.....	4
2.1 Customer Information.....	4
2.2 Identification of EUT.....	4
2.3 Spec of EUT.....	4
2.4 Test Standards List.....	4
3. Test Specifications.....	5
3.1 Standard(s) Used.....	5
3.2 Deviations from the Test Specification.....	5
3.3 Test mode.....	5
4. Test Result.....	6
4.1 Antenna Requirement.....	6
4.2 Conducted Emission (mains).....	7
4.3 Hopping Channel Bandwidth.....	10
4.4 Hopping Channel Separation.....	13
4.5 Number of Hopping Frequency.....	16
4.6 Dwell Time of Each Frequency.....	18
4.7 Maximum Peak Output Power.....	23
4.8 Band Edges Emission.....	26
4.9 Spurious Radiated Emission.....	37
5. Test Setup.....	59
5.1 Ancillary and Accessory Equipment Used.....	59
5.2Photographs of the Test Configuration.....	60
5.3 Photographs of the EUT.....	62
6. Equipment List.....	63
7. Test Uncertainty.....	64
8. Appendix.....	64
8.1 Confirmation of Compliance within the Limits.....	64
8.2 Compliance Statements.....	65

1. Description of the Test Site

1.1 Test Site Location:

Laboratory : TDK South China EMC Center
SAE Technologies Development (Dongguan) Co.,
Ltd. Changan Branch
Address : Zhenan Hi-tech Industrial Park, Dongguan City,
Guangdong Province, China
Phone no. : (86)-769-8564-4678
Fax no. : (86)-769-8564-4499
Email : emc@cn.tdk.com

1.2 Site Registration

VCCI (November 2011) : Reg. No. R-4814, C-3733,
G-473, T-1212
FCC site registration (August, 2011) : Reg. No. 732901
IC registration (January,2011) : Reg. No. 7993A
CNAS(August, 2010) : Reg. No. L4677

1.3 Test Scope

EMC and RF testing according to national / international standards

2. Description of the Tested Samples

2.1 Customer Information

Customer : GP Electronics (HK) Ltd.
Address : 6/F Gold Peak Building, 30 Kwai Wing Road, Kwai
Chung, N.T., Hong Kong
Phone no. : NIL
Fax no. : NIL

2.2 Identification of EUT

Trademark : KEF
Model(s) : V-20W
Serial No. : None

2.3 Spec of EUT

Description of Antenna#1 : fixed, built-in antenna, 2.1dBi
(GPE part number: 1726-124A+000A)
Description of Antenna#2 : fixed, built-in antenna, -0.4dBi
(GPE part number: 2107-1571+0)
Power Supply : AC 100-240V 50/60Hz
Operation Frequency : 2404 MHz ~ 2476 MHz
Number of Channels : 18
Spread Spectrum : FHSS
Type of Modulation : shaped-8FSK

2.4 Test Standards List

FCC Part 15 (2012)

American national standard for methods of measurement of radio noise emissions from low-voltage electrical and electronic equipment in the range of 9KHz to 40GHz.

FCC PUBLIC NOTICE DA 00-705

Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

3. Test Specifications

3.1 Standard(s) Used

FCC Rules	Description Of Test	Result
15.203/15.247(b)	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.247(a)(1)	Hopping Channel Bandwidth	Pass
15.247(a)(1)	Hopping Channel Separation	Pass
15.247(a)(1)	Number of Hopping Frequency Used	Pass
15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.247(d)	Band Edges Emission	Pass
15.247(d)	Spurious Radiated Emission	Pass

3.2 Deviations from the Test Specification

N/A

3.3 Test mode

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode is programmed.

Channel 1(2406MHz), Channel 9(2438MHz), Channel 18(2474MHz) are chosen for the final testing.

4. Test Result

4.1 Antenna Requirement

4.1.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.1.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.


Transmitter antennas of directional gain is 2.1dBi and -0.4dBi.

4.2 Conducted Emission (mains)

4.2.1 Test Summary

Test Room	:	Shielded Room
Power Source	:	AC 120V / 60Hz
Standards:	:	FCC Part15 B : 2012
EUT Type	:	Table Top
EUT configuration	:	EUT's highest possible emission level

4.2.2 Block diagram of test setup

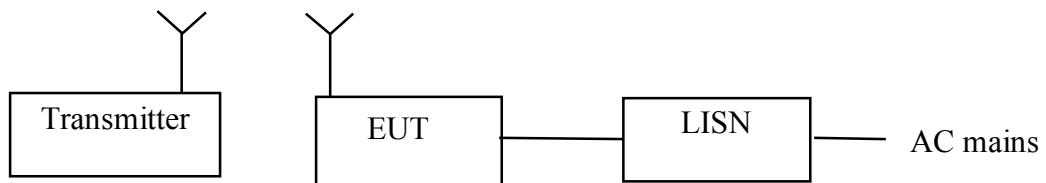

4.2.3 Measurement method

The EUT along with its peripherals were placed on a 1.0m (W) x 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4m space from a vertical reference plane. The EUT was connected to power mains through a Artificial Mains Network(AMN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.

The excess power cable between the EUT and the AMN was bundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

4.2.4. Result

PASS



Conducted Emission

TDK South China EMC Centre
Date : 2013-07-04 17:27:40

Trade Name	:		Document No.	:	
Model Name	:	V-20W	Power Supply	:	AC 120V/60Hz
Product Name	:	Powered Subwoofer	Temp/Humi	:	25deg / 52%RH
Test condition	:	TX	Operator	:	JiaLiang Cao

Memo :

LIMIT : FCC Part 15 B QP
FCC Part 15 B AV

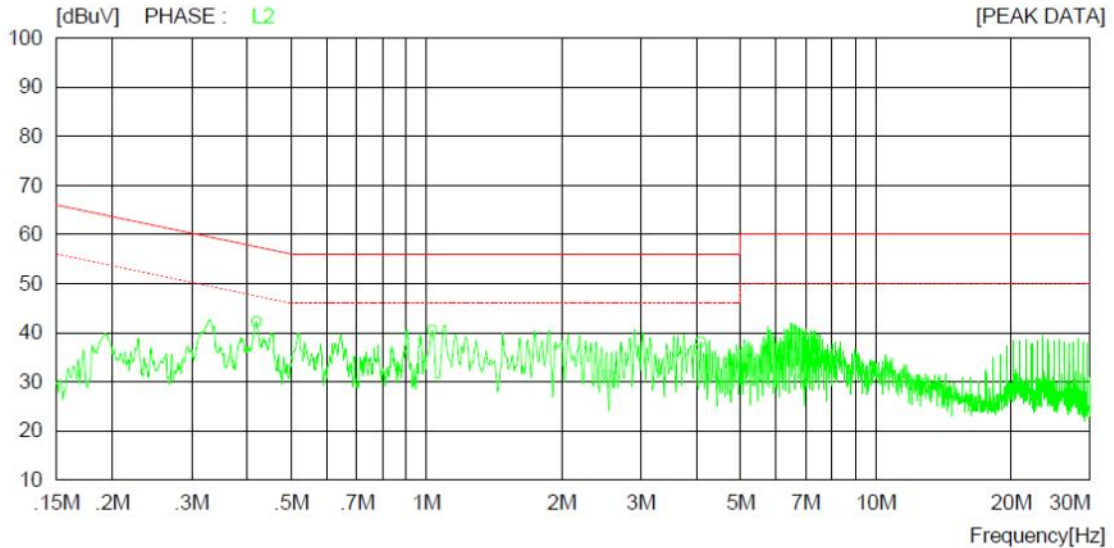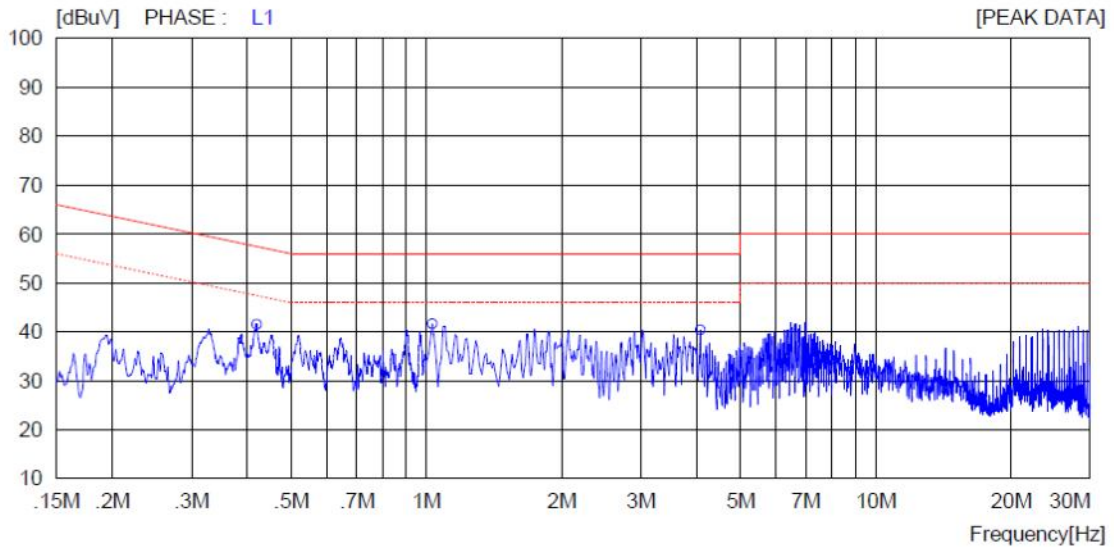

Conducted Emission

TDK South China EMC Centre
Date : 2013-07-04 17:27:40Trade Name :
Model Name : V-20W
Product Name : Powered Subwoofer
Test condition : TXDocument No. :
Power Supply : AC 120V/60Hz
Temp/Humi : 25deg / 52%RH
Operator : JiaLiang Cao

Memo :

LIMIT : FCC Part 15 B QP
FCC Part 15 B AV


NO	FREQ [MHz]	READING(PK) [dBuV]	C.F [dB]	RESULT [dBuV]	LIMIT		MARGIN		PHASE
					QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
1	0.41900	31.6	10.0	41.6	57.5	47.5	15.9	5.9	L1
2	1.03000	31.8	9.9	41.7	56.0	46.0	14.3	4.3	L1
3	4.07000	30.5	10.0	40.5	56.0	46.0	15.5	5.5	L1
4	0.41900	32.2	10.0	42.2	57.5	47.5	15.3	5.3	L2
5	1.03000	30.6	9.9	40.5	56.0	46.0	15.5	5.5	L2
6	4.07000	28.1	10.0	38.1	56.0	46.0	17.9	7.9	L2

4.3 Hopping Channel Bandwidth

4.3.1 Applicable Standard

Section 15.247(a)(1): frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW(20.96dBm).

4.3.2 Block diagram of test setup



Spectrum

Connection method: delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The Z_c of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.


4.3.3 Measurement method

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Measure spectrum width with level more than 20dB below the peak level.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.


4.3.4. Result

Temperature (°C) : 22~23	EUT: Powered Subwoofer
Humidity (%RH) : 50~54	M/N: V-20W
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode
Test data: Jul 19, 2012	Test engineer: Phenix


Channel No.	Frequency (MHz)	20dB Bandwidth (MHz)	Min. Limit (kHz)
LOW	2406	4.52	>25
MID	2438	4.42	>25
HIG	2474	4.40	>25

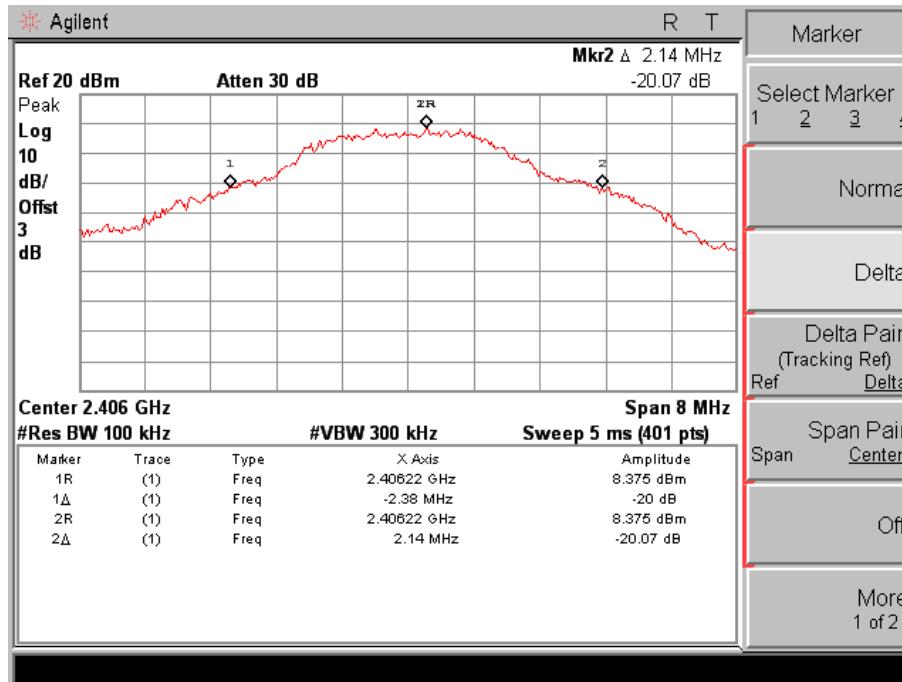Channel LOW :


Channel MID :

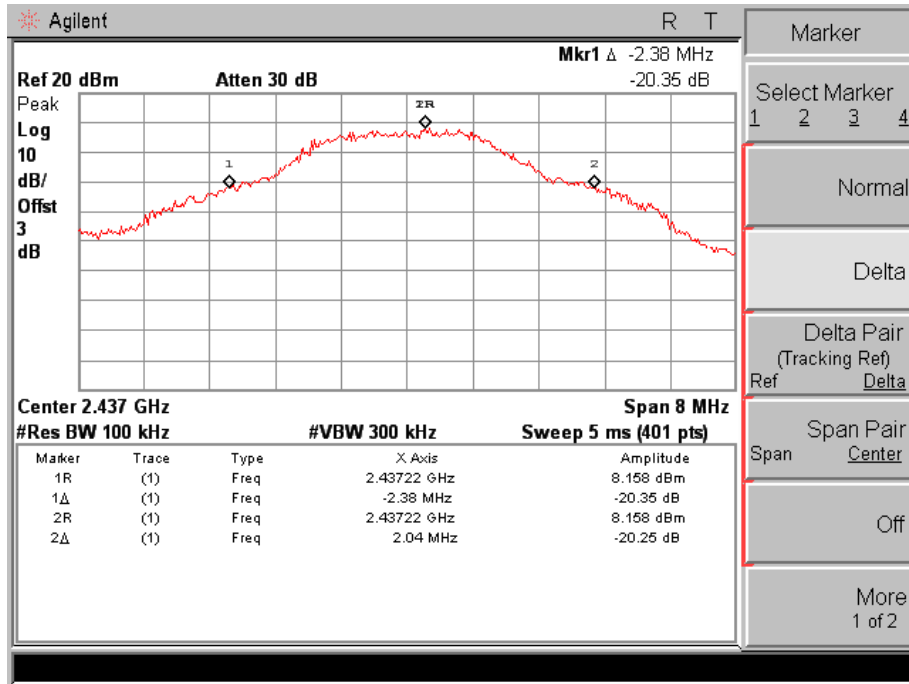

Channel HIG :

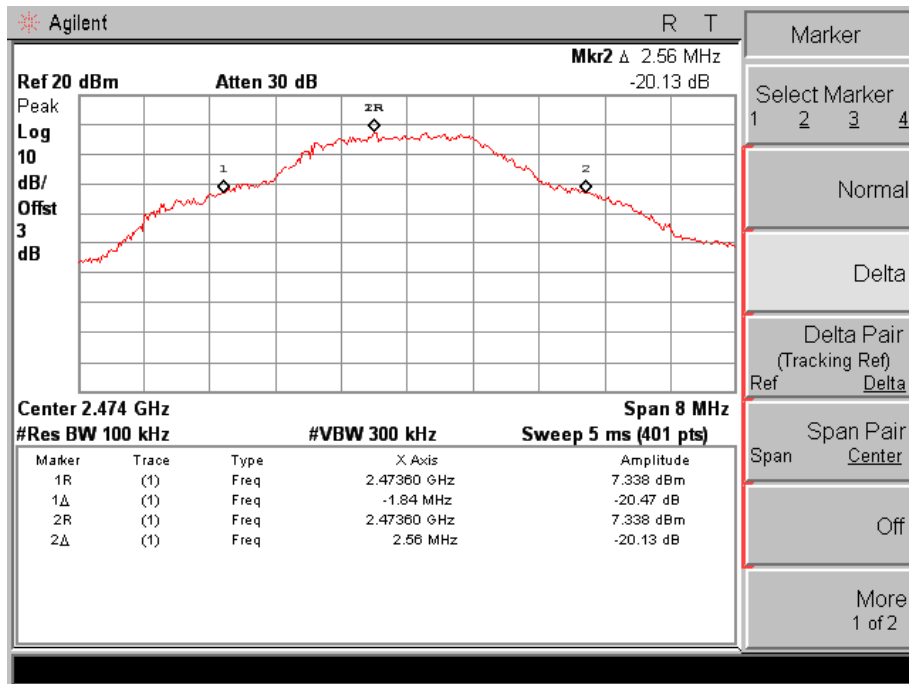


4.4 Hopping Channel Separation

4.4.1 Applicable Standard

Section 15.247(a)(1): frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW(20.96dBm).

4.4.2 Block diagram of test setup

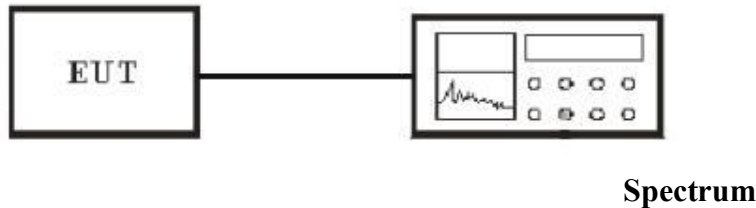

Connection method: delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The Z_c of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

4.4.3 Measurement method

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.


4.4.4. Result

PASS


Temperature (°C) : 22~23	EUT: Powered Subwoofer
Humidity (%RH) : 50~54	M/N: V-20W
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode
Test data: Jul 19, 2012	Test engineer: Phenix

Channel No.	Frequency (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)
LOW(channel 1)	2406	4.0	4.52
MID(channel 9)	2438	3.975	4.42
HIG(channel 18)	2474	3.9975	4.40


Conclusion: $2/3$ rd of the largest 20dB Bandwidth = $2/3 \times 4.52 \text{ MHz} = 3.013 \text{ MHz}$ (see section 4.3), which is less than the carrier channel separation of 4 MHz. In addition, the output power is less than 125 mW. See section 4.7 for the measurement of output power.

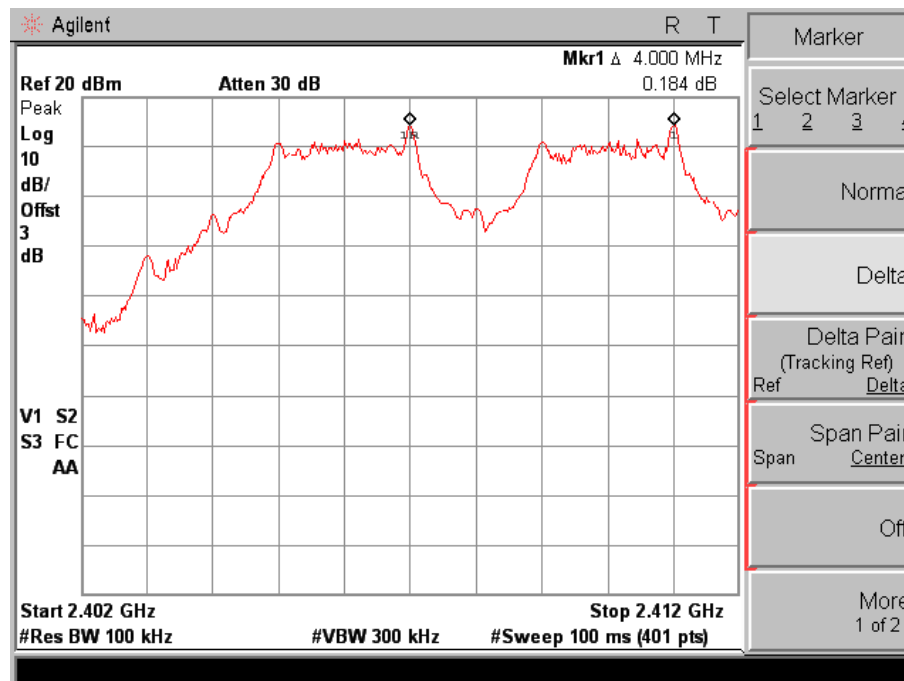Channel Low :


Channel MID :

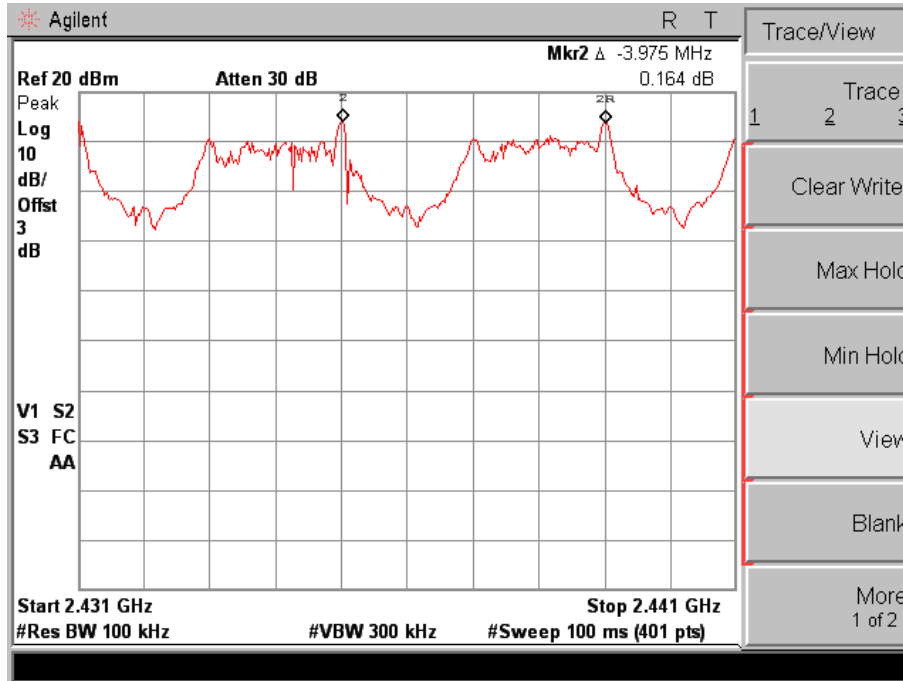

Channel HIG :

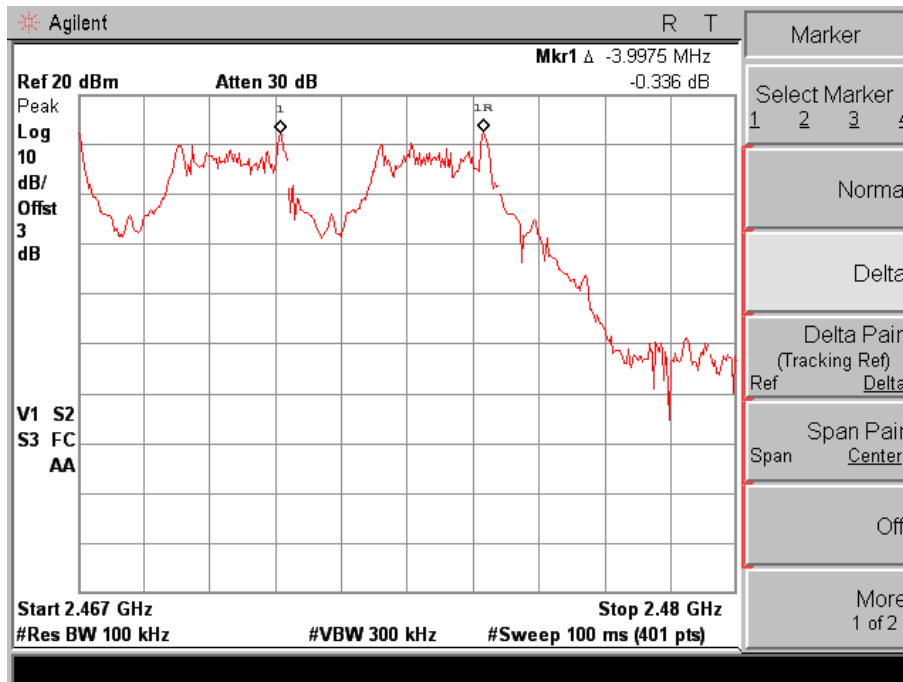


4.5 Number of Hopping Frequency

4.5.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

4.5.2 Block diagram of test setup

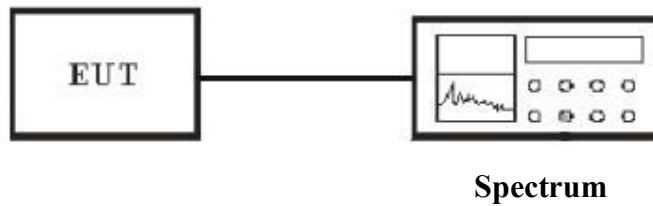

Connection method: delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The Z_c of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.


4.5.3 Measurement method

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are 18 non-overlapping channels.

4.5.4. Result

Temperature (°C) : 22~23	EUT: Powered Subwoofer
Humidity (%RH) : 50~54	M/N: V-20W
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode
Test data: Jul 19, 2012	Test engineer: Phenix

Frequency (MHz)	Number of Hopping Channel	Min. Limit (Channels)
2400~2483	18	>15

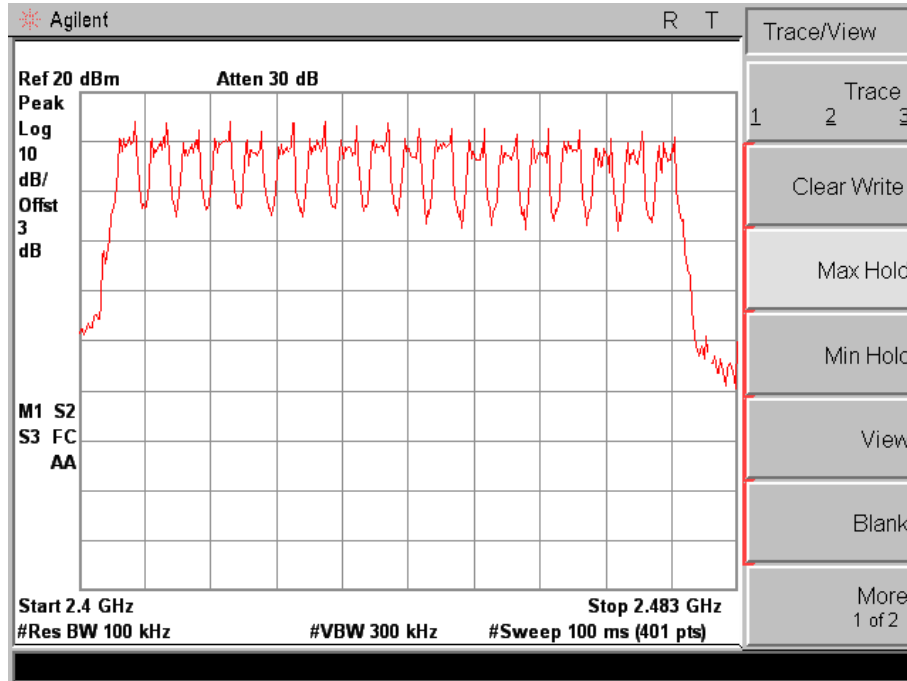
Test Plot:


4.6 Dwell Time of Each Frequency

4.6.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

4.6.2 Block diagram of test setup



Spectrum

Connection method: delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The Z_c of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

4.6.3 Measurement method

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

4.6.4. Result

Temperature (°C) : 22~23	EUT: Powered Subwoofer
Humidity (%RH) : 50~54	M/N: V-20W
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode
Test data: Jul 19, 2012	Test engineer: Phenix



Calculate:

The Dwell Time = (time of Pulse / Pulse Cycle) x 0.4(second) x 18(channels)



Channel	Time of Pulse (ms)	Pulse Cycle (ms)	Dwell Time (ms)	Limit (ms)	Result
LOW	0.2	10	144	400	Pass
MID	0.2	10	144	400	Pass
HIG	0.2	10	144	400	Pass

The maximum time of occupancy for a particular channel is 144 ms, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.



Test Plot:
Channel LOW :

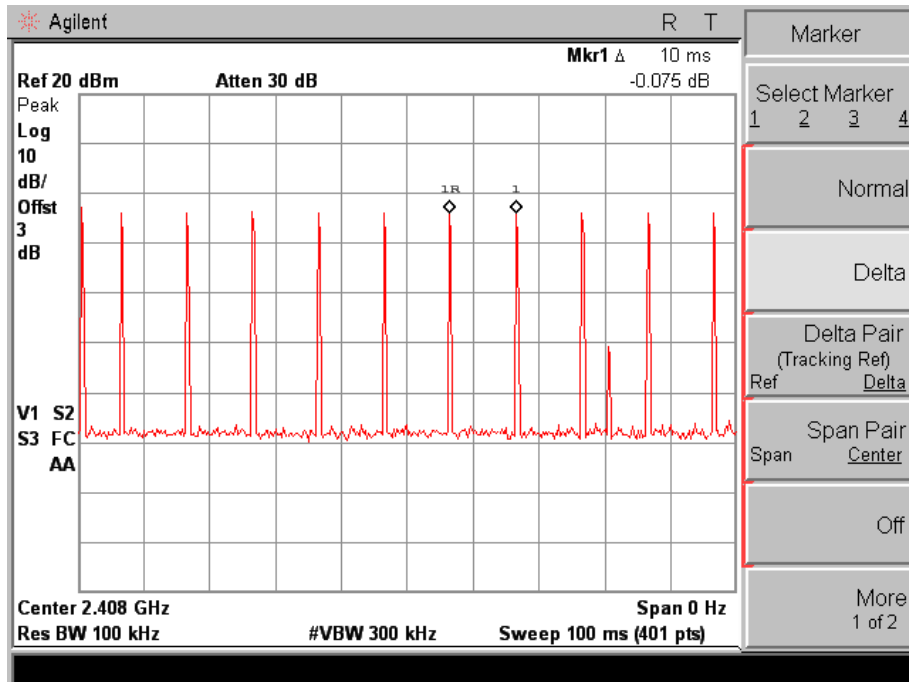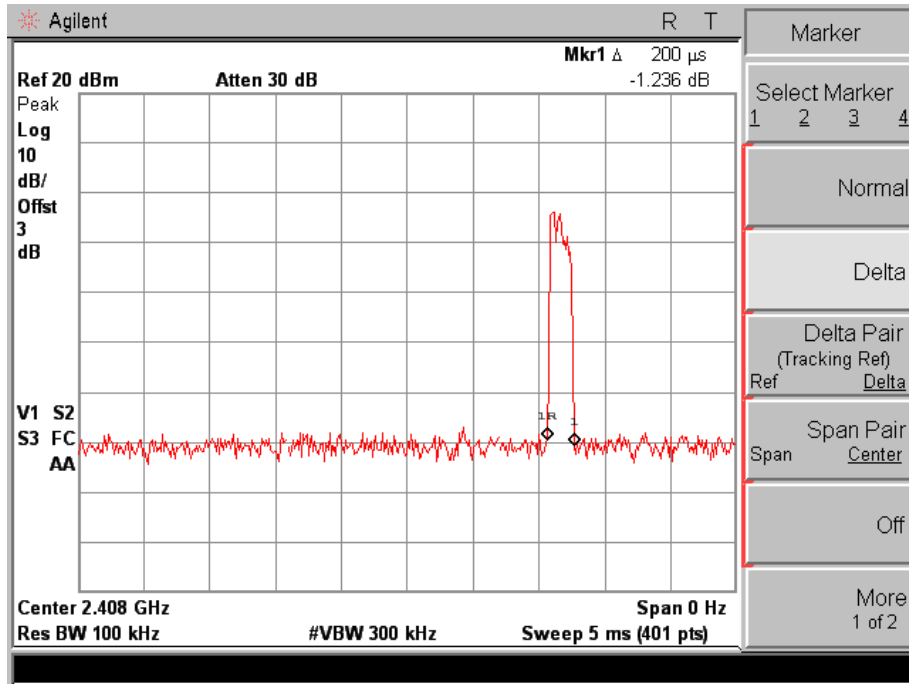

Channel MID :

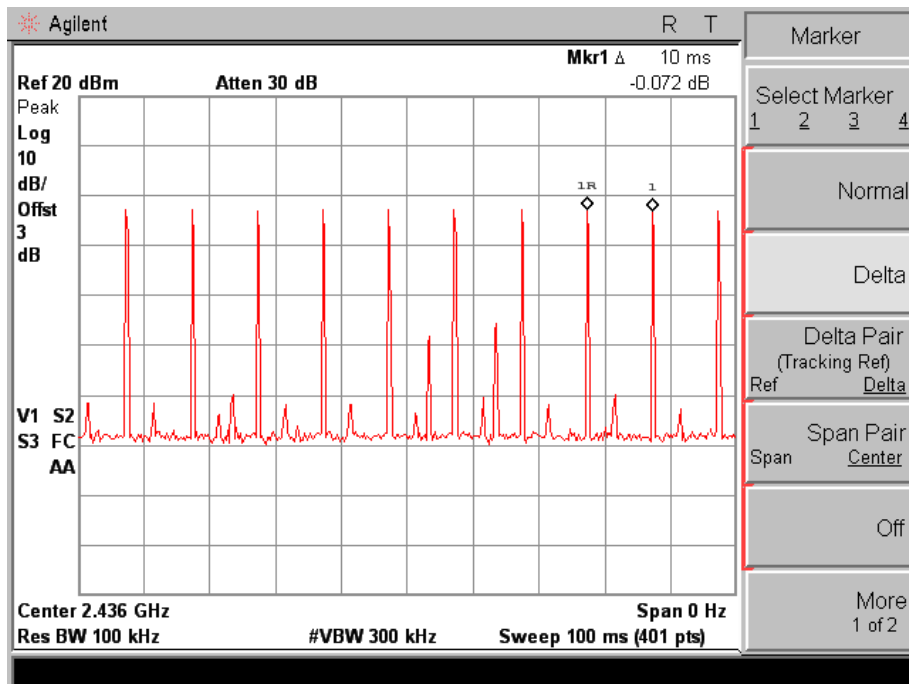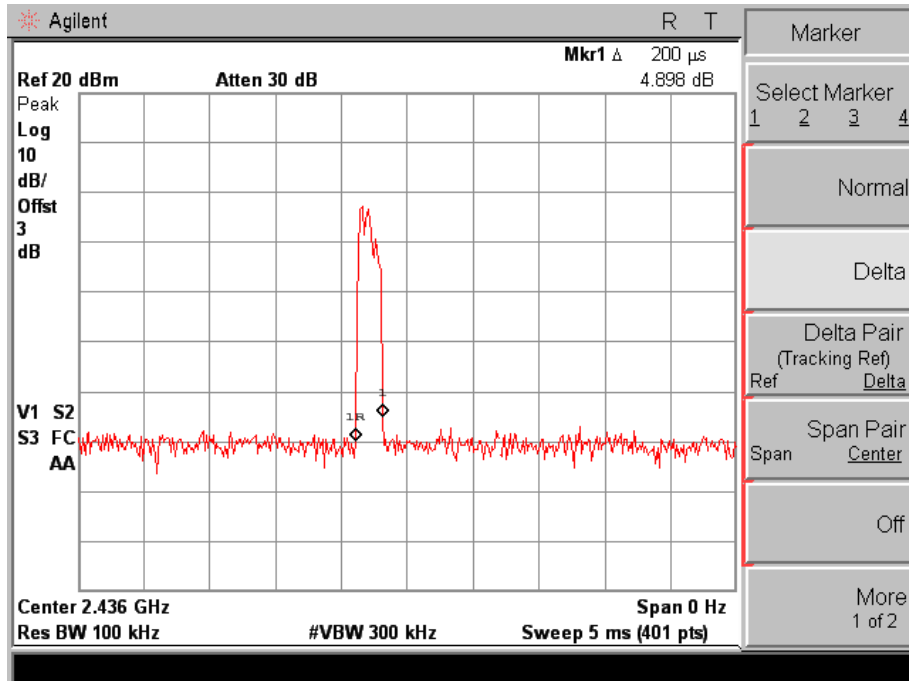

Channel HIG :

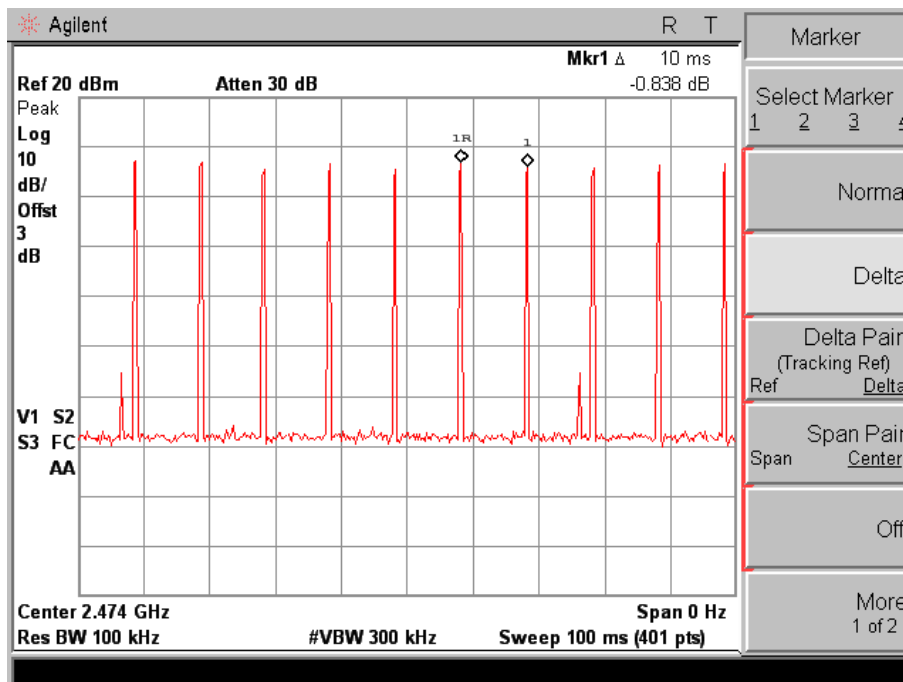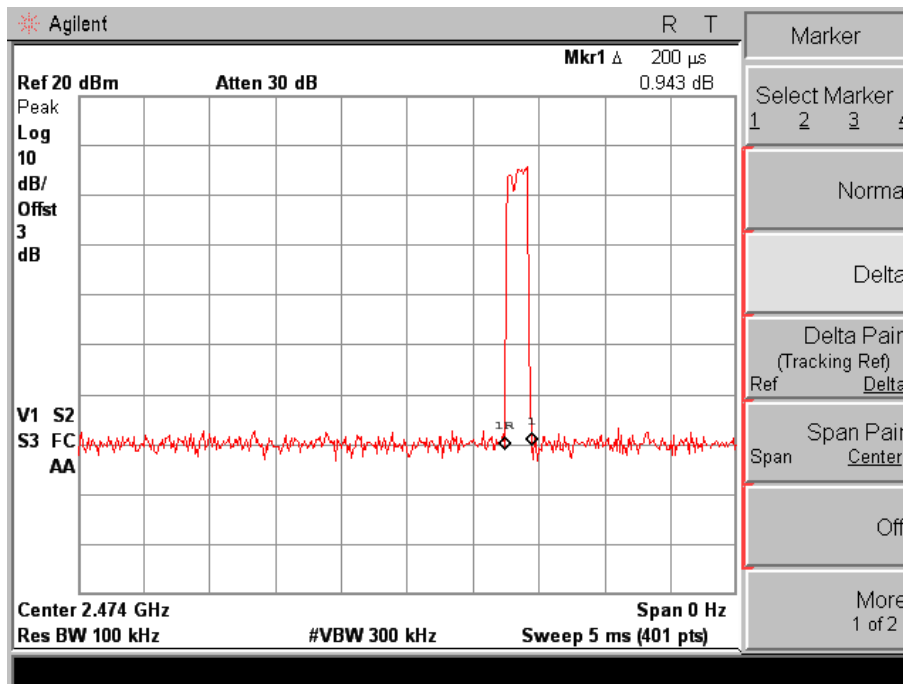


4.7 Maximum Peak Output Power

4.7.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

4.7.2 Block diagram of test setup

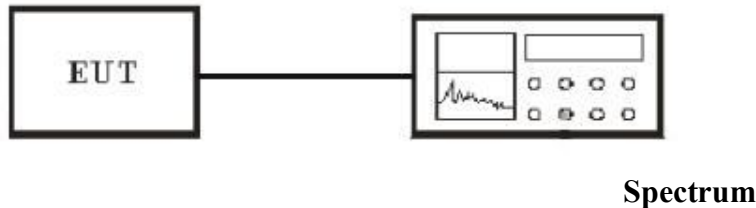

Connection method: delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The Z_c of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

4.7.3 Measurement method


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in above figure without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - RBW > the 20 dB bandwidth of the emission being measured
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.



4.7.4. Result

Temperature (°C) : 22~23	EUT: Powered Subwoofer
Humidity (%RH) : 50~54	M/N: V-20W
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode
Test data: Jul 19, 2012	Test engineer: Phenix

Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
LOW	2406	11.30	20.96
MID	2438	10.88	20.96
HIG	2474	10.03	20.96

Channel LOW :

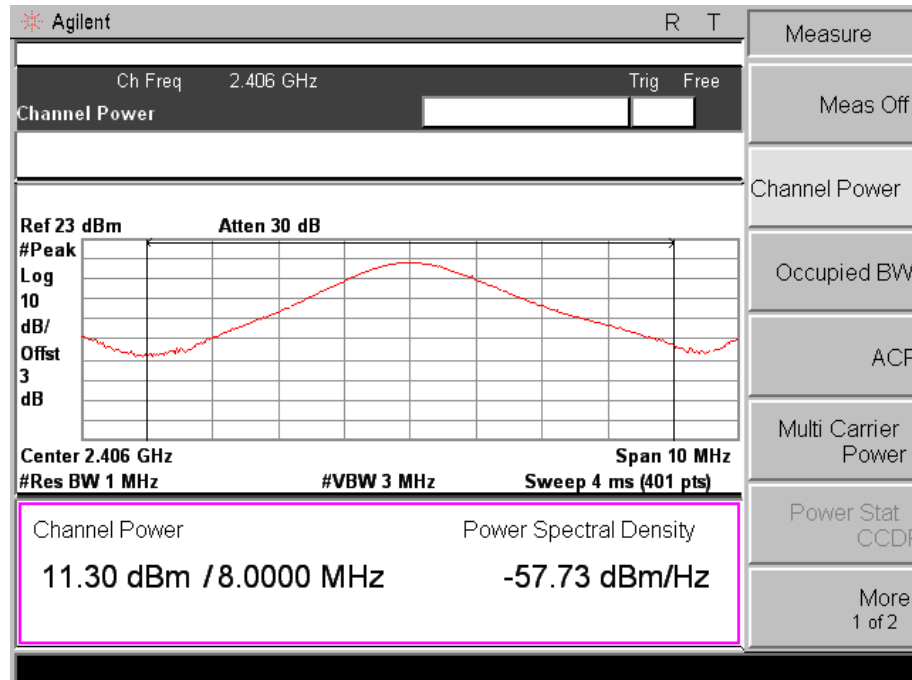

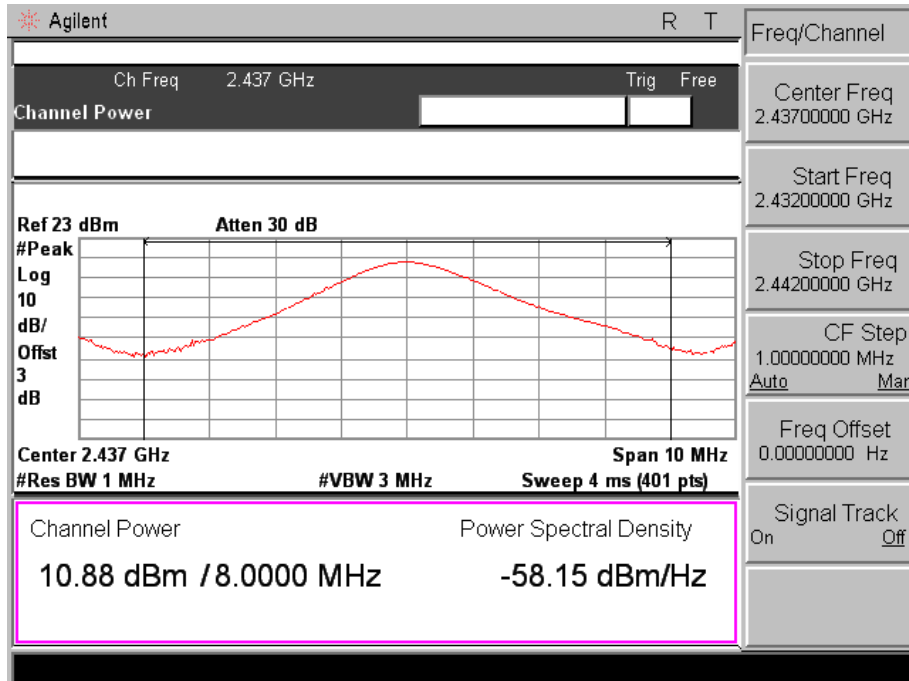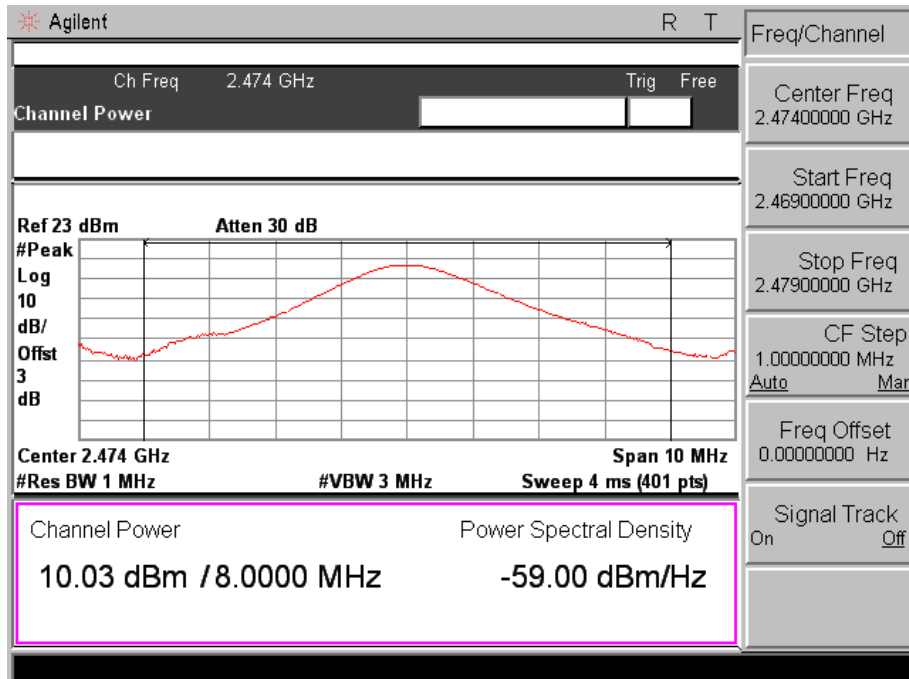
Channel MID :

Channel HIG :


4.8 Band Edges Emission

4.8.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

4.8.2 Block diagram of test setup



Spectrum

Connection method: delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The Z_c of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

4.8.3 Measurement method

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 10MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.


4.8.4. Result

Temperature (°C) : 22~23	EUT: Powered Subwoofer
Humidity (%RH) : 50~54	M/N: V-20W
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode
Test data: Jul 19, 2012	Test engineer: Phenix


Conducted:

Frequency (MHz)	Read Delta (dB)	Limits (dB)	Margin (dB)
2400	36.83	-20	16.83
2483.5	49.36	-20	29.36

Channel LOW :

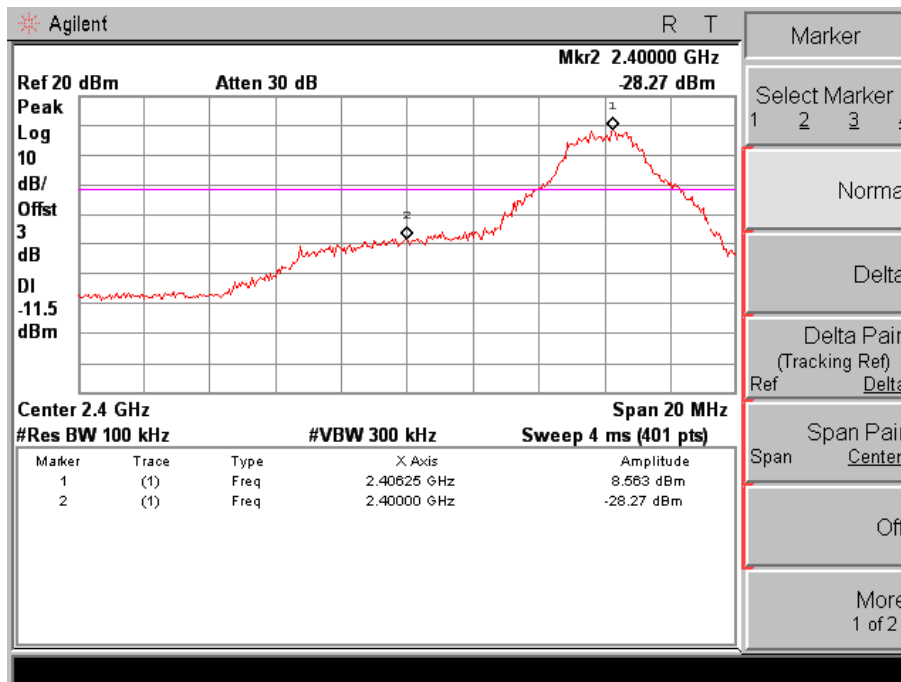

Channel HIG :

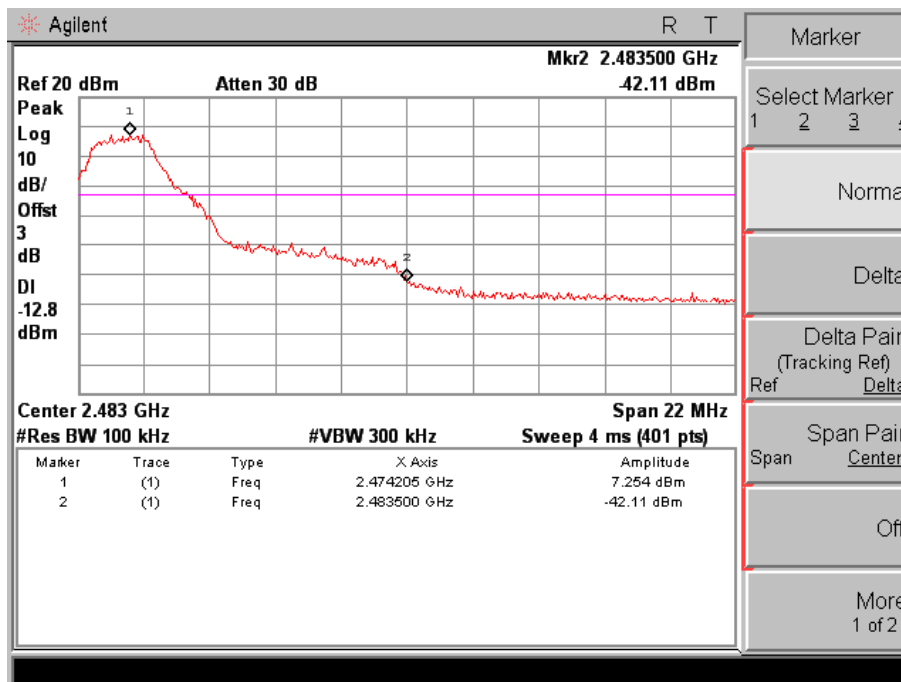

Radiated:
 CH LOW:
 #1 antenna



RADIATED EMISSION

Date : 2013/07/04 16:37:53

Trade Name	:	Document No.	:
Model Name	:	Power Supply	:
Product Name	:	Temp/Humi	:
Test Condition	:	Operator	:

Memo : 1# antenna

LIMIT :
 FCC Part15 C transmitter spurious above1G(average)

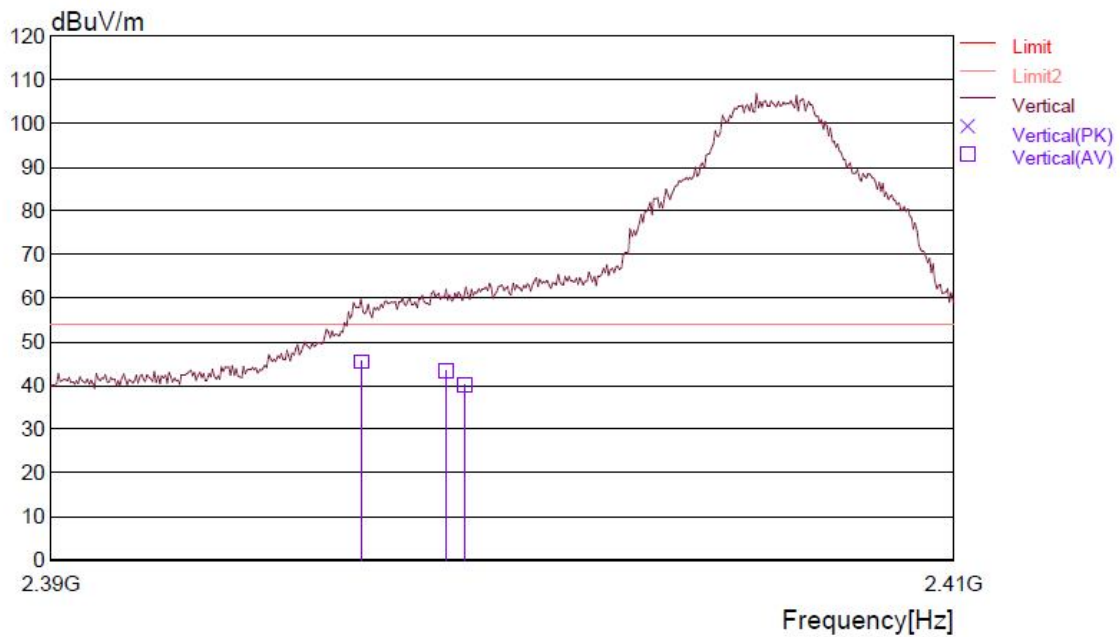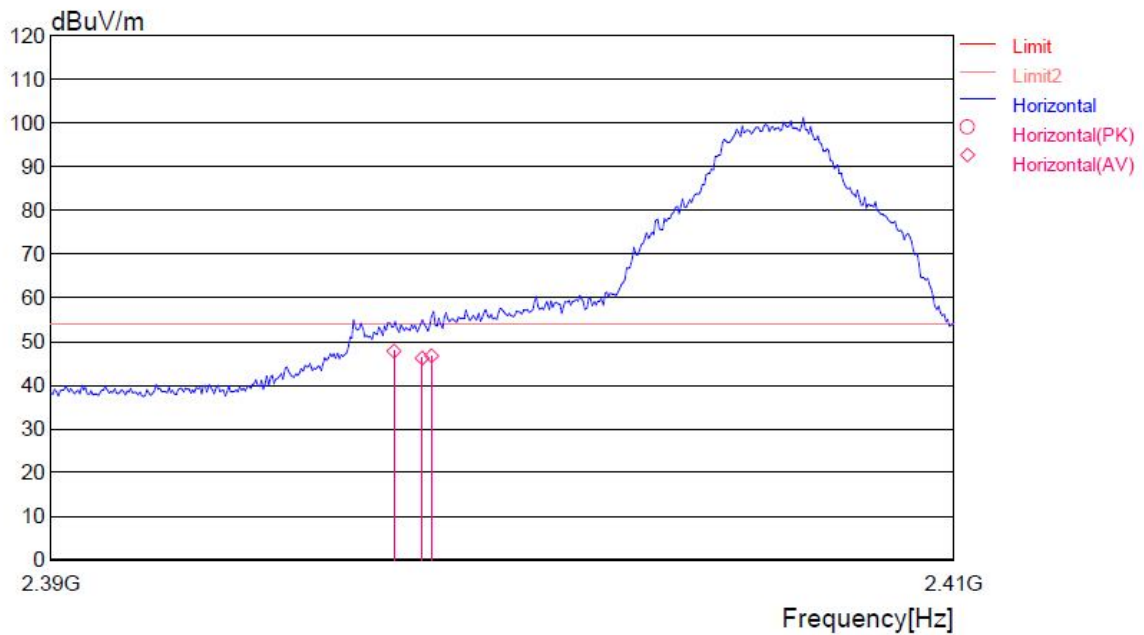

RADIATED EMISSION

Date : 2013/07/04 16:37:53

 Trade Name :
 Model Name : V-20W
 Product Name : Powered Subwoofer
 Test Condition : TX CH-L

 Document No. :
 Power Supply : AC 120V/60Hz
 Temp/Humi : 27/55RH%
 Operator : pang

Memo : 1# antenna

 LIMIT :
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter Reading (PK) (AV) [dBuV]		Ant. Type	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) (AV) [dBuV/m]		Angle [degree]	Height [cm]	Pola.	Limit (PK) (AV) [dBuV/m]		Margin (PK) (AV) [dB]	
2397.607	57.1	50.3	HRN	31.4	-34.0	54.5	47.7	121	1.00	Hori	----	54.0	----	6.3
2398.208	57.6	48.6	HRN	31.4	-34.0	55.0	46.0	125	1.00	Hori	----	54.0	----	8.0
2398.448	59.4	49.3	HRN	31.4	-34.0	56.8	46.7	125	1.00	Hori	----	54.0	----	7.3
2396.847	62.4	47.9	HRN	31.4	-34.0	59.8	45.3	206	1.00	Vert	----	54.0	----	8.7
2398.729	64.7	45.8	HRN	31.4	-34.0	62.1	43.2	201	1.00	Vert	----	54.0	----	10.8
2399.169	65.2	42.8	HRN	31.4	-34.0	62.6	40.2	206	1.00	Vert	----	54.0	----	13.8

#2 antenna



RADIATED EMISSION

Date : 2013/08/20 16:10:38

Trade Name	:	Document No.	:
Model Name	:	Power Supply	:
Product Name	:	Temp/Humi	:
Test Condition	:	Operator	:

Memo : #2 antenna

LIMIT : FCC Part15 C transmitter spurious above1G(average)

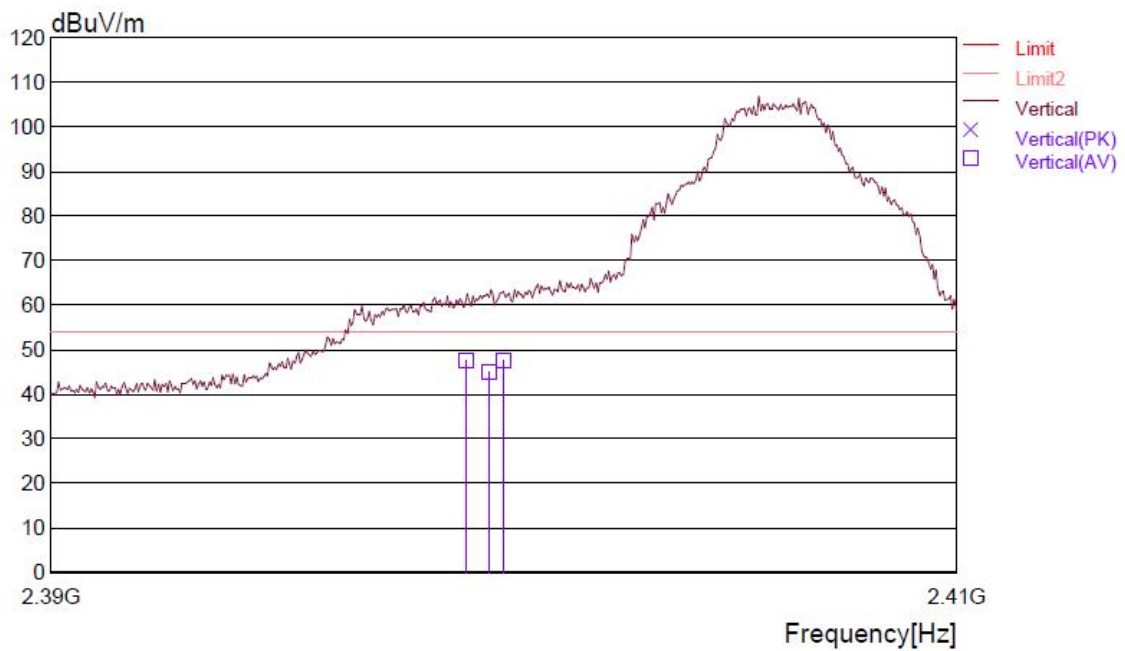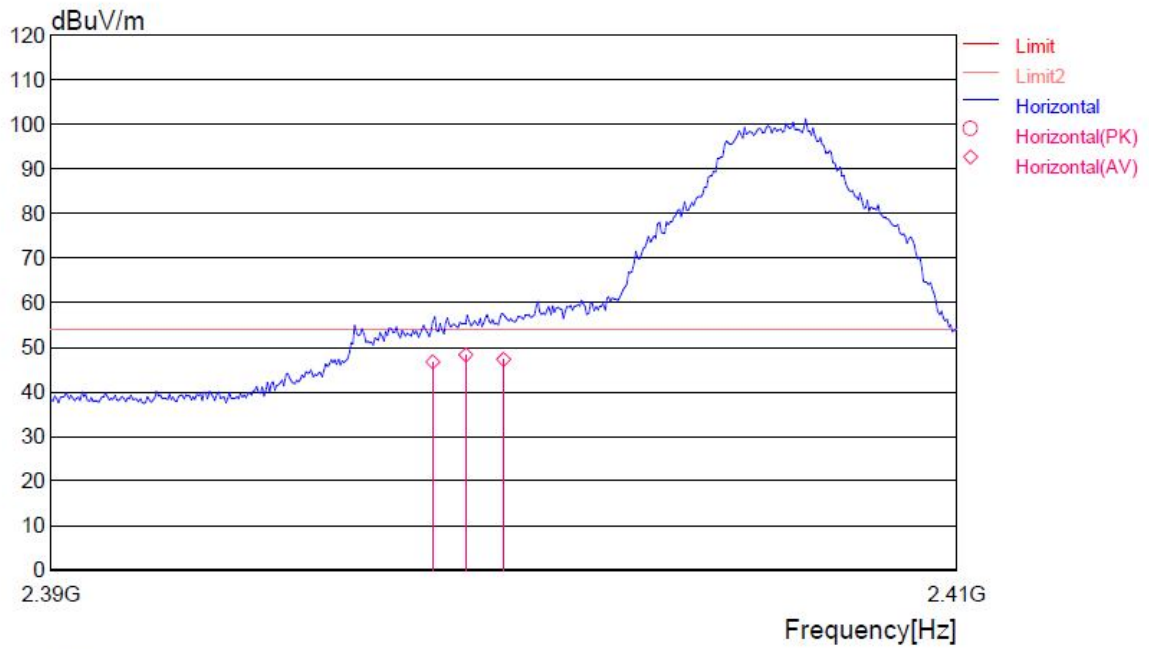

RADIATED EMISSION

Date : 2013/08/20 16:10:38

Trade Name : Model Name : V-20W Product Name : Powered Subwoofer Test Condition : TX CH-L	Document No. : Power Supply : AC 120V/60Hz Temp/Humi : 27/55RH% Operator : pang
--	--

Memo : 2# antenna

LIMIT :
FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter Reading [dBuV]		Ant. Type	Antenna Factor [dB/m]	Total Loss [dB]	Level [dBuV/m]		Angle [degree]	Height [cm]	Pola.	Limit [dBuV/m]		Margin [dB]	
	(PK)	(AV)				(PK)	(AV)				(PK)	(AV)	(PK)	(AV)
2398.448	59.4	49.3	HRN	31.4	-34.0	56.8	46.7	125	1.00	Hori	----	54.0	----	7.3
2399.169	59.8	50.6	HRN	31.4	-34.0	57.2	48.0	125	1.00	Hori	----	54.0	----	6.0
2399.970	59.9	49.6	HRN	31.4	-34.0	57.3	47.0	125	1.00	Hori	----	54.0	----	7.0
2399.169	65.2	50.0	HRN	31.4	-34.0	62.6	47.4	206	1.00	Vert	----	54.0	----	6.6
2399.689	66.0	47.2	HRN	31.4	-34.0	63.4	44.6	210	1.00	Vert	----	54.0	----	9.4
2399.970	65.6	50.1	HRN	31.4	-34.0	63.0	47.5	201	1.00	Vert	----	54.0	----	6.5

CH HIG:
#1 antenna

RADIATED EMISSION



Date : 2013/07/04 11:04:50

Trade Name :
Model Name : V-20W
Product Name : Powered Subwoofer
Test Condition : TX CH-H

Document No. :
Power Supply : AC 120V/60Hz
Temp/Humi : 27/55RH%
Operator : pang

Memo :

LIMIT : FCC Part15 C transmitter spurious above1G(average)

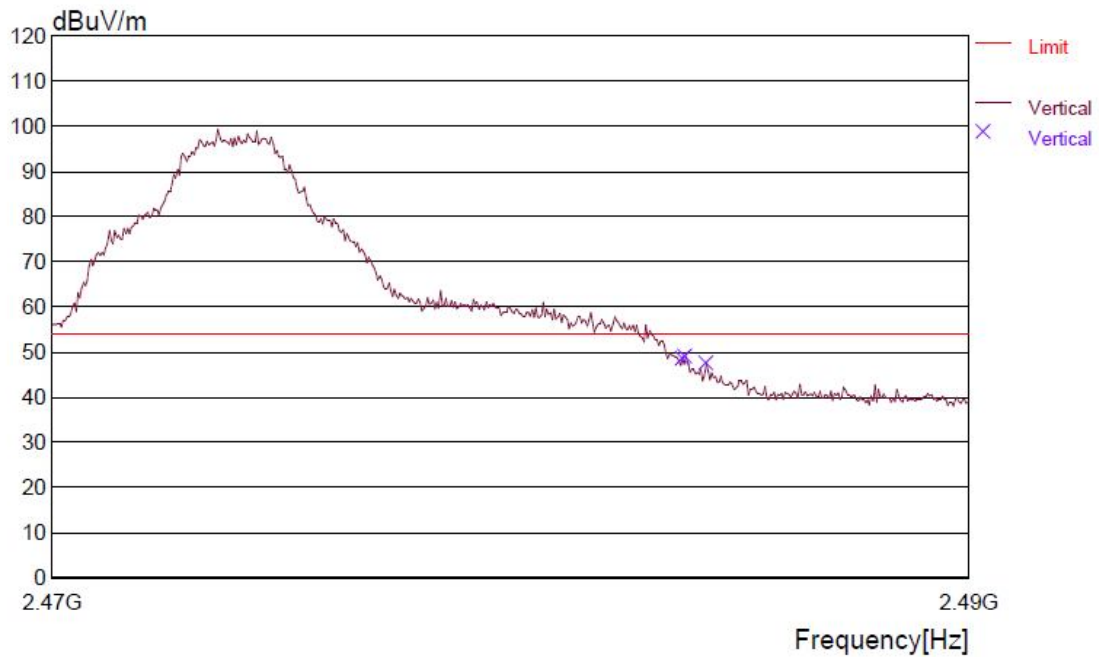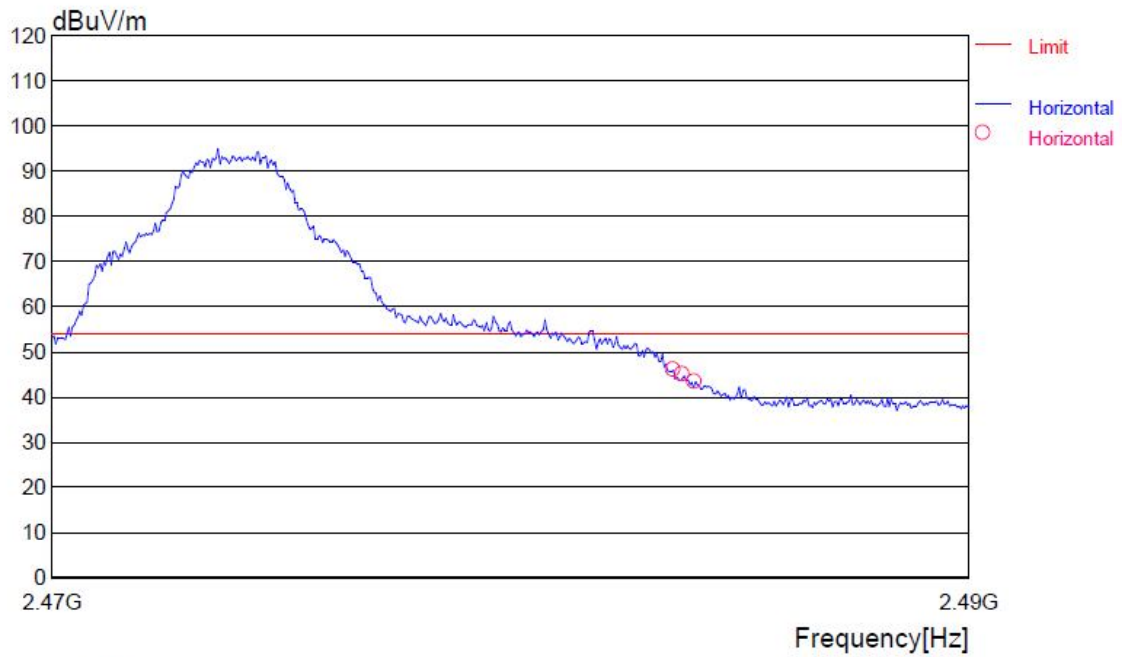

RADIATED EMISSION

Date : 2013/07/04 11:04:50

Trade Name : V-20W	Document No. :
Model Name : Powered Subwoofer	Power Supply : AC 120V/60Hz
Product Name : TX	Temp/Humi : 27/55RH%
Test Condition :	Operator : pang

Memo :

LIMIT : FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
2483.533	48.5	HRN	PK	31.2	-33.8	45.9	273	2.00	Hori.	54.0	8.1
2483.733	50.9	HRN	PK	31.2	-33.8	48.3	199	1.00	Vert.	54.0	5.7
2483.773	47.3	HRN	PK	31.2	-33.8	44.7	63	1.00	Hori.	54.0	9.3
2483.813	51.5	HRN	PK	31.2	-33.8	48.9	194	1.00	Vert.	54.0	5.1
2484.014	46.0	HRN	PK	31.2	-33.8	43.4	273	2.00	Hori.	54.0	10.6
2484.254	50.0	HRN	PK	31.2	-33.8	47.4	194	1.00	Vert.	54.0	6.6

#2 antenna



RADIATED EMISSION

Date : 2013/08/20 16:29:34

Trade Name	:	Document No.	:
Model Name	:	Power Supply	:
Product Name	:	Temp/Humi	:
Test Condition	:	Operator	:

Memo : #2 antenna

LIMIT :
FCC Part15 C transmitter spurious above1G(average)

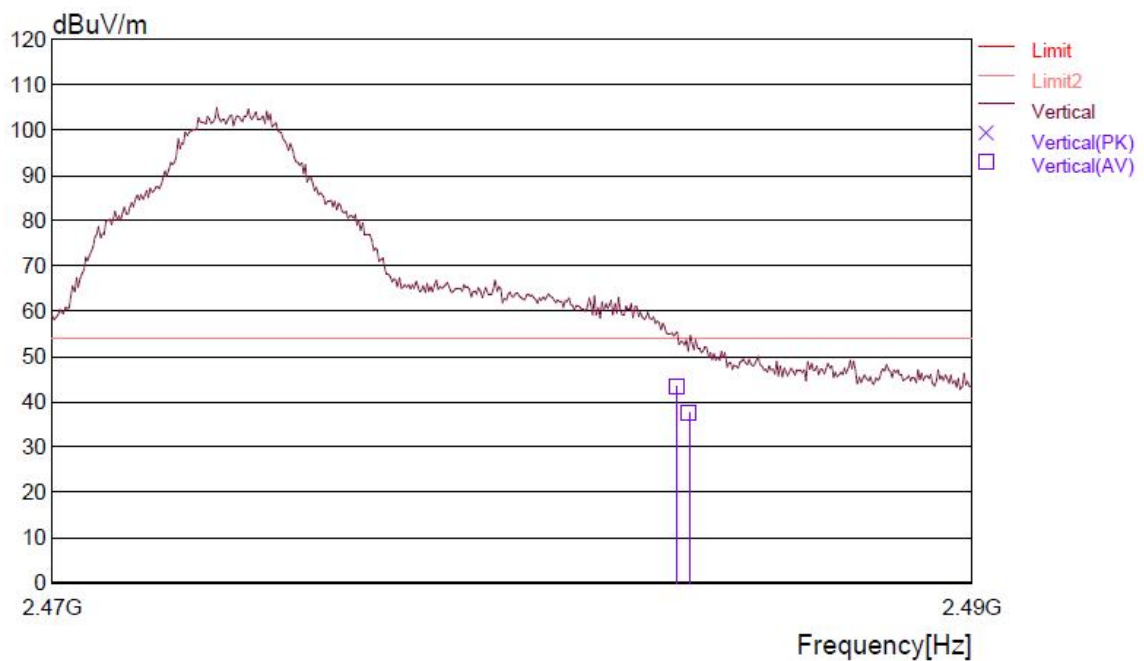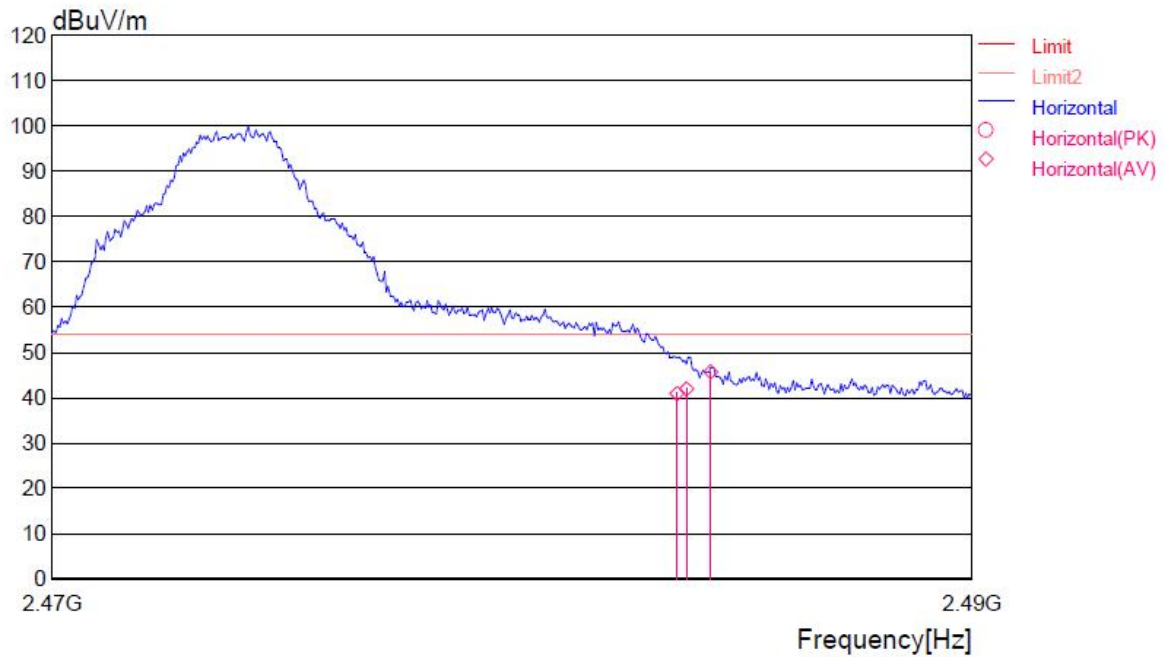

RADIATED EMISSION

Date : 2013/08/20 16:29:34

Trade Name	:		Document No.	:	
Model Name	:	V-20W	Power Supply	:	AC 120V/60Hz
Product Name	:	Powered Subwoofer	Temp/Humi	:	27/55RH%
Test Condition	:	TX CH-H	Operator	:	pang

Memo : 2# antenna

LIMIT : FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter Reading (PK) (AV) [dBuV]		Ant. Type	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) (AV) [dBuV/m]		Angle [degree]	Height [cm]	Pola.	Limit (PK) (AV) [dBuV/m]		Margin (PK) (AV) [dB]	
2483.613	51.6	43.5	HRN	31.2	-33.8	49.0	40.9	282	1.00	Hori	---	54.0	---	13.1
2483.813	51.6	44.2	HRN	31.2	-33.8	49.0	41.6	253	1.00	Hori	---	54.0	---	12.4
2484.334	49.3	47.8	HRN	31.2	-33.8	46.7	45.2	278	1.00	Hori	---	54.0	---	8.8
2483.573	58.0	45.8	HRN	31.2	-33.8	55.4	43.2	197	1.00	Vert	---	54.0	---	10.8
2483.854	57.3	39.8	HRN	31.2	-33.8	54.7	37.2	201	1.00	Vert	---	54.0	---	16.8
2483.974	56.3	---	HRN	31.2	-33.8	53.7	---	201	1.00	Vert	---	54.0	---	---

4.9 Spurious Radiated Emission

4.9.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

4.9.2 Block diagram of test setup

Radiated Measurement Setup:

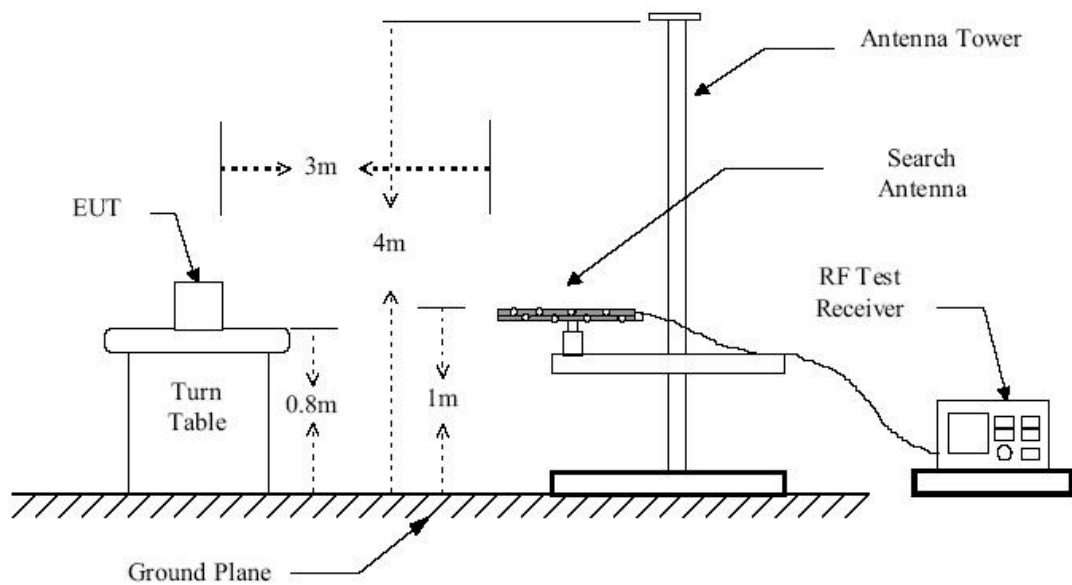


Figure 1 : Frequencies measured below 1 GHz configuration


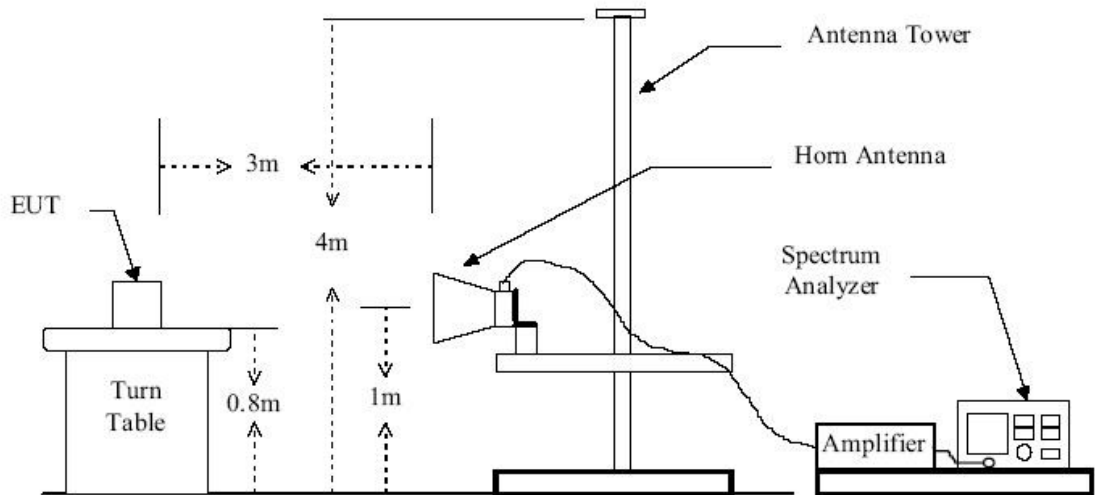


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup:

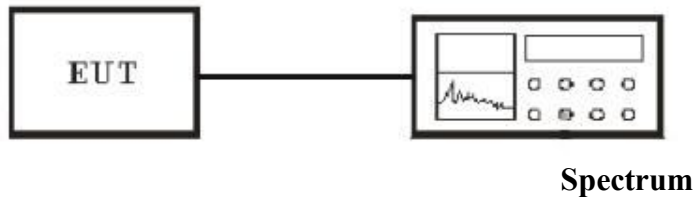

Connection method: delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The Z_c of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

4.9.3 Measurement method

Radiated Measurement

1. Configure the EUT according to ANSI C63.4 (2003).
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.

5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

Conducted Measurement

1. For emission above 1GHz, conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 100KHz and VBW to 300 KHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

4.9.4. Result

PASS

Radiated:

Below 30MHz:

No further spurious emissions has been found between 9kHz and 30 MHz.



30M- 1GHz(#1 antenna):

RADIATED EMISSION

Date : 2013/07/05 15:46:46

Trade Name	:		Document No.	:	
Model Name	:	V-20W	Power Supply	:	AC 120V60Hz
Product Name	:	Powered Subwoofer	Temp/Humi	:	27/55RH%
Test Condition	:	TX MODE	Operator	:	pang
Memo	:	1# antenna			

LIMIT : FCC Part15 Class B(3m)/USA

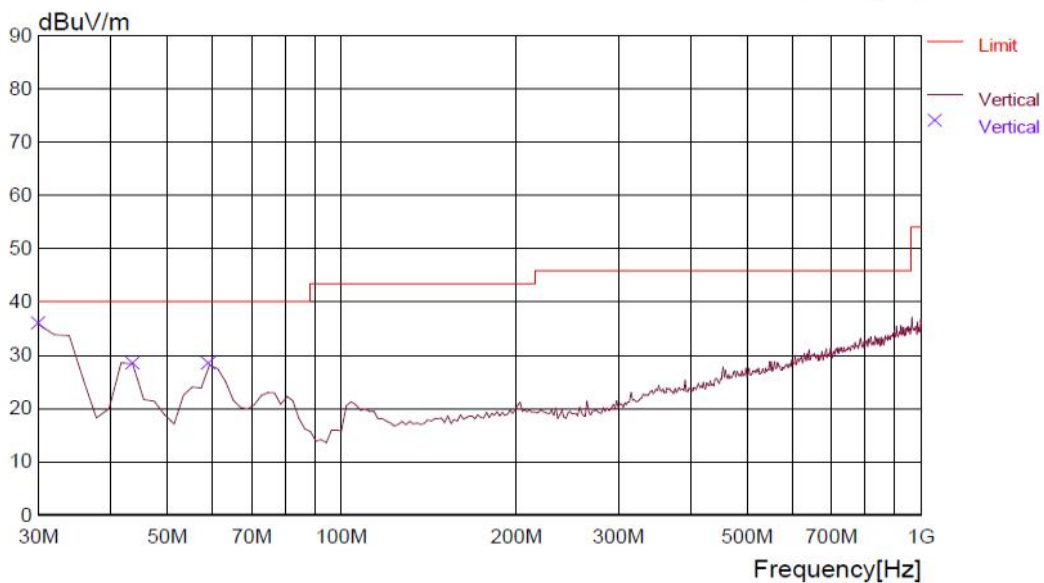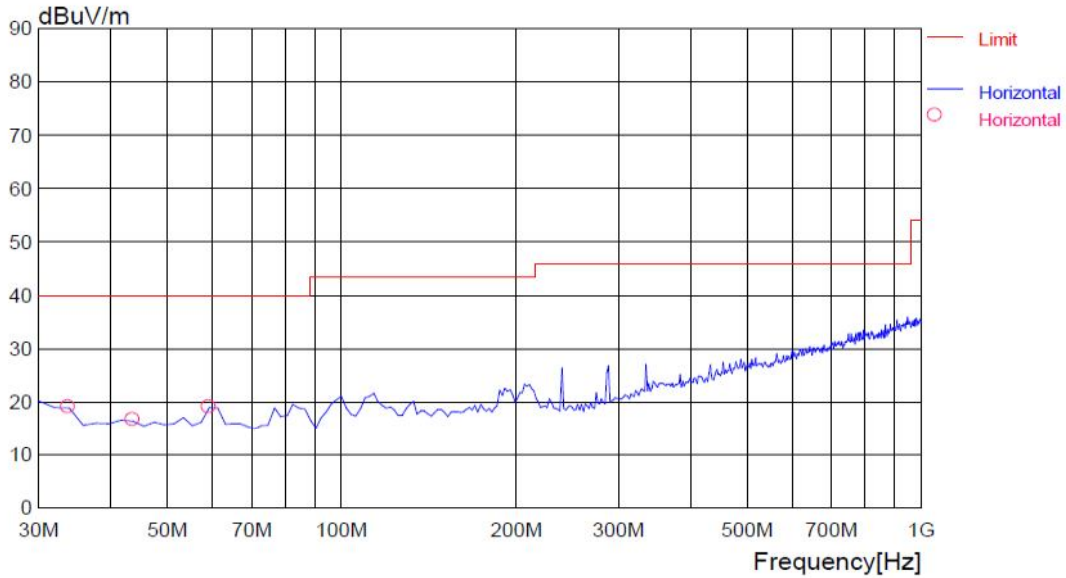

RADIATED EMISSION

Date : 2013/07/05 15:46:46

Trade Name	:	Document No.	:
Model Name	:	Power Supply	:
Product Name	:	Temp/Humi	:
Test Condition	:	Operator	:

Memo : 1# antenna

LIMIT : FCC Part15 Class B(3m)/USA

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA TABLE [cm]	COMMENT [DEG]
---- Horizontal ----										
1	33.888	32.3	11.4	6.8	31.6	18.9	40	21.1	100	358
2	43.607	30.0	11.2	6.9	31.6	16.5	40	23.5	200	273
3	59.158	32.8	10.8	7.0	31.6	19.0	40	21.0	200	166
---- Vertical ----										
4	30.000	48.9	11.9	6.7	31.6	35.9	40	4.1	100	207
5	43.607	41.9	11.2	6.9	31.6	28.4	40	11.6	100	42
6	59.158	42.0	10.8	7.0	31.6	28.2	40	11.8	100	174

30M- 1GHz(#2 antenna):

RADIATED EMISSION



Date : 2013/07/05 15:38:24

Trade Name :
 Model Name : V-20W
 Product Name : Powered Subwoofer
 Test Condition : TX MODE

Document No. :
 Power Supply : AC 120V60Hz
 Temp/Humi : 27/55RH%
 Operator : pang

Memo : 2# antenna

LIMIT : FCC Part15 Class B(3m)/USA

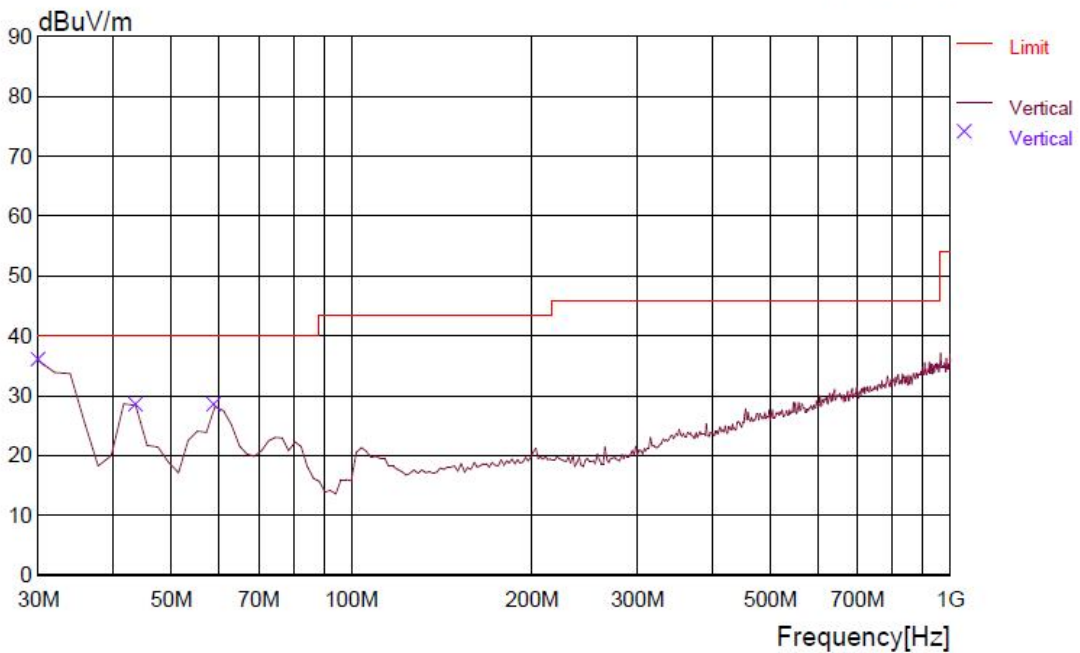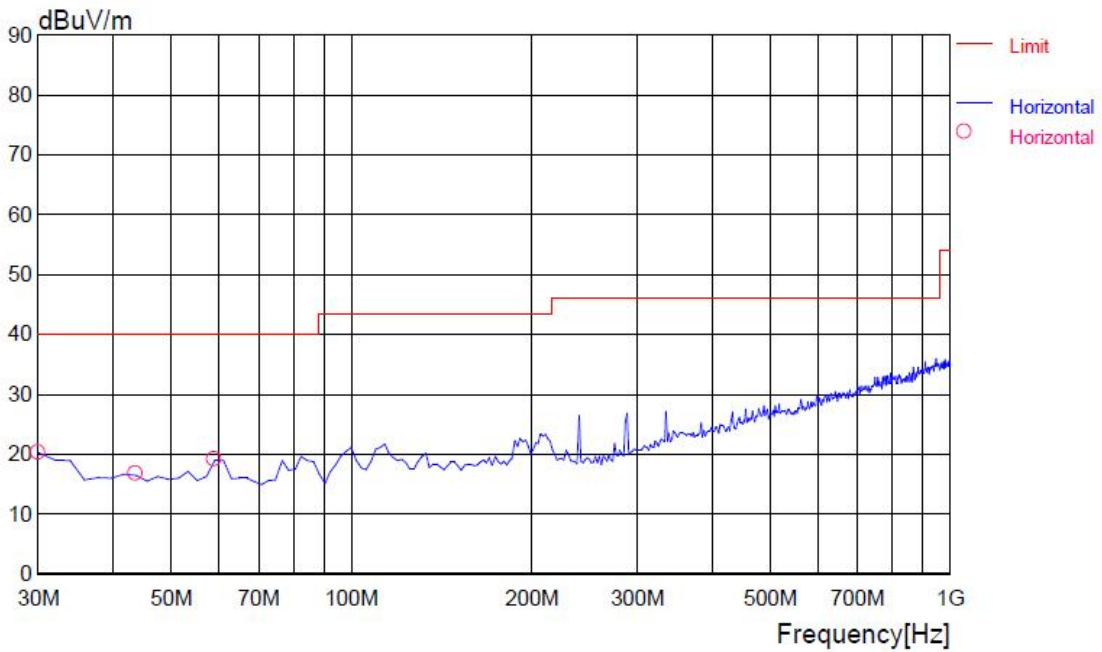

RADIATED EMISSION

Date : 2013/07/05 15:38:24

Trade Name : Model Name : V-20W Product Name : Powered Subwoofer Test Condition : TX MODE	Document No. : Power Supply : AC 120V60Hz Temp/Humi : 27/55RH% Operator : pang
--	---

Memo : 2# antenna

LIMIT : FCC Part15 Class B(3m)/USA

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]	COMMENT
---- Horizontal ----											
1	30.000	33.3	11.9	6.7	31.6	20.3	40	19.7	200	273	
2	43.607	30.0	11.2	6.9	31.6	16.5	40	23.5	200	273	
3	59.158	32.8	10.8	7.0	31.6	19.0	40	21.0	200	166	
---- Vertical ----											
4	30.000	48.9	11.9	6.7	31.6	35.9	40	4.1	100	207	
5	43.607	41.9	11.2	6.9	31.6	28.4	40	11.6	100	42	
6	59.158	42.0	10.8	7.0	31.6	28.2	40	11.8	100	174	

Above 1GHz(#1 antenna):

CH LOW:

RADIATED EMISSION



Date : 2013/07/04 11:17:12

Trade Name :
 Model Name : V-20W
 Product Name : Powered Subwoofer
 Test Condition : 2406MHz,TX

Document No. :
 Power Supply : AC 120V/60Hz
 Temp/Humi : 27/55RH%
 Operator : pang

Memo : 1# antenna

LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

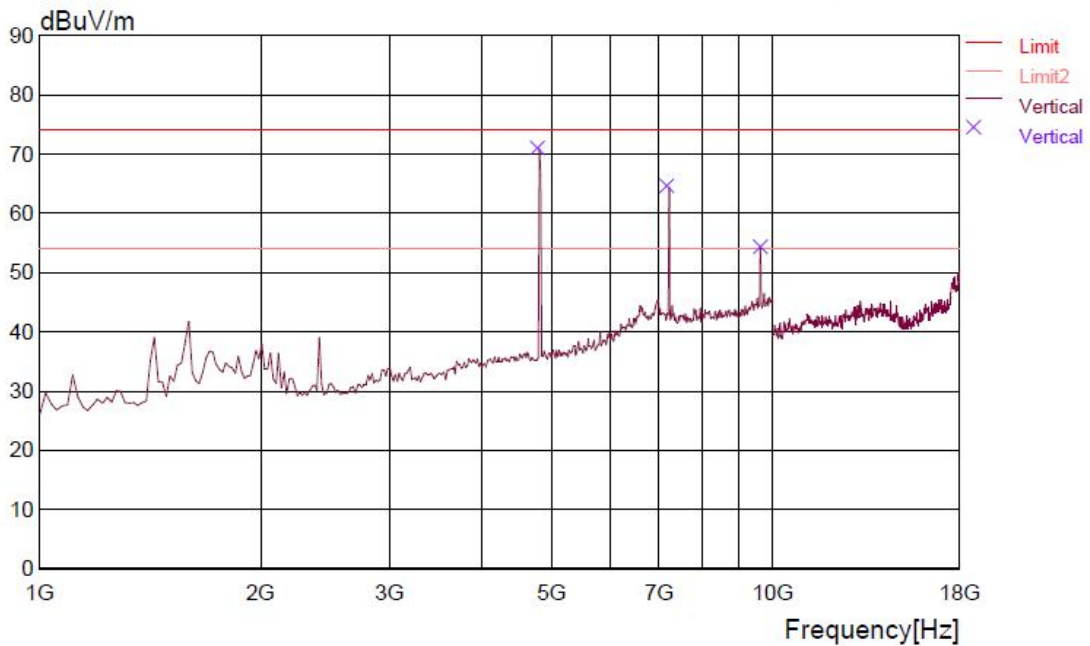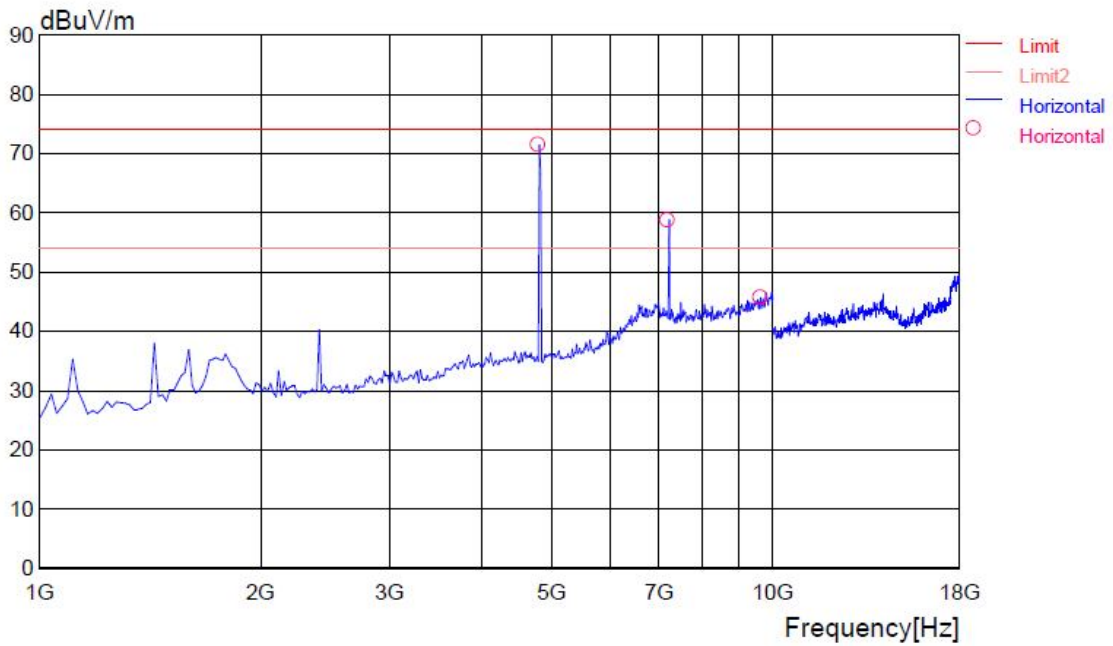

No further spurious emissions found between highest frequency in the table and 25GHz.

RADIATED EMISSION

Date : 2013/07/04 11:17:12

Trade Name	:		Document No.	:	
Model Name	:	V-20W	Power Supply	:	AC 120V/60Hz
Product Name	:	Powered Subwoofer	Temp/Humi	:	27/55RH%
Test Condition	:	2406MHz,TX	Operator	:	pang
Memo	:	1# antenna			

LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
4805.624	66.3	HRN	PK	36.4	-31.3	71.4	42	2.00	Hori.	74.0	2.6
4805.624	65.8	HRN	PK	36.4	-31.3	70.9	9	1.00	Vert.	74.0	3.1
7222.465	46.6	HRN	PK	41.4	-29.2	58.8	185	1.00	Hori.	74.0	15.2
7222.465	52.1	HRN	PK	41.4	-29.2	64.3	1	1.00	Vert.	74.0	9.7
9621.271	40.1	HRN	PK	42.2	-28.2	54.1	212	2.00	Vert.	74.0	19.9
9639.307	31.5	HRN	PK	42.3	-28.1	45.7	281	2.00	Hori.	74.0	28.3

Retest as FCC DA-00-705A1 required for VBW=10Hz:

Frequency (MHz)	Result at VBW=10Hz (dBuv)	Pola.	Limit (dBuv)	Margin (dB)
4805.624	50.1	Hor	54	3.9
7222.465	39.7	Hor	54	14.3
9639.307	24.8	Hor	54	29.2
4805.624	49.8	Ver	54	4.2
7222.465	42.6	Ver	54	11.4
9621.271	33.4	Ver	54	20.6

CH MID:

RADIATED EMISSION



Date : 2013/07/04 11:59:04

Trade Name :
 Model Name : V-20W
 Product Name : Powered Subwoofer
 Test Condition : 2438MHz,TX

Document No. :
 Power Supply : AC 120V/60Hz
 Temp/Humi : 27/55RH%
 Operator : pang

Memo : #1 antenna

LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

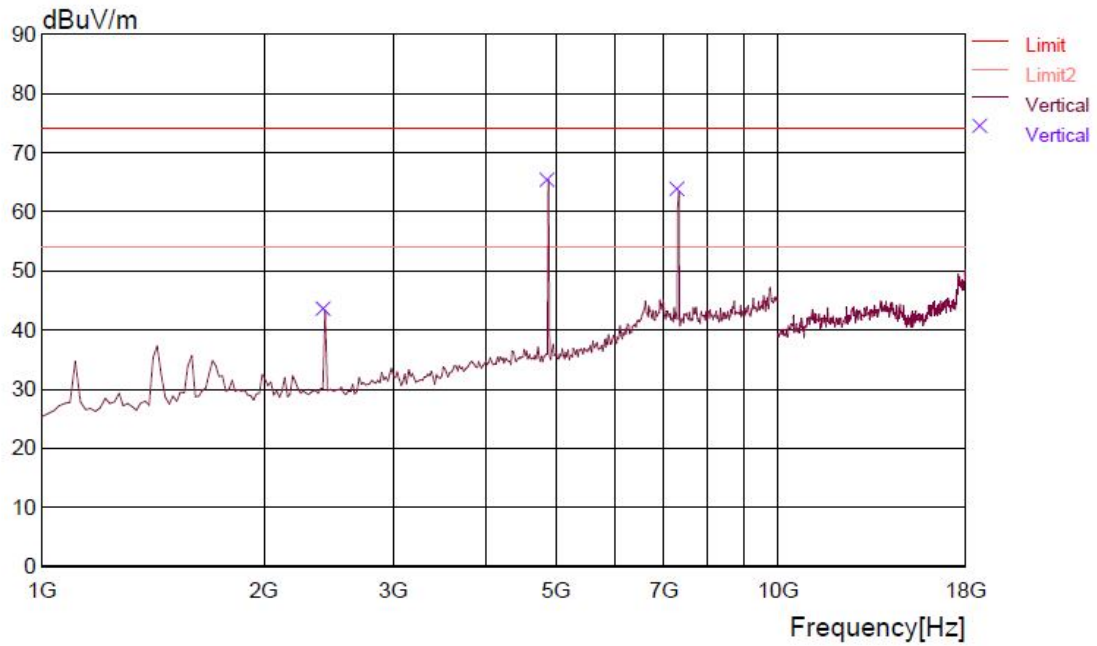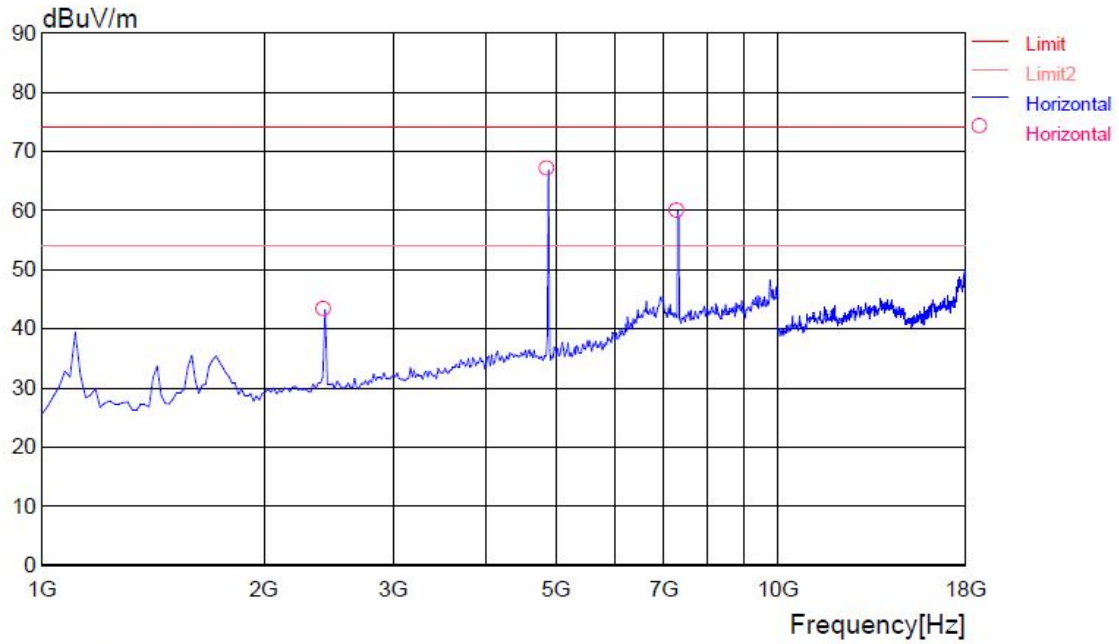

No further spurious emissions found between highest frequency in the table and 25GHz.

RADIATED EMISSION

Date : 2013/07/04 11:59:04

Trade Name :	Document No. :
Model Name : V-20W	Power Supply : AC 120V/60Hz
Product Name : Powered Subwoofer	Temp/Humi : 27/55RH%
Test Condition : 2438MHz, TX	Operator : pang

Memo : #1 antenna

 LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
2424.854	45.7	HRN	PK	31.4	-33.9	43.2	96	1.00	Hori.	74.0	30.8
2424.854	45.8	HRN	PK	31.4	-33.9	43.3	142	2.00	Vert.	74.0	30.7
4877.768	61.5	HRN	PK	36.5	-31.2	66.8	298	2.00	Hori.	74.0	7.2
4877.768	60.1	HRN	PK	36.5	-31.2	65.4	311	2.00	Vert.	74.0	8.6
7312.646	48.0	HRN	PK	41.1	-29.2	59.9	200	1.00	Hori.	74.0	14.1
7330.682	51.7	HRN	PK	41.0	-29.2	63.5	68	2.00	Vert.	74.0	10.5

Retest as FCC DA-00-705A1 required for VBW=10Hz:

Frequency (MHz)	Result at VBW=10Hz (dBuv)	Pola.	Limit (dBuv)	Margin (dB)
4877.768	45.4	Hor	54	8.6
7312.646	39.4	Hor	54	14.6
4877.768	44.8	Ver	54	9.2
7330.682	43.0	Ver	54	11.0

CH HIG:

RADIATED EMISSION



Date : 2013/07/04 13:15:30

Trade Name :
 Model Name : V-20W
 Product Name : Powered Subwoofer
 Test Condition : 2474MHz,TX

Document No. :
 Power Supply : AC 120V/60Hz
 Temp/Humi : 27/55RH%
 Operator : pang

Memo : #1 antenna

LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

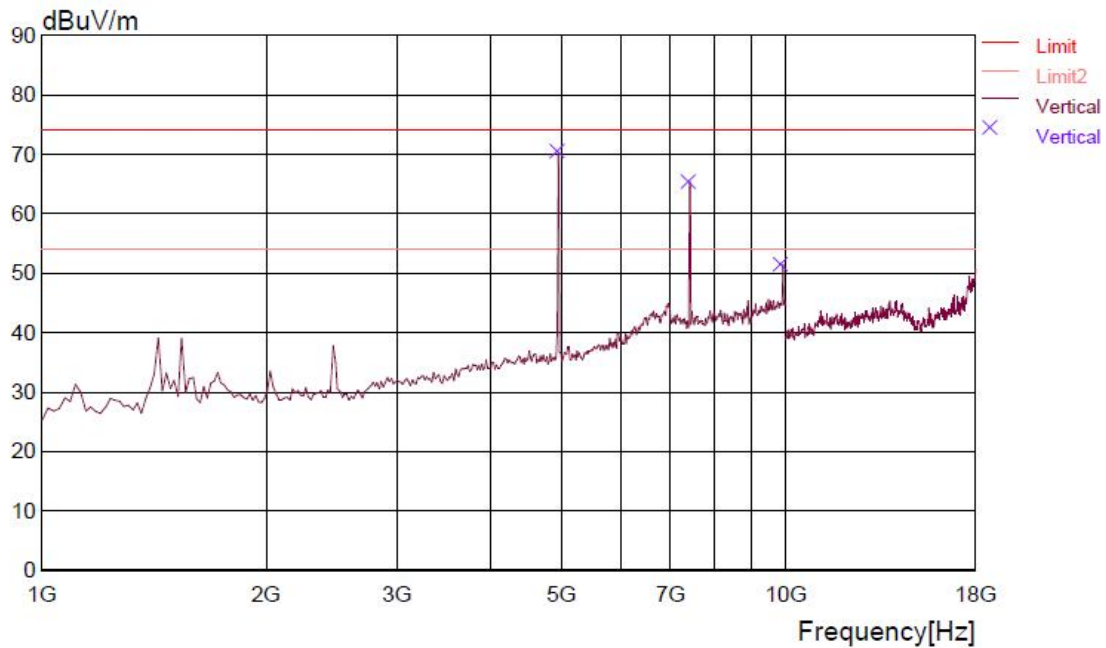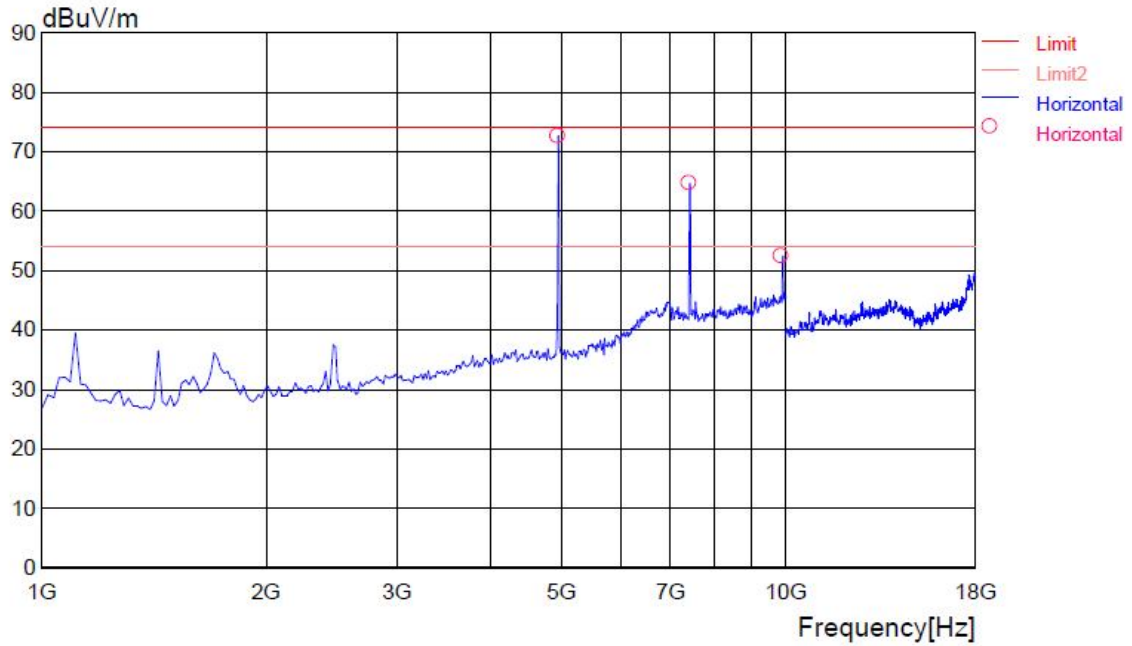

No further spurious emissions found between highest frequency in the table and 25GHz.

RADIATED EMISSION

Date : 2013/07/04 13:15:30

 Trade Name :
 Model Name : V-20W
 Product Name : Powered Subwoofer
 Test Condition : 2474MHz,TX

 Document No. :
 Power Supply : AC 120V/60Hz
 Temp/Humi : 27/55RH%
 Operator : pang

Memo : #1 antenna

 LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
4949.913	67.2	HRN	PK	36.6	-31.1	72.7	230	2.00	Hori.	74.0	1.3
4949.913	64.8	HRN	PK	36.6	-31.1	70.3	290	2.00	Vert.	74.0	3.7
7420.863	53.0	HRN	PK	40.8	-29.2	64.6	32	2.00	Hori.	74.0	9.4
7420.863	53.8	HRN	PK	40.8	-29.2	65.4	67	2.00	Vert.	74.0	8.6
9909.849	37.7	HRN	PK	42.3	-27.6	52.4	48	2.00	Hori.	74.0	21.6
9909.849	36.8	HRN	PK	42.3	-27.6	51.5	286	2.00	Vert.	74.0	22.5

Retest as FCC DA-00-705A1 required for VBW=10Hz:

Frequency (MHz)	Result at VBW=10Hz (dBuV)	Pola.	Limit (dBuV)	Margin (dB)
4949.913	51.4	Hor	54	2.6
7420.863	44.2	Hor	54	9.8
9909.849	31.8	Hor	54	22.2
4949.913	49.7	Ver	54	4.3
7420.863	45.1	Ver	54	8.9
9909.849	31.5	Ver	54	22.5

Above 1GHz(#2 antenna):

CH LOW:



RADIATED EMISSION

Date : 2013/07/04 14:50:14

Trade Name :	Document No. :
Model Name : V-20W	Power Supply : AC 120V/60Hz
Product Name : Powered Subwoofer	Temp/Humi : 27/55RH%
Test Condition : 2406MHz,TX	Operator : pang

Memo : 2# antenna

LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

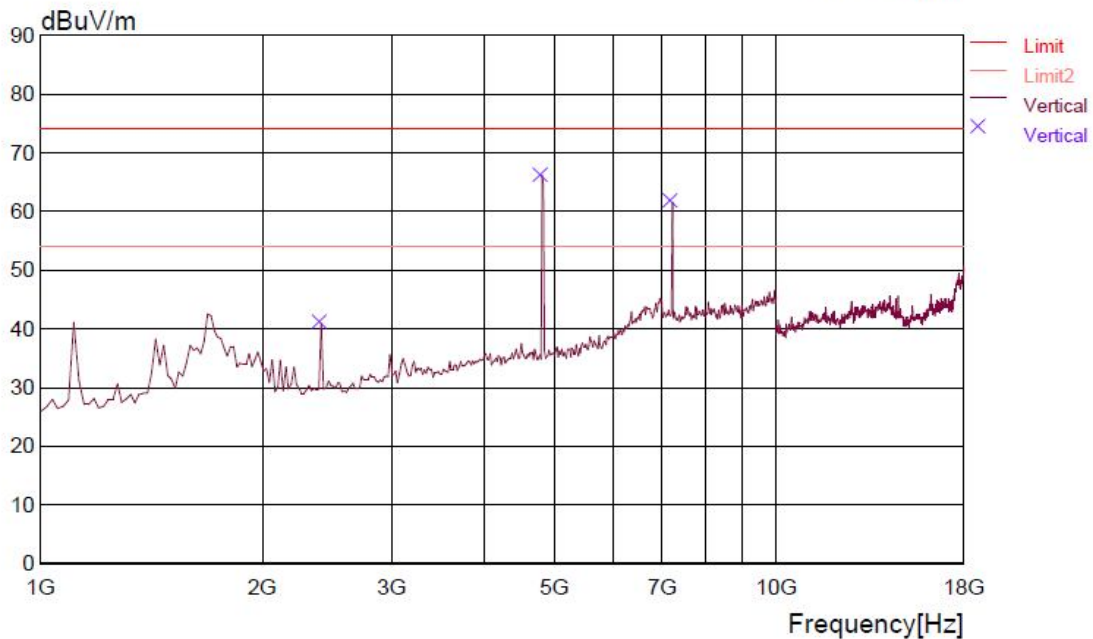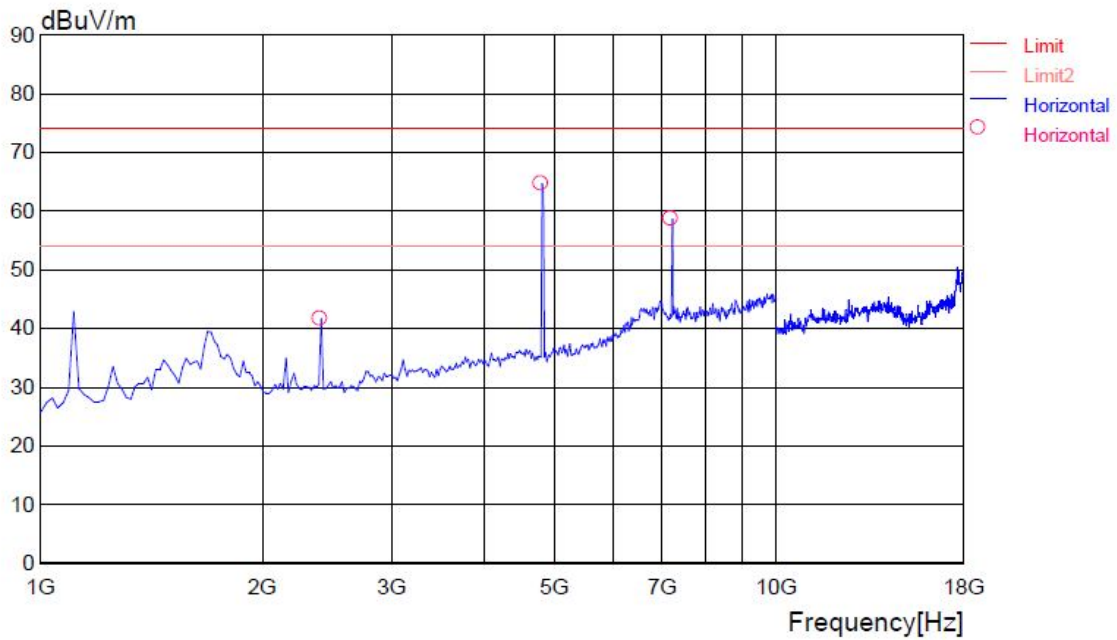

No further spurious emissions found between highest frequency in the table and 25GHz.

RADIATED EMISSION

Date : 2013/07/04 14:50:14

Trade Name : Model Name : V-20W Product Name : Powered Subwoofer Test Condition : 2406MHz, TX	Document No. : Power Supply : AC 120V/60Hz Temp/Humi : 27/55RH% Operator : pang
Memo : 2# antenna	

LIMIT : FCC Part15 C transmitter spurious above1G(peak)
FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
2406.818	44.2	HRN	PK	31.4	-33.9	41.7	178	2.00	Hori.	74.0	32.3
2406.818	43.4	HRN	PK	31.4	-33.9	40.9	358	2.00	Vert.	74.0	33.1
4805.624	59.6	HRN	PK	36.4	-31.3	64.7	125	1.00	Hori.	74.0	9.3
4805.624	61.0	HRN	PK	36.4	-31.3	66.1	9	1.00	Vert.	74.0	7.9
7222.465	46.4	HRN	PK	41.4	-29.2	58.6	356	1.00	Hori.	74.0	15.4
7222.465	49.4	HRN	PK	41.4	-29.2	61.6	96	2.00	Vert.	74.0	12.4

Retest as FCC DA-00-705A1 required for VBW=10Hz:

Frequency (MHz)	Result at VBW=10Hz (dBuv)	Pola.	Limit (dBuv)	Margin (dB)
4805.624	44.2	Hor	54	9.8
7222.465	38.0	Hor	54	16.0
4805.624	46.5	Ver	54	7.5
7222.465	41.8	Ver	54	12.0

CH MID:

RADIATED EMISSION



Date : 2013/07/04 15:24:58

Trade Name :
 Model Name : V-20W
 Product Name : Powered Subwoofer
 Test Condition : 2438MHz, TX

Document No. :
 Power Supply : AC 120V/60Hz
 Temp/Humi : 27/55RH%
 Operator : pang

Memo : 2# antenna

LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

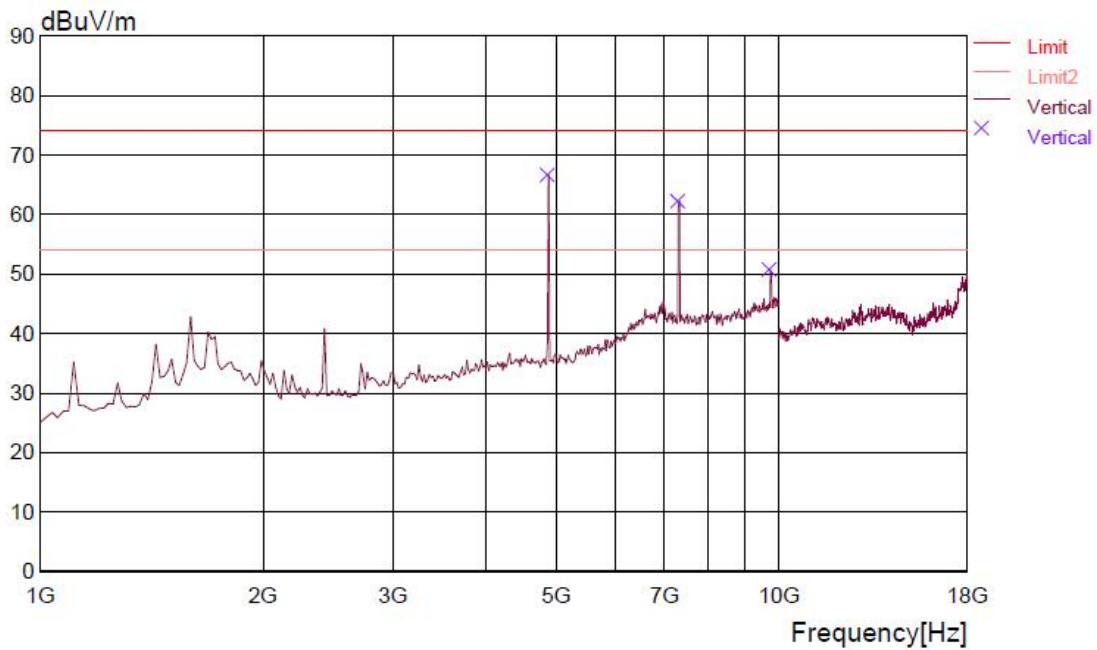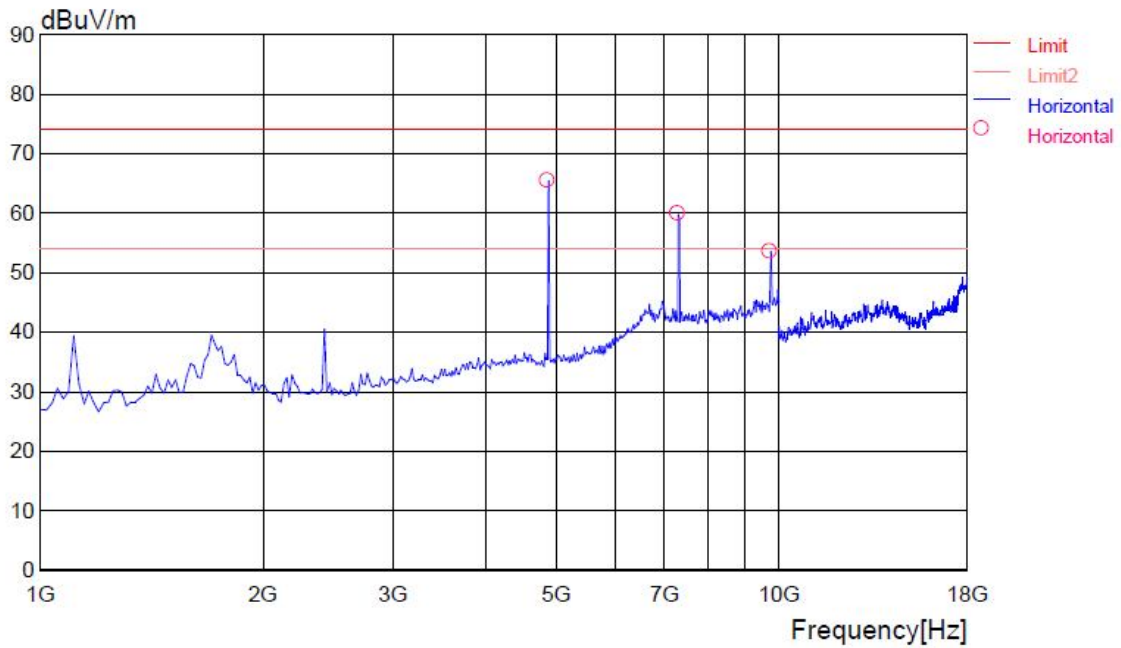

No further spurious emissions found between highest frequency in the table and 25GHz.

RADIATED EMISSION

Date : 2013/07/04 15:24:58

 Trade Name :
 Model Name : V-20W
 Product Name : Powered Subwoofer
 Test Condition : 2438MHz, TX

 Document No. :
 Power Supply : AC 120V/60Hz
 Temp/Humi : 27/55RH%
 Operator : pang

Memo : 2# antenna

 LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
4877.768	60.2	HRN	PK	36.5	-31.2	65.5	67	2.00	Hori.	74.0	8.5
4877.768	61.3	HRN	PK	36.5	-31.2	66.6	186	1.00	Vert.	74.0	7.4
7312.646	47.9	HRN	PK	41.1	-29.2	59.8	124	2.00	Hori.	74.0	14.2
7330.682	50.4	HRN	PK	41.0	-29.2	62.2	303	2.00	Vert.	74.0	11.8
9765.560	39.2	HRN	PK	42.4	-28.0	53.6	162	2.00	Hori.	74.0	20.4
9765.560	36.1	HRN	PK	42.4	-28.0	50.5	355	2.00	Vert.	74.0	23.5

Retest as FCC DA-00-705A1 required for VBW=10Hz:

Frequency (MHz)	Result at VBW=10Hz (dBuV)	Pola.	Limit (dBuV)	Margin (dB)
4877.768	45.2	Hor	54	8.8
7312.646	39.5	Hor	54	14.5
9765.560	33.9	Hor	54	20.1
4877.768	46.5	Ver	54	7.5
7330.682	41.8	Ver	54	12.2
9765.560	30.7	Ver	54	23.3

CH HIG:



RADIATED EMISSION

Date : 2013/07/04 16:00:40

Trade Name : V-20W	Document No. : AC 120V/60Hz
Model Name : Powered Subwoofer	Power Supply : 27/55RH%
Product Name : 2474MHz,TX	Temp/Humi : pang
Test Condition : 2# antenna	Operator :

Memo : 2# antenna

LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

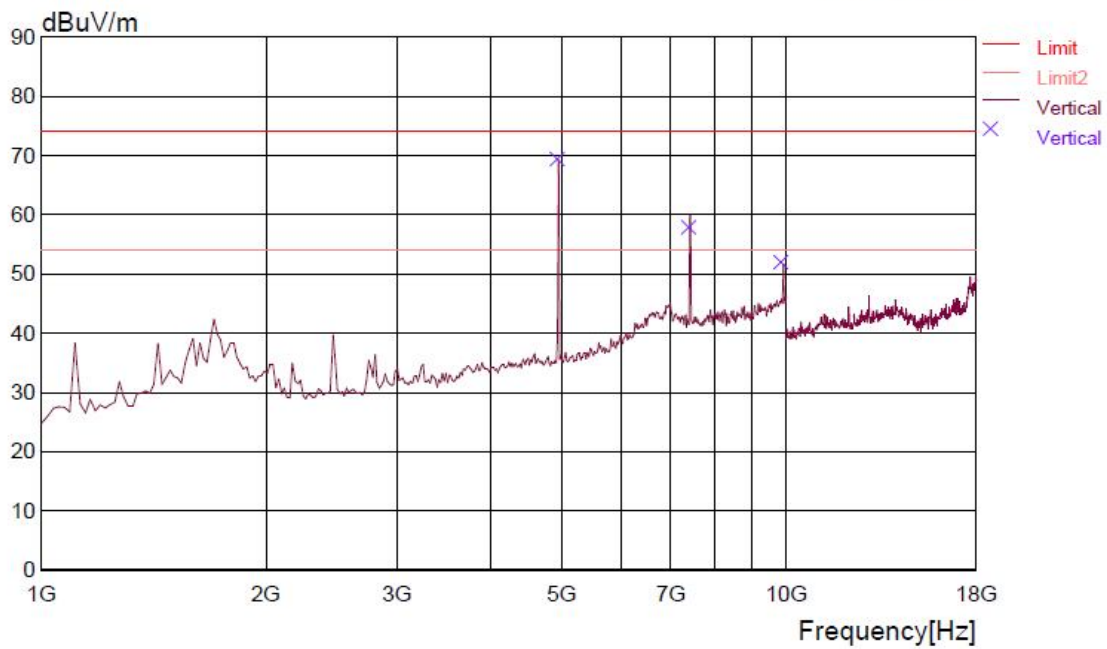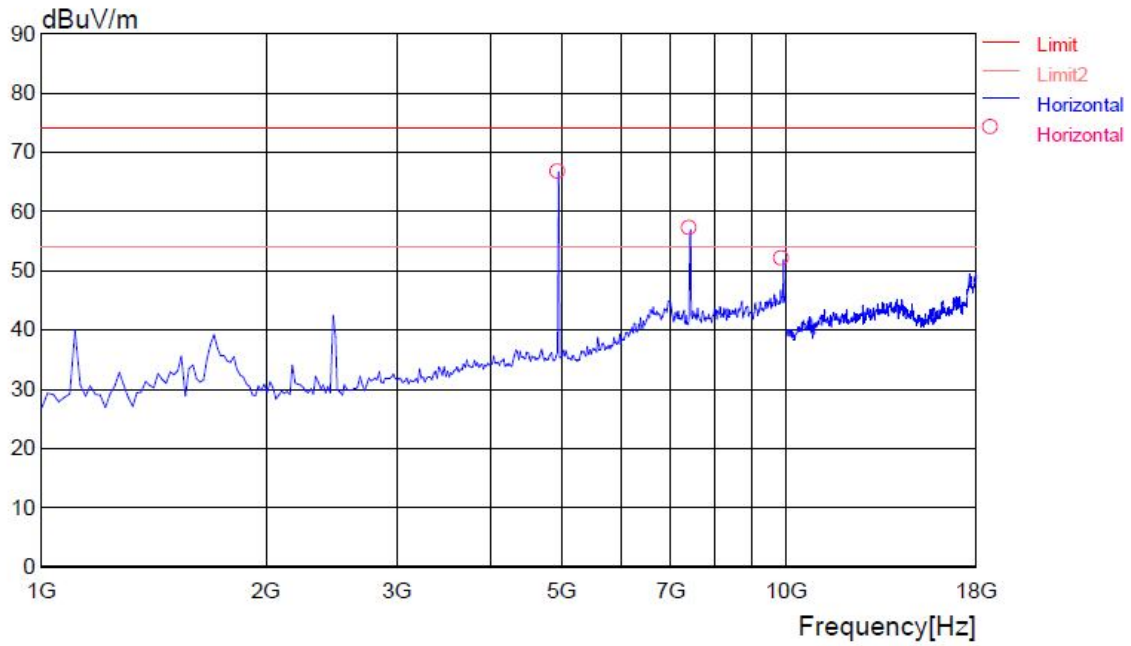

No further spurious emissions found between highest frequency in the table and 25GHz.

RADIATED EMISSION

Date : 2013/07/04 16:00:40

Trade Name	Document No.
Model Name	Power Supply
Product Name	Temp/Humi
Test Condition	Operator
Memo	



LIMIT : FCC Part15 C transmitter spurious above1G(peak)
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
4949.913	61.2	HRN	PK	36.6	-31.1	66.7	284	2.00	Hori.	74.0	7.3
4949.913	63.7	HRN	PK	36.6	-31.1	69.2	185	1.00	Vert.	74.0	4.8
7438.899	45.3	HRN	PK	40.8	-29.2	56.9	148	1.00	Hori.	74.0	17.1
7438.899	46.1	HRN	PK	40.8	-29.2	57.7	288	2.00	Vert.	74.0	16.3
9909.849	37.1	HRN	PK	42.3	-27.6	51.8	98	2.00	Hori.	74.0	22.2
9909.849	37.0	HRN	PK	42.3	-27.6	51.7	201	1.00	Vert.	74.0	22.3



Retest as FCC DA-00-705A1 required for VBW=10Hz:

Frequency (MHz)	Result at VBW=10Hz (dBuV)	Pola.	Limit (dBuV)	Margin (dB)
4949.913	46.1	Hor	54	7.9
7438.899	36.5	Hor	54	17.5
9909.849	31.2	Hor	54	22.8
4949.913	48.5	Ver	54	5.5
7438.899	37.1	Ver	54	16.9
9909.849	31.4	Ver	54	22.6



Conducted:
Channel LOW :

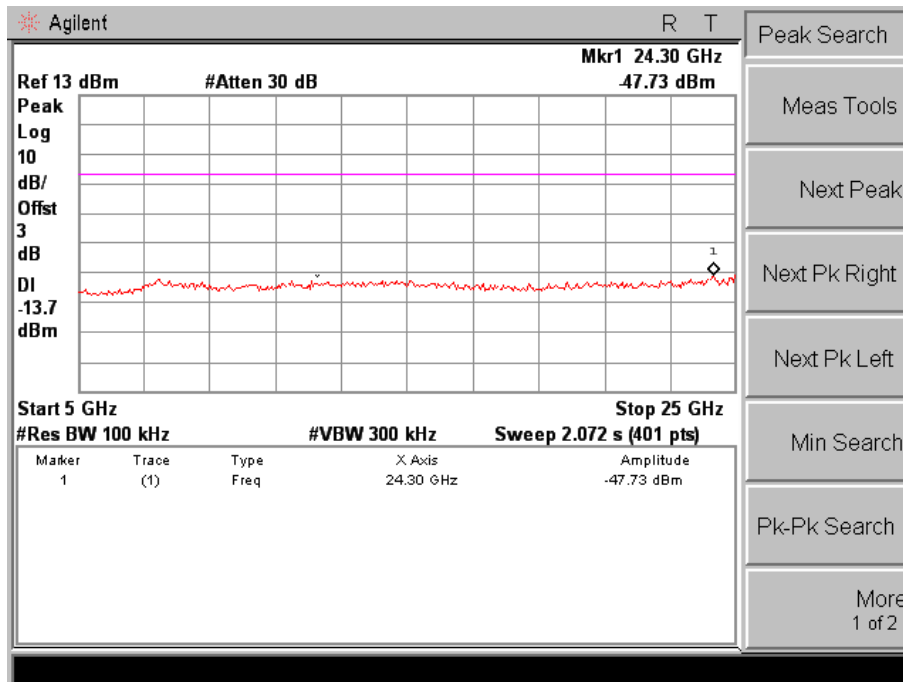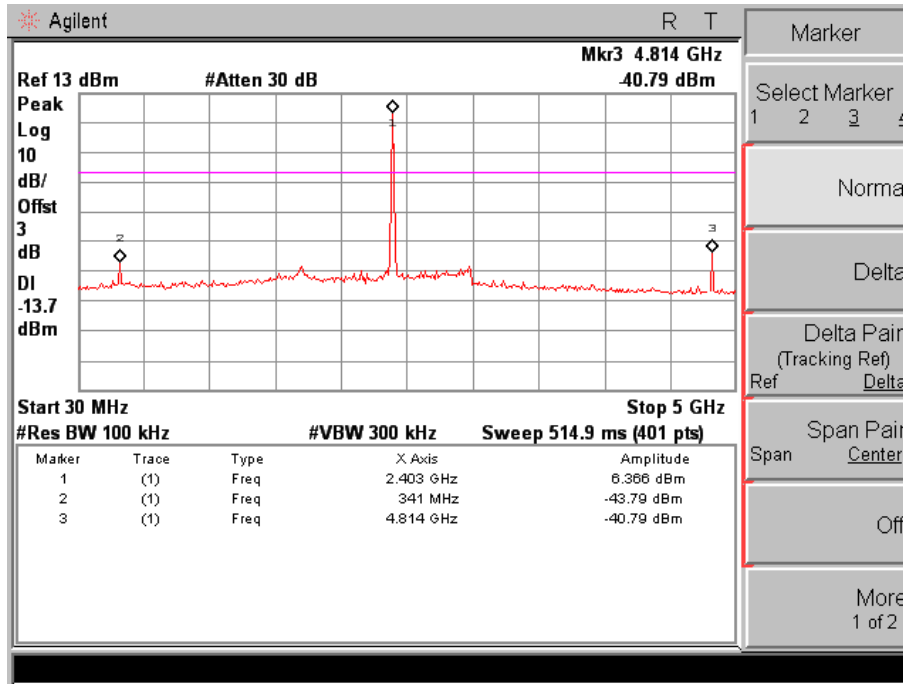

Channel MID :

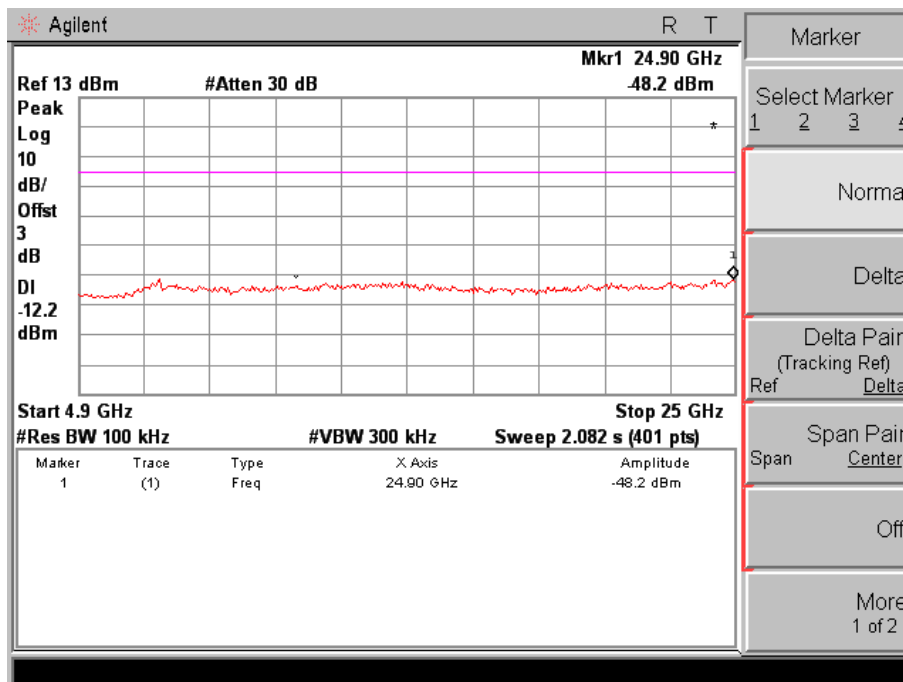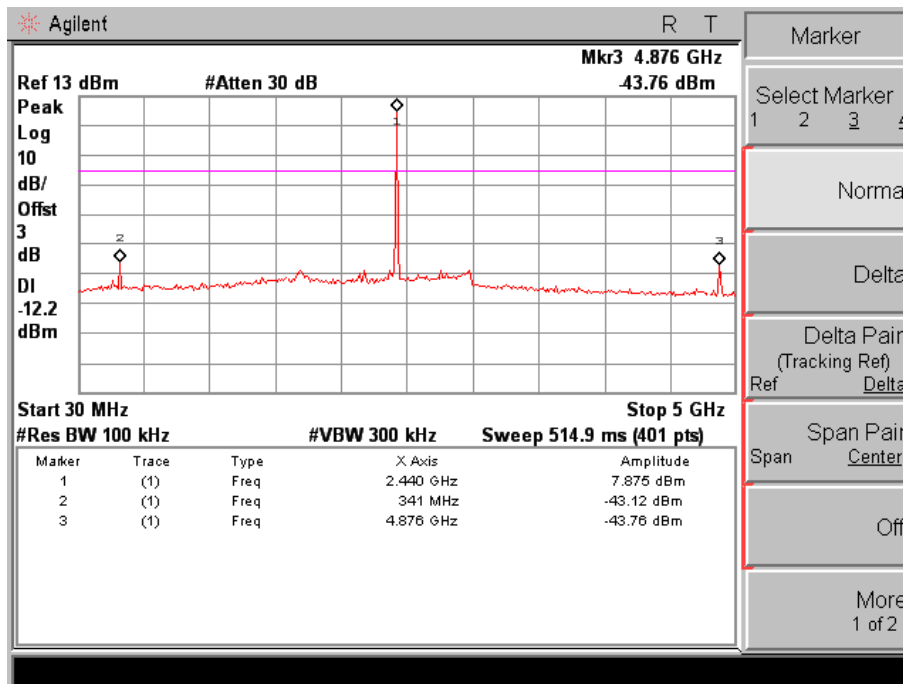

Channel HIG :

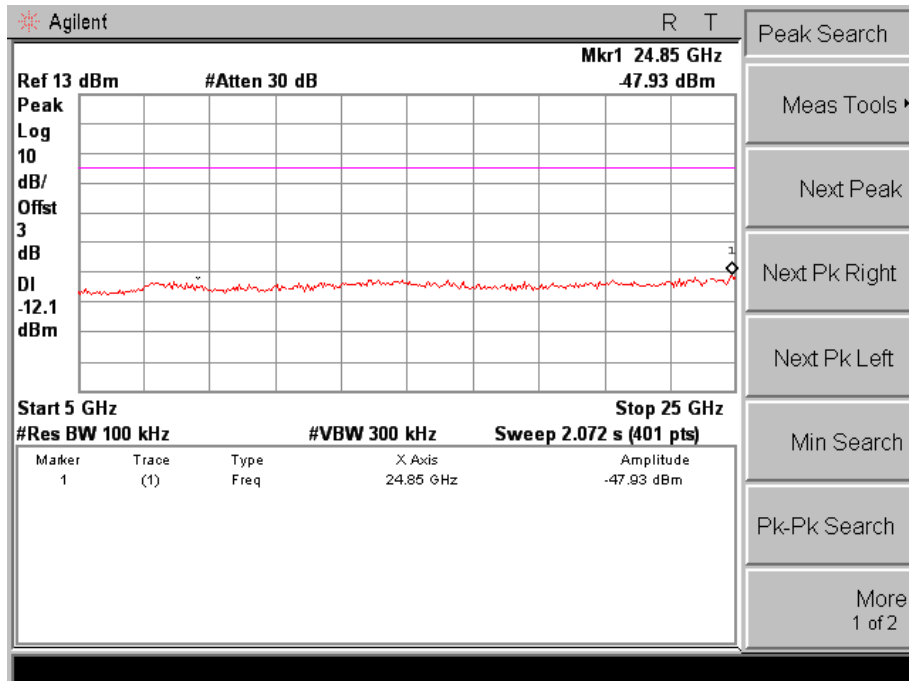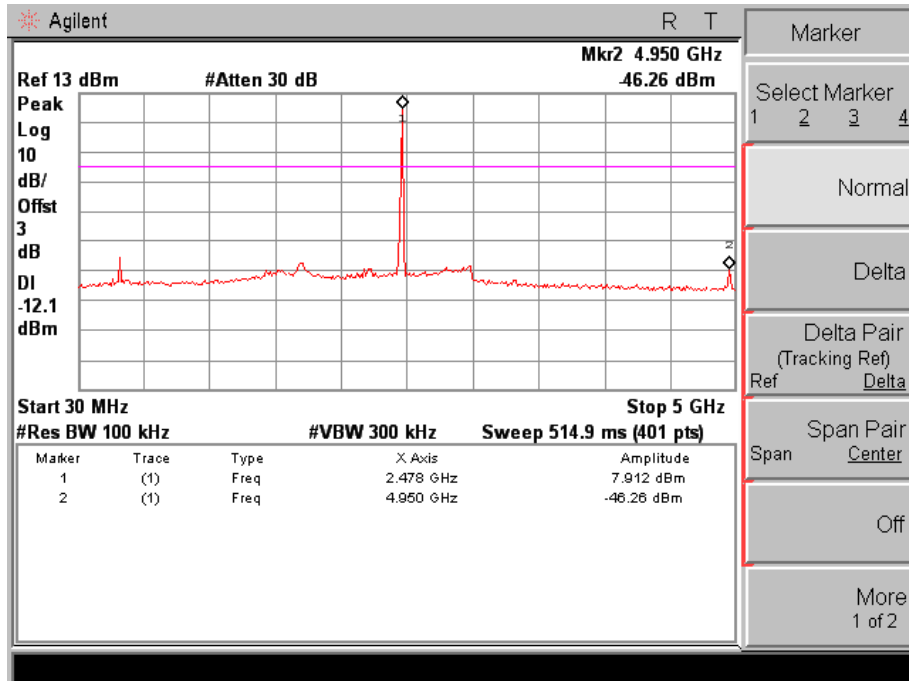

5. Test Setup


5.1 Ancillary and Accessory Equipment Used

No.	Description	Specification	Quantity
1.	transmitter	Provided by applicant(GPE)	1

5.2 Photographs of the Test Configuration

5.2.1 Radiated emission

Below 1GHz:

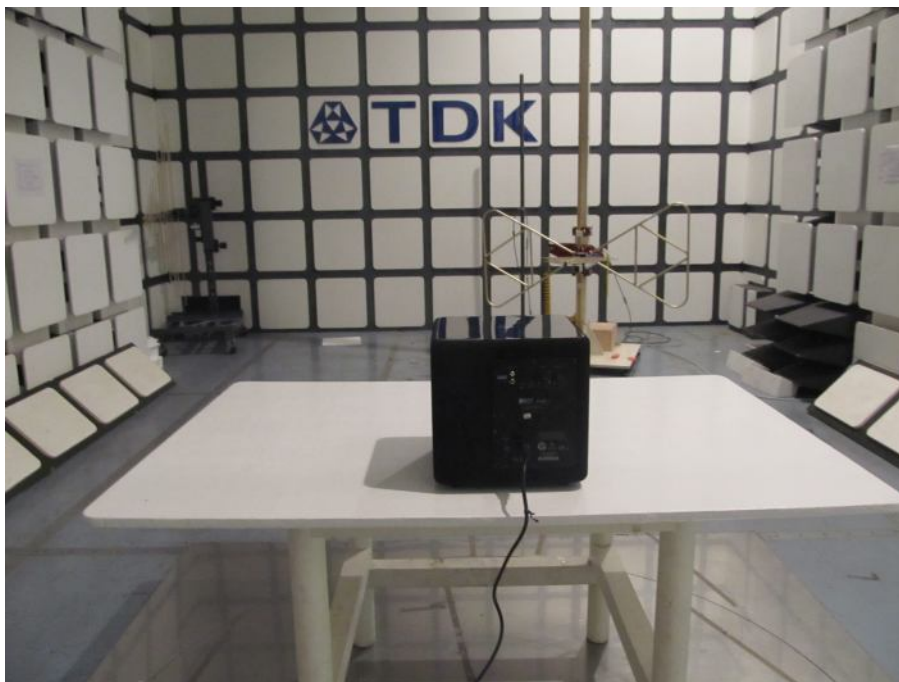

Above 1GHz:




5.2.2 Conducted emission



5.3 Photographs of the EUT



Enclosure of EUT

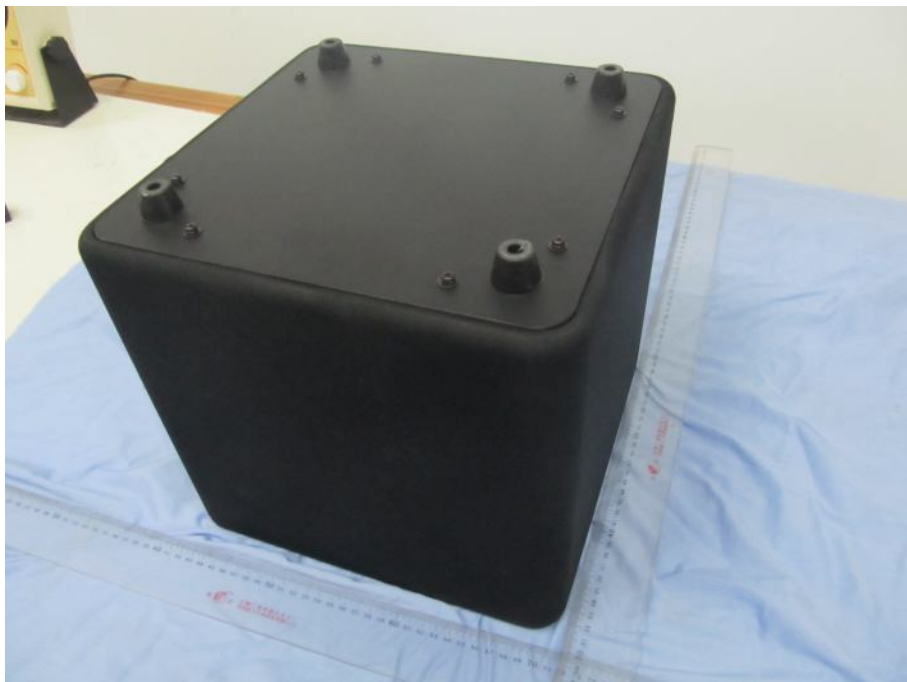

Enclosure of EUT

6. Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Last Cal. Date	Cal. Period
1	Precision Biconical Antenna	TDK Co.	PBA-2030	090500	2012-09-18	1Y
2	Precision Log Periodic Antenna	TDK Co.	PLP-3003	061001	2012-09-18	1Y
3	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130174	2012-09-18	1Y
4	Horn antenna	TDK	HRN-0118	130174	2013-04-07	1Y
5	Horn antenna	TDK	HRN-0118	130186	2013-04-07	1Y
6	Horn antenna	SCHWARZBECK	BBHA 9170	208	2013-04-07	1Y
7	Attenuator 6 dB	Agilent	8491B	MY39260147	2012-09-18	1Y
8	Preamplifier	TDK Sonoma	310	242803	2013-04-07	1Y
9	Preamplifier	ELENA	EAU-3718 GXA	A070701	2013-04-07	1Y
10	EMI Receiver	Rohde & Schwarz	ESIB26	100234	2013-04-07	1Y
11	EMI Receiver	Rohde & Schwarz	ESCS30	100350	2013-04-07	1Y
12	Spectrum Analyzer	Agilent	E4403B	MY44210199	2013-04-07	1Y
13	Art. Mains Network	EMCO	3816/2	00044921	2013-04-07	1Y
14	Transient Limiter(10 dB)	Agilent	11947A	3107A03736	2013-04-07	1Y
15	Personal Computer	HP	DX2000MT	MXD4250 FZM	N/A	
16	Personal Computer	HP	DX2000MT	MXD4130 B2N	N/A	
17	Semi-Anechoic Chamber	TDK Co.	N/A	N/A	2013-04-07	1Y
18	Shielded Room	TDK Co.	N/A	N/A	N/A	
19	Loop Antenna	EMCO	6502	9107-2440	2013-04-07	1Y

7. Test Uncertainty

Test	Range	Confidence Level	Calculated Uncertainty
Radiated emission(3m)	9kHz-30MHz	95%	3.6dB
Radiated emission(3m)	30-1000MHz	95%	4.3dB
Radiated emission(3m)	1-25GHz	95%	5.4dB
Conducted emission	0.15-30MHz	95%	3.3dB
RF power, Spurious(conducted)	30M-25GHz	95%	3.0dB

8. Appendix

8.1 Confirmation of Compliance within the Limits

8.1.1 Method of calculating measurement result

Radiated Emission

	Reading	+	Antenna factor	+	Cable loss	-	Gain	=	Result
Example	45.2	+	11.9	+	6.7	-	31.6	=	32.2

Conducted Emission

	Reading	+	C. FACTOR	=	Result
Example	34.4	+	10.0	=	44.4

8.2 Compliance Statements

Subclause 15.247 (a) – Equal Hopping Frequency Use

Requirement: Each of the transmitter's hopping channels is used equally on average.

The frequency hopping algorithm, when using all 18 channels and no swaps between the active and trial channel sets occur, goes through a sequence of 70 hops over the course of which every RF channel has been used.

Subclause 15.247 (a) – Receiver Input Bandwidth

Requirement: The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.

18 RF channels with a 4-MHz bandwidth are defined. The hopping frequency range is 72 MHz and channel bandwidth is 4MHz for both transmitter and receiver.

When the receiver receives a good data packet from a transmitter, the receiver sends an acknowledgment back to the transmitter. Once the receiver has responded to the transmitter, then both the transmitter and receiver units each hop to the next frequency channel and the process is repeated.

Subclause 15.247 (a) – Receiver Hopping Capability

Requirement: The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.

Radio transceiver CC85xx has

- An integrated frequency synthesizer with 1 MHz step size for any frequency in the range 2400-2483 MHz.
- Complex 3 MHz IF TX signal chain with programmable gain PA
- Complex zero-IF RX signal chain with 36 dB variable gain in the LNAs and 70 dB dynamic range ADCs

Changing the receiver channel is achieved by changing the frequency of the PLL controlled local oscillator. The signal from the local oscillator is fed to the mixer which convert the received signal to the baseband signal. Base-band filtering are contained within the integrated circuit. The incoming RF signal is then filtered and demodulated.

Upon startup the receiver searches for a transmitter on all 18 channels. When the receiver joins

the audio network with chip ID exchange. The receiver captures the packet sent by the transmitter. It extracts the current hopping channels and matches the hopping sequence. At this point the transmitter and receiver have a connection and are now synchronized to the hopping time.

The transmitter sends the change request to the receiver before the hopping sequence adapts. The hop set change does not occur until the receiver has acknowledged the change. This way the transceivers within the system maintain synchronization.

Subclause 15.247 (a) – Hopping Sequence

Requirement: The hopping sequence is generated and provided with an example.

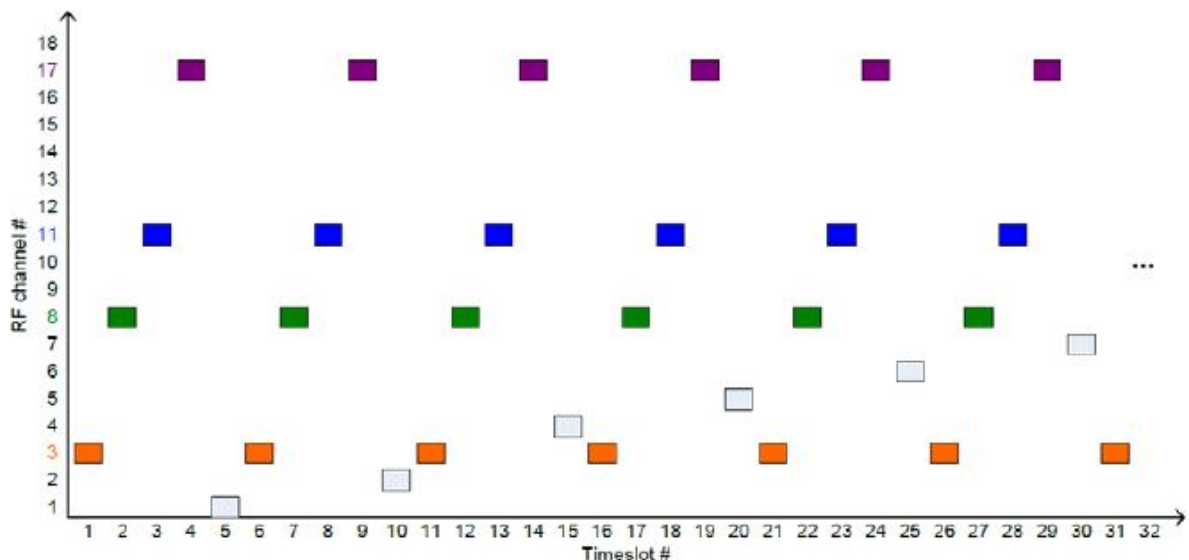


Figure 36 – Example of AFH hop sequence (active set in color, trial set in black/gray)

This 70-hop macrosequence consists of 14 repetitions of a 5-hop microsequence during which

- Each of the four active RF channels are used once

- One of the trial RF channels is used once

(cycling through all trial channels over the course of a macrosequence)

Figure 36 illustrates this concept. This gives an average steady-state RF channel usage of:

- Each of the four active channels are used 20% of the time

- Each trial channel is used 1.43% of the time