



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822  
 Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>



Dates of Tests: January 09 ~ 17, 2007  
 Test Report S/N: LR500190701F  
 Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

UXI-CE-F1000

APPLICANT

iSkin Inc.

FCC Classification	:	FHSS Sequence Spread Spectrum (FHSS)
Manufacturing Description	:	Bluetooth Stereo Headset
Manufacturer	:	DIOSTECH Co., Ltd.
Model name	:	CE-F1000
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2003
Frequency Range	:	2402 ~ 2480MHz
RF power	:	1.837mW - Conducted
Data of issue	:	January 19, 2007

This test report is issued under the authority of:

Dong-Min JUNG, Technical Manager

The test was supervised by:

Kyung-Taek LEE, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.

NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION'S -----	3
2. INFORMATION'S ABOUT TEST ITEM -----	4
3. TEST REPORT -----	5
3.1 SUMMARY OF TESTS -----	5
3.2 TECHNICAL CHARACTERISTICS TEST -----	6
3.2.1 CARRIER FREQUENCY SEPARATION -----	6
3.2.2 NUMBER OF HOPPING FREQUENCIES -----	8
3.2.3 20 dB BANDWIDTH -----	11
3.2.4 TIME OF OCCUPANCY (Dwell Time) -----	13
3.2.5 TTANSMITTER OUTPUT POWER -----	15
3.2.6 BAND - EDGE -----	17
3.2.7 FIELD STRENGTH OF HARMONICS -----	26
3.2.8 AC CONDUCTED EMISSIONS -----	28
 <b>APPENDIX</b>	
APPENDIX TEST EQUIPMENT USED FOR TESTS -----	31

## 1. General information's

### **1-1 Test Performed**

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### **1-2 Accredited agencies**

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2007-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2007-07-13	EMC accredited Lab.
FCC	U.S.A	610755	2008-03-28	FCC filing
VCCI	JAPAN	R2133, C2307	2008-06-22	VCCI registration
IC	CANADA	IC5799	2008-04-23	IC filing

## 2. Information's about test item

### 2-1 Client

Company name : iSkin Inc.  
 Address : 2225 Sheppard Ave. East, Suite#1203 Toronto, Ontario M2J 5C2  
 CANADA  
 Tel / Fax : +1-416-924-9607/ +1-416-924-7731

### 2-2 Manufacturer

Company name : DIOSTECH Co., Ltd.  
 Address : Room 1020 777 Zhaojia Bang Road, Shanghai, China

### 2-3 Equipment Under Test (EUT)

Trade name : Bluetooth Stereo Headset  
 FCC ID : UXI-CE-F1000  
 Model name : CE-F1000  
 Serial number : Identical prototype  
 Date of receipt : December 28, 2006  
 EUT condition : Pre-production, not damaged  
 Antenna type : Chip antenna Max. Gain 1.16dBi  
 Frequency Range : 2402 ~ 2480MHz  
 RF output power Range : -6dBm~+4dBm (Class 2)  
 Number of channels : 79  
 Duty Cycle : 78.3%  
 Channel spacing : 1MHz  
 Channel Access Protocol : Frequency Hopping  
 Type of Modulation : GFSK  
 Power Source : 3.7V (Li-Polymer Rechargeable) (Recharging – by USB Cable)

### 2-4 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

### 2-5 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	$\geq$ 15 hops		C
15.247(a)	20 dB Bandwidth	< 1 MHz		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.207 / 15.107	AC Conducted Emissions	EN 55022	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2003

## 3.2 Transmitter requirements

### 3.2.1 Carrier Frequency Separation

#### Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

#### The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz (1% of the span or more)      Sweep = auto

VBW = 30 kHz      Detector function = peak

Trace = max hold

#### Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
0.960	Complies

- See next pages for actual measured spectrum plots.

#### Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

#### Measurement Setup


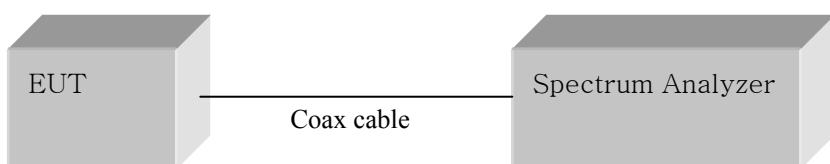


Figure 1: Measurement setup for the carrier frequency separation

### Carrier Frequency Separation

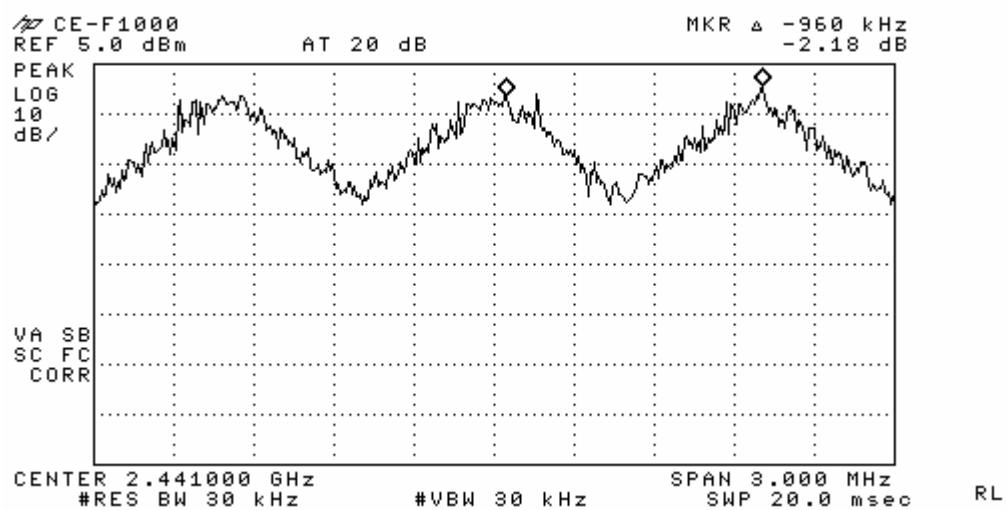

### 3.2.2 Number of Hopping Frequencies

#### Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

#### The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5MHz, Stop = 2414.5 MHz

2: Start = 2414.5MHz, Stop = 2439.5 MHz

3: Start = 2439.5MHz, Stop = 2464.5 MHz

4: Start = 2464.5MHz, Stop = 2489.5 MHz

RBW = 300 kHz (1% of the span or more) Sweep = auto

VBW = 300 kHz (VBW  $\geq$  RBW) Detector function = peak

Trace = max hold Span = 25MHz

#### Measurement Data: Complies

<b>Total number of Hopping Channels</b>	79
---	----

- See next pages for actual measured spectrum plots.



#### Minimum Standard:

At least 15 hopes



#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

### Number of Hopping Frequencies

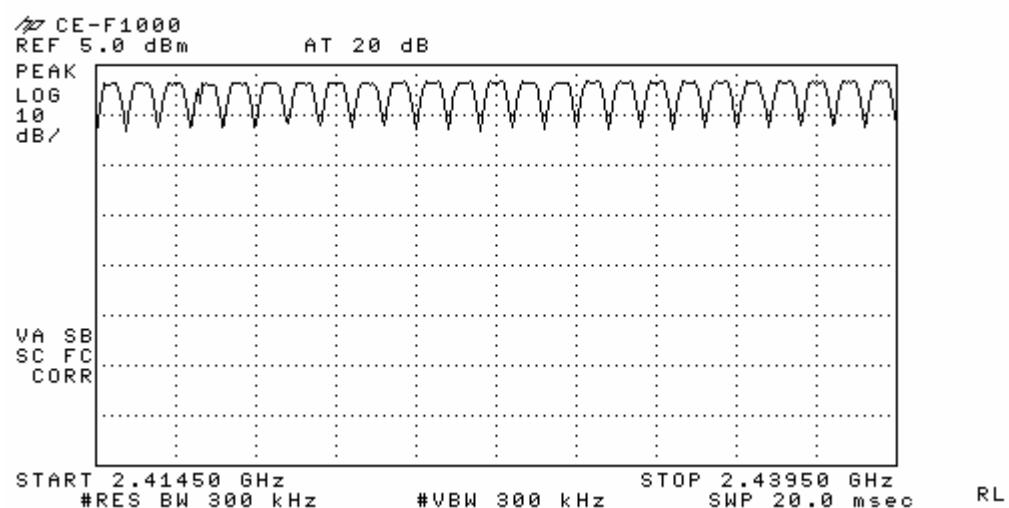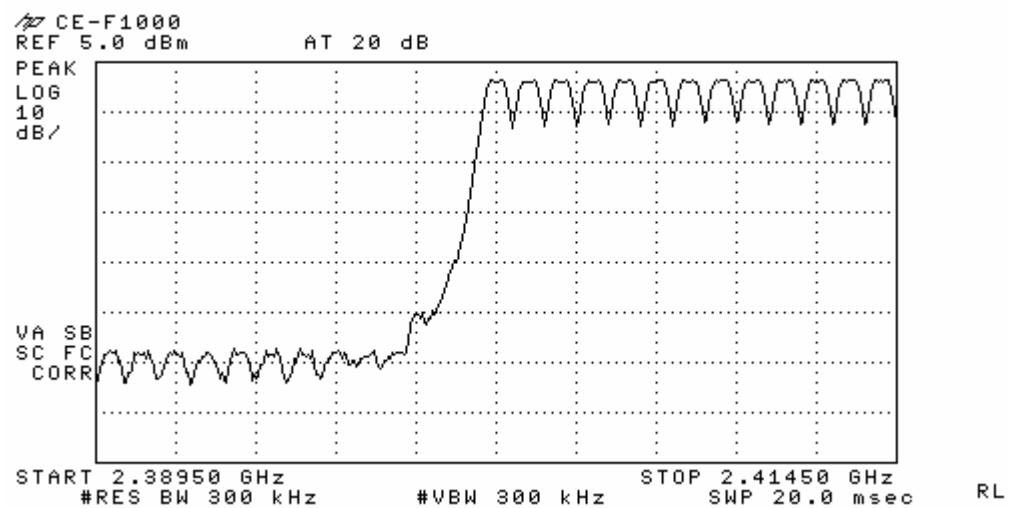

### Number of Hopping Frequencies

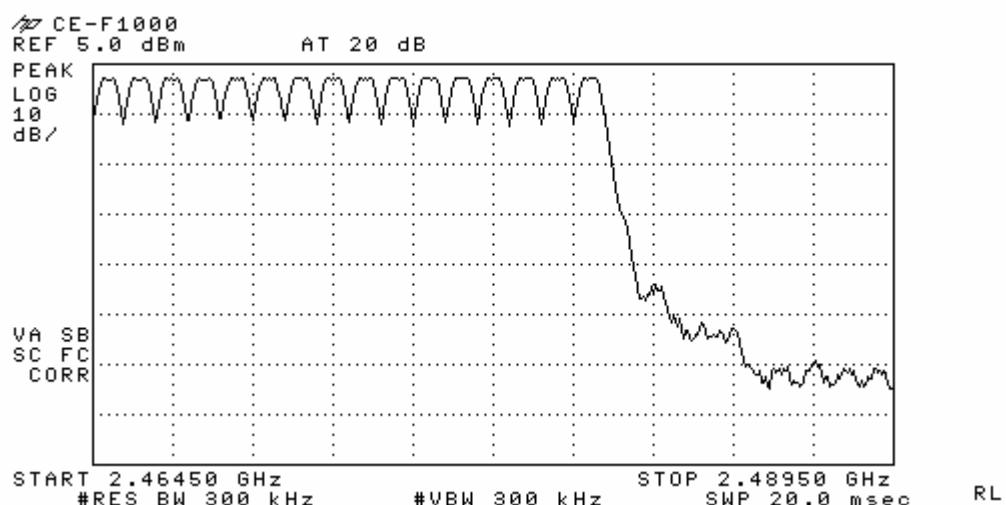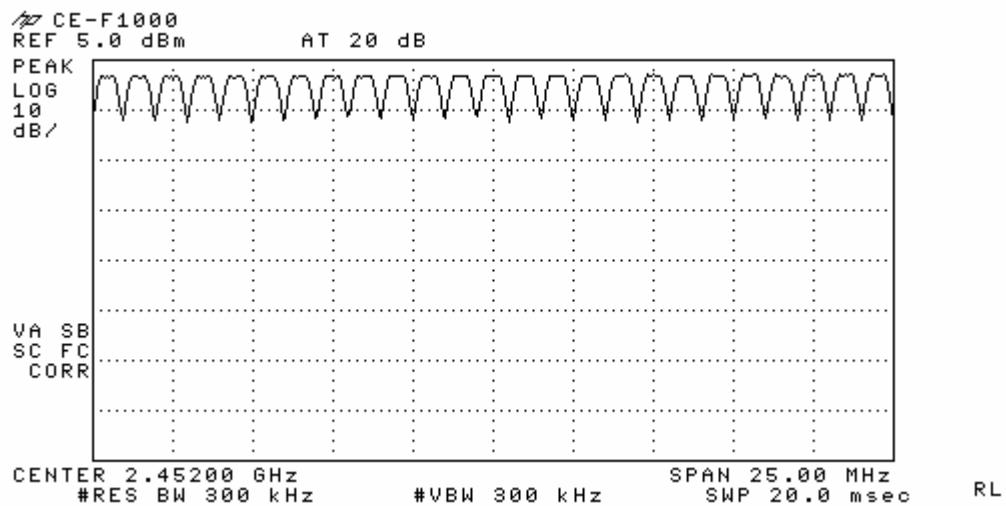

### 3.2.3 20 dB Bandwidth

#### Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

#### The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz Sweep = auto

VBW = 30 kHz (VBW  $\geq$  RBW) Detector function = peak

Trace = max hold

#### Measurement Data:

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2402	0	0.945	Complies
2441	39	0.935	Complies
2480	78	0.935	Complies

- See next pages for actual measured spectrum plots.




#### Minimum Standard:

The transmitter shall have a maximum 20dB bandwidth of 1 MHz.

#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

## 20 dB Bandwidth

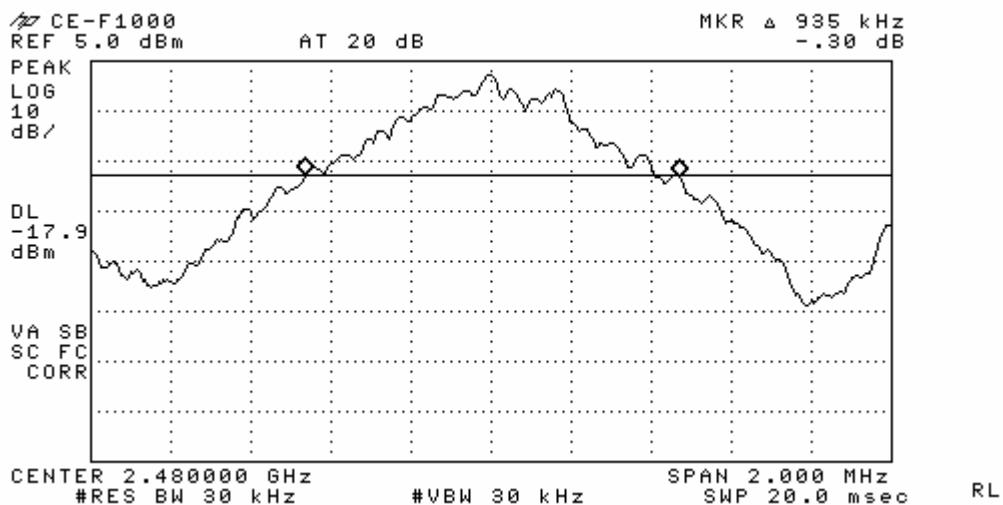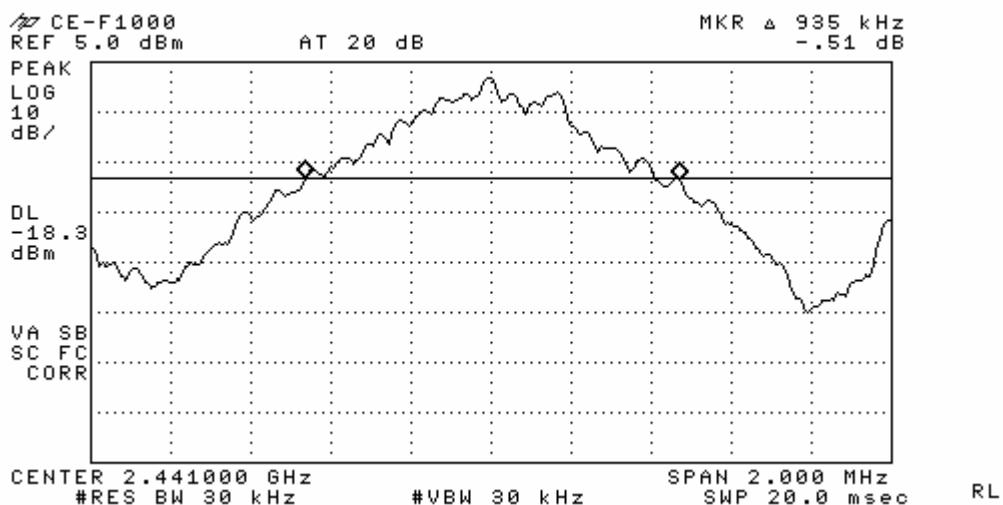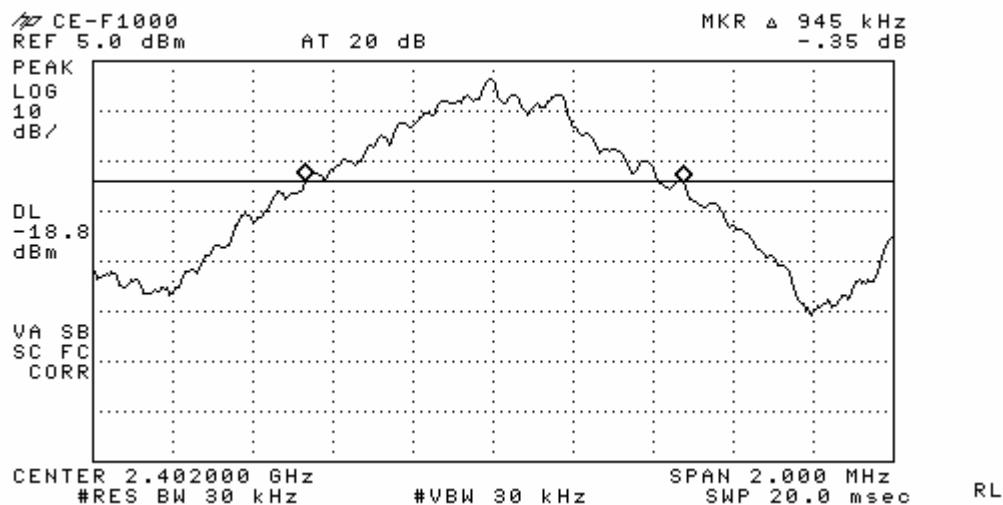

### 3.2.4 Time of Occupancy (Dwell Time)

#### Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW  $\geq$  RBW)

Trace = max hold

Detector function = peak

#### Measurement Data:

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results	
			Dwell Time (s)	Result
39	2441	DH 1	0.1400	Complies
		DH 3	0.2699	Complies
		DH 5	0.3128	Complies




- See next pages for actual measured spectrum plots.

#### Minimum Standard:

0.4 seconds

#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

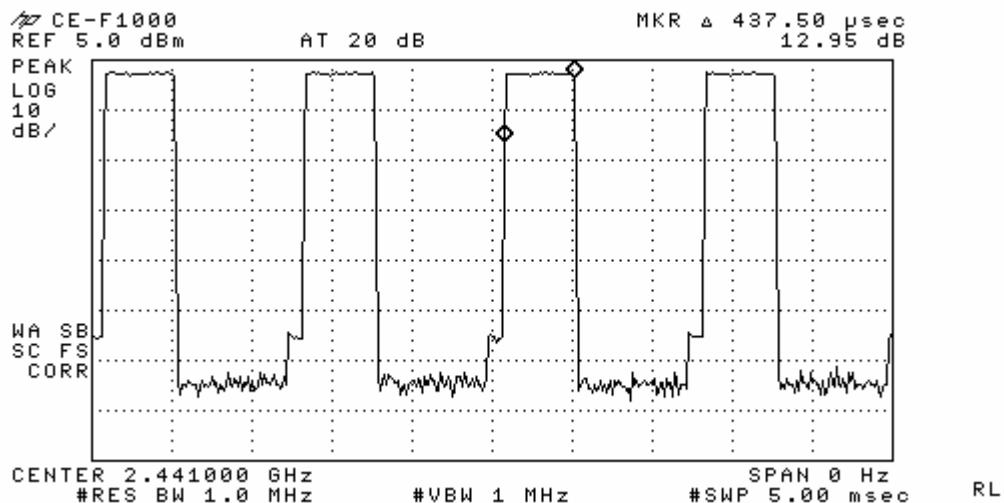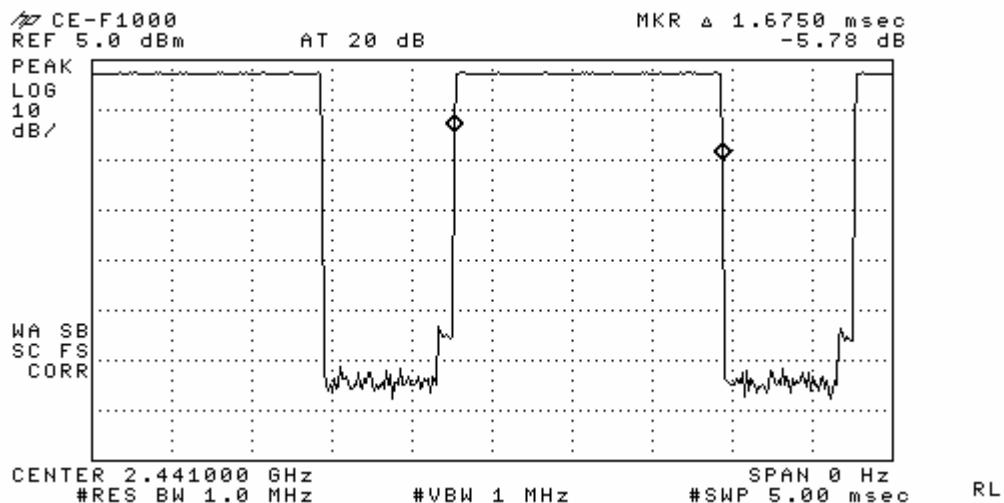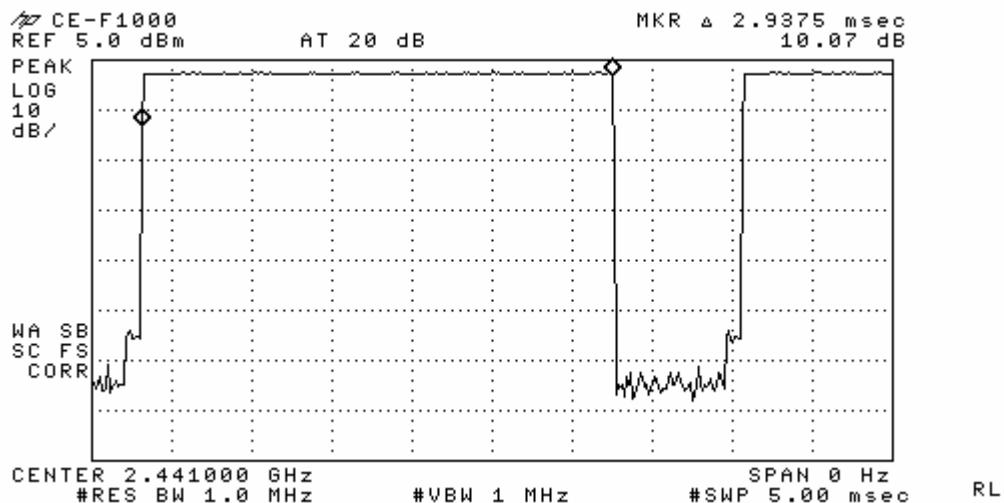**DH 1****DH 3****DH 5**

### 3.2.5 Transmitter Output Power

## Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW  $\geq$  RBW)

Detector function = peak

Trace = max hold

Sweep = auto

## Measurement Data:

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	<b>1.53</b>	<b>1.422</b>	Complies
2441	39	<b>2.14</b>	<b>1.637</b>	Complies
2480	78	<b>2.64</b>	<b>1.837</b>	Complies

- See next pages for actual measured spectrum plots.

---




<b>Minimum Standard:</b>	< 1W
--------------------------	------

---

## Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

### Peak Output Power

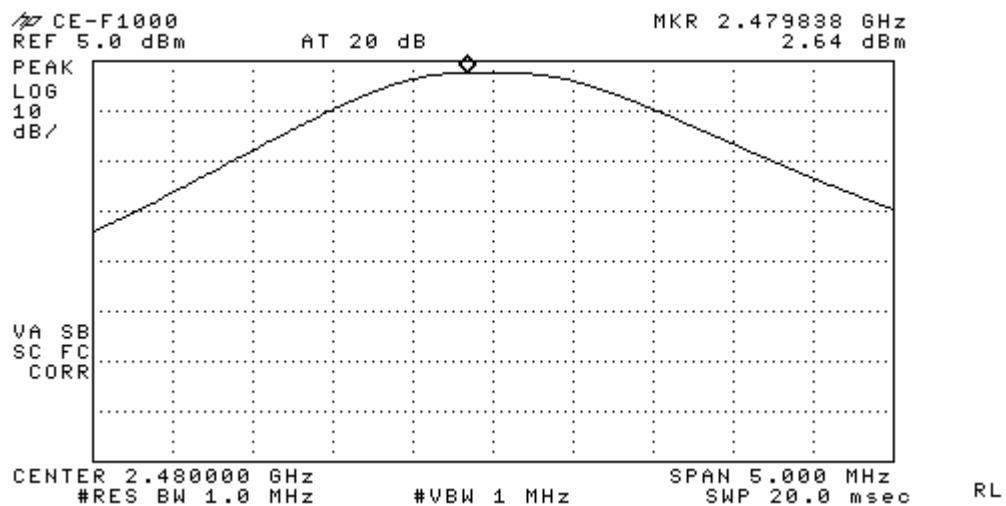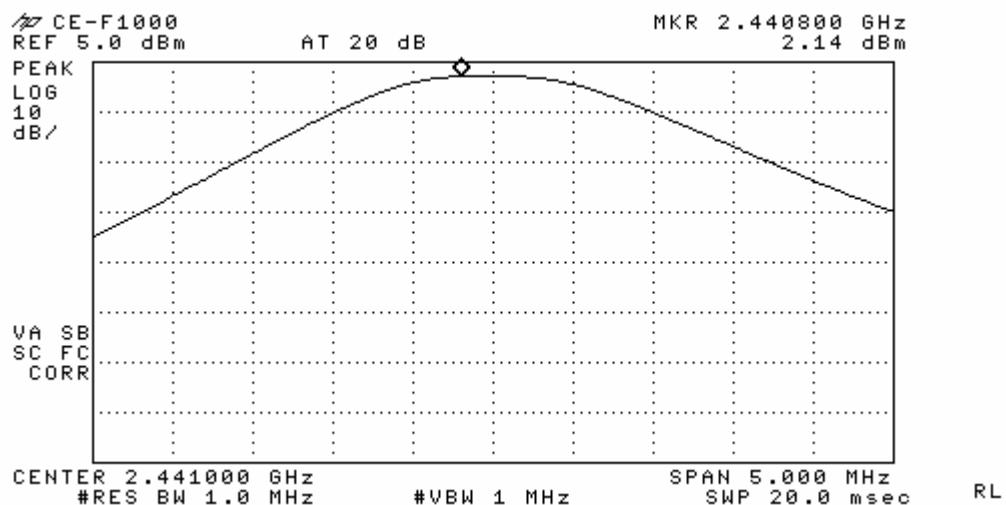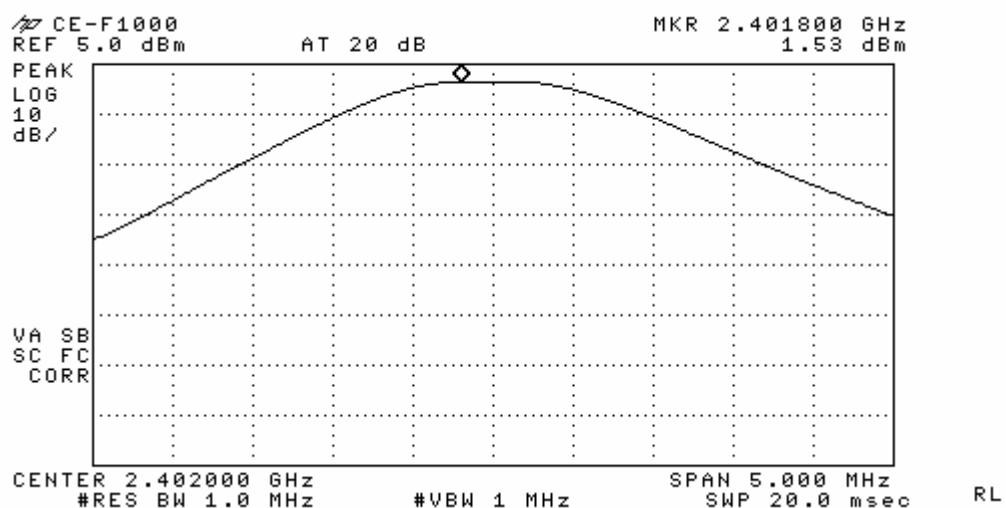

### 3.2.6 Band - edge

## Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 10 MHz      Detector function = peak

Trace = max hold      Sweep = auto



**Measurement Data: Complies**

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------

## Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

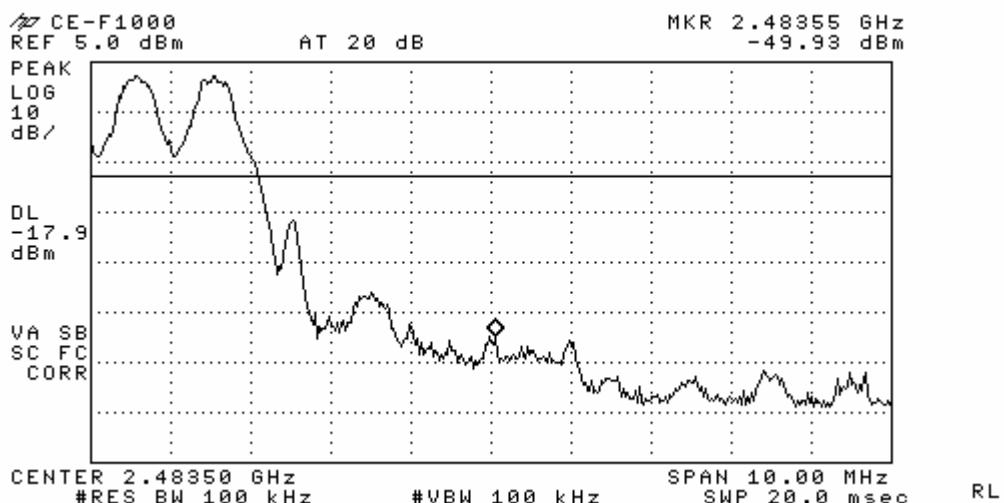
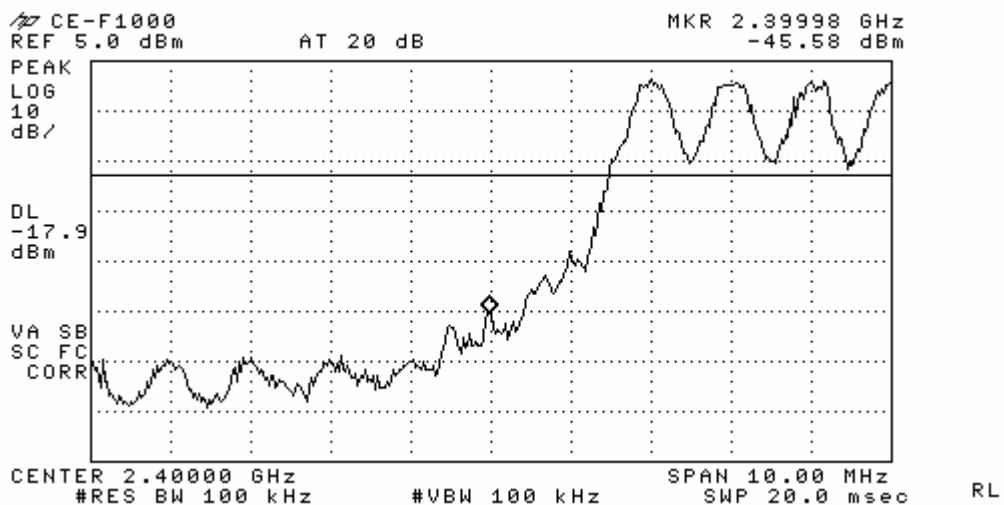
**Band - edge (with Hopping)****Band-edges in the restricted band 2483.5 ~ 2500 MHz measurement**

- Document DA 00-705 Marker Delta Method

Frequency (MHz)	Detect mode	Pol.	Reading (dBuV/m)	T.F (dB)	Step 1 Data	delta	Step 3 Data	Limit
2480	PK	H	64.0	34.6	98.6	29.33	69.27	74
	AV	H	46.4	34.6	81.0	29.33	51.67	54

**Note) Step 1 = Reading + T.F**

**T.F = Ant.F + Cable loss      Step 3 = Step 1 – Delta Value**

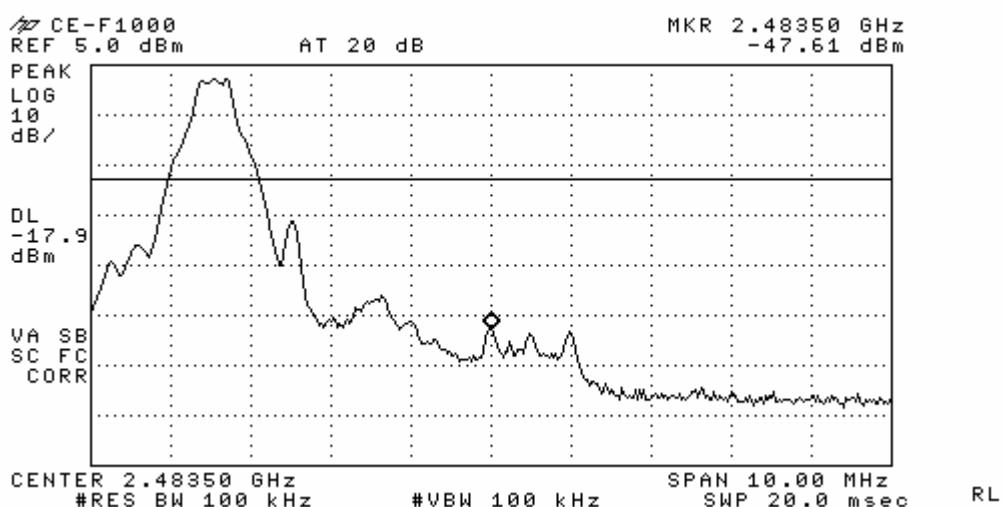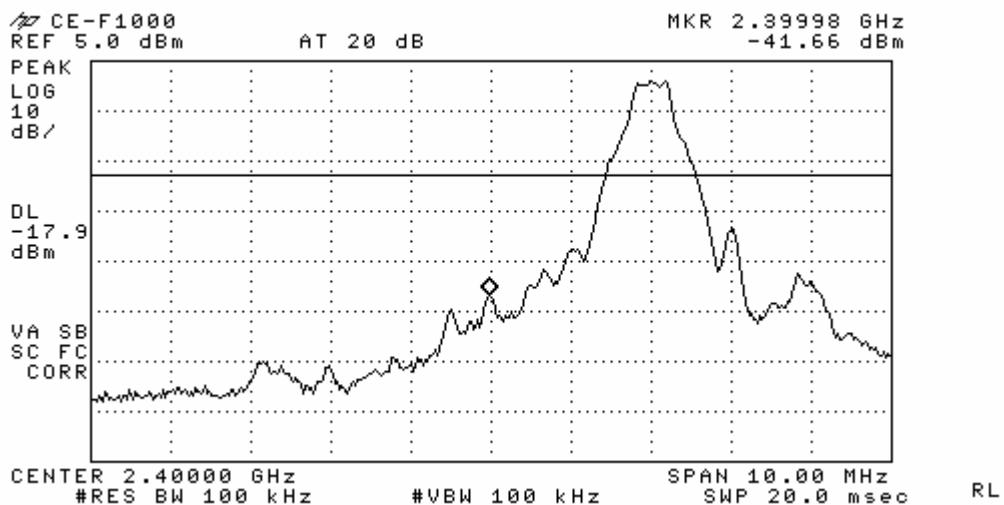**Band - edge (without Hopping)****Band-edges in the restricted band 2483.5 ~ 2500 MHz measurement**



- Document DA 00-705 Marker Delta Method

Frequency (MHz)	Detect mode	Pol.	Reading (dBuV/m)	T.F (dB)	Step 1 Data	delta	Step 3 Data	Limit
2480	PK	H	64.8	34.6	99.4	49.93	49.47	74
	AV	H	58.9	34.6	93.5	49.93	43.57	54

Note) Step 1 = Reading + T.F


T.F = Ant.F + Cable loss      Step 3 = Step 1 – Delta Value

**Band - edge (at 20 dB blow) – Low channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.**

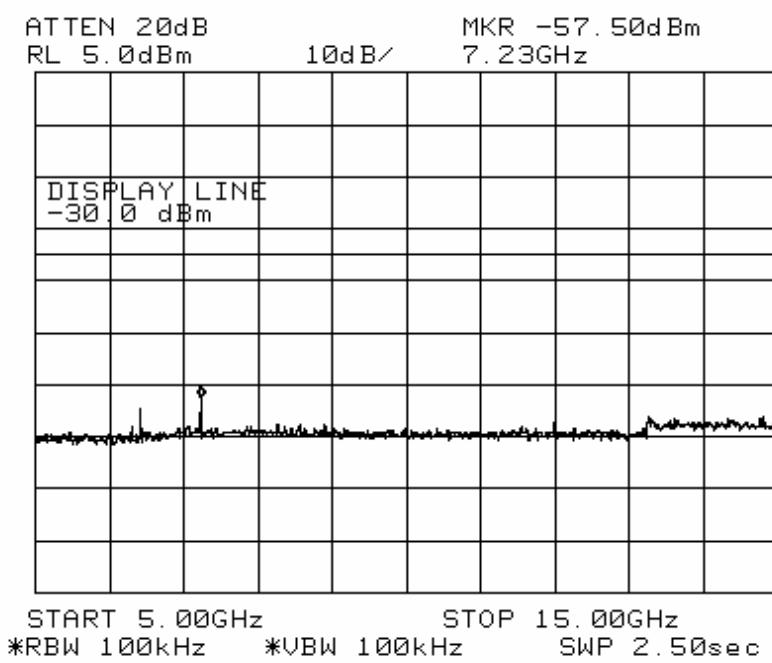
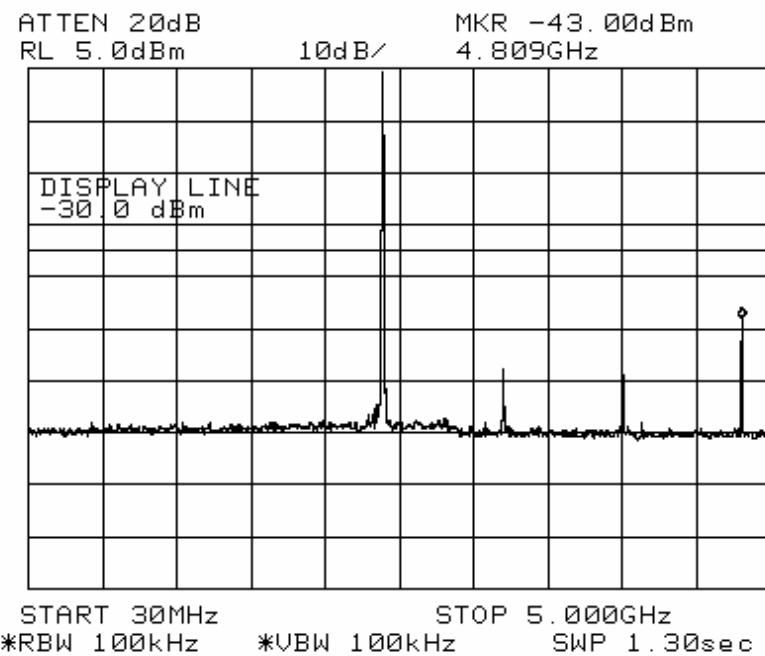


**Band - edge (at 20 dB blow) – Low channel**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonics.**

- Continues

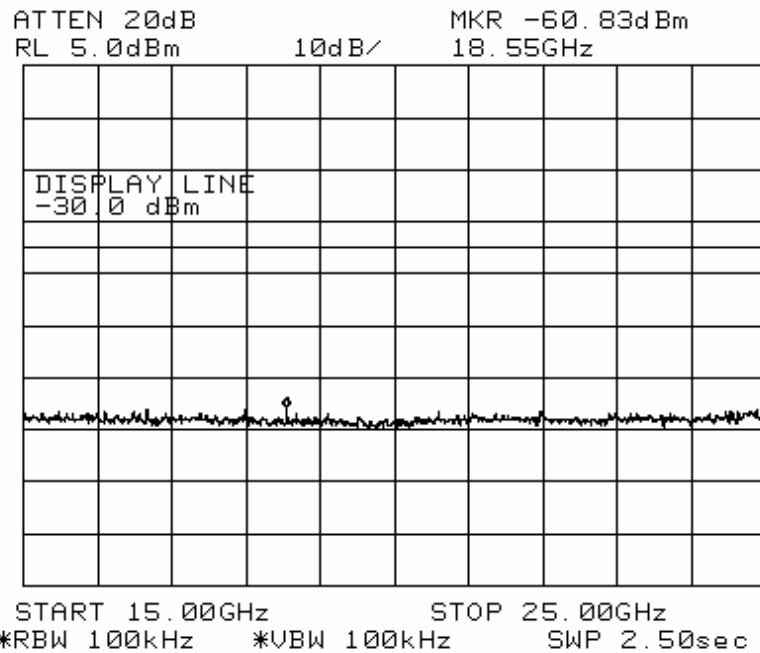


**Band - edge (at 20 dB blow) – Mid channel**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.**

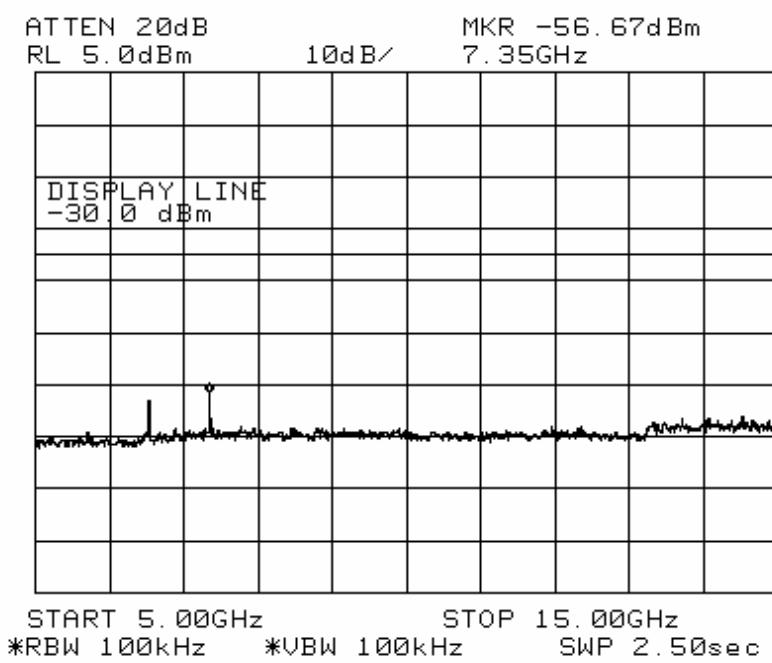
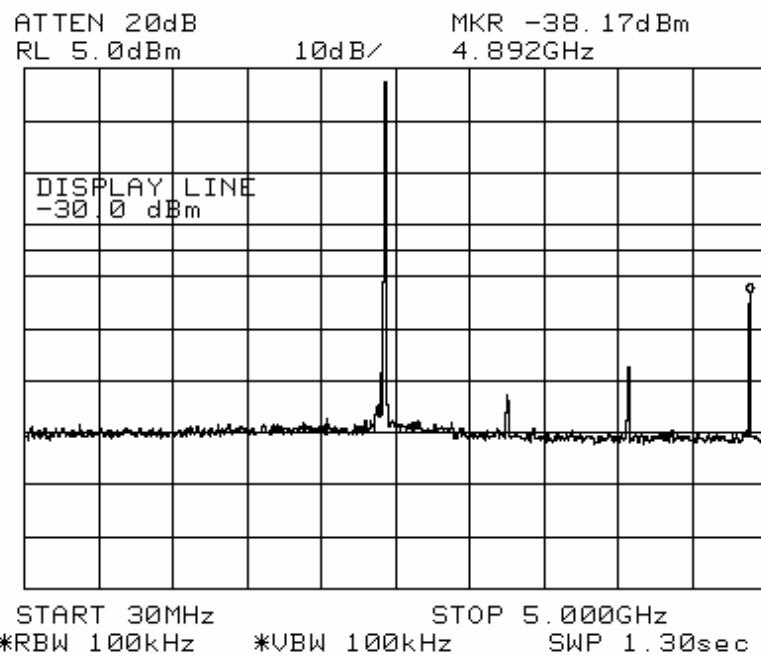


**Band - edge (at 20 dB blow) – Mid channel**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonics.**

## - Continues

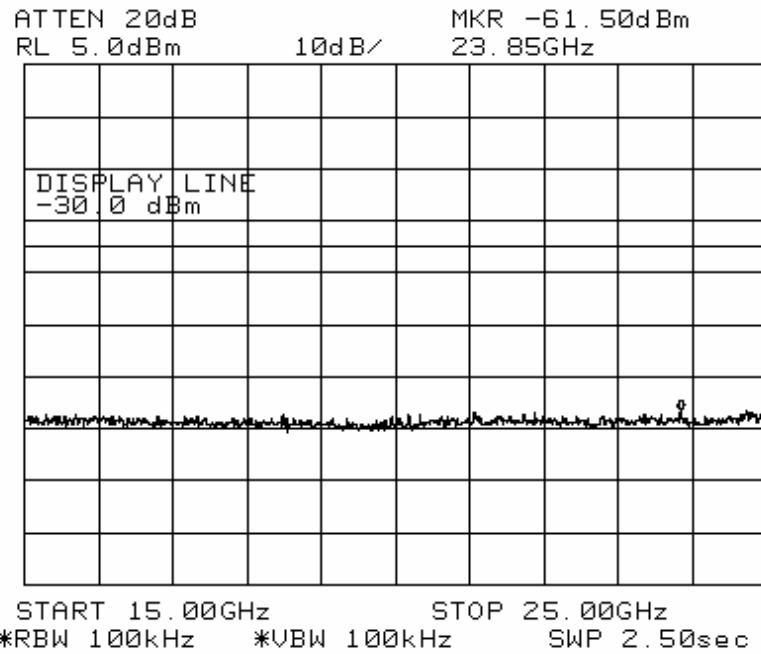


**Band - edge (at 20 dB blow) – High channel**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.**

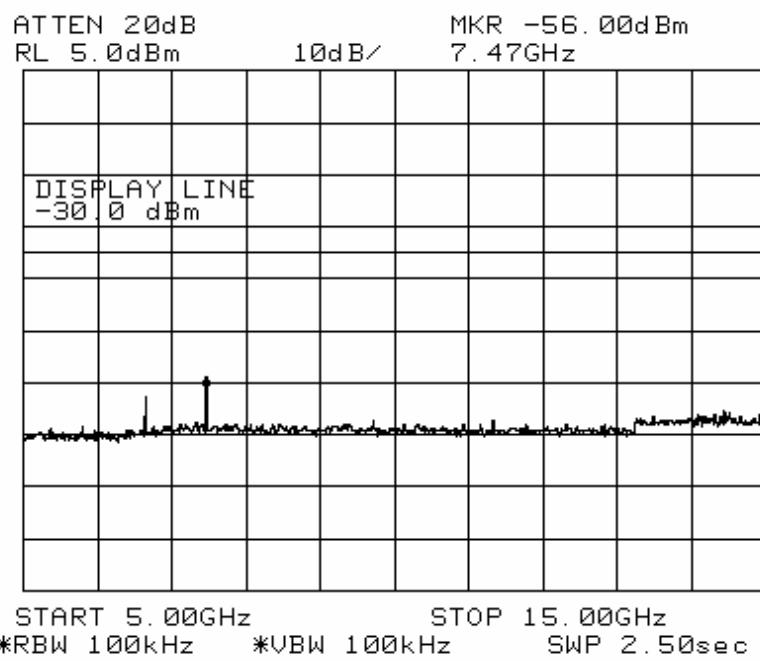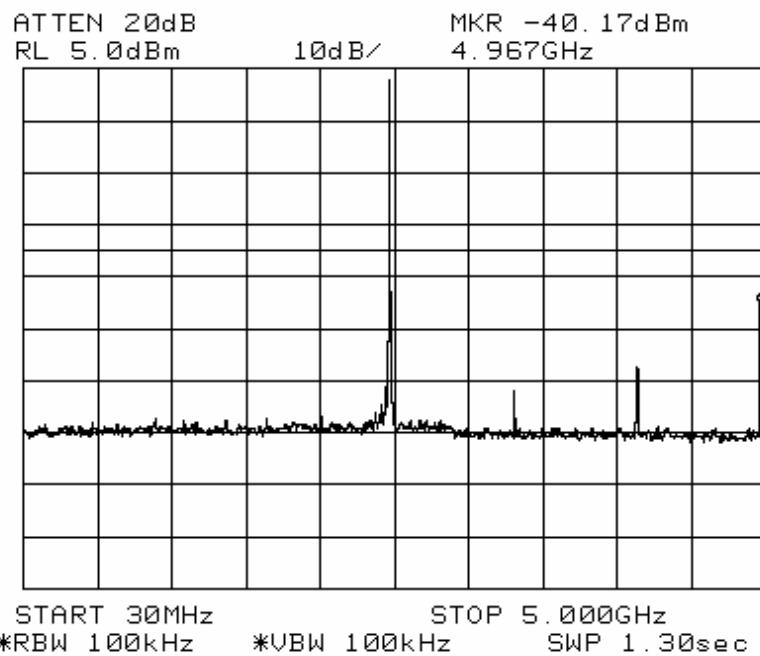

Band - edge (at 20 dB blow) – High channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonics.

### - Continues

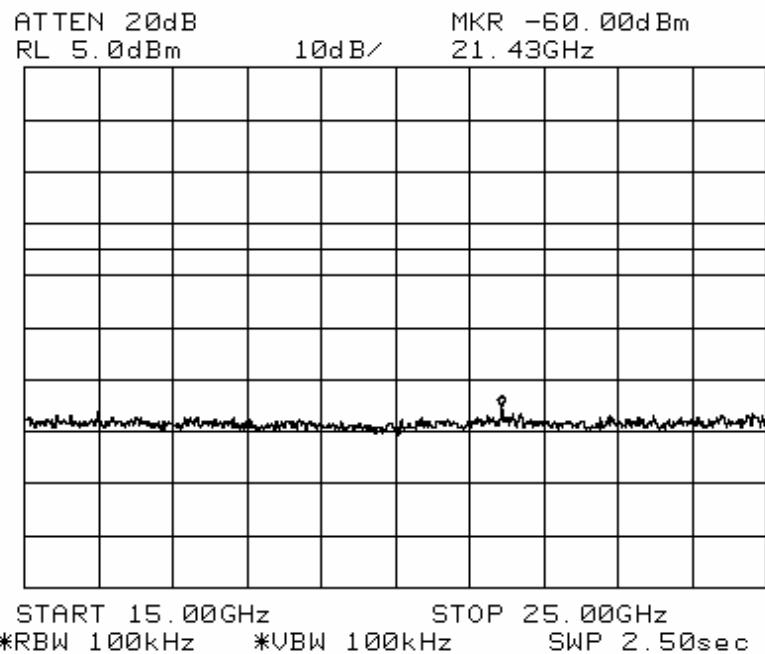

### 3.2.7 Field Strength of Harmonics

#### Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.

RBW = 100 kHz ( 30MHz ~ 1 GHz)  
= 1 MHz (1 GHz ~ 10<sup>th</sup> harmonic )

VBW ≥ RBW

Span = 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

#### Measurement Data: Complies - Harmonics

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
3201.0	43.4	3254.3	42.3	3308.0	39.2
4004.0	41.7	4068.8	44.6	4134.0	40.1
4804.0	51.1	4881.1	52.5	4960.0	50.8
7205.4	44.7	7322.7	43.8	7440.0	44.1
<b>Measurement uncertainty</b>		± 6 dB			

**Note:** No other emissions were detected at a level greater than 10dB below limit.

#### Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500


\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

## Measurement Data: Complies - Other Frequency



243 Jukug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel: +82-31-3236008,9  
Fax: +82-31-3236010

EUT/Model No.: CE-F1000 Temp/Humi: 2 / 32  
Test Mode : FCC+Bluetooth+CHARGER mode Tested by: B. S. KIM

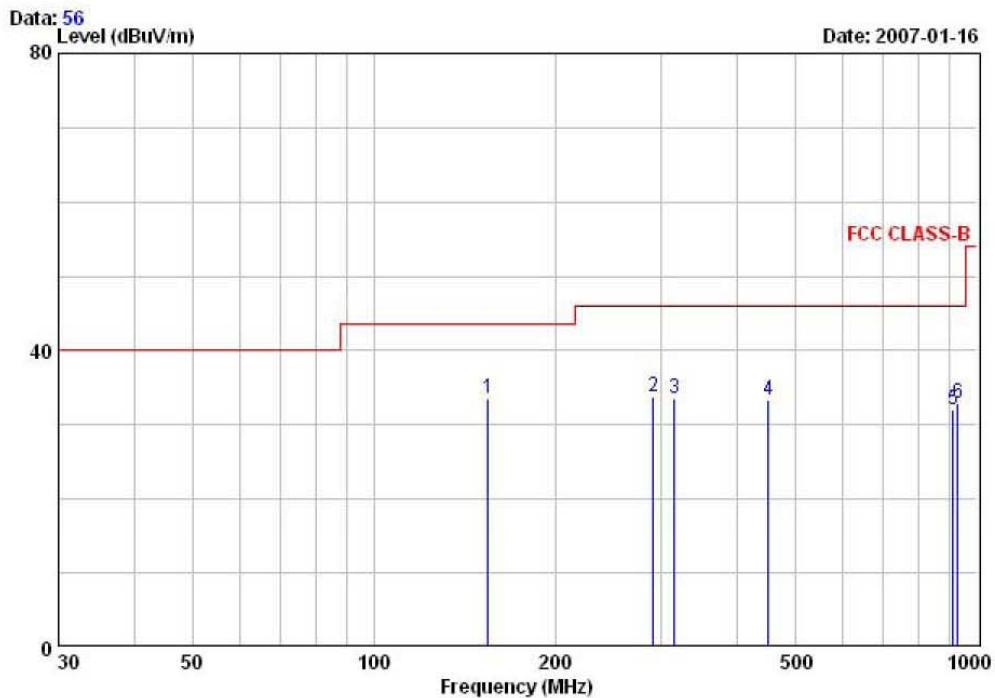

	Freq MHz	Reading (QP) dBuV	C.F Result (QP) dB	Limit dBuV/m	Margin dB	Height cm	Polarity
1	154.82	43.72	-10.25	33.47	43.50	10.03	HORIZONTAL
2	291.04	43.59	-9.90	33.69	46.00	12.31	HORIZONTAL
3	315.48	42.92	-9.29	33.63	46.00	12.37	HORIZONTAL
4	451.14	39.72	-6.47	33.25	46.00	12.75	HORIZONTAL
5	912.86	29.88	2.06	31.94	46.00	14.06	VERTICAL
6	929.01	30.41	2.46	32.87	46.00	13.13	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

### 3.2.8 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No other emissions were detected at a level greater than 10dB below limit.

#### Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


\* Decreases with the logarithm of the frequency

## AC Conducted Emissions –Line



243 Jukug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel +82-31-323-6008  
Fax +82-31-323-6010

EUT / Model No. : CE-F1000 Phase : LINE  
 Test Mode : Charger & bluetooth mode Test Power : 120 / 60  
 Temp./Humi. : 20 / 22 Test Engineer : B.S.KIM

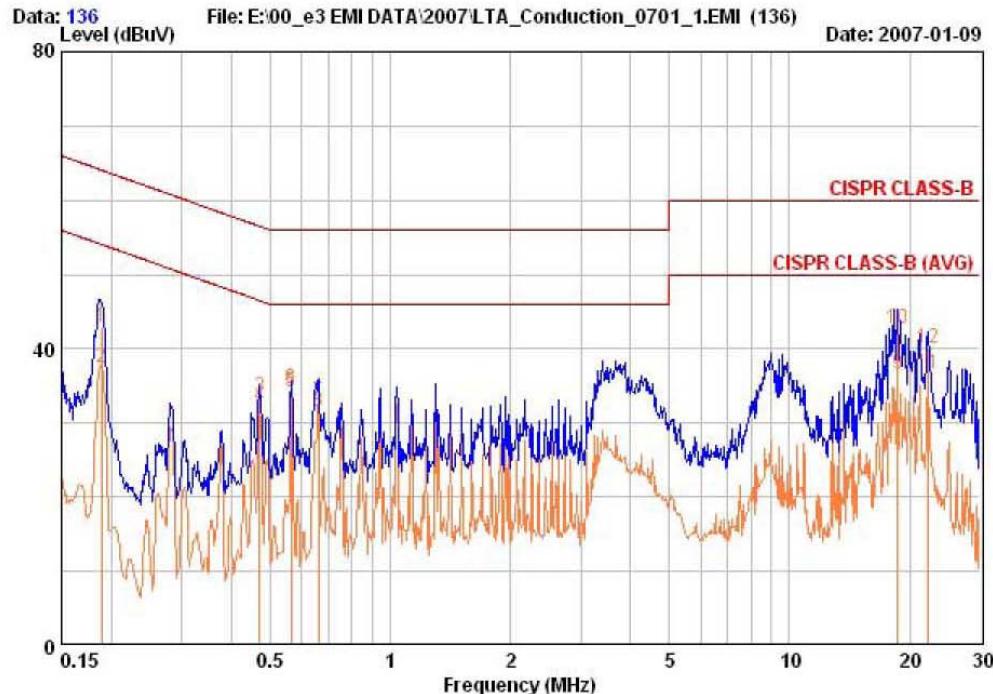

Freq MHz	RD QP	RD AV	C. F	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.189	42.70	37.20	0.27	42.97	37.47	64.08	54.08	21.11	16.61
0.471	33.30	31.90	0.32	33.62	32.22	56.50	46.50	22.88	14.28
0.565	34.30	33.90	0.29	34.59	34.19	56.00	46.00	21.41	11.81
0.661	32.60	31.40	0.30	32.90	31.70	56.00	46.00	23.10	14.30
18.639	41.30	35.30	1.36	42.66	36.66	60.00	50.00	17.34	13.34
22.314	38.50	35.10	1.61	40.11	36.71	60.00	50.00	19.89	13.29


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

## AC Conducted Emissions -Neutral



243 Jibug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel :+82-31-323-6008  
Fax :+82-31-323-6010

EUT / Model No. : CE-F1000 Phase : NEUTRAL  
-----  
Test Mode : Charger & bluetooth mode Test Power : 120 / 60  
-----  
Temp./Humi. : 20 / 22 Test Engineer : B.S.KIM  
-----

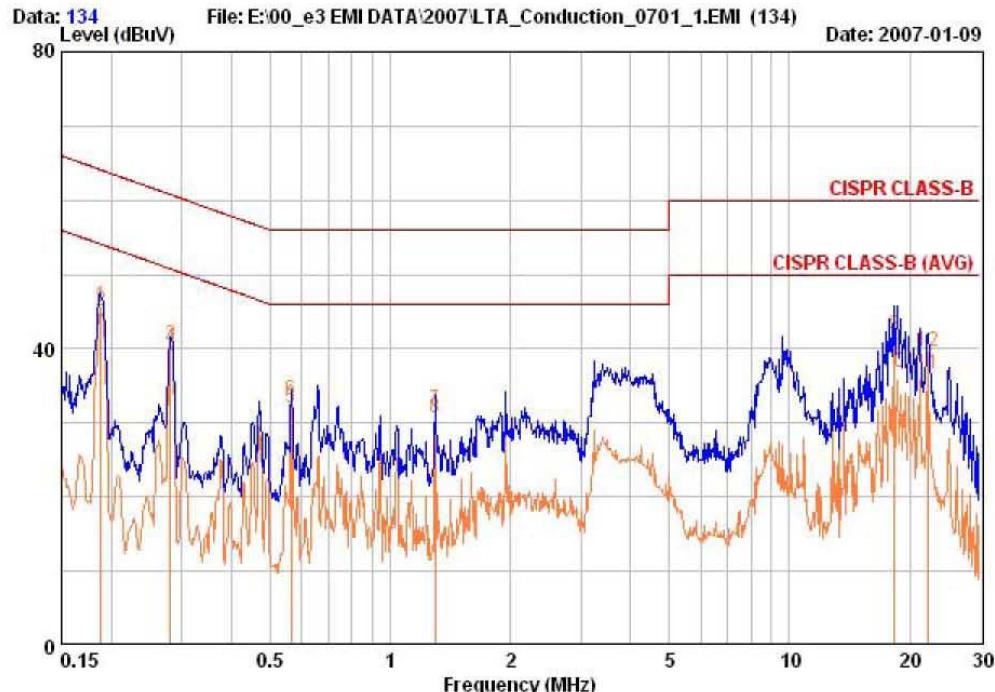

Freq MHz	RD QP		RD AV		C. F dB	Result dBuV	Result dBuV	Limit QP		Limit AV		Margin dB	Margin dB
	dBuV	dBuV	dBuV	dBuV				dBuV	dBuV	dBuV	dBuV		
0.188	45.40	44.80	0.27	45.67	45.07	64.12	54.12	18.45	9.05	20.23	10.63		
0.281	40.30	39.90	0.26	40.56	40.16	60.79	50.79	22.92	14.02				
0.563	32.80	31.70	0.28	33.08	31.98	56.00	46.00	24.07	15.17				
1.295	31.60	30.50	0.33	31.93	30.83	56.00	46.00	18.11	13.11				
18.358	40.70	35.70	1.19	41.89	36.89	60.00	50.00	20.30	13.40				
22.191	38.30	35.20	1.40	39.70	36.60	60.00	50.00						

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

## APPENDIX

### TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	8594E	3649A03649	HP	Mar-07
2	Signal Generator	8657A	3430U02049	HP	Dec-07
3	Attenuator (3dB)	8491A	37822	HP	Nov-07
4	Attenuator (3dB)	8491A	28881	HP	Nov-07
5	EMI Test Receiver	ESVD	843748/001	R&S	Jan-07
6	LISN	KNW-407	8-1430-1	Kyoritsu	Jan-07
7	Two-Line V-Network	ESH3-Z5	893045/017	R&S	Jan-07
8	RF Amplifier	8447D	2949A02670	HP	Jan-07
9	RF Amplifier	8447D	2439A09058	HP	Jan-07
10	RF Amplifier	8449B	3008A02126	HP	Jun-07
11	Test Receiver	ESHS10	828404009	R&S	Jan-07
12	TRILOG Antenna	VULB 9160	9160-3172	SCHWARZBECK	Feb-07
13	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Feb-07
14	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Feb-07
15	Horn Antenna	3115	00055005	ETS LINDGREN	Jun-07
16	Horn Antenna	BBHA 9120D	0499	Schwarzbeck	Jun-07
17	Dipole Antenna	VHA9103	2116	Schwarzbeck	Nov-07
18	Dipole Antenna	VHA9103	2117	Schwarzbeck	Nov-07
19	Dipole Antenna	UHA9105	2261	Schwarzbeck	Nov-07
20	Dipole Antenna	UHA9105	2262	Schwarzbeck	Nov-07
21	Spectrum Analyzer	8591E	3649A05888	HP	Jan-07
22	Spectrum Analyzer	8563E	3425A02505	HP	Jan-07
23	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Feb-07
24	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	Jun-07
25	RF Switch	MP59B	6200414971	ANRITSU	Jun-07
26	RF Switch	MP59B	6200438565	ANRITSU	Jun-07
27	Power Divider	11636A	6243	HP	Nov-07
28	DC Power Supply	6622A	3448A03079	HP	Oct-07
29	Attenuator (30dB)	11636A	6243	HP	Nov-07
30	Attenuator (10dB)	8491A	63196	HP	Nov-07
31	Power Meter	EPM-441A	GB32481702	HP	Apr-07
32	Power Sensor	8481A	2702A64048	HP	Apr-07
33	Audio Analyzer	8903B	3729A18901	HP	Nov-07
34	Modulation Analyzer	8901B	3749A05878	HP	Nov-07
35	TEMP & HUMIDITY Chamber	YJ-500	L05022	JinYoung Tech	Oct-07