

Amended

Test Report

Includes NCEE Labs report R20170329-22-02 and amendment in full

Prepared for: Hunter Douglas

Address: 2550 Midway Boulevard
Broomfield, CO 80020

Product: Repeater 2.0

Test Report No: R20170329-22-02A

Approved By:

A handwritten signature in black ink, appearing to read "Nic S. Johnson".

Nic S. Johnson, NCE
Technical Manager
iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 18 August 2017

Total Pages: 41



The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

1.0 Summary of test results

- 1.1 Test Results
- 1.2 Reason for amendment

2.0 Description

- 2.1 Equipment under test
- 2.2 Laboratory description
- 2.3 Description of test modes
- 2.4 Applied standards
- 2.5 Description of support units
- 2.6 Configuration of system under test
- 2.7 Modular or limited modular approval

3.0 Test equipment used

4.0 Detailed Results

- 4.1 Unique antenna requirement
- 4.2 Radiated Emissions
- 4.3 Bandwidth and peak EIRP
- 4.4 Bandedges
- 4.5 Power Spectral Density
- 4.6 Conducted AC Mains Emissions

Appendix A – Sample calculation

Appendix B – Table of figures

Table of Figures

Figure Number	Page
Figure 1 - Radiated Emissions Test Setup	11
Figure 2 - Radiated Emissions Plot, Receive	12
Figure 3 - Radiated Emissions Plot, Low Channel	14
Figure 4 - Radiated Emissions Plot, Mid Channel	16
Figure 5 - Radiated Emissions Plot, High Channel	18
Figure 6 - Bandwidth Measurements Test Setup	20
Figure 7 - 99% Occupied Bandwidth, Low Channel, 1.99 MHz	22
Figure 8 - 99% Occupied Bandwidth, Mid Channel, 1.80 MHz	23
Figure 9 - 99% Occupied Bandwidth, High Channel, 1.78 MHz	24
Figure 10 - Band-edge Measurement, Low Channel, Restricted Frequency	27
Figure 11 - Band-edge Measurement, Low Channel, Fundamental.....	28
Figure 12 - Band-edge Measurement, High Channel, Restricted Frequency	29
Figure 13 - Band-edge Measurement, High Channel, Fundamental.....	30
Figure 14 - Band-edge Measurement, Low Channel, out-of-band	31
Figure 15 - Band-edge Measurement, High Channel, out-of-band.....	32
Figure 16 – Power Spectral Density, Low Channel.....	34
Figure 17 – Power Spectral Density, Mid Channel.....	35
Figure 18 – Power Spectral Density, High Channel.....	36
Figure 19 - Conducted Emissions Plot	38

Table Number	Page
Table 1 - Radiated Emissions Quasi-peak Measurements, Receive	13
Table 2 - Radiated Emissions Peak Measurements, Receive.....	13
Table 3 - Radiated Emissions Quasi-peak Measurements, Low Channel	15
Table 4 - Radiated Emissions Peak Measurements, Low Channel.....	15
Table 5 - Radiated Emissions Quasi-peak Measurements, Mid Channel	17
Table 6 - Radiated Emissions Peak Measurements, Mid Channel.....	17
Table 7 - Radiated Emissions Quasi-peak Measurements, High Channel	19
Table 8 - Radiated Emissions Peak Measurements, High Channel.....	19

1.0 Summary of test results

1.1 Test Results

The EUT has been tested according to the following specifications:

SUMMARY			
Standard Section	Test Type and Limit	Result	Remark
FCC 15.203	Unique Antenna Requirement	Pass	Internal Antenna
FCC 15.209 RSS-Gen, 7.1.2	Receiver Radiated Emissions	Pass	Meets the requirement of the limit.
FCC 15.247(a)(2) RSS-247, 5.2(a)	Minimum Bandwidth, Limit: Min. 500kHz	Pass	Meets the requirement of the limit.
FCC 15.247(b) RSS-247, 5.4	Maximum Peak Output Power, Limit: Max. 30dBm Conducted spurious measurements	Pass	Meets the requirement of the limit.
FCC 15.209 RSS-Gen, 8.9 RSS-247, 5.5	Transmitter Radiated Emissions	Pass	Meets the requirement of the limit.
FCC 15.247 RSS-247, 5.2(b)	Power Spectral Density, Limit: Max. 8dBm	Pass	Meets the requirement of the limit.
FCC 15.247 RSS-247, 5.5	Band Edge Measurement, Limit: 20dB less than the peak value of fundamental frequency	Pass	Meets the requirement of the limit.
FCC 15.207 RSS-Gen, 8.8	Conducted AC power-line emissions	Pass	Meets the requirement of the limit.

2.0 Description

2.1 Equipment under test

The Equipment Under Test (EUT) was a wireless repeater module used to boost the control signal for window blinds. It operates from 2407 to 2480 MHz and has transmit and receive capabilities. It is intended to be paired with a remote.

EUT Received Date: 7 June 2017

EUT Tested Dates: 8 June 2017 – 21 July 2017

Description	Wireless window blind controller repeater
MODEL	Repeater 2.0
Serial No.	C4 (used for conducted and Rx), C0 (assigned by laboratory, used for all other measurements)
POWER SUPPLY	120 VAC / 60 Hz
ANTENNA TYPE	Antenna is not user replaceable

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 Laboratory description

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
4740 Discovery Drive
Lincoln, NE 68521

A2LA Certificate Number: 1953.01
FCC Accredited Test Site Designation No: US1060
Industry Canada Test Site Registration No: 4294A-1
NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $32 \pm 4\%$
Temperature of $22 \pm 3^\circ$ Celsius

2.3 Description of test modes

The EUT operates on, and was tested at the frequencies, in MHz, below:

Channel	Frequency
Low	2407
Middle	2440
High	2480

These are the only three representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

2.4 Applied standards

The EUT uses digital modulation and operates between 2407-2480MHz. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- (1) FCC Part 15, Subpart C (15.207, 15.209, 15.247)**
- (2) ANSI C63.10:2013**
- (3) Industry Canada RSS-Gen Issue 4**
- (4) Industry Canada RSS-247 Issue 2**

All test items have been performed and recorded as per the above.

2.5 Description of support units

None

2.6 Configuration of system under test

This EUT was set to transmit in a worse-case scenario with modulation on. The manufacturer modified the unit to transmit continuously on the lowest, highest and one channel in the middle.

3.0 Test equipment used

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Rohde & Schwarz Test Receiver	ES126	100037	24 Jan 2017	24 Jan 2018
EMCO Biconilog Antenna	3142B	1647	02 Aug 2016	02 Aug 2017
EMCO Horn Antenna	3115	6416	25 Jan 2016	25 Jan 2018
EMCO Horn Antenna	3116	2576	26 Jan 2016	26 Jan 2018
Rohde & Schwarz Preamplifier	TS-PR18	3545700803	9 Feb 2017*	9 Feb 2018*
Trilithic High Pass Filter	6HC330	23042	9 Feb 2017*	9 Feb 2018*
Rohde & Schwarz LISN	ESH3-Z5	100023	23 Jan 2017	23 Jan 2018
RF Cable (preamplifier to antenna)	MFR-57500	01-07-002	09 Feb 2017*	09 Feb 2018*
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	09 Feb 2017*	09 Feb 2018*
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	09 Feb 2017*	09 Feb 2018*
RF Cable (Control room bulkhead to RF switch)	FSCM 64639	01E3871	09 Feb 2017*	09 Feb 2018*
RF Cable (RF switch to test receiver)	FSCM 64639	01F1206	09 Feb 2017*	09 Feb 2018*
RF switch – Rohde and Schwarz	TS-RSP	1113.5503.14	09 Feb 2017*	09 Feb 2018*
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	09 Feb 2017*	09 Feb 2018*
N connector bulkhead (control room)	PE9128	NCEEBH2	09 Feb 2017*	09 Feb 2018*

*Internal Characterization

4.0 Detailed results

4.1 Unique antenna requirement

4.1.1 Standard applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.1.2 Antenna description

The antenna on the EUT is on a PCB and is not user replaceable.

4.2 Radiated emissions

Test Method: ANSI C63.10, Section(s) 6.5

4.2.1 Limits for radiated emissions measurements

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.

4.2.2 Test procedures

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1GHz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The preview scan was performed with the EUT oriented in all 3 orthogonal axis. It was found that the X-axis (laying flat) position produced the highest emissions, and this orientation was used for all final measurements.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all

measurements above 1GHz. Measurements were made with an EMI Receiver.

4.2.3 Deviations from test standard

No deviation.

4.2.4 Test setup

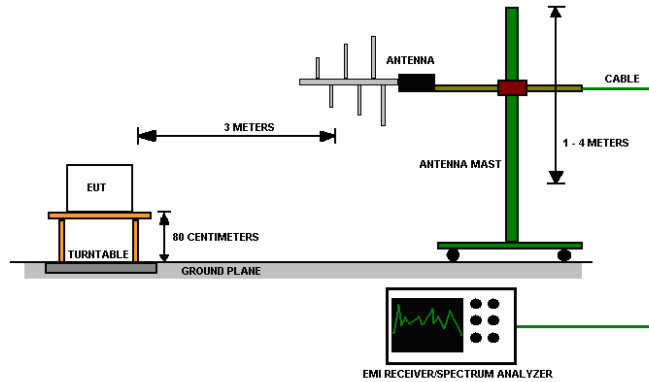


Figure 1 - Radiated Emissions Test Setup

The EUT was tested in all **3 orthogonal axis** to meet the requirements from **ANS C63.10 Section 5.10.1**.

4.2.5 EUT operating conditions

The EUT was powered by 120 VAC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

4.2.6 Test results

EUT	Repeater 2.0	MODE	Receive
INPUT POWER	120 VAC/60 Hz	FREQUENCY RANGE	30MHz – 26GHz
ENVIRONMENTAL CONDITIONS	32 % ± 5% RH 23 ± 3°C	TECHNICIAN	KVepuri

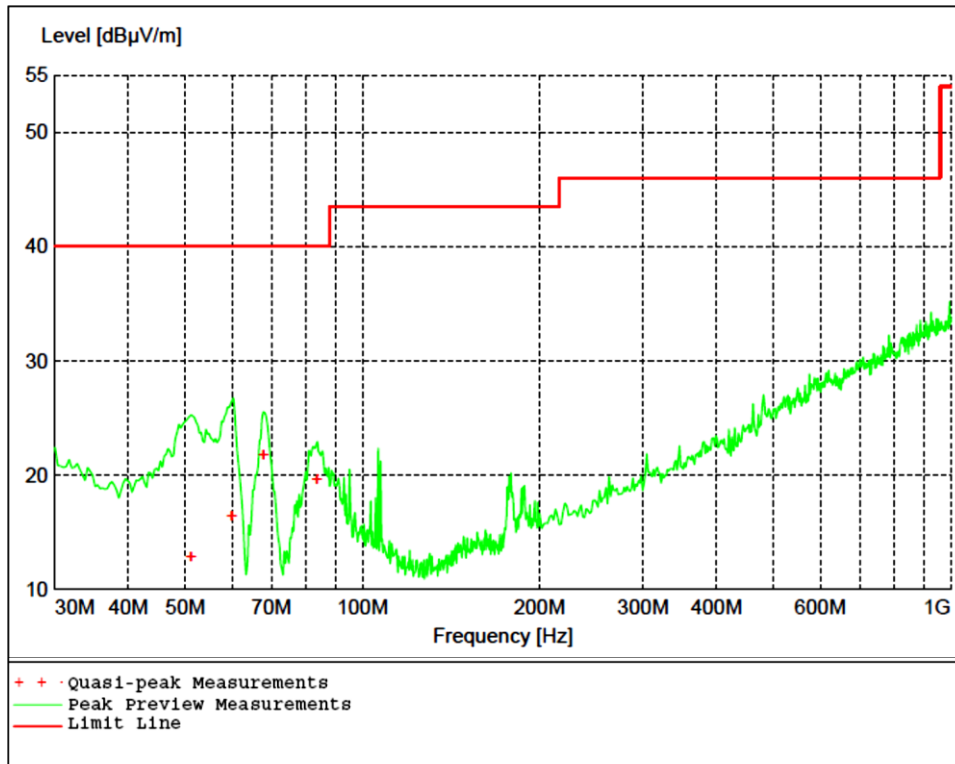


Figure 2 - Radiated Emissions Plot, Receive
 EUT X-axis was found to be the worse-case

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Since peak measurements were compliant with the average limit, average measurements were not required.
6. The EUT was measured in both the horizontal and vertical orientation. It was found that the Horizontal position produced the highest emissions, and this orientation was used for all testing. See Annex A for test photos.

Table 1 - Radiated Emissions Quasi-peak Measurements, Receive

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
51.120000	12.80	40.00	27.20	399	0	VERT
60.000000	16.36	40.00	23.60	143	343	VERT
67.860000	21.79	40.00	18.20	100	163	VERT
83.760000	19.59	40.00	20.40	130	21	VERT

Table 2 - Radiated Emissions Peak Measurements, Receive

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
2430.200000	22.71	54.00	31.30	135	27	VERT
4876.400000	32.96	54.00	21.00	180	36	VERT
7333.600000	29.88	54.00	24.10	271	7	HORI
9775.200000	32.93	54.00	21.10	380	96	VERT
12223.800000	30.00	54.00	24.00	284	0	VERT

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

EUT	Repeater 2.0	MODE	Transmit, Low Channel
INPUT POWER	120 VAC/60Hz	FREQUENCY RANGE	30MHz – 26GHz
ENVIRONMENTAL CONDITIONS	32 % ± 5% RH 23 ± 3°C	TECHNICIAN	KVepuri

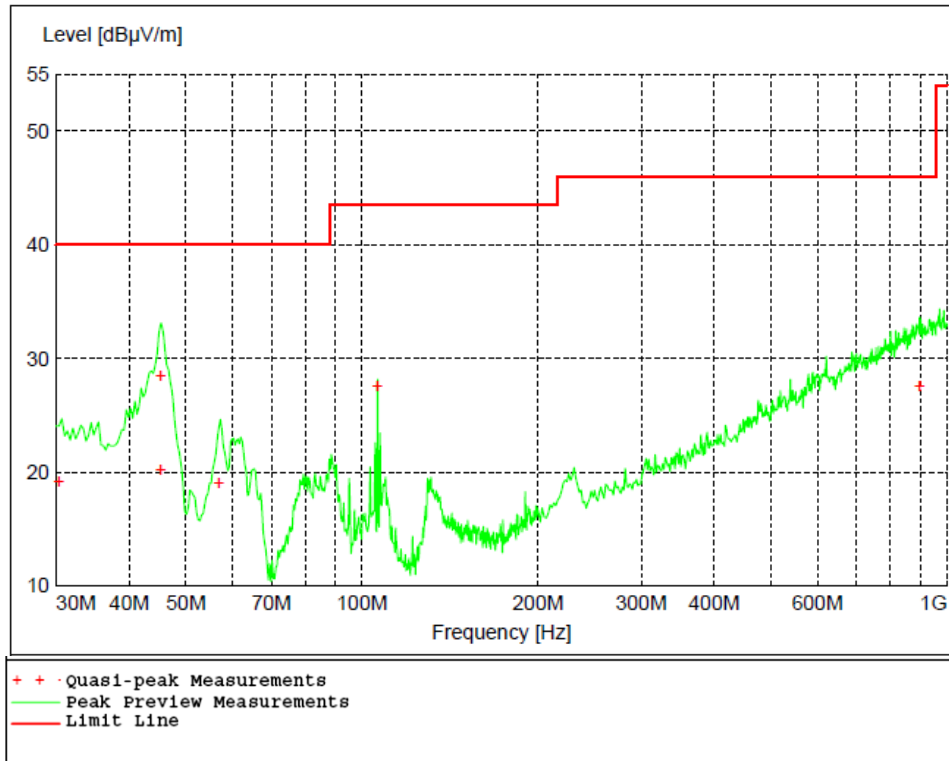


Figure 3 - Radiated Emissions Plot, Low Channel
 X - Axis of EUT was found to be the worse-case

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The EUT was measured in both the horizontal and vertical orientation. It was found that the Horizontal position produced the highest emissions, and this orientation was used for all testing. See Annex A for test photos.

Table 3 - Radiated Emissions Quasi-peak Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
30.360000	19.19	40.00	20.80	99	3	VERT
45.240000	20.29	40.00	19.70	394	319	VERT
45.300000	28.57	40.00	11.40	99	4	VERT
56.940000	19.07	40.00	20.90	121	129	VERT
106.260000	27.61	43.50	15.90	100	216	VERT
898.260000	27.58	46.00	18.40	206	52	VERT

Table 4 - Radiated Emissions Peak Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
2407.000000	91.27	NA	NA	131	339	VERT
4814.000000	44.80	54.00	9.20	200	202	VERT

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

EUT	Repeater 2.0	MODE	Transmit, Mid Channel
INPUT POWER	120 VAC / 60Hz	FREQUENCY RANGE	30MHz – 26GHz
ENVIRONMENTAL CONDITIONS	32 % ± 5% RH 23 ± 3°C	TECHNICIAN	KVepuri

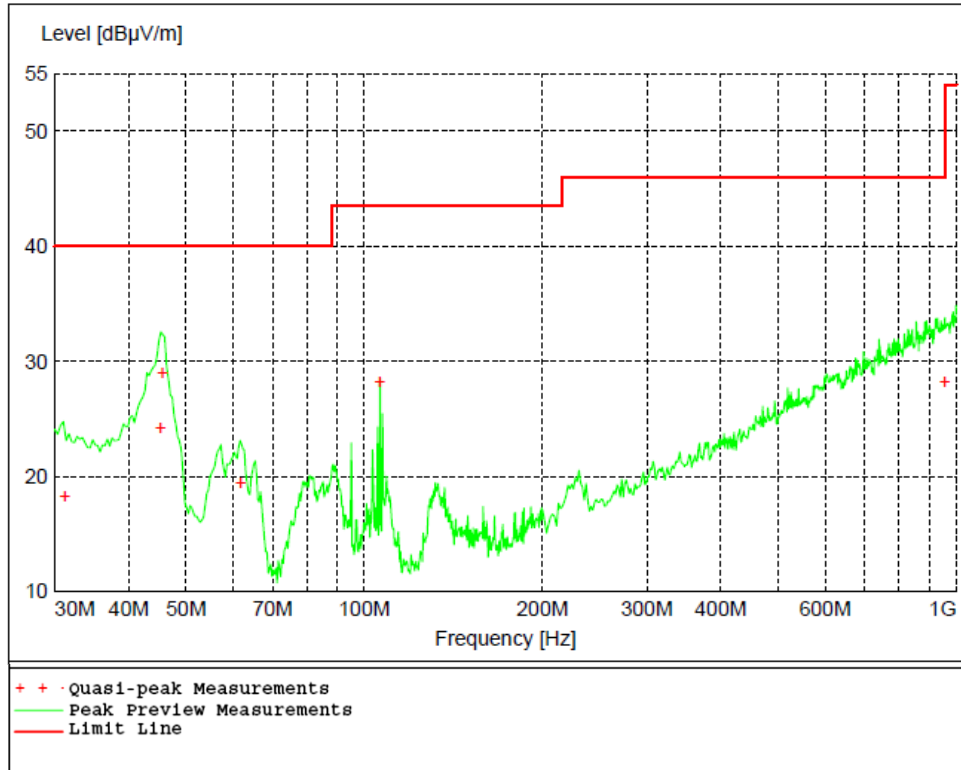


Figure 4 - Radiated Emissions Plot, Mid Channel
 X – Axis of EUT was found to be the worse-case

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The EUT was measured in both the horizontal and vertical orientation. It was found that the Horizontal position produced the highest emissions, and this orientation was used for all testing. See Annex A for test photos.

Table 5 - Radiated Emissions Quasi-peak Measurements, Mid Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
31.200000	18.34	40.00	21.70	100	143	VERT
45.300000	24.23	40.00	15.80	261	209	VERT
45.660000	29.07	40.00	10.90	99	224	VERT
61.860000	19.47	40.00	20.50	100	312	VERT
106.260000	28.29	43.50	15.20	99	216	VERT
956.820000	28.23	46.00	17.80	290	267	VERT

Table 6 - Radiated Emissions Peak Measurements, Mid Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
2440.000000	89.40	NA	NA	176	339	VERT
4880.000000	44.69	54.00	9.30	99	234	VERT

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

EUT	Repeater 2.0	MODE	Transmit, High Channel
INPUT POWER	120 VAC/60Hz	FREQUENCY RANGE	30MHz – 26GHz
ENVIRONMENTAL CONDITIONS	32 % ± 5% RH 23 ± 3°C	TECHNICIAN	KVepuri

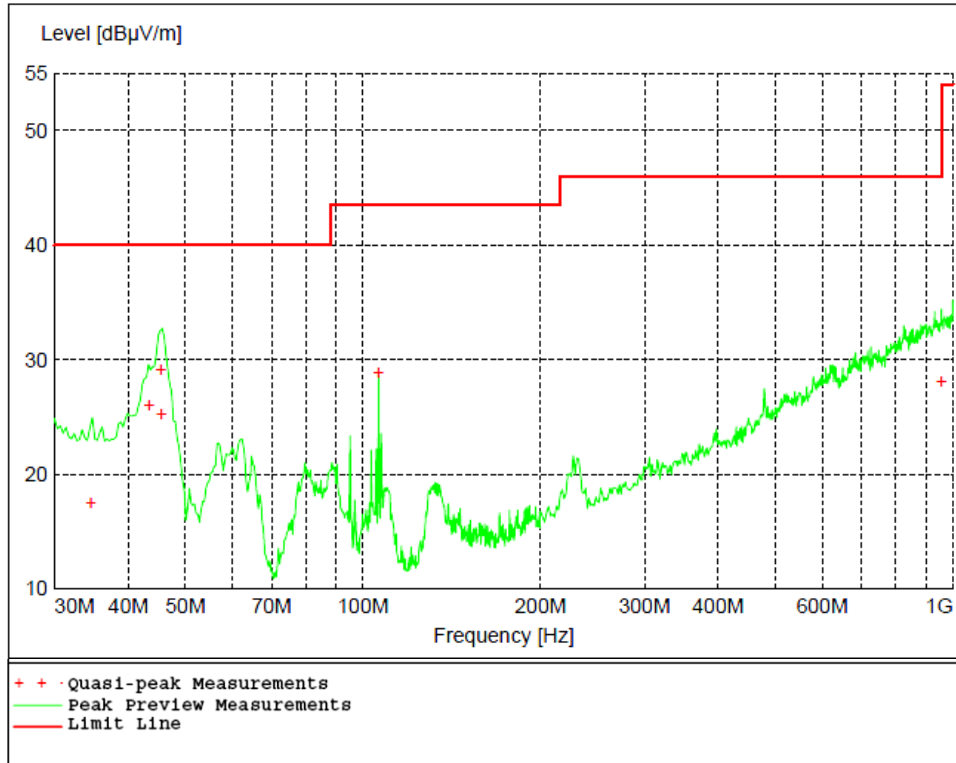


Figure 5 - Radiated Emissions Plot, High Channel
 X - Axis of EUT was found to be the worse-case

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The EUT was measured in both the horizontal and vertical orientation. It was found that the Horizontal position produced the highest emissions, and this orientation was used for all testing. See Annex A for test photos.

Table 7 - Radiated Emissions Quasi-peak Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
34.560000	17.60	40.00	22.40	99	96	VERT
43.440000	26.07	40.00	13.90	101	0	VERT
45.480000	29.18	40.00	10.80	101	246	VERT
45.540000	25.33	40.00	14.70	228	236	VERT
106.260000	28.91	43.50	14.60	99	205	VERT
955.680000	28.16	46.00	17.80	179	26	HORI

Table 8 - Radiated Emissions Peak Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
2480.000000	88.35	NA	NA	173	45	HORI
4960.000000	44.92	54.00	9.10	227	205	VERT

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

4.3 Bandwidth and Peak EIRP

Test Method: ANSI C63.10,
Section(s) 6.7, 6.9, 11.8.1, 11.9.1.1

4.3.1 Limits of bandwidth measurements

The 99% occupied bandwidth and peak EIRP are displayed for informational purposes only. The peak EIRP was measured using a 10 MHz RBW, which was over-laid on the plot showing the bandwidth using a 100 kHz RBW.

4.3.2 Test procedures

All measurements were taken at a distance of 3m from the EUT. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

The 99% occupied is defined as the bandwidth at which 99% of the signal power is found. This corresponds to 20dB down from the maximum power level. The maximum power was measured with the largest resolution bandwidth possible (10MHz) and this value was recorded. The signal was then captured with a 100 kHz resolution bandwidth and the frequencies where the measurements were 20dB below the maximum power were marked. The bandwidth between these frequencies was recorded as the 99% occupied bandwidth.

4.3.3 Deviations from test standard

No deviation.

4.3.4 Test setup

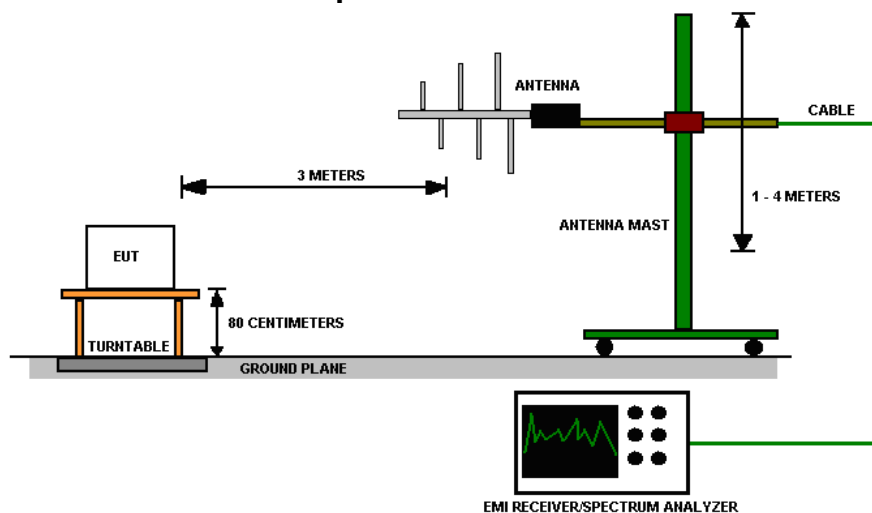


Figure 6 - Bandwidth Measurements Test Setup

4.3.5 EUT operating conditions

The EUT was powered by 120 VAC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

4.3.6 Test results

EUT	Repeater 2.0	MODE	Transmit
INPUT POWER	120 VAC/60 Hz	FREQUENCY RANGE	2407- 2480 MHz
ENVIRONMENTAL CONDITIONS	32 % ± 5% RH 23 ± 3°C	TECHNICIAN	KVepuri

99% Occupied Bandwidth

CHANNEL	CHANNEL FREQUENCY (MHz)	99% Occupied BW (MHz)
Low	2407	1.98
Mid	2440	1.80
High	2480	1.78

REMARKS:
 None

Peak EIRP

CHANNEL	CHANNEL FREQUENCY (MHz)	EIRP PEAK POWER OUTPUT (dBm)	RESULT
Low	2407	-3.16	Pass
Mid	2440	-3.84	Pass
High	2480	-5.24	Pass

All measurements were taken from the 99% occupied bandwidth screen captures.

REMARKS:
 None

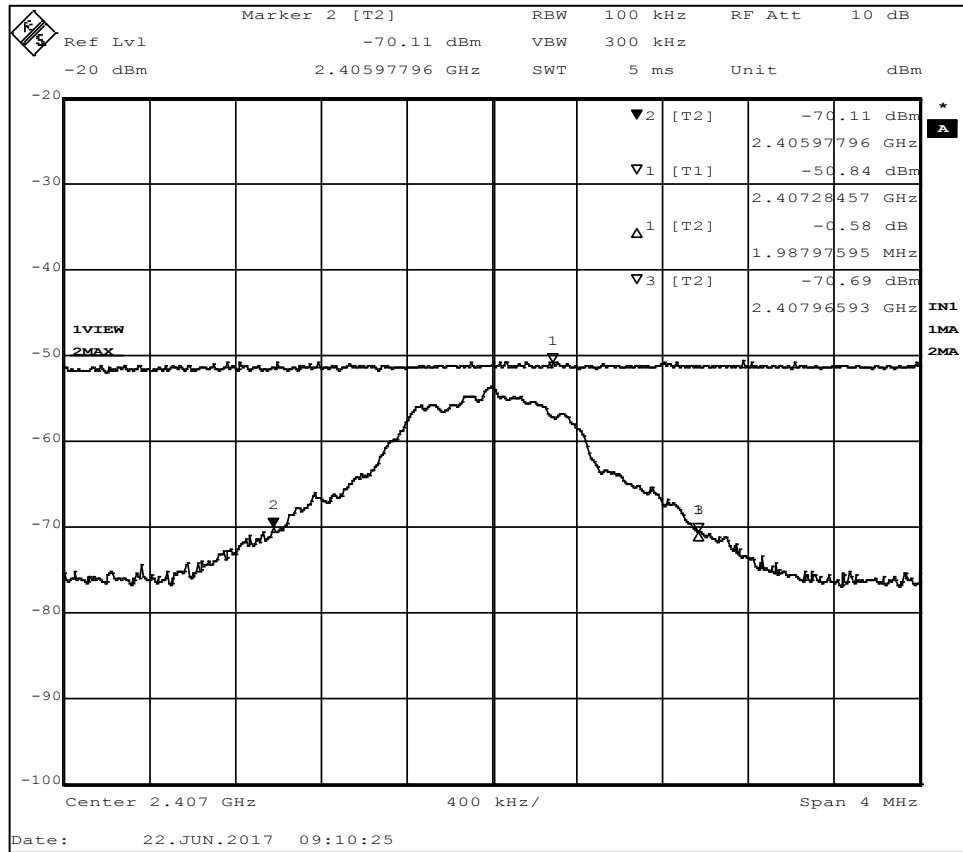


Figure 7 - 99% Occupied Bandwidth, Low Channel. 1.99 MHz

Maximum power = -50.84 dBm + 107 + CL + AF - 95.23 = -3.16 dBm

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

Note: the trace at the top where Marker 1 is located was made with a 10MHz resolution bandwidth and saved on the screen. The trace on the bottom was made with a 100 kHz RBW.

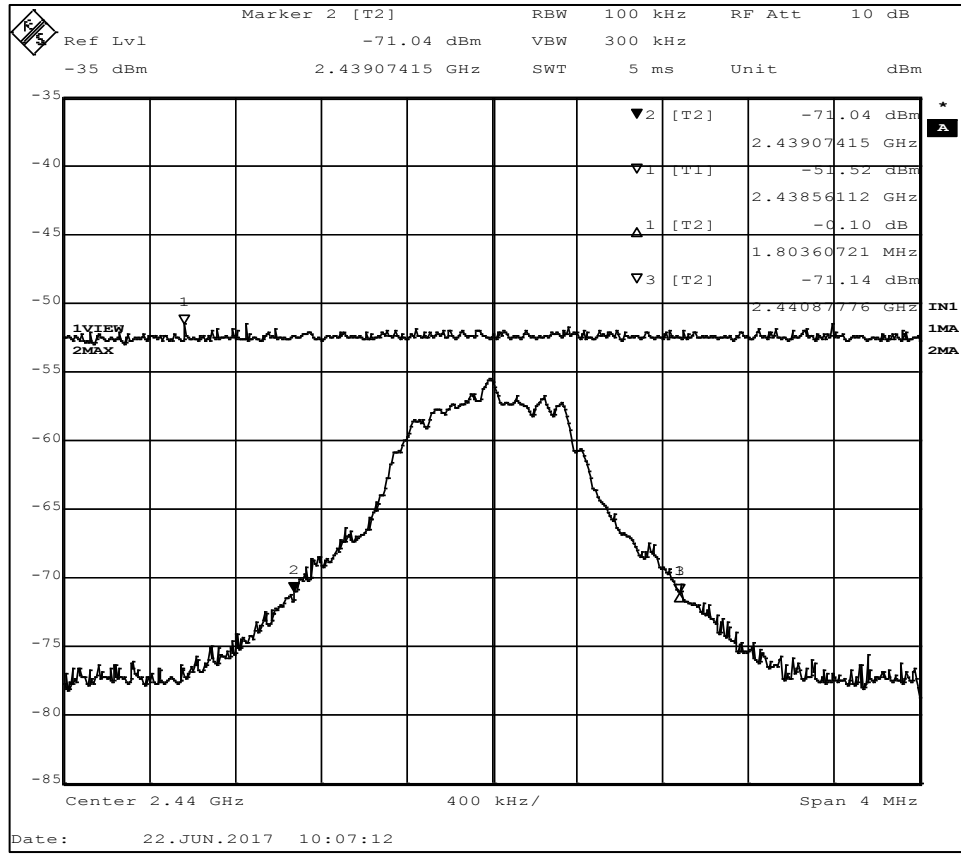


Figure 8 - 99% Occupied Bandwidth, Mid Channel, 1.80 MHz

Maximum power = -51.52 dBm + 107 + CL + AF - 95.23 = -3.84 dBm

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

Note: the trace at the top where Marker 1 is located was made with a 10MHz resolution bandwidth and saved on the screen. The trace on the bottom was made with a 100 kHz RBW.

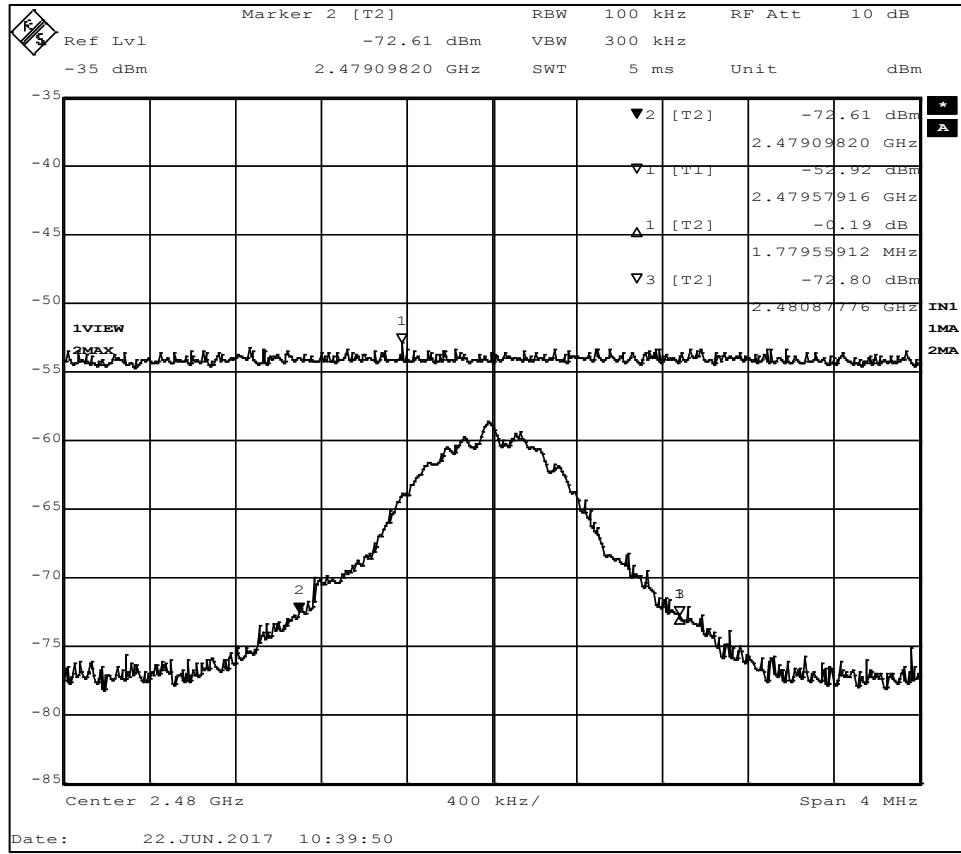


Figure 9 - 99% Occupied Bandwidth, High Channel, 1.78 MHz

Maximum power = $-52.92 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = -5.24 \text{ dBm}$

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

Note: the trace at the top where Marker 1 is located was made with a 10MHz resolution bandwidth and saved on the screen. The trace on the bottom was made with a 100 kHz RBW.

4.4 Bandedges

Test Method: ANSI C63.10, Section(s) 6.10.6, 11.13.2

4.4.1 Limits of bandedge measurements

For emissions outside of the allowed band of operation (2400.0MHz – 2483.5MHz), the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

4.4.2 Test procedures

The EUT was tested in the same method as described in section 4.3 - *Bandwidth*. The EUT was oriented as to produce the maximum emission levels. The resolution bandwidth was set to 30kHz and the EMI receiver was used to scan from the bandedge to the fundamental frequency with a quasi-peak detector. The highest emissions level beyond the bandedge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209.

4.4.3 Deviations from test standard

No deviation.

4.4.4 Test setup

See Section 4.3

4.4.5 EUT operating conditions

The EUT was powered by 120 VAC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

4.4.6 Test results

EUT	Repeater 2.0	MODE	Transmit
INPUT POWER	120 VAC	FREQUENCY RANGE	2407 MHz – 2480 MHz
ENVIRONMENTAL CONDITIONS	32 % ± 5% RH 23 ± 3°C	TECHNICIAN	KVepuri

Highest Out of Band Emissions

CHANNEL	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level dBm	Relative Fundamental Level (dBm)	Delta	Min (dBc)	Result
Low	2390.0	-108.15	-56.56	51.59	37.27	PASS
Low	2400.0	-86.20	-36.48	49.72	20.00	PASS
High	2483.5	-105.83	-60.82	45.01	34.35	PASS

*Minimum delta = [highest fundamental peak field strength from Section 4.2] – [Part 15.209 radiated emissions limit.]

From Section 4.2,

Fundamental average field strength at 2407MHz for low channel = 91.27 dB μ V/m
 Fundamental average field strength at 2480MHz for high channel =88.35 dB μ V/m

$$\text{Channel 1 minimum delta} = 91.27 - 54.00 = 37.27^*$$

$$\text{Channel 3 minimum delta} = 88.35 - 54.00 = 34.35^*$$

*These values apply in restricted bands

Measurements do not include correction factors and are intended to be relative measurements only.

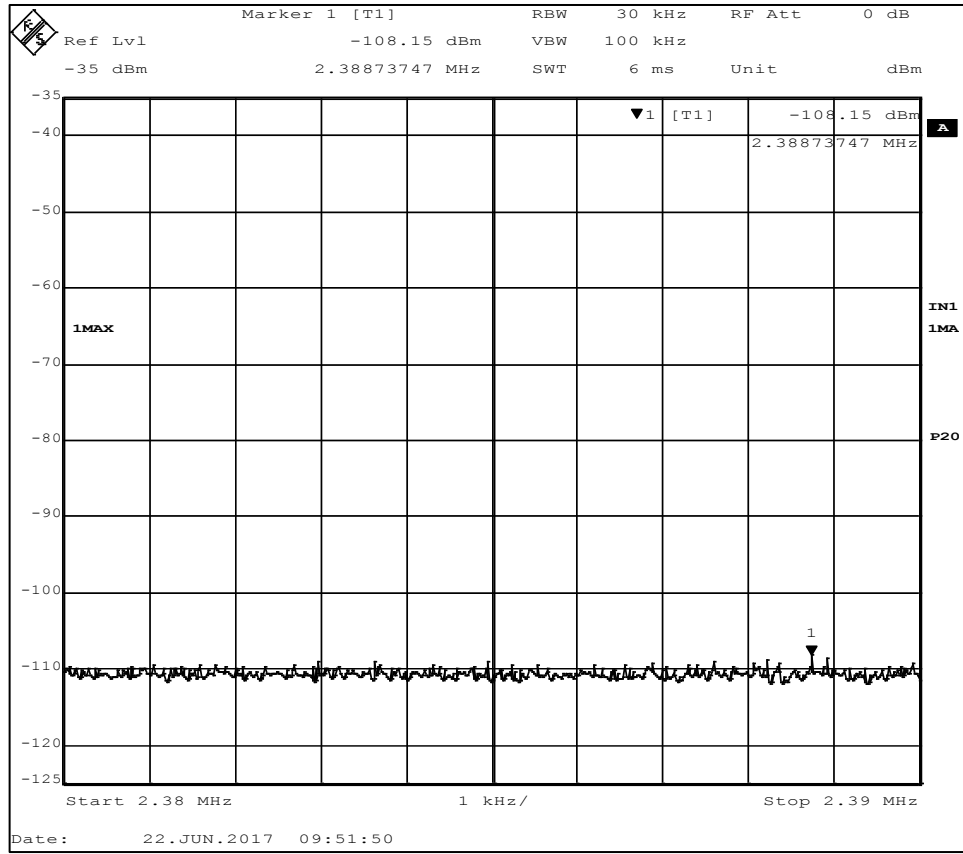


Figure 10 - Band-edge Measurement, Low Channel, Restricted Frequency
The plot shows an uncorrected measurement, used for relative measurements only.

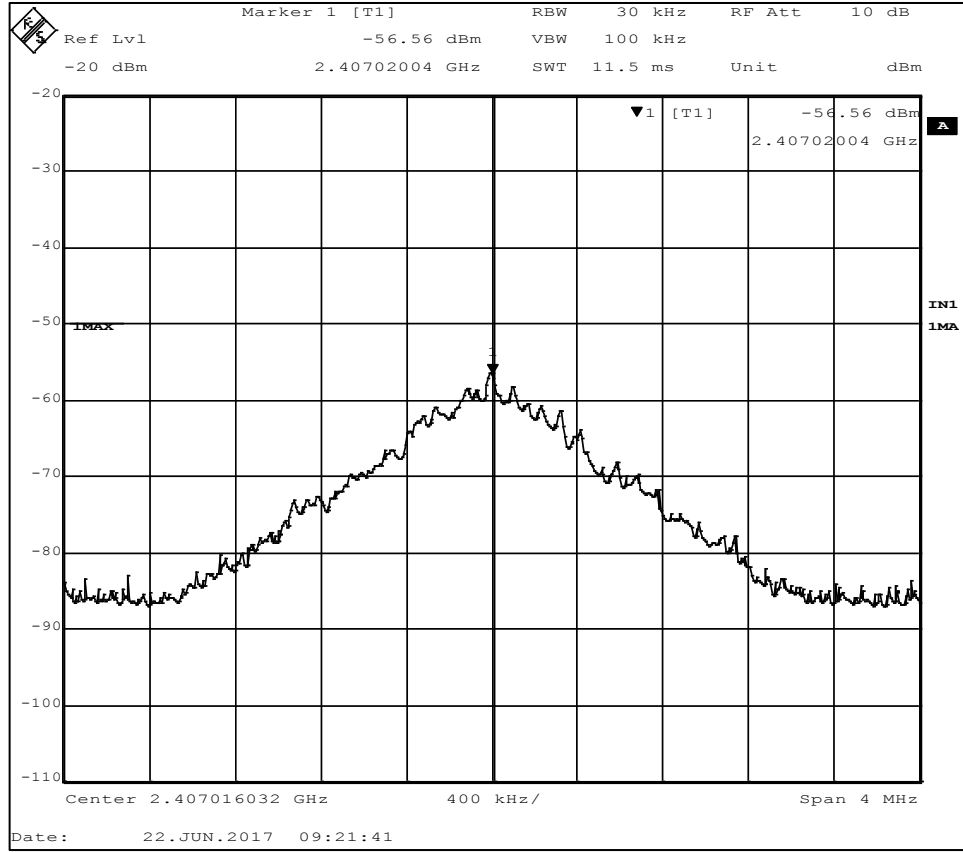


Figure 11 - Band-edge Measurement, Low Channel, Fundamental
The plot shows an uncorrected measurement, used for relative measurements only.

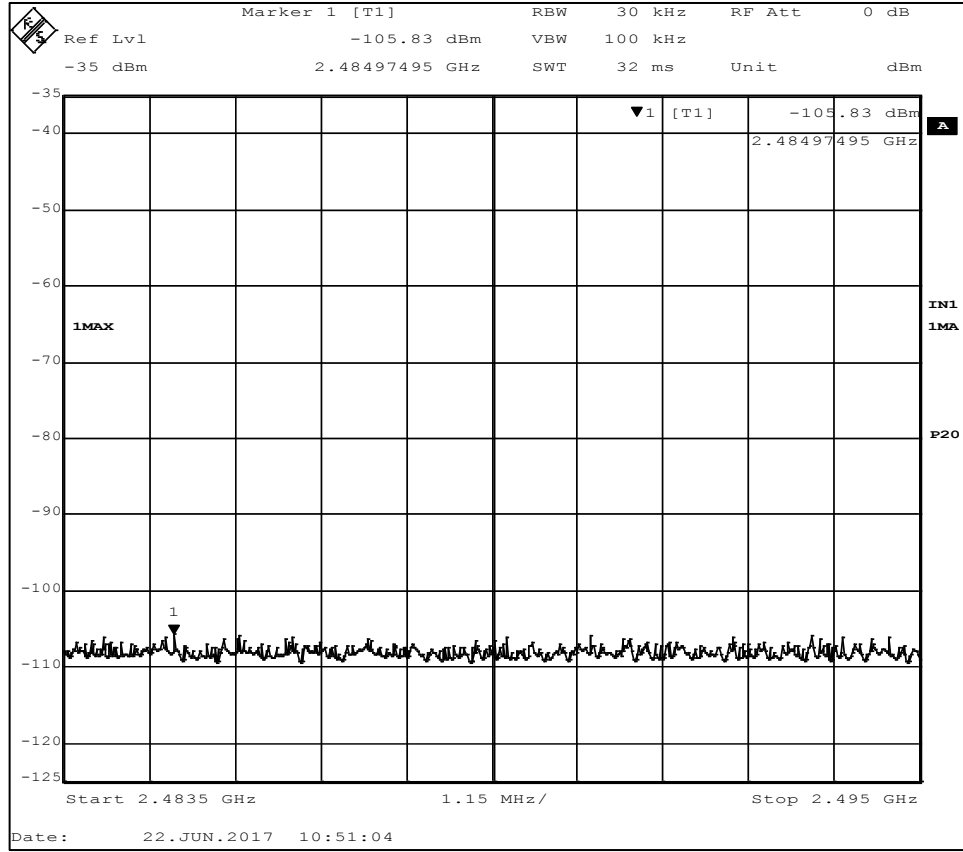


Figure 12 - Band-edge Measurement, High Channel, Restricted Frequency
 The plot shows an uncorrected measurement, used for relative measurements only.

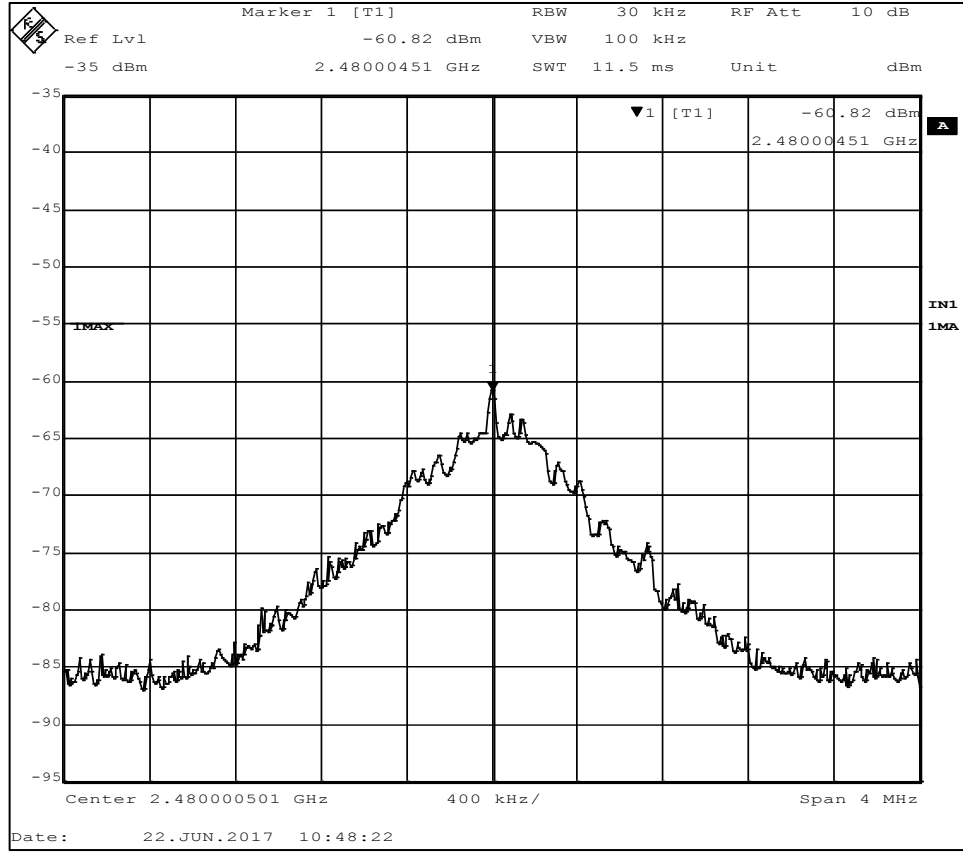


Figure 13 - Band-edge Measurement, High Channel, Fundamental
The plot shows an uncorrected measurement, used for relative measurements only.

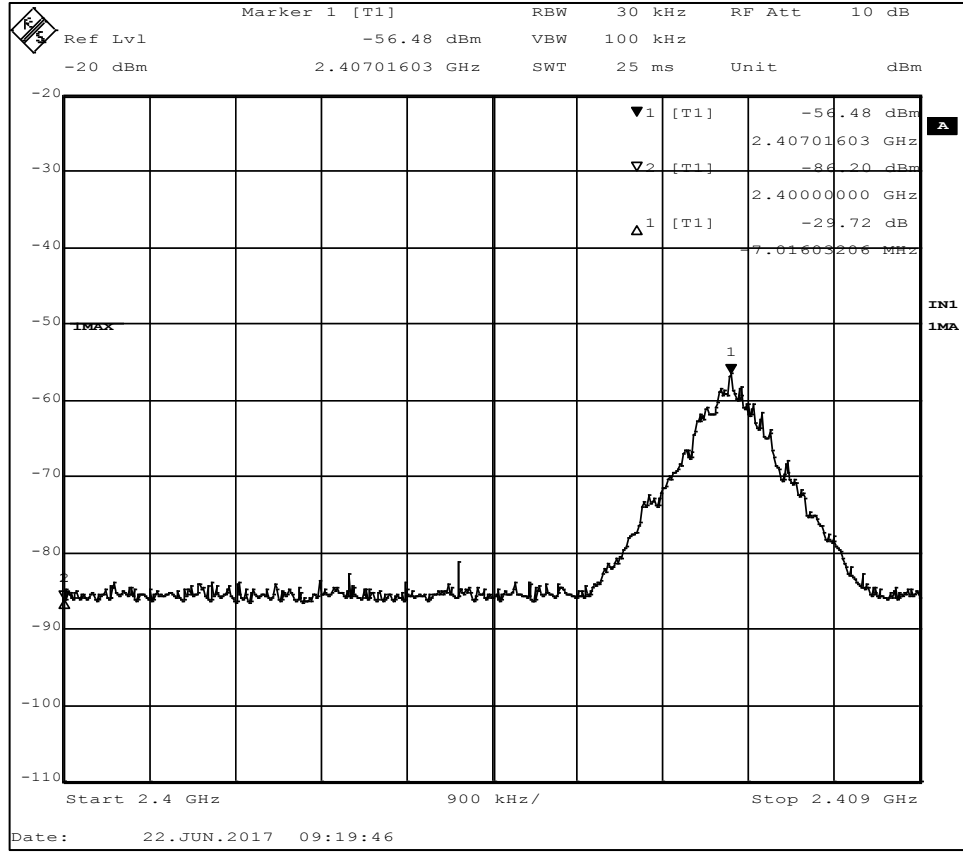


Figure 14 - Band-edge Measurement, Low Channel, out-of-band

Delta = 29.27 dB; Minimum = 20 dB

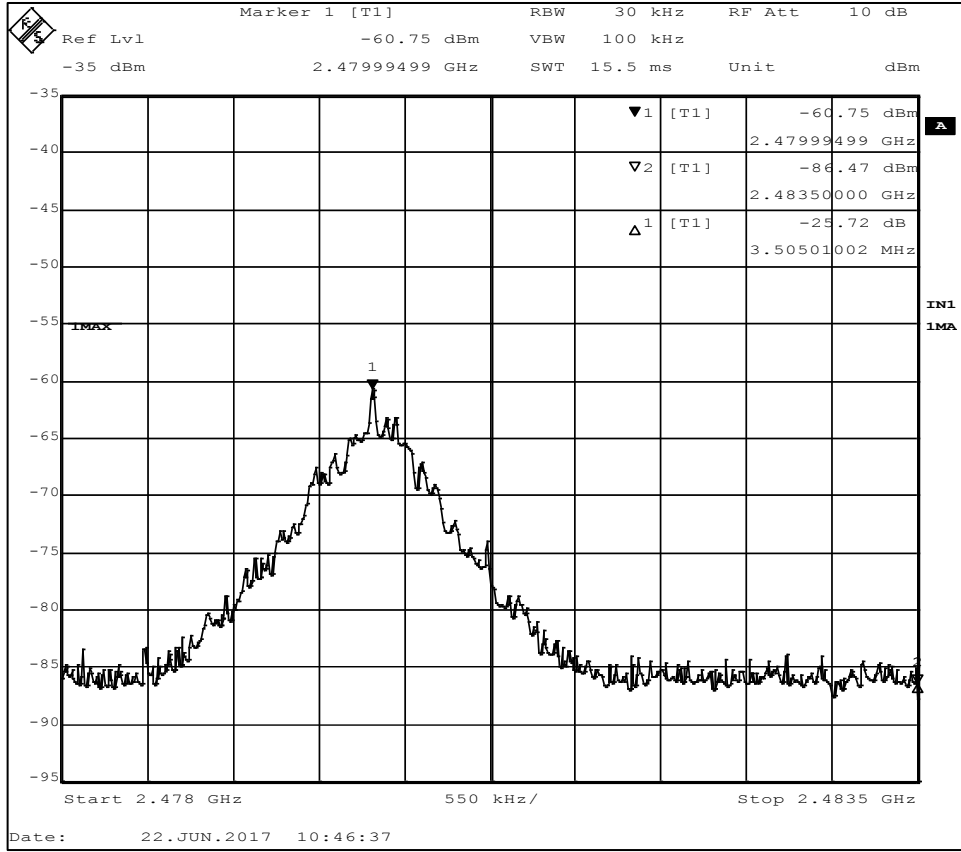


Figure 15 - Band-edge Measurement, High Channel, out-of-band

Delta = 25.72 dB; Minimum = 20 dB

4.5 Power Spectral Density

Test Method: ANSI C63.10, Section 11.10.2

4.5.1 Limits of power measurements

The maximum PSD allowed is 8 dBm.

4.5.2 Test procedures

1. All measurements were taken at a distance of 3m from the EUT.
2. The resolution bandwidth was set to 3 kHz and the video bandwidth was set to 30 kHz to capture the signal. The analyzer used a peak detector in max hold mode.

4.5.3 Test setup

The field strength was measured at a distance of 3m and the EIRP was calculated using field strength equation below each plot.

4.5.4 EUT operating conditions

The EUT was powered by 120 VAC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

4.5.5 Test results

Power Spectral Density

CHANNEL	CHANNEL FREQUENCY (MHz)	EIRP RF POWER LEVEL IN # KHz BW (dBm)	MAXIMUM POWER LIMIT (dBm)	RESULT
1	2407	-20.39	8.00	PASS
2	2440	-22.51	8.00	PASS
3	2480	-23.91	8.00	PASS

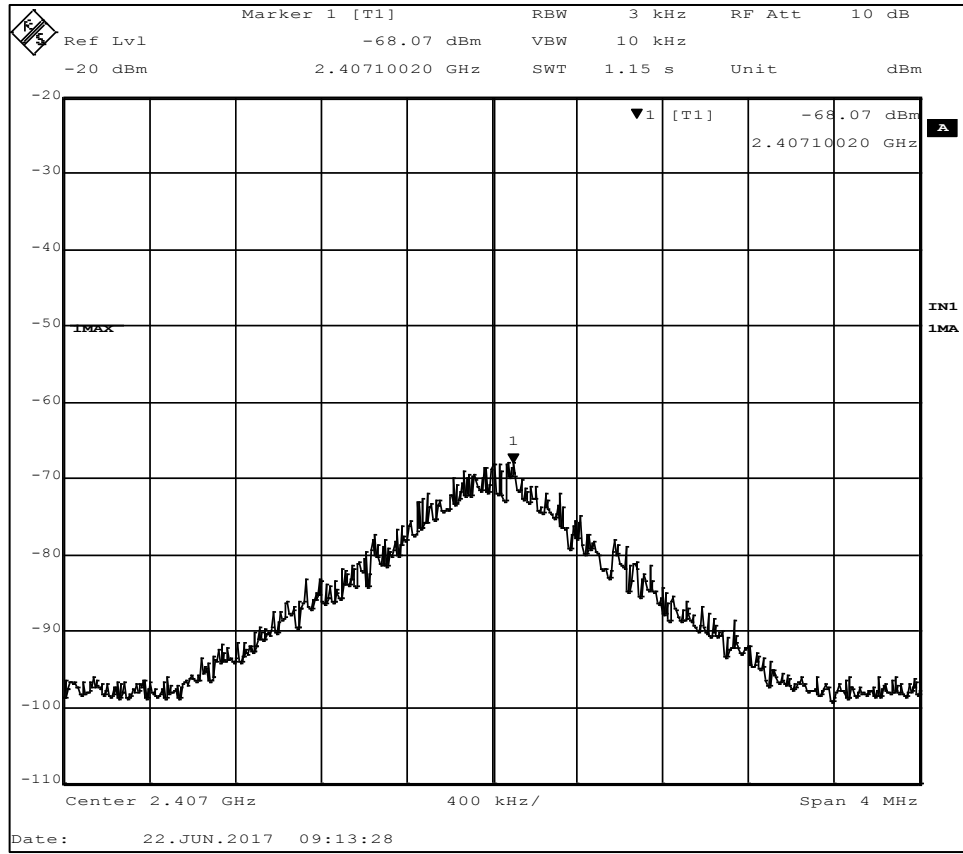


Figure 16 – Power Spectral Density, Low Channel

$$\text{Power Spectral Density} = -68.07 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = -20.39 \text{ dBm}$$

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

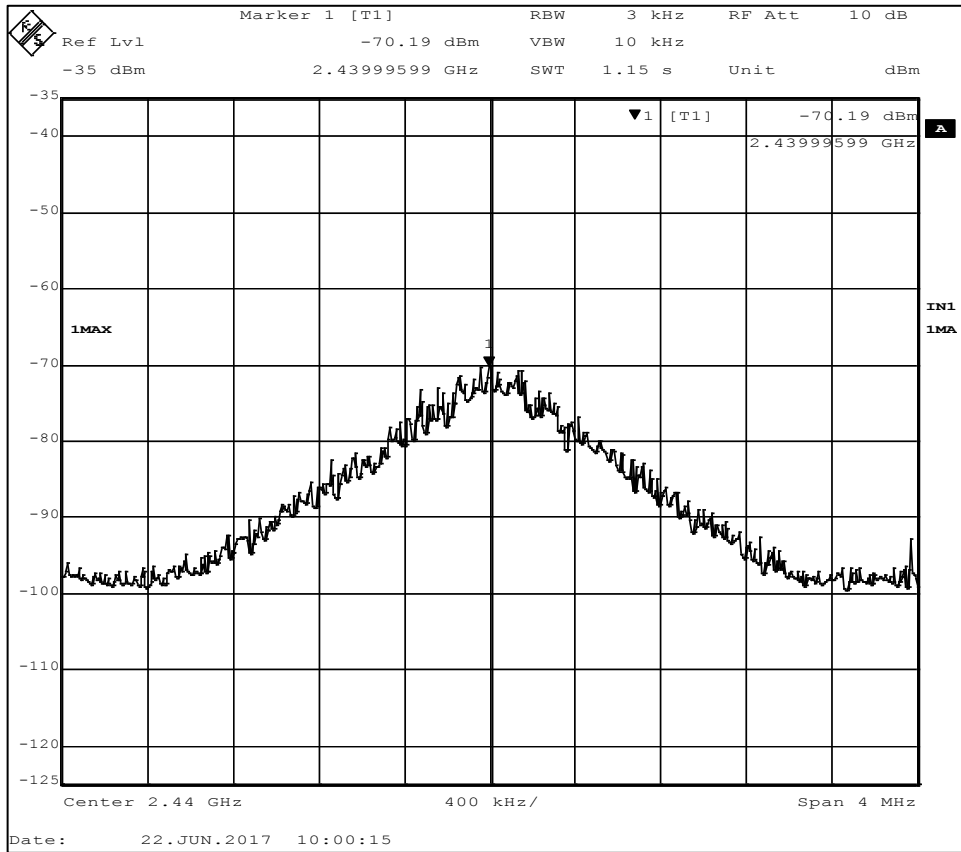


Figure 17 – Power Spectral Density, Mid Channel

$$\text{Power Spectral Density} = -70.18 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = -22.51 \text{ dBm}$$

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

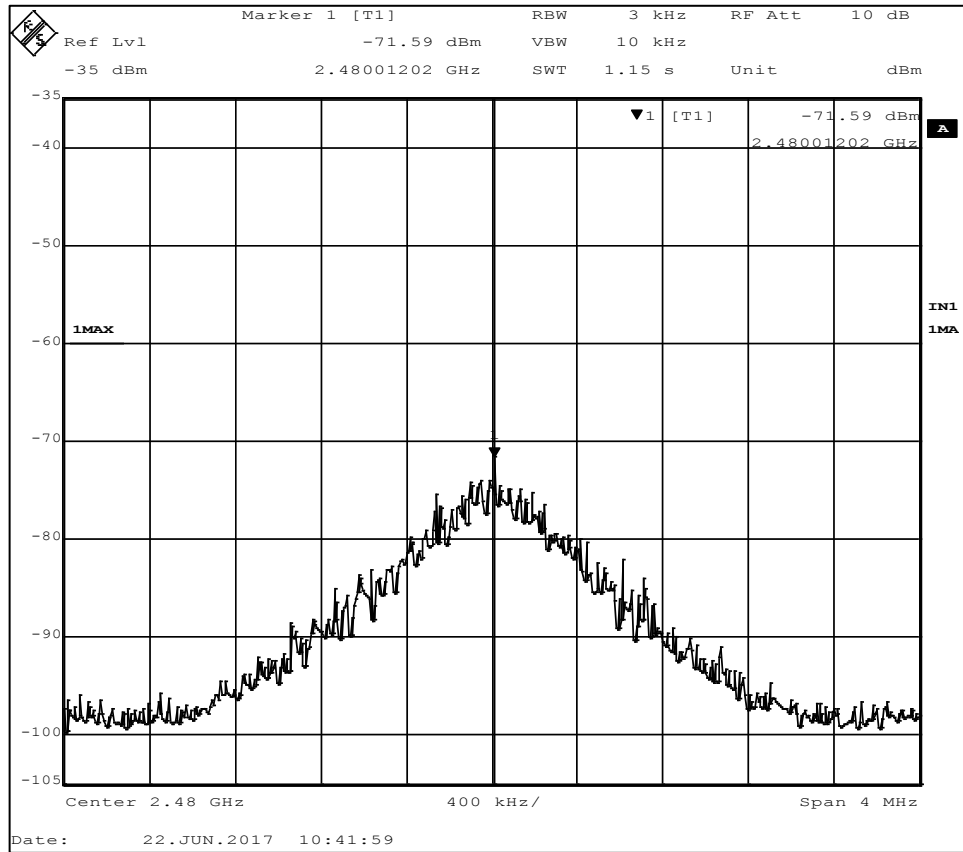


Figure 18 – Power Spectral Density, High Channel

Power Spectral Density = -71.59 dBm + 107 + CL + AF - 95.23 = -23.91 dBm

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

4.6 Conducted AC Mains Emissions

Test Method: ANSI C63.10, Section(s) 6.2

4.5.1 Limits for conducted emissions measurements

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.6.2 Test Procedures

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.
- d. Results were compared to the 15.207 limits.

4.6.3 Deviation from the test standard

No deviation

4.6.4 Test setup

The EUT was tested as a module.

4.6.5 EUT operating conditions

The EUT was powered by 120 VAC unless specified and set to transmit continuously on the middle of its operating range for this test.

4.6.6 Test Results

EUT MODULE	Repeater 2.0	MODE	Transmit (Mid channel used)
INPUT POWER	120 VAC	FREQUENCY RANGE	150kHz – 30MHz
ENVIRONMENTAL CONDITIONS	32 % ± 5% RH 23 ± 3°C	TECHNICIAN	KVepuri

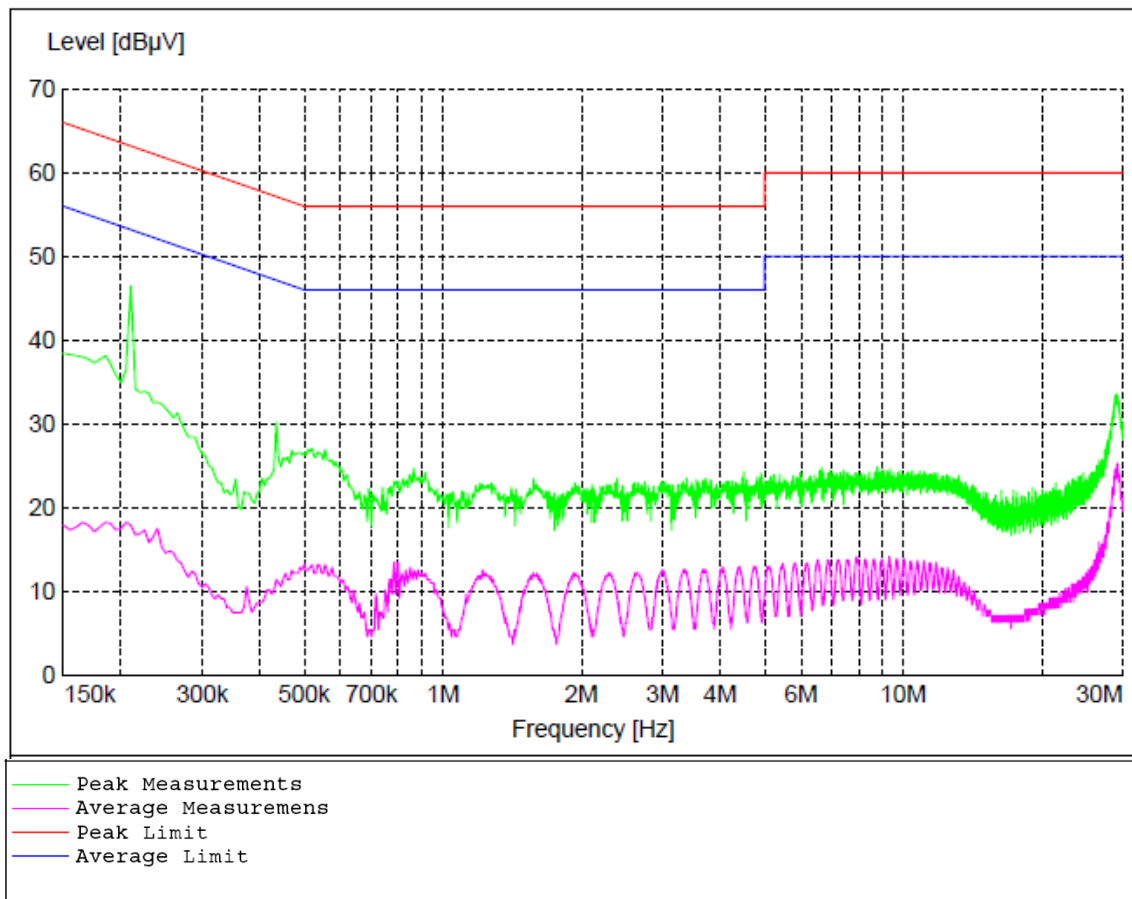


Figure 19 - Conducted Emissions Plot

All measurements were found to be at least 10dB below the applicable limit.

Appendix A: Sample Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [Field \text{ Strength (V/m)} \times \text{antenna distance (m)}]^2 / [30 \times \text{Gain (numeric)}]$$

$$\text{Power (watts)} = 10^{[Power \text{ (dBm)}/10]} \times 1000$$

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Field Strength (dBm)} = 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$\text{Field Strength (V/m)} = 10^{[\text{Field Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$\text{Gain} = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = (FS \times d^2)/30 = FS [(d^2)/30] = FS [0.3]$$

$$EIRP(\text{dBm}) = FS(\text{dB}\mu\text{V/m}) - 10(\log 10^9) + 10\log[0.3] = -95.23$$

10log(10^9) is the conversion from micro to milli

Annex B – Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	150kHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.

CISPR 16-4-2:2011 was used to calculate the above values.